


PWM/PFM DUAL MODE STEP-DOWN DC/DC CONVERTER


Pin Assignment



Pin Description

Pin Name	Description
V _{OUT}	Output Voltage
GND	Ground
V _{cc}	Input Supply
CE/SS	Chip Enable / Soft Start
FB	Feedback pin

Block Diagram

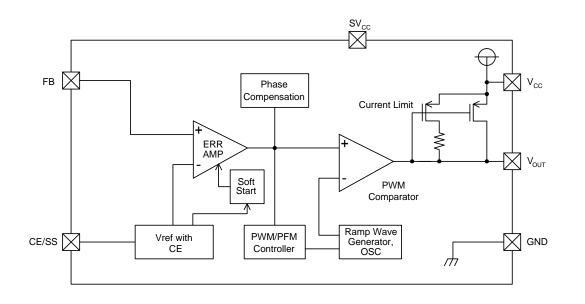

AP1604A Rev. 2



PWM/PFM DUAL MODE STEP-DOWN DC/DC CONVERTER

Absolute Maximum Ratings (T_A=25°C)

Symbol	Parameter	Ratings	Units
V _{cc} /SV _{cc}	V _{IN} Pin Voltage	-0.3 ~ 6.5	V
V _{OUT}	V _{OUT} Pin Voltage	-0.3 ~ V _{IN} +0.3	V
V _{FB}	FB Pin Voltage	-0.3 ~ V _{IN} +0.3	V
V _{CE/SS}	CE/SS Pin Voltage	-0.3 ~ V _{IN} +0.3	V
PD	Continuous Total Power Dissipation	Internal limited	
T _{OP}	Operating Ambient Temperature	-25 ~ +80	°C
T _{ST}	Storage Temperature Range	-40 ~ +125	°C

Electrical Characteristics

$V_{IN} = 5V, V_{OUT} = 2V, Load = 300mA, TA = 25^{\circ}C$	TA = 25°C
---	-----------


Sym.	Parameter	Conditions	Min	Тур.	Max	Units
V _{FB}	FB		0.975	1.0	1.025	V
V _{IN}	Input Voltage		2.2	-	5.5	V
	Line Regulation	V _{IN} = 2.2 ~ 5.5V, Load = 10mA	-	-	0.12	%
	Load Regulation	I _{OUT} = 10 ~ 800mA	-	-	1.2	%
V _{UVLO}	UVLO Voltage (min. operating voltage)	$V_{\text{CC}},$ voltage required to maintain H at V_{OUT}	-	-	2	V
I _{cc}	Operating Current	CE/SS = V _{IN} , No Load	-	100	150	μA
I _{CCQ}	Supply Current	No external components, CE/SS = V_{IN} , V_{FB} = 1.2V	-	90	120	μA
I _{STB}	Stand-by Current	No external components, CE/SS = $0V$, $V_{FB} = 0V$	-	2	-	μΑ
I _{CL}	Current Limit	peak current $V_{IN} = 5V, V_{OUT} = 2V$	800	1000	1200	mA
Fosc	Oscillator Frequency	Load = 300mA, $V_{IN} = 5V$, $V_{OUT} = 2V$	500	600	700	kHz
MAXDTY	Maximum Duty Ratio		85	90	-	%
PFMDTY	PFM Duty Ratio	No load	15	25	35	%
V _{CEH}	CE/SS "High" Voltage	Apply 1.4V (min.) to CE/SS, determine V _{OUT} "High"	1.4	-	-	V
V _{CEL}	CE/SS "Low" Voltage	Same as V _{CEH} , determine V _{OUT} /"Low"	-	-	0.6	V
EFFI	Efficiency	$V_{CC} = 5V, V_{OUT} = 3.3V, Load = 300mA$	-	93	-	%
Rdson	Rdson Condition	$I_{OUT} = 300 \text{mA}, V_{IN} = 5 \text{V}, V_{OUT} = 2 \text{V}$	-	350	450	mΩ




AP1604A PWM/PFM DUAL MODE STEP-DOWN DC/DC

CONVERTER


Typical Performance Characteristics

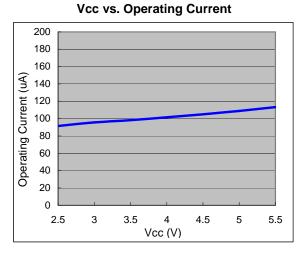

Vcc vs. Stand-by Current

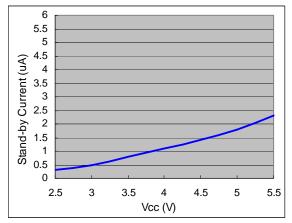




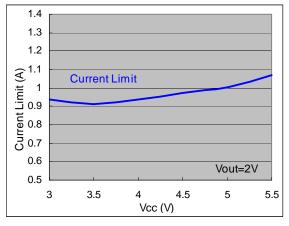


AP1604A Rev. 2

4 of 7 www.diodes.com


FEBRUARY 2009 © Diodes Incorporated

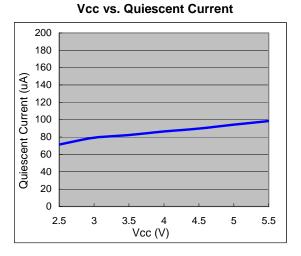

Vcc vs. Frequency

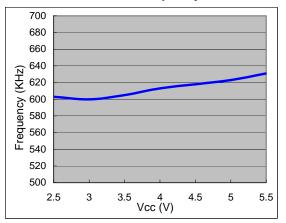



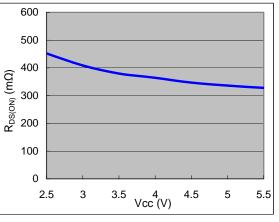


Downloaded from Arrow.com.




PWM/PFM DUAL MODE STEP-DOWN DC/DC CONVERTER

Typical Performance Characteristics (Continued)

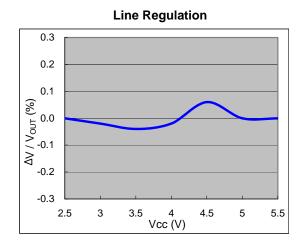



Typical Application Circuit

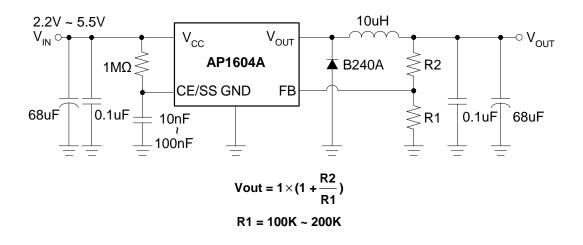




PWM/PFM DUAL MODE STEP-DOWN DC/DC CONVERTER


Marking Information

(1) SOT25

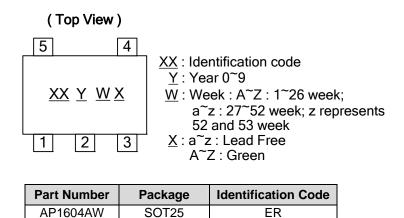

Package Information	(All Dimensions in mm)

(1) Package Type: SOT25

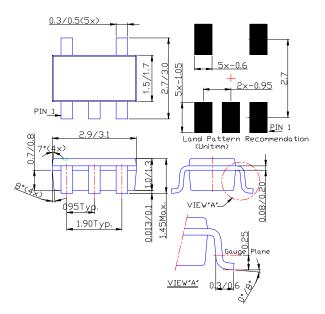





PWM/PFM DUAL MODE STEP-DOWN DC/DC CONVERTER

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.