

# Low-Cost Microprocessor Supervisory Circuits with Battery Backup

## ABSOLUTE MAXIMUM RATINGS

|                                        |                                                                   |                 |
|----------------------------------------|-------------------------------------------------------------------|-----------------|
| Terminal Voltage (with respect to GND) | Rate-of-Rise $V_{BATT}$ , $V_{CC}$ .....                          | 100V/ $\mu$ s   |
| $V_{CC}$ .....                         | Operating Temperature Range                                       |                 |
| $V_{BATT}$ .....                       | C Suffix .....                                                    | 0°C to +70°C    |
| All Other Inputs (Note 1) .....        | E Suffix .....                                                    | -40°C to +85°C  |
| Input Current                          | M Suffix .....                                                    | -55°C to +125°C |
| $V_{CC}$ .....                         | Continuous Power Dissipation ( $T_A = +70^\circ\text{C}$ )        |                 |
| $V_{BATT}$ .....                       | 8-Pin PDIP (derated 9.09mW/ $^\circ\text{C}$ above +70°C) .....   | 727mW           |
| GND .....                              | 8-Pin SO (derated 5.88mW/ $^\circ\text{C}$ above +70°C) .....     | 471mW           |
| Output Current                         | 8-Pin Cerdip (derated 8.00mW/ $^\circ\text{C}$ above +85°C) ..... | 640mW           |
| $V_{OUT}$ .....                        | Storage Temperature Range .....                                   | -65°C to +160°C |
| All Other Outputs .....                | Lead Temperature (soldering, 10s) .....                           | +300°C          |

**Note 1:**  $V_{CB}$  is the greater of  $V_{CC}$  and  $V_{BATT}$ . The input voltage limits on PFI and  $\overline{MR}$  may be exceeded if the current into these pins is limited to less than 10mA.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS

( $V_{CC} = +4.75\text{V}$  to  $+5.5\text{V}$  for MAX703,  $V_{CC} = +4.5\text{V}$  to  $+5.5\text{V}$  for MAX704,  $V_{BATT} = 2.8\text{V}$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted.)

| PARAMETER                                                  | SYMBOL       | CONDITIONS                                                                                                 | MIN              | TYP               | MAX   | UNITS         |
|------------------------------------------------------------|--------------|------------------------------------------------------------------------------------------------------------|------------------|-------------------|-------|---------------|
| Operating Voltage Range<br>$V_{CC}$ , $V_{BATT}$           |              | (Note 2)                                                                                                   | 0                |                   | 5.5   | V             |
| Supply Current (Excluding $I_{OUT}$ )                      | $I_{SUPPLY}$ | MAX70_C                                                                                                    |                  | 200               | 350   | $\mu\text{A}$ |
|                                                            |              | MAX70_E/M                                                                                                  |                  | 200               | 500   |               |
| $I_{SUPPLY}$ in Battery-Backup Mode (Excluding $I_{OUT}$ ) |              | $V_{CC} = 0\text{V}$ , $V_{BATT} = 2.8\text{V}$                                                            |                  | 0.05              | 1.0   | $\mu\text{A}$ |
|                                                            |              | $T_A = +25^\circ\text{C}$<br>$T_A = T_{MIN}$ to $T_{MAX}$                                                  |                  |                   | 5.0   |               |
| $V_{BATT}$ Standby Current (Note 3)                        |              | $5.5\text{V} > V_{CC} > V_{BATT} + 0.2\text{V}$                                                            |                  | -0.10             | +0.02 | $\mu\text{A}$ |
|                                                            |              | $T_A = +25^\circ\text{C}$<br>$T_A = T_{MIN}$ to $T_{MAX}$                                                  |                  | -1.00             | +0.02 |               |
| $V_{OUT}$ Output                                           |              | $I_{OUT} = 5\text{mA}$                                                                                     | $V_{CC} - 0.05$  | $V_{CC} - 0.025$  |       | V             |
|                                                            |              | $I_{OUT} = 50\text{mA}$                                                                                    | $V_{CC} - 0.5$   | $V_{CC} - 0.25$   |       |               |
| $V_{OUT}$ in Battery-Backup Mode                           |              | $I_{OUT} = 250\mu\text{A}$ , $V_{CC} < V_{BATT} - 0.2\text{V}$                                             | $V_{BATT} - 0.1$ | $V_{BATT} - 0.02$ |       | V             |
| Battery Switch Threshold ( $V_{CC} - V_{BATT}$ )           |              | $V_{CC} < V_{RST}$                                                                                         |                  | 20                |       | mV            |
|                                                            |              | Power-up<br>Power-down                                                                                     |                  | -20               |       |               |
| Battery Switchover Hysteresis                              |              |                                                                                                            |                  | 40                |       | mV            |
| RESET Threshold                                            | $V_{RST}$    | MAX703                                                                                                     | 4.50             | 4.65              | 4.75  | V             |
|                                                            |              | MAX704                                                                                                     | 4.25             | 4.40              | 4.50  |               |
| RESET Threshold Hysteresis                                 |              |                                                                                                            |                  | 40                |       | mV            |
| RESET Pulse Width                                          | $t_{RST}$    |                                                                                                            | 140              | 200               | 280   | ms            |
| RESET Output Voltage                                       | $V_{OH}$     | $I_{SOURCE} = 800\mu\text{A}$                                                                              | $V_{CC} - 1.5$   |                   |       | V             |
|                                                            | $V_{OL}$     | $I_{SINK} = 3.2\text{mA}$                                                                                  |                  | 0.4               |       |               |
|                                                            |              | MAX70_C, $V_{CC} = 1\text{V}$ , $V_{CC}$ falling, $V_{BATT} = 0\text{V}$ , $I_{SINK} = 50\mu\text{A}$      |                  | 0.3               |       |               |
|                                                            |              | MAX70_E/M, $V_{CC} = 1.2\text{V}$ , $V_{CC}$ falling, $V_{BATT} = 0\text{V}$ , $I_{SINK} = 100\mu\text{A}$ |                  | 0.3               |       |               |

# Low-Cost Microprocessor Supervisory Circuits with Battery Backup

## ELECTRICAL CHARACTERISTICS (continued)

( $V_{CC} = +4.75V$  to  $+5.5V$  for MAX703,  $V_{CC} = +4.5V$  to  $+5.5V$  for MAX704,  $V_{BATT} = 2.8V$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted.)







| PARAMETER                       | SYMBOL   | CONDITIONS              | MIN            | TYP   | MAX  | UNITS   |
|---------------------------------|----------|-------------------------|----------------|-------|------|---------|
| $\overline{MR}$ Input Threshold | $V_{IL}$ | Low                     |                |       | 0.8  | V       |
|                                 | $V_{IH}$ | High                    | 2.0            |       |      |         |
| $\overline{MR}$ Pulse Width     | $t_{MR}$ |                         | 150            |       |      | ns      |
| $\overline{MR}$ to RESET Delay  | $t_{MD}$ |                         |                |       | 250  | ns      |
| $\overline{MR}$ Pullup Current  |          | $\overline{MR} = 0V$    | 100            | 250   | 600  | $\mu A$ |
| PFI Input Threshold             |          | $V_{CC} = 5V$           | 1.20           | 1.25  | 1.30 | V       |
| PFI Input Current               |          |                         | -25            | +0.01 | +25  | nA      |
| $\overline{PFO}$ Output Voltage | $V_{OH}$ | $I_{SOURCE} = 800\mu A$ | $V_{CC} - 1.5$ |       |      | V       |
|                                 | $V_{OL}$ | $I_{SINK} = 3.2mA$      |                |       | 0.4  |         |

**Note 2:** Either  $V_{CC}$  or  $V_{BATT}$  can go to 0V if the other is greater than 2.0V.

**Note 3:** “-” = battery-charging current, “+” = battery-discharging current.

## Typical Operating Characteristics

( $V_{CC} = +5V$ ,  $V_{BATT} = 2.8V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

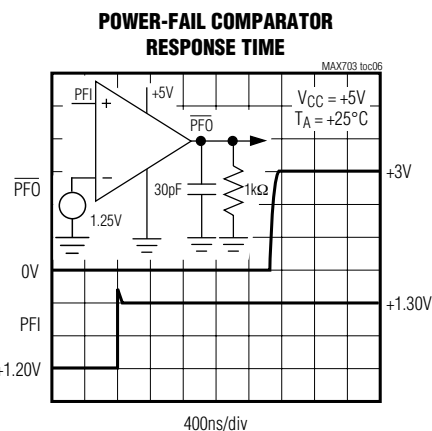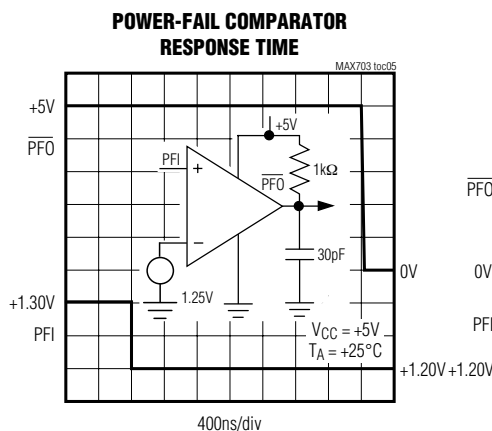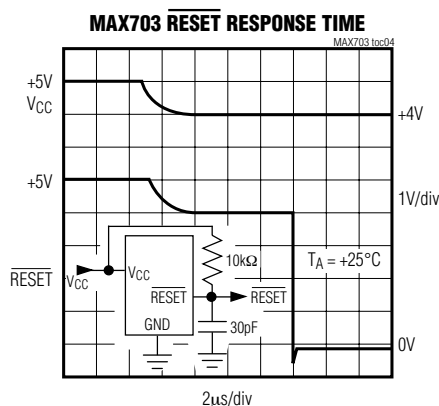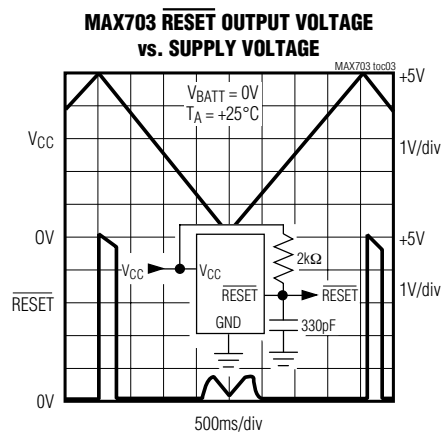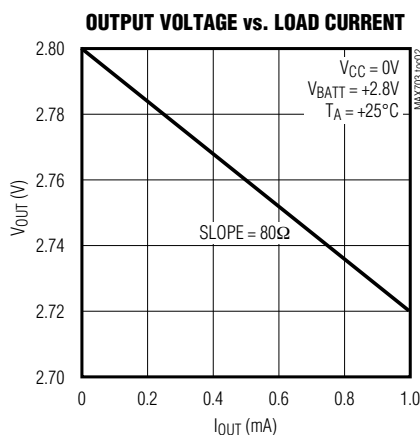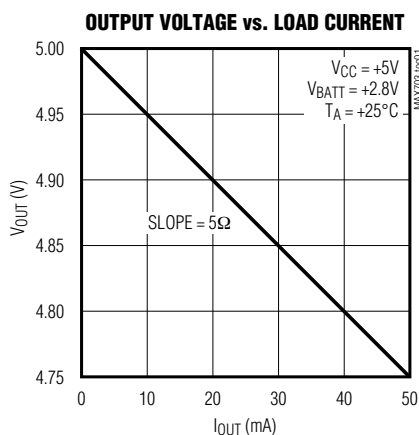

# Low-Cost Microprocessor Supervisory Circuits with Battery Backup

## Pin Description

| PIN | NAME                      | FUNCTION                                                                                                                                                                                                                                                                                                                                                                               |
|-----|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | V <sub>OUT</sub>          | Supply Output for CMOS RAM. When V <sub>CC</sub> is above the reset threshold, V <sub>OUT</sub> connects to V <sub>CC</sub> through a p-channel MOSFET switch. When V <sub>CC</sub> is below the reset threshold, the higher of V <sub>CC</sub> or V <sub>BATT</sub> is connected to V <sub>OUT</sub> .                                                                                |
| 2   | V <sub>CC</sub>           | +5V Supply Input                                                                                                                                                                                                                                                                                                                                                                       |
| 3   | GND                       | Ground                                                                                                                                                                                                                                                                                                                                                                                 |
| 4   | PFI                       | Power-Fail Comparator Input. When PFI is less than 1.25V, $\overline{\text{PFO}}$ goes low; otherwise $\overline{\text{PFO}}$ remains high. Connect PFI to GND or V <sub>CC</sub> when not used.                                                                                                                                                                                       |
| 5   | $\overline{\text{PFO}}$   | Power-Fail Comparator Output. It goes low and sinks current when PFI is less than 1.25V; otherwise $\overline{\text{PFO}}$ remains high.                                                                                                                                                                                                                                               |
| 6   | $\overline{\text{MR}}$    | Manual Reset Input. Generates a reset pulse when pulled below 0.8V. This active-low input is TTL/CMOS compatible and can be shorted to ground with a switch. It has an internal 250 $\mu$ A pullup current. Leave floating when not used.                                                                                                                                              |
| 7   | $\overline{\text{RESET}}$ | Reset Output. Remains low while V <sub>CC</sub> is below the reset threshold (4.65V for the MAX703, 4.40V for the MAX704). It remains low for 200ms after V <sub>CC</sub> rises above the reset threshold (Figure 2) or $\overline{\text{MR}}$ goes from low to high.                                                                                                                  |
| 8   | V <sub>BATT</sub>         | Backup-Battery Input. When V <sub>CC</sub> falls below the reset threshold, V <sub>BATT</sub> is switched to V <sub>OUT</sub> if V <sub>BATT</sub> is 20mV greater than V <sub>CC</sub> . When V <sub>CC</sub> rises 20mV above V <sub>BATT</sub> , V <sub>CC</sub> is switched to V <sub>OUT</sub> . The 40mV hysteresis prevents repeated switching if V <sub>CC</sub> falls slowly. |

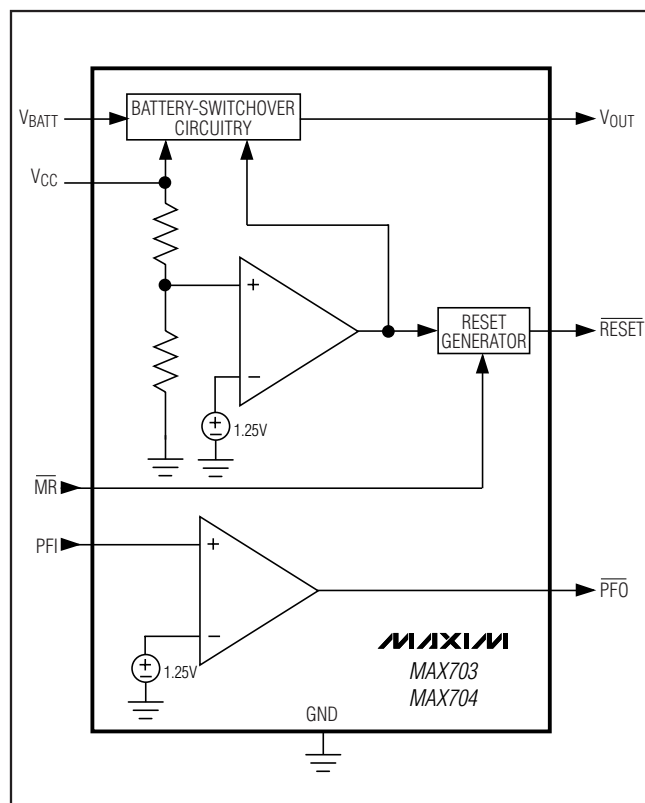


Figure 1. Block Diagram

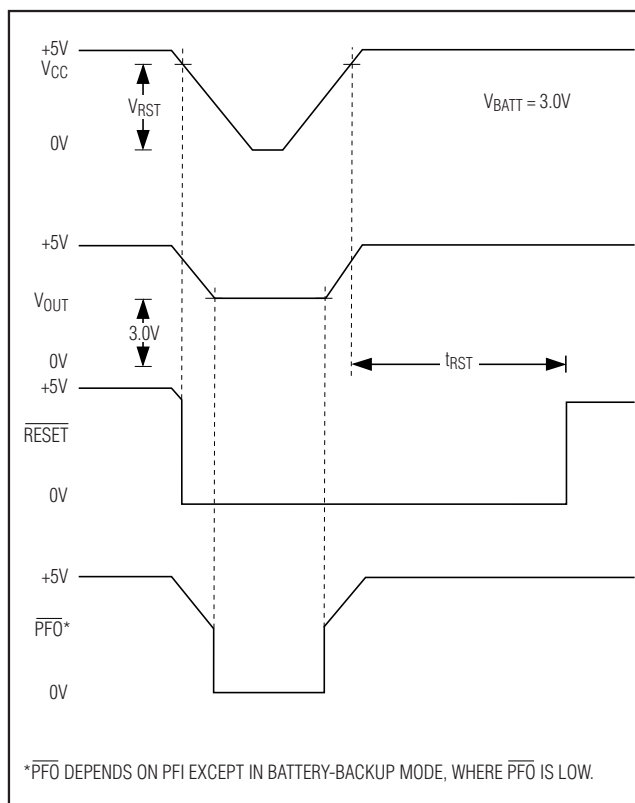


Figure 2. Timing Diagram

# Low-Cost Microprocessor Supervisory Circuits with Battery Backup

## Detailed Description

### RESET Output

A  $\mu\text{P}$ 's reset input starts the  $\mu\text{P}$  in a known state. Whenever the  $\mu\text{P}$  is in an unknown state, it should be held in reset. The MAX703/MAX704 assert reset when  $V_{CC}$  is low, preventing code-execution errors during power-up, power-down, or brownout conditions.

When  $V_{BATT}$  is 2V or more,  $\overline{\text{RESET}}$  is always valid, irrespective of  $V_{CC}$ . On power-up, as  $V_{CC}$  rises,  $\overline{\text{RESET}}$  remains low. When  $V_{CC}$  exceeds the reset threshold, an internal timer holds  $\overline{\text{RESET}}$  low for a time equal to the reset pulse width (typically 200ms); after this interval,  $\overline{\text{RESET}}$  goes high (Figure 2). If a power-fail or brownout condition occurs (i.e.,  $V_{CC}$  drops below the reset threshold),  $\overline{\text{RESET}}$  is asserted. As long as  $V_{CC}$  remains below the reset threshold, the internal timer is continually restarted, causing the  $\overline{\text{RESET}}$  output to remain low. Thus, a brownout condition that interrupts a previously initiated reset pulse causes an additional 200ms delay from the end of the last interruption.

### Power-Fail Comparator

The PFI input is compared to an internal reference. If PFI is less than 1.25V,  $\overline{\text{PFO}}$  goes low. The power-fail comparator can be used as an undervoltage detector to signal a failing power supply. In the *Typical Operating Circuit*, an external voltage-divider at PFI is used to monitor the unregulated DC voltage from which the regulated +5V supply is derived.

The voltage-divider can be chosen so the voltage at PFI falls below 1.25V just before the +5V regulator drops out.  $\overline{\text{PFO}}$  is then used as an interrupt to prepare the  $\mu\text{P}$  for power-down.

To conserve power, the power-fail comparator is turned off and  $\overline{\text{PFO}}$  is forced low when the MAX703/MAX704 enter battery-backup mode.

### Backup-Battery Switchover

In the event of a brownout or power failure, it may be necessary to preserve the contents of RAM. With a backup battery installed at  $V_{BATT}$ , the MAX703/MAX704 automatically switch RAM to backup power when  $V_{CC}$  fails.

As long as  $V_{CC}$  exceeds the reset threshold,  $V_{CC}$  connects to  $V_{OUT}$  through a  $5\Omega$  p-channel MOSFET power switch. Once  $V_{CC}$  falls below the reset threshold,  $\overline{\text{RESET}}$  goes low and  $V_{CC}$  or  $V_{BATT}$  (whichever is higher) switches to  $V_{OUT}$ . Note that  $V_{BATT}$  switches to  $V_{OUT}$  through an  $80\Omega$  switch only if  $V_{CC}$  is below the reset-threshold voltage and  $V_{BATT}$  is greater than  $V_{CC}$ . When  $V_{CC}$  exceeds the reset threshold, it is connected to the MAX703/MAX704 substrate, regardless of the voltage

applied to  $V_{BATT}$  (Figure 3). During this time, diode D1 (between  $V_{BATT}$  and the substrate) conducts current from  $V_{BATT}$  to  $V_{CC}$  if  $V_{BATT} \geq (V_{CC} + 0.6\text{V})$ .

When the battery-backup mode is activated,  $V_{BATT}$  connects to  $V_{OUT}$ . In this mode, the substrate connects to  $V_{BATT}$  and internal circuitry is powered from the battery (Figure 3). Table 1 shows the status of the MAX703/MAX704 inputs and outputs in battery-backup mode.

When  $V_{CC}$  is below, but within, 1V of  $V_{BATT}$ , the internal switchover comparator draws about  $30\mu\text{A}$ . Once  $V_{CC}$

**Table 1. Input and Output Status in Battery-Backup Mode**

| SIGNAL                    | STATUS                                                                                               |
|---------------------------|------------------------------------------------------------------------------------------------------|
| $V_{CC}$                  | Disconnected from $V_{OUT}$ .                                                                        |
| $V_{OUT}$                 | Connected to $V_{BATT}$ through an internal $80\Omega$ p-channel MOSFET switch.                      |
| $V_{BATT}$                | Connected to $V_{OUT}$ . Supply current is $< 1\mu\text{A}$ when $V_{CC} < (V_{BATT} - 1\text{V})$ . |
| $\overline{\text{RESET}}$ | Logic-low.                                                                                           |
| PFI                       | Power-fail comparator is disabled.                                                                   |
| $\overline{\text{PFO}}$   | Logic-low.                                                                                           |
| MR                        | Disabled.                                                                                            |

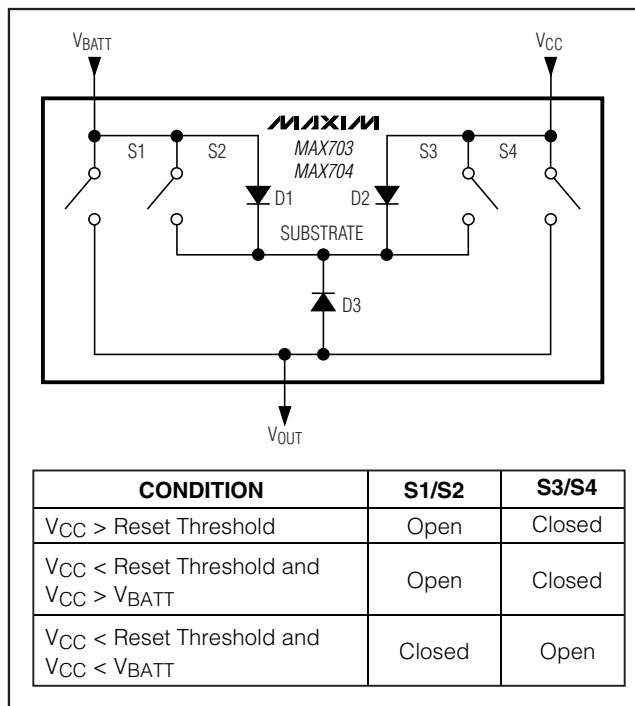


Figure 3. Battery-Switchover Block Diagram

# Low-Cost Microprocessor Supervisory Circuits with Battery Backup

drops to more than 1V below  $V_{BATT}$ , the internal switchover comparator shuts off and the supply current falls to less than 1 $\mu$ A.

## Manual Reset

The manual reset input ( $\overline{MR}$ ) allows  $\overline{RESET}$  to be activated by a pushbutton switch. The switch is effectively debounced by the 140ms minimum reset pulse width. Because it is TTL/CMOS compatible,  $\overline{MR}$  can be driven by an external logic line.

## Applications Information

### Using a SuperCap® as a Backup Power Source

SuperCaps are capacitors with extremely high capacitance values (on the order of 0.1 Farad). When using SuperCaps, if  $V_{CC}$  exceeds the MAX703/MAX704 reset thresholds (4.65V and 4.40V, respectively),  $V_{BATT}$  may not exceed  $V_{CC}$  by more than 0.6V. Thus, with a 5% tolerance on  $V_{CC}$ ,  $V_{BATT}$  should not exceed  $V_{CC}(\min) + 0.6V = 5.35V$ . Similarly, with a 10% tolerance on  $V_{CC}$ ,  $V_{BATT}$  should not exceed 5.1V.

Figure 4's SuperCap circuit uses the MAX703 with a  $\pm 5\%$  tolerance voltage supply. In this circuit, the SuperCap rapidly charges to within a diode drop of  $V_{CC}$ . However, the diode leakage current with trickle-charge the SuperCap voltage to  $V_{CC}$ . If  $V_{BATT} = 5.25V$  and the power is suddenly removed and then reapplied with  $V_{CC} = 4.75V$ ,  $V_{BATT} - V_{CC}$  does not exceed the allowable 0.6V difference voltage.

Figure 5's circuit uses the MAX704 with a  $\pm 10\%$  tolerance voltage supply. Note that if  $V_{CC} = 5.5V$  and  $V_{BATT} \leq 5.1V$ , the power can be suddenly removed and reapplied with  $V_{CC} = 4.5V$ , and  $V_{BATT} - V_{CC}$  will not exceed the allowable 0.6V voltage difference.

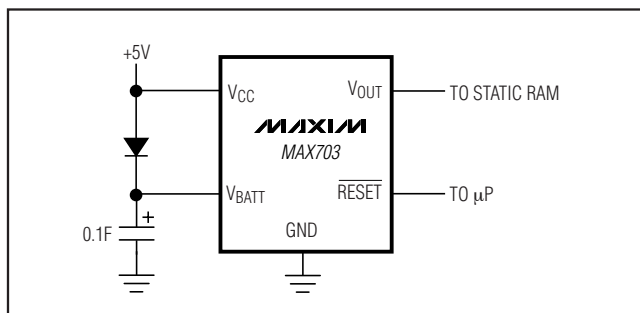


Figure 4. Using a SuperCap as a Backup Power Source with a MAX703 and a +5V  $\pm 5\%$  Supply

SuperCap is a registered trademark of Bankor Industries.

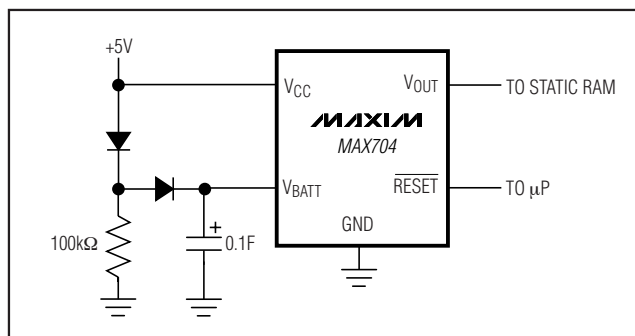


Figure 5. Using a SuperCap as a Backup Power Source with the MAX704 and a +5V  $\pm 10\%$  Supply

### Batteries and Power Supplies as Backup Power Sources

Lithium batteries work well as backup batteries because they have very low self-discharge rates and high-energy density. Single lithium batteries with open-circuit voltages of 3.0V to 3.6V are ideal for use with the MAX703/MAX704. Batteries with an open-circuit voltage less than the minimum reset threshold plus 0.3V can be directly connected to the MAX703/MAX704  $V_{BATT}$  input with no additional circuitry (see the *Typical Operating Circuit*).

However, batteries with open-circuit voltages greater than the reset threshold plus 0.3V CANNOT be used as backup batteries, since they source current into the substrate through diode D1 (Figure 3) when  $V_{CC}$  is close to the reset threshold.

Table 2. Allowable Backup-Battery Voltages

| PART   | MAXIMUM BACKUP-BATTERY VOLTAGE (V) |
|--------|------------------------------------|
| MAX703 | 4.80                               |
| MAX704 | 4.55                               |

### Using the MAX703/MAX704 without a Backup Power Source

If a backup power source is not used, ground  $V_{BATT}$  and connect  $V_{CC}$  to  $V_{OUT}$ . A direct connection to  $V_{CC}$  eliminates any voltage drop across the internal switch, which would otherwise appear at  $V_{OUT}$ . Alternatively, use the MAX705–MAX708, which do not have battery-backup capabilities.

# Low-Cost Microprocessor Supervisory Circuits with Battery Backup

## Ensuring a Valid RESET Output Down to $V_{CC} = 0V$

When  $V_{CC}$  falls below 1V, the MAX703/MAX704 RESET output no longer sinks current; it becomes an open circuit. High-impedance CMOS logic inputs can drift to undetermined voltages if left as open circuits. If a pull-down resistor is added to the RESET pin as shown in Figure 6, any stray charge or leakage currents will flow to ground, holding RESET low. Resistor value R1 is not critical. It should be about 100k $\Omega$ , which is large enough not to load RESET and small enough to pull RESET to ground.

## Replacing the Backup Battery

The backup battery can be removed while  $V_{CC}$  remains valid without triggering a reset. As long as  $V_{CC}$  stays above the reset threshold, battery-backup mode cannot

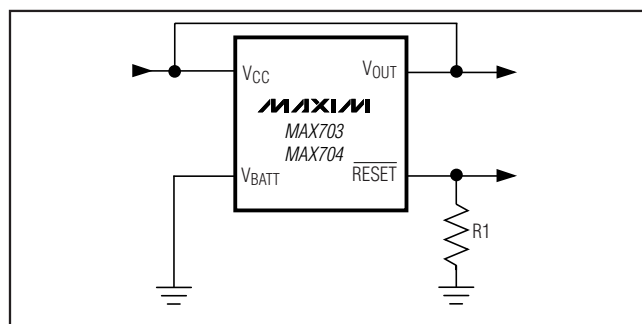


Figure 6. RESET Valid to Ground Circuit

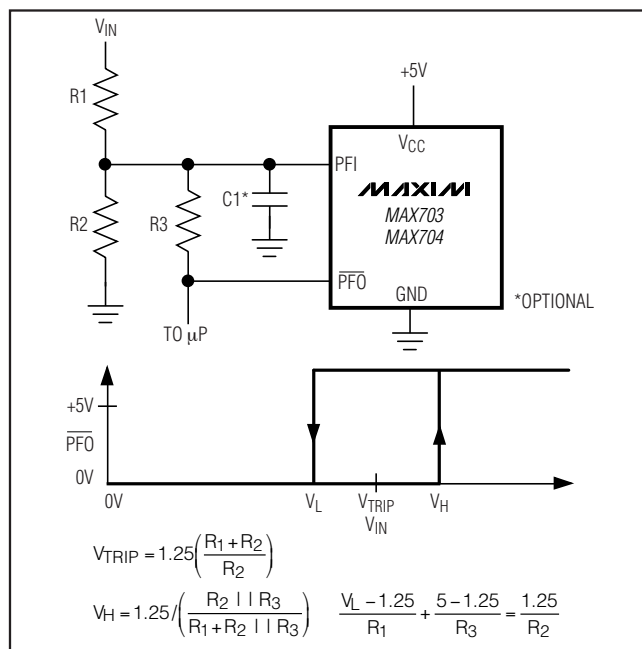


Figure 7. Adding Hysteresis to the Power-Fail Comparator

be entered. This is an improvement on switchover ICs that initiate a reset when  $V_{CC}$  and  $V_{BATT}$  are at or near the same voltage level (regardless of the reset threshold voltage). If the voltage on the unconnected  $V_{BATT}$  pin floats up toward  $V_{CC}$ , this condition alone cannot initiate a reset when using the MAX703/MAX704.

## Adding Hysteresis to the Power-Fail Comparator

Hysteresis adds a noise margin to the power-fail comparator and prevents repeated triggering of PFO when  $V_{IN}$  is near the power-fail comparator trip point. Figure 7 shows how to add hysteresis to the power-fail comparator. Select the ratio of R1 and R2 so that PFI sees 1.25V when  $V_{IN}$  falls to the desired trip point ( $V_{TRIP}$ ). Resistor R3 adds hysteresis. It will typically be an order of magnitude greater than R1 or R2. The current through R1 and R2 should be at least 1 $\mu$ A to ensure that the 25nA (max) PFI input current does not shift the trip point. R3 should be larger than 10k $\Omega$  to prevent it from loading down the PFO pin. Capacitor C1 adds additional noise rejection.

## Monitoring a Negative Voltage

The power-fail comparator can be used to monitor a negative supply voltage using Figure 8's circuit. When the negative supply is valid, PFO is low. When the negative supply voltage droops, PFO goes high. This circuit's accuracy is affected by the PFI threshold tolerance, the  $V_{CC}$  voltage, and resistors R1 and R2.

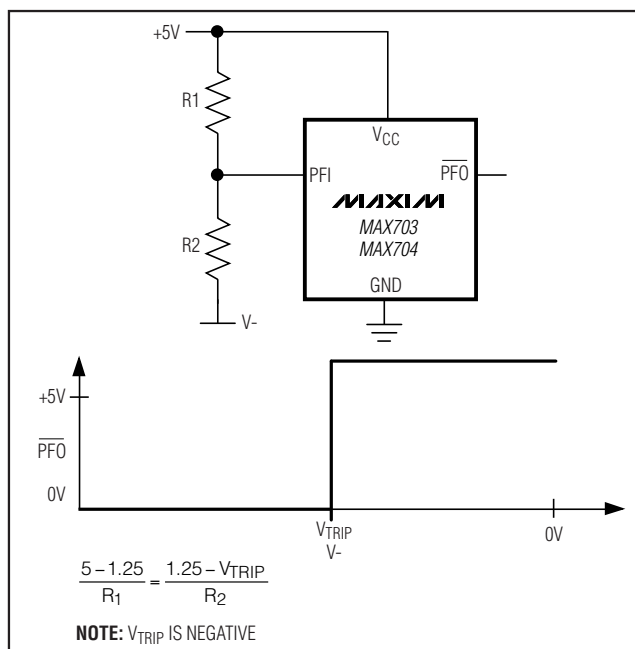


Figure 8. Monitoring a Negative Voltage

# Low-Cost Microprocessor Supervisory Circuits with Battery Backup

## Using the Power-Fail Comparator to Assert Reset

In addition to asserting reset at the  $V_{CC}$  reset threshold voltage, reset can also be asserted at the PFI input threshold voltage. Connect PFO to MR to initiate a reset

pulse when the monitored supply drops below a user-specified threshold or when  $V_{CC}$  falls below the reset threshold. For additional noise rejection, place a capacitor between PFI and GND.


**Table 3. Maxim Microprocessor Supervisory Products**

| PART    | NOMINAL<br>RESET<br>THRESHOLD<br>(V) | MINIMUM<br>RESET<br>PULSE<br>WIDTH<br>(ms) | NOMINAL<br>WATCH-<br>DOG<br>TIMEOUT<br>PERIOD<br>(s) | BACKUP-<br>BATTERY<br>SWITCH | $\overline{CE}$<br>WRITE<br>PROTECT | POWER-FAIL<br>COMPARATOR | MANUAL<br>RESET<br>INPUT | WATCH-<br>DOG<br>INPUT | LOW-<br>LINE<br>OUTPUT | ACTIVE-<br>HIGH<br>RESET | BATT<br>ON<br>OUTPUT |
|---------|--------------------------------------|--------------------------------------------|------------------------------------------------------|------------------------------|-------------------------------------|--------------------------|--------------------------|------------------------|------------------------|--------------------------|----------------------|
| MAX690A | 4.65                                 | 140                                        | 1.6                                                  | Yes                          | No                                  | Yes                      | No                       | No                     | No                     | No                       | No                   |
| MAX691A | 4.65                                 | 140/Adj.                                   | 1.6/Adj.                                             | Yes                          | Yes                                 | Yes                      | No                       | Yes                    | Yes                    | Yes                      | Yes                  |
| MAX692A | 4.40                                 | 140                                        | 1.6                                                  | Yes                          | No                                  | Yes                      | No                       | No                     | No                     | No                       | No                   |
| MAX693A | 4.40                                 | 140/Adj.                                   | 1.6/Adj.                                             | Yes                          | Yes                                 | Yes                      | No                       | Yes                    | Yes                    | Yes                      | Yes                  |
| MAX696  | Adj.                                 | 35/Adj.                                    | 1.6/Adj.                                             | Yes                          | No                                  | Yes                      | No                       | Yes                    | Yes                    | Yes                      | Yes                  |
| MAX697  | Adj.                                 | 35/Adj.                                    | 1.6/Adj.                                             | No                           | Yes                                 | Yes                      | No                       | Yes                    | Yes                    | Yes                      | No                   |
| MAX700  | 4.65/Adj.                            | 200                                        | —                                                    | No                           | No                                  | No                       | Yes                      | No                     | No                     | Yes                      | No                   |
| MAX703  | 4.65                                 | 140                                        | —                                                    | Yes                          | No                                  | Yes                      | Yes                      | No                     | No                     | No                       | No                   |
| MAX704  | 4.40                                 | 140                                        | —                                                    | Yes                          | No                                  | Yes                      | Yes                      | No                     | No                     | No                       | No                   |
| MAX705  | 4.65                                 | 140                                        | 1.6                                                  | No                           | No                                  | Yes                      | Yes                      | Yes                    | No                     | No                       | No                   |
| MAX706  | 4.40                                 | 140                                        | 1.6                                                  | No                           | No                                  | Yes                      | Yes                      | Yes                    | No                     | No                       | No                   |
| MAX707  | 4.65                                 | 140                                        | —                                                    | No                           | No                                  | Yes                      | Yes                      | No                     | No                     | Yes                      | No                   |
| MAX708  | 4.40                                 | 140                                        | —                                                    | No                           | No                                  | Yes                      | Yes                      | No                     | No                     | Yes                      | No                   |
| MAX791  | 4.65                                 | 140                                        | 1.0                                                  | Yes                          | Yes                                 | Yes                      | Yes                      | Yes                    | Yes                    | Yes                      | Yes                  |
| MAX1232 | 4.50/4.75                            | 250                                        | 0.15/0.60/<br>1.2                                    | No                           | No                                  | No                       | Yes                      | No                     | No                     | Yes                      | No                   |
| MAX1259 | —                                    | —                                          | —                                                    | Yes                          | No                                  | Yes                      | No                       | No                     | No                     | No                       | No                   |



# Low-Cost Microprocessor Supervisory Circuits with Battery Backup

## Chip Topography

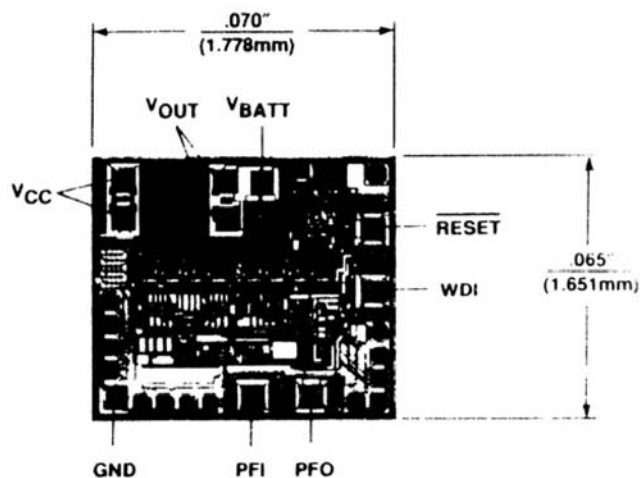

SUBSTRATE MUST BE LEFT UNCONNECTED  
TRANSISTOR COUNT: 573

## Package Information

For the latest package outline information, go to  
[www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).

MAX703/MAX704

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600 \_\_\_\_\_ 9

© 2005 Maxim Integrated Products

Maxim is a registered trademark of Maxim Integrated Products, Inc.