

## Absolute Maximum Ratings

Supply Voltage ( $V_{DD}$  to  $V_{SS}$ ) ..... -0.3V to +6V  
 Voltage Inputs ( $IN+$ ,  $IN-$  to  $V_{SS}$ ) ..... -0.3V to ( $V_{DD}$  + 0.3V)  
 Differential Input Voltage ( $IN+$  to  $IN-$ ) ..... +6.6V  
 Output Short-Circuit  
 Duration ..... 2s to Either  $V_{DD}$  or  $V_{SS}$   
 Current into Any Pin ..... 20mA  
 Continuous Power Dissipation ( $T_A = +70^\circ\text{C}$ ) .....  
   5-Pin SC70 (derate 3.1mW/ $^\circ\text{C}$  above  $+70^\circ\text{C}$ ) ..... 247mW  
   5-Pin SOT23 (derate 7.1mW/ $^\circ\text{C}$  above  $+70^\circ\text{C}$ ) ..... 571mW  
   6-Pin SC70 (derate 3.1mW/ $^\circ\text{C}$  above  $+70^\circ\text{C}$ ) ..... 245mW  
   6-Pin SOT23 (derate 8.7mW/ $^\circ\text{C}$  above  $+70^\circ\text{C}$ ) ..... 696mW

8-Pin SOT23 (derate 9.1mW/ $^\circ\text{C}$  above  $+70^\circ\text{C}$ ) ..... 727mW  
 8-Pin  $\mu\text{MAX}$  (derate 4.5mW/ $^\circ\text{C}$  above  $+70^\circ\text{C}$ ) ..... 362mW  
 8-Pin SO (derate 5.88mW/ $^\circ\text{C}$  above  $+70^\circ\text{C}$ ) ..... 471mW  
 14-Pin TSSOP (derate 9.1mW/ $^\circ\text{C}$  above  $+70^\circ\text{C}$ ) ..... 727mW  
 14-Pin SO (derate 8.33mW/ $^\circ\text{C}$  above  $+70^\circ\text{C}$ ) ..... 667mW  
 Operating Temperature Range  
   Automotive Application .....  $-40^\circ\text{C}$  to  $+125^\circ\text{C}$   
 Junction Temperature .....  $+150^\circ\text{C}$   
 Storage Temperature Range .....  $-65^\circ\text{C}$  to  $+150^\circ\text{C}$   
 Lead Temperature (soldering, 10s) .....  $+300^\circ\text{C}$   
 Soldering Temperature (reflow) .....  $+260^\circ\text{C}$

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## Electrical Characteristics

( $V_{DD} = +5\text{V}$ ,  $V_{SS} = 0$ ,  $V_{CM} = 0$ ,  $V_{SHDN} = +5\text{V}$  (Note 1),  $T_A = -40^\circ\text{C}$  to  $+125^\circ\text{C}$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ\text{C}$ .) (Note 2)

| PARAMETER                                    | SYMBOL     | CONDITIONS                                                                 | MIN                 | TYP                 | MAX            | UNITS                        |
|----------------------------------------------|------------|----------------------------------------------------------------------------|---------------------|---------------------|----------------|------------------------------|
| Operating Voltage Range                      | $V_{DD}$   | Guaranteed by PSRR test                                                    | 2.5                 |                     | 5.5            | V                            |
| Supply Current per Comparator                | $I_{DD}$   |                                                                            |                     | 35                  | 55             | $\mu\text{A}$                |
| Supply Current in Shutdown                   |            | $V_{SHDN} = 0$ (Note 1)                                                    |                     | 0.05                | 1              | $\mu\text{A}$                |
| Shutdown Input Bias Current                  |            | $V_{SHDN} = 0$ to $V_{DD}$ (Note 1)                                        |                     | 0.1                 | 2.5            | $\mu\text{A}$                |
| Shutdown Logic High                          |            | (Note 1)                                                                   | $0.7 \times V_{DD}$ |                     |                | V                            |
| Shutdown Logic Low                           |            | (Note 1)                                                                   |                     | $0.3 \times V_{DD}$ |                | V                            |
| Input Offset Voltage                         | $V_{OS}$   | (Note 3)                                                                   |                     | $\pm 1$             | $\pm 5$        | mV                           |
| Input Offset Voltage Temperature Coefficient | $TCV_{OS}$ |                                                                            |                     | $\pm 1$             |                | $\mu\text{V}/^\circ\text{C}$ |
| Hysteresis                                   |            | (Note 4)                                                                   |                     | 4                   |                | mV                           |
| Input Bias Current                           | $I_{BIAS}$ |                                                                            |                     | 8                   | 80             | nA                           |
| Input Offset Current                         | $I_{OS}$   |                                                                            |                     | $\pm 2$             | $\pm 60$       | nA                           |
| Common-Mode Voltage Range                    | $V_{CM}$   | Guaranteed by CMRR test                                                    | $V_{SS}$            |                     | $V_{DD} - 1.1$ | V                            |
| Common-Mode Rejection Ratio                  | CMRR       | $V_{SS} \leq V_{CM} \leq (V_{DD} - 1.1\text{V})$ , $V_{DD} = +5.5\text{V}$ | 72                  | 100                 |                | dB                           |
| Power-Supply Rejection Ratio                 | PSRR       | $V_{DD} = +2.5\text{V}$ to $+5.5\text{V}$                                  | 72                  | 100                 |                | dB                           |

## Electrical Characteristics (continued)

( $V_{DD} = +5V$ ,  $V_{SS} = 0$ ,  $V_{CM} = 0$ ,  $V_{SHDN} = +5V$  (Note 1),  $T_A = -40^{\circ}C$  to  $+125^{\circ}C$ , unless otherwise noted. Typical values are at  $T_A = +25^{\circ}C$ .) (Note 2)

| PARAMETER                    | SYMBOL                | CONDITIONS                                                                  | MIN                    | TYP        | MAX       | UNITS   |
|------------------------------|-----------------------|-----------------------------------------------------------------------------|------------------------|------------|-----------|---------|
| Output Voltage-Swing         | $V_{OL}$ , $V_{OH}$   | $V_{OH} = V_{DD} - V_{OUT}$ ,<br>( $V_{IN+} - V_{IN-}$ ) $\geq 20mV$        | $I_{SOURCE} = 10\mu A$ | 2          |           | mV      |
|                              |                       |                                                                             | $I_{SOURCE} = 4mA$     | 165        | 400       |         |
|                              |                       | $V_{OL} = V_{OUT} - V_{SS}$ ,<br>( $V_{IN-} - V_{IN+}$ ) $\geq 20mV$        | $I_{SINK} = 10\mu A$   | 2          |           |         |
|                              |                       |                                                                             | $I_{SINK} = 4mA$       | 165        | 400       |         |
| Output Short-Circuit Current | $I_{SC}$              |                                                                             |                        | 45         |           | mA      |
| Shutdown Mode Output Leakage |                       | $V_{SHDN} \leq (0.3 \times V_{DD})$ , $V_{OUT} = 0$ to $V_{DD}$<br>(Note 1) |                        | $\pm 0.01$ | $\pm 3.5$ | $\mu A$ |
| Propagation Delay            | $t_{PD+}$ , $t_{PD-}$ | $R_L = 10k\Omega$ ,<br>$C_L = 15pF$ (Note 5)                                | $V_{OD} = 10mV$        | 228        |           | ns      |
|                              |                       |                                                                             | $V_{OD} = 100mV$       | 188        |           |         |
| Rise/Fall-Time               | $t_R$ , $t_F$         | $V_{DD} = +5V$ , $R_L = 10k\Omega$ , $C_L = 15pF$ (Note 6)                  |                        | 20         |           | ns      |
| Shutdown Delay Time ON/OFF   |                       | (Note 1)                                                                    |                        | 40         |           | ns      |
| Shutdown Delay Time OFF/ON   |                       | (Note 1)                                                                    |                        | 400        |           | ns      |
| Power-On Time                |                       | $R_L = 10k\Omega$ , $C_L = 15pF$                                            |                        | 200        |           | ns      |
| Maximum Capacitive Load      | $C_L$                 | No sustained oscillations                                                   |                        | 150        |           | pF      |

**Note 1:** MAX9030 only.

**Note 2:** All devices are production tested at  $+25^{\circ}C$ . All temperature limits are guaranteed by design.

**Note 3:** Comparator Input Offset is defined as the center of the hysteresis zone.




**Note 4:** Hysteresis is defined as the difference of the trip points required to change comparator output states.

**Note 5:**  $V_{OD}$  is the overdrive that is beyond the offset and hysteresis-determined trip points.

**Note 6:** Rise and fall times are measured between 10% and 90% at OUT.










## Typical Operating Characteristics

( $V_{DD} = +5V$ ,  $V_{SS} = 0$ ,  $V_{CM} = 0$ ,  $R_L = 10k\Omega$ ,  $C_L = 15pF$ ,  $V_{OD} = 100mV$ ,  $T_A = +25^{\circ}C$ , unless otherwise noted.)

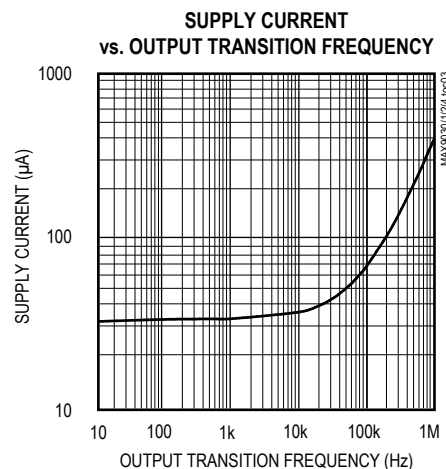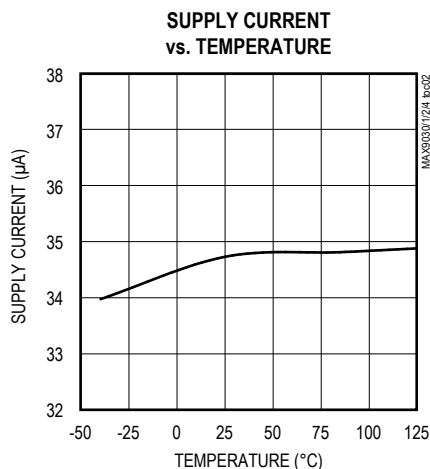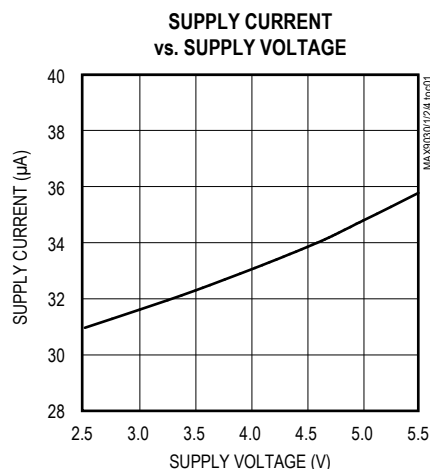

## Typical Operating Characteristics (continued)


( $V_{DD} = +5V$ ,  $V_{SS} = 0$ ,  $V_{CM} = 0$ ,  $R_L = 10k\Omega$ ,  $C_L = 15pF$ ,  $V_{OD} = 100mV$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

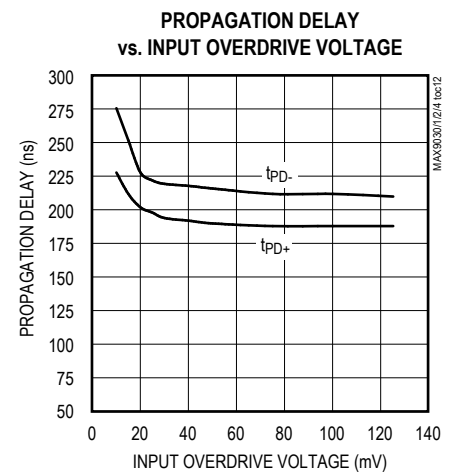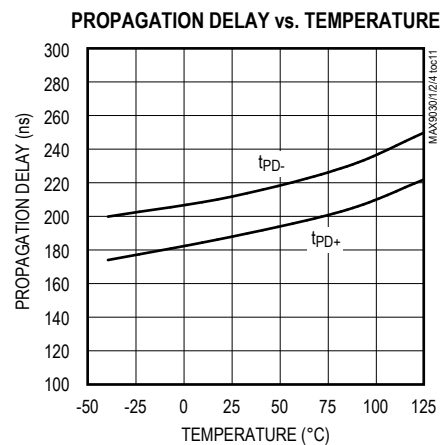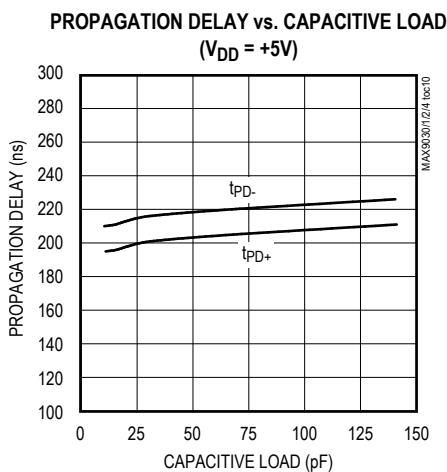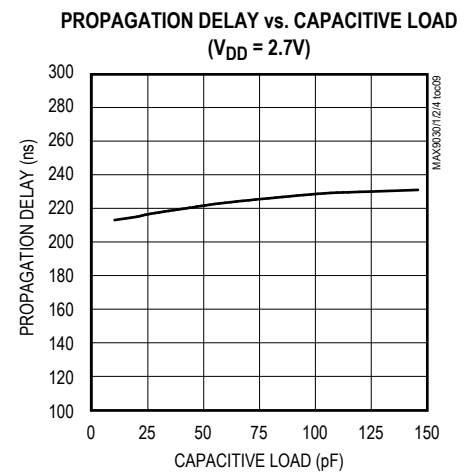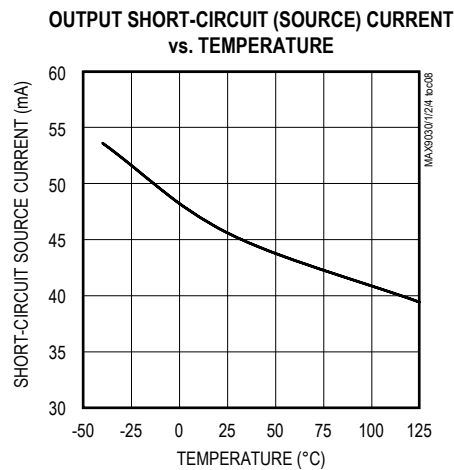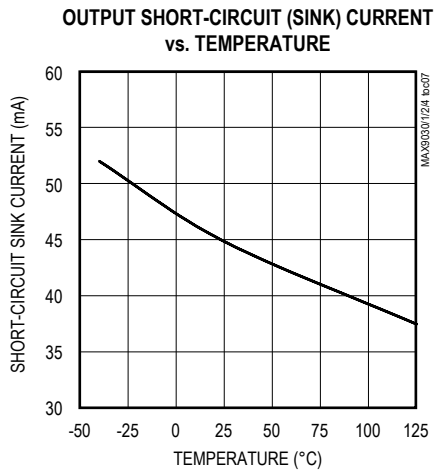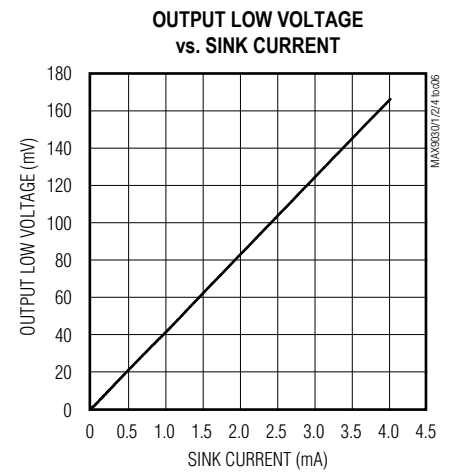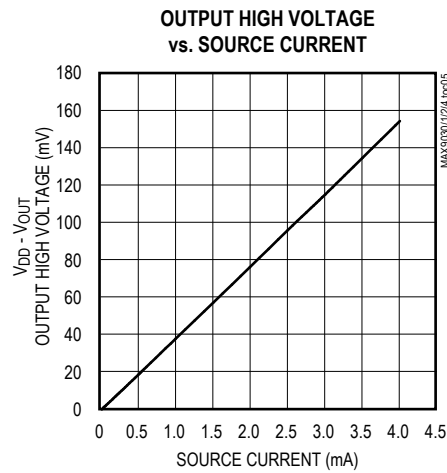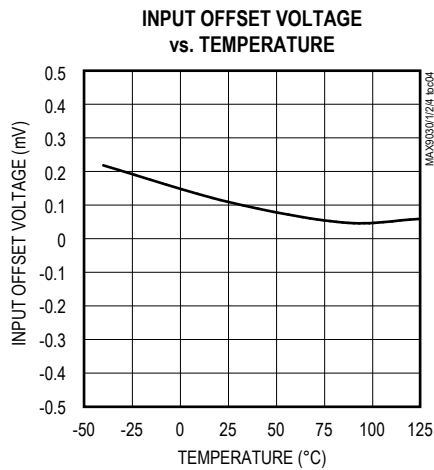


## Typical Operating Characteristics (continued)

( $V_{DD} = +5V$ ,  $V_{SS} = 0$ ,  $V_{CM} = 0$ ,  $R_L = 10k\Omega$ ,  $C_L = 15pF$ ,  $V_{OD} = 100mV$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)


PROPAGATION DELAY

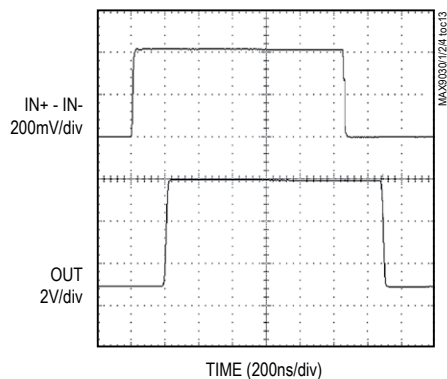


OUTPUT SWITCHING CURRENT, RISING

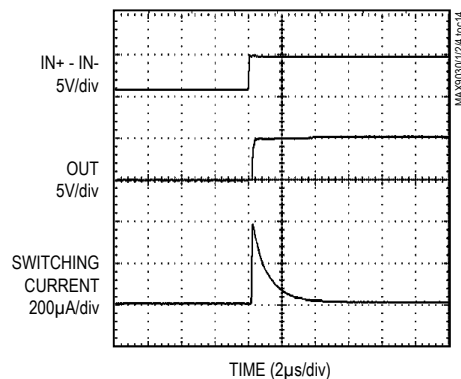


OUTPUT SWITCHING CURRENT, FALLING

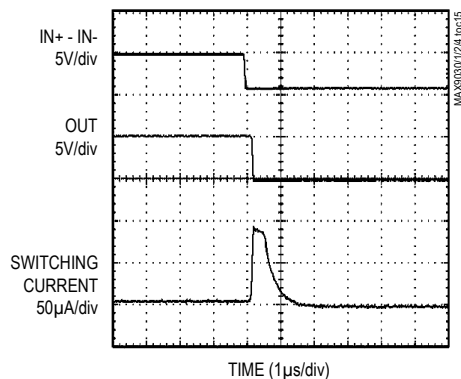


SINUSOID 1MHz RESPONSE AT 1.25MHz  
 $V_{OD} = 100mV$

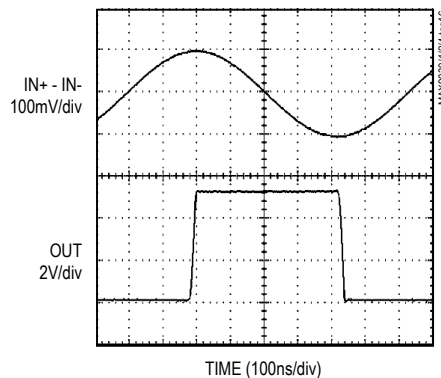

SINUSOID 1MHz RESPONSE AT 1.25MHz  
 $V_{OD} = 10mV$

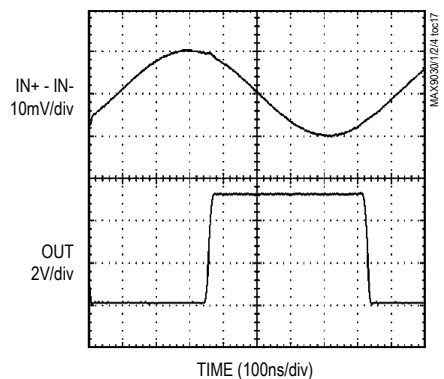

POWER-UP DELAY

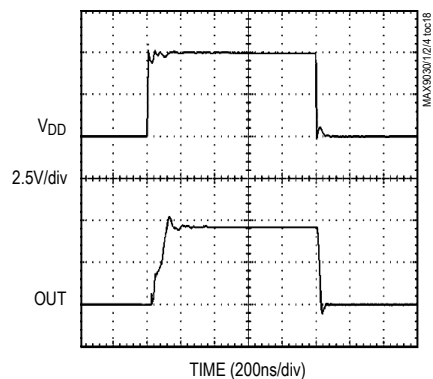

## Pin Description

| PIN     |         |         |         | NAME                     | FUNCTION                                                |
|---------|---------|---------|---------|--------------------------|---------------------------------------------------------|
| MAX9030 | MAX9031 | MAX9032 | MAX9034 |                          |                                                         |
| 1       | 1       | —       | —       | IN+                      | Comparator Noninverting Input                           |
| 2       | 2       | 4       | 11      | V <sub>SS</sub>          | Negative Supply Voltage. Bypass with a 0.1μF capacitor. |
| 3       | 3       | —       | —       | IN-                      | Comparator Inverting Input                              |
| 4       | 4       | —       | —       | OUT                      | Comparator Output                                       |
| 5       | —       | —       | —       | $\overline{\text{SHDN}}$ | Shutdown                                                |
| 6       | 5       | 8       | 4       | V <sub>DD</sub>          | Positive Supply Voltage. Bypass with a 0.1μF capacitor. |
| —       | —       | 1       | 1       | OUTA                     | Comparator A Output                                     |
| —       | —       | 2       | 2       | INA-                     | Comparator A Inverting Input                            |
| —       | —       | 3       | 3       | INA+                     | Comparator A Noninverting Input                         |
| —       | —       | 5       | 5       | INB+                     | Comparator B Noninverting Input                         |
| —       | —       | 6       | 6       | INB-                     | Comparator B Inverting Input                            |
| —       | —       | 7       | 7       | OUTB                     | Comparator B Output                                     |
| —       | —       | —       | 8       | OUTC                     | Comparator C Output                                     |
| —       | —       | —       | 9       | INC-                     | Comparator C Inverting Input                            |
| —       | —       | —       | 10      | INC+                     | Comparator C Noninverting Input                         |
| —       | —       | —       | 12      | IND+                     | Comparator D Noninverting Input                         |
| —       | —       | —       | 13      | IND-                     | Comparator D Inverting Input                            |
| —       | —       | —       | 14      | OUTD                     | Comparator D Output                                     |

## Detailed Description

The MAX9030/MAX9031/MAX9032/MAX9034 are single/dual/quad low-cost comparators. They have an operating supply voltage from +2.5V to +5.5V when operating from a single supply and from ±1.25V to ±2.75V when operating from dual power supplies, and consume only 35μA. Their common-mode input voltage range extends from the negative supply to within 1.1V of the positive supply. Internal hysteresis ensures clean output switching, even with slow-moving input signals.

### Shutdown Mode

The MAX9030 comparator comes with a power-saving shutdown mode. When in shutdown, the supply current drops from a typical 35μA to 0.05μA, and the outputs become high impedance.  $\overline{\text{SHDN}}$  has a high input impedance and typically draws 0.1μA when connected to V<sub>SS</sub> or V<sub>DD</sub>. A maximum logic low voltage of 0.3V x V<sub>DD</sub> applied

to  $\overline{\text{SHDN}}$  places the device in the shutdown mode. A minimum logic high voltage of 0.7V x V<sub>DD</sub> applied to  $\overline{\text{SHDN}}$  will enable normal operation. To disable shutdown, connect  $\overline{\text{SHDN}}$  to V<sub>DD</sub>.

## Applications Information

### Adding Hysteresis

Hysteresis extends the comparator's noise margin by increasing the upper threshold and decreasing the lower threshold. A voltage-divider from the output of the comparator sets the trip voltage. Therefore, the trip voltage is related to the output voltage.

These comparators have 4mV internal hysteresis. Additional hysteresis can be generated with two resistors using positive feedback (Figure 1). Use the following procedure to calculate resistor values:

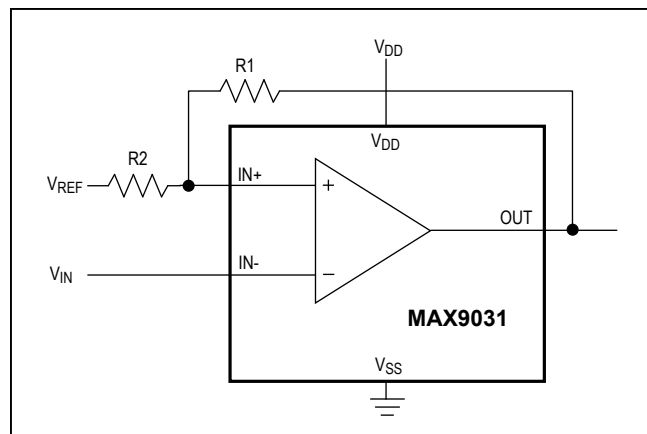


Figure 1. Additional Hysteresis

- 1) Find the trip points of the comparator using these formulas:

$$V_{TH} = V_{REF} + [(V_{DD} - V_{REF})R2] / (R1 + R2)$$

$$V_{TL} = V_{REF}(1 - (R2 / (R1 + R2)))$$

where  $V_{TH}$  is the threshold voltage at which the comparator switches its output from high to low as  $V_{IN}$  rises above the trip point.  $V_{TL}$  is the threshold voltage at which the comparator switches its output from low to high as  $V_{IN}$  drops below the trip point.

- 2) The hysteresis band will be:

$$V_{HYS} = V_{TH} - V_{TL} = V_{DD}(R2 / (R1 + R2))$$

- 3) In this example, let  $V_{DD} = +5V$  and  $V_{REF} = +2.5V$ .

$$V_{TH} = 2.5V + 2.5(R2 / (R1 + R2))V$$

and

$$V_{TL} = 2.5[1 - (R2 / (R1 + R2))]$$

- 4) Select  $R2$ . In this example, we will choose  $1k\Omega$ .

- 5) Select  $V_{HYS}$ . In this example, we will choose  $50mV$ .

- 6) Solve for  $R1$ .

$$V_{HYS} = V_{DD}(R2 / (R1 + R2))$$

$$0.050V = 5(1000\Omega / (R1 + 1000\Omega))V$$

where  $R1 \approx 100k\Omega$ ,  $V_{TH} = 2.525V$ , and  $V_{TL} = 2.475V$ .

The above-described design procedure assumes rail-to-rail output swing. If the output is significantly loaded, the results should be corrected.

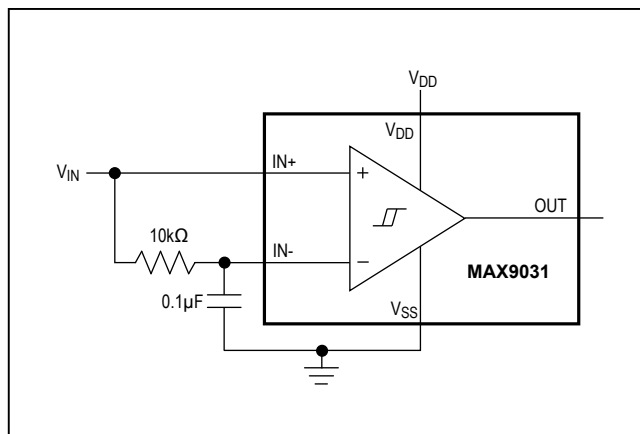


Figure 2. Time Averaging of the Input Signal for Data Recovery

## Board Layout and Bypassing

Use  $100nF$  bypass as a starting point. Minimize signal trace lengths to reduce stray capacitance. Minimize the capacitive coupling between  $IN-$  and  $OUT$ . For slow-moving input signals (rise-time  $> 1ms$ ), use a  $1nF$  capacitor between  $IN+$  and  $IN-$ .


## Biasing for Data Recovery

Digital data is often embedded into a bandwidth and amplitude-limited analog path. Recovering the data can be difficult. Figure 2 compares the input signal to a time-averaged version of itself. This self-biases the threshold to the average input voltage for optimal noise margin. Even severe phase distortion is eliminated from the digital output signal. Be sure to choose  $R1$  and  $C1$  so that:

$$f_{CAR} \gg 1 / (2\pi R1 C1)$$

where  $f_{CAR}$  is the fundamental carrier frequency of the digital data stream.

Typical Application Circuit

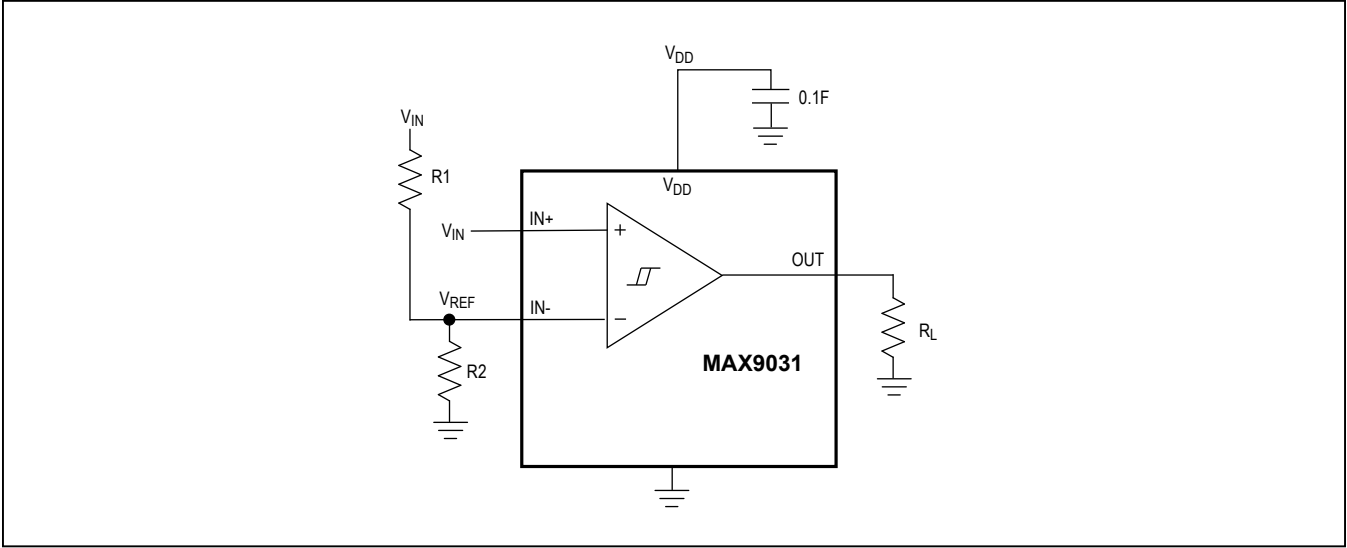

Package Information

For the latest package outline information and land patterns (footprints), go to [www.maximintegrated.com/packages](http://www.maximintegrated.com/packages). Note that a “+”, “#”, or “-” in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE | PACKAGE CODE | OUTLINE NO.             | LAND PATTERN NO.        |
|--------------|--------------|-------------------------|-------------------------|
| 5 SC70       | X5+1         | <a href="#">21-0076</a> | <a href="#">90-0188</a> |
| 6 SC70       | X6SN+1       | <a href="#">21-0077</a> | <a href="#">90-0189</a> |
| 5 SOT23      | U5+1         | <a href="#">21-0057</a> | <a href="#">90-0174</a> |
| 6 SOT23      | U6SN+1       | <a href="#">21-0058</a> | <a href="#">90-0175</a> |
| 8 SOT23      | K8+5         | <a href="#">21-0078</a> | <a href="#">90-0176</a> |
| 8 SO         | S8+2         | <a href="#">21-0041</a> | <a href="#">90-0096</a> |
| 14 SO        | S14+1        | <a href="#">21-0041</a> | <a href="#">90-0112</a> |
| 8 $\mu$ MAX  | U8+1         | <a href="#">21-0036</a> | <a href="#">90-0092</a> |
| 14 TSSOP     | U14+1        | <a href="#">21-0066</a> | <a href="#">90-0113</a> |

MAX9030/MAX9031/  
MAX9032/MAX9034

Low-Cost, Ultra-Small, Single/Dual/Quad  
Single-Supply Comparators

## Revision History

| REVISION<br>NUMBER | REVISION<br>DATE | DESCRIPTION                                                | PAGES<br>CHANGED |
|--------------------|------------------|------------------------------------------------------------|------------------|
| 0                  | 10/00            | Initial release                                            | —                |
| 1                  | 5/10             | Removed future product reference and added lead-free parts | 1                |
| 2                  | 8/12             | Added MAX9032ASA/V+ to data sheet                          | 1                |
| 3                  | 4/19             | Updated Package Information table                          | 8                |

For pricing, delivery, and ordering information, please visit Maxim Integrated's online storefront at <https://www.maximintegrated.com/en/storefront/storefront.html>.

*Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.*