


Equivalent Circuit

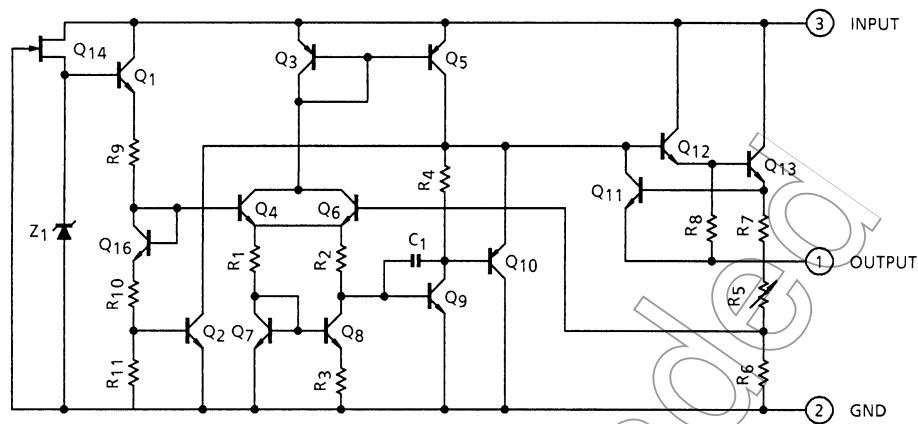

Absolute Maximum Ratings (Ta = 25°C)

Characteristics		Symbol	Rating	Unit
Input voltage		V_{IN}	35	V
Output current		I_{OUT}	0.1	A
Power dissipation	(Ta = 25°C)	P_D	600	mW
Operating temperature		T_{opr}	-30 to 85	°C
Storage temperature		T_{stg}	-55 to 150	°C
Junction temperature		T_j	150	°C
Thermal resistance		$R_{th(j-a)}$	208	°C/W

Note: Using continuously under heavy loads (e.g. the application of high temperature/current/voltage and the significant change in temperature, etc.) may cause this product to decrease in the reliability significantly even if the operating conditions (i.e. operating temperature/current/voltage, etc.) are within the absolute maximum ratings and the operating ranges.
Please design the appropriate reliability upon reviewing the Toshiba Semiconductor Reliability Handbook ("Handling Precautions"/"Derating Concept and Methods") and individual reliability data (i.e. reliability test report and estimated failure rate, etc).

TA78L05S

Electrical Characteristics

(Unless otherwise specified, $V_{IN} = 10\text{ V}$, $I_{OUT} = 40\text{ mA}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$)

Characteristics	Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit
Output voltage	V_{OUT}	1	$T_j = 25^\circ\text{C}$	4.8	5.0	5.2	V
Line regulation	Reg-line	1	$T_j = 25^\circ\text{C}$	—	55	150	mV
			$7.0\text{ V} \leq V_{IN} \leq 20\text{ V}$	—	45	100	
Load regulation	Reg-load	1	$T_j = 25^\circ\text{C}$	—	11	60	mV
			$1.0\text{ mA} \leq I_{OUT} \leq 100\text{ mA}$	—	5.0	30	
Output voltage	V_{OUT}	1	$T_j = 25^\circ\text{C}$	4.75	—	5.25	V
			$7.0\text{ V} \leq V_{IN} \leq 20\text{ V}$, $1.0\text{ mA} \leq I_{OUT} \leq 40\text{ mA}$	4.75	—	5.25	
			$1.0\text{ mA} \leq I_{OUT} \leq 70\text{ mA}$	4.75	—	5.25	
Quiescent current	I_B	1	$T_j = 25^\circ\text{C}$	—	3.1	6.0	mA
			$T_j = 125^\circ\text{C}$	—	—	5.5	
Quiescent current change	ΔI_B	1	$T_j = 25^\circ\text{C}$	—	—	1.5	mA
			$8.0\text{ V} \leq V_{IN} \leq 20\text{ V}$, $1.0\text{ mA} \leq I_{OUT} \leq 40\text{ mA}$	—	—	0.1	
Output noise voltage	V_{NO}	2	$T_a = 25^\circ\text{C}$, $10\text{ Hz} \leq f \leq 100\text{ kHz}$	—	40	—	μV_{rms}
Long term stability	$\Delta V_{OUT}/\Delta t$	1	—	—	12	—	mV/kh
Ripple rejection	R.R.	3	$f = 120\text{ Hz}$, $8\text{ V} \leq V_{IN} \leq 18\text{ V}$, $T_j = 25^\circ\text{C}$	41	49	—	dB
Dropout voltage	V_D	1	$T_j = 25^\circ\text{C}$	—	1.7	—	V
Average temperature coefficient of output voltage	T_{CVO}	1	$I_{OUT} = 5\text{ mA}$	—	-0.6	—	mV/ $^\circ\text{C}$

TA78L07S

Electrical Characteristics

(Unless otherwise specified, $V_{IN} = 12\text{ V}$, $I_{OUT} = 40\text{ mA}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$)

Characteristics	Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit
Output voltage	V_{OUT}	1	$T_j = 25^\circ\text{C}$	6.72	7.0	7.28	V
Line regulation	Reg.line	1	$T_j = 25^\circ\text{C}$	—	50	160	mV
			$9.2\text{ V} \leq V_{IN} \leq 22\text{ V}$	—	45	115	
Load regulation	Reg.load	1	$T_j = 25^\circ\text{C}$	—	13	75	mV
			$1.0\text{ mA} \leq I_{OUT} \leq 100\text{ mA}$	—	6.0	40	
Output voltage	V_{OUT}	1	$T_j = 25^\circ\text{C}$	6.65	—	7.35	V
			$9.2\text{ V} \leq V_{IN} \leq 22\text{ V}$, $1.0\text{ mA} \leq I_{OUT} \leq 40\text{ mA}$	6.65	—	7.35	
Quiescent current	I_B	1	$T_j = 25^\circ\text{C}$	—	3.1	6.5	mA
			$T_j = 125^\circ\text{C}$	—	—	6.0	
Quiescent current change	ΔI_B	1	$T_j = 25^\circ\text{C}$	—	—	1.5	mA
			$10\text{ V} \leq V_{IN} \leq 22\text{ V}$, $1.0\text{ mA} \leq I_{OUT} \leq 40\text{ mA}$	—	—	0.1	
Output noise voltage	V_{NO}	2	$T_a = 25^\circ\text{C}$, $10\text{ Hz} \leq f \leq 100\text{ kHz}$	—	50	—	μV_{rms}
Long term stability	$\Delta V_{OUT}/\Delta t$	1	—	—	17	—	mV/kh
Ripple rejection	R.R.	3	$f = 120\text{ Hz}$, $10\text{ V} \leq V_{IN} \leq 20\text{ V}$, $T_j = 25^\circ\text{C}$	37	46	—	dB
Dropout voltage	V_D	1	$T_j = 25^\circ\text{C}$, $I_{OUT} = 100\text{ mA}$	—	1.7	—	V
Average temperature coefficient of output voltage	T_{CVO}	1	$I_{OUT} = 5\text{ mA}$	—	-0.84	—	mV/ $^\circ\text{C}$

TA78L08S

Electrical Characteristics

(Unless otherwise specified, $V_{IN} = 14\text{ V}$, $I_{OUT} = 40\text{ mA}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$)

Characteristics	Symbol	Test Circuit	Test Condition		Min	Typ.	Max	Unit
Output voltage	V _{OUT}	1	T _j = 25°C		7.7	8.0	8.3	V
Line regulation	Reg-line	1	T _j = 25°C	10.5 V ≤ V _{IN} ≤ 23 V	—	20	175	mV
				11 V ≤ V _{IN} ≤ 23 V	—	12	125	
Load regulation	Reg-load	1	T _j = 25°C	1.0 mA ≤ I _{OUT} ≤ 100 mA	—	15	80	mV
				1.0 mA ≤ I _{OUT} ≤ 40 mA	—	7.0	40	
Output voltage	V _{OUT}	1	T _j = 25°C	10.5 V ≤ V _{IN} ≤ 23 V, 1.0 mA ≤ I _{OUT} ≤ 40 mA	7.6	—	8.4	V
				1.0 mA ≤ I _{OUT} ≤ 70 mA	7.6	—	8.4	
Quiescent current	I _B	1	T _j = 25°C	—	3.1	6.5	mA	
			T _j = 125°C	—	—	6.0		
Quiescent current change	ΔI _B	1	T _j = 25°C	11 V ≤ V _{IN} ≤ 23 V	—	—	1.5	mA
				1.0 mA ≤ I _{OUT} ≤ 40 mA	—	—	0.1	
Output noise voltage	V _{NO}	2	T _a = 25°C, 10 Hz ≤ f ≤ 100 kHz		—	60	—	μV _{rms}
Long term stability	ΔV _{OUT} /Δt	1	—		—	20	—	mV/kh
Ripple rejection	R.R.	3	f = 120 Hz, 12 V ≤ V _{IN} ≤ 23 V, T _j = 25°C		37	45	—	dB
Dropout voltage	V _D	1	T _j = 25°C, I _{OUT} = 100 mA		—	1.7	—	V
Average temperature coefficient of output voltage	T _{CVO}	1	I _{OUT} = 5 mA		—	−0.97	—	mV/°C

TA78L09S

Electrical Characteristics

(Unless otherwise specified, $V_{IN} = 15\text{ V}$, $I_{OUT} = 40\text{ mA}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$)

Characteristics	Symbol	Test Circuit	Test Condition	Min	Typ.	Max	Unit
Output voltage	V_{OUT}	1	$T_j = 25^\circ\text{C}$	8.64	9.0	9.36	V
Line regulation	Reg.line	1	$T_j = 25^\circ\text{C}$	—	80	200	mV
			$11.4\text{ V} \leq V_{IN} \leq 24\text{ V}$	—	20	160	
Load regulation	Reg.load	1	$T_j = 25^\circ\text{C}$	—	17	90	mV
			$1.0\text{ mA} \leq I_{OUT} \leq 100\text{ mA}$	—	8.0	45	
Output voltage	V_{OUT}	1	$T_j = 25^\circ\text{C}$	8.55	—	9.45	V
			$11.4\text{ V} \leq V_{IN} \leq 24\text{ V}$, $1.0\text{ mA} \leq I_{OUT} \leq 40\text{ mA}$	8.55	—	9.45	
Quiescent current	I_B	1	$T_j = 25^\circ\text{C}$	—	3.2	6.5	mA
			$T_j = 125^\circ\text{C}$	—	—	6.0	
Quiescent current change	ΔI_B	1	$T_j = 25^\circ\text{C}$	—	—	1.5	mA
			$12\text{ V} \leq V_{IN} \leq 24\text{ V}$	—	—	0.1	
Output noise voltage	V_{NO}	2	$T_a = 25^\circ\text{C}$, $10\text{ Hz} \leq f \leq 100\text{ kHz}$	—	65	—	μV_{rms}
Long term stability	$\Delta V_{OUT}/\Delta t$	1	—	—	21	—	mV/kh
Ripple rejection	R.R.	3	$f = 120\text{ Hz}$, $12\text{ V} \leq V_{IN} \leq 24\text{ V}$, $T_j = 25^\circ\text{C}$	36	44	—	dB
Dropout voltage	V_D	1	$T_j = 25^\circ\text{C}$, $I_{OUT} = 100\text{ mA}$	—	1.7	—	V
Average temperature coefficient of output voltage	T_{CVO}	1	$I_{OUT} = 5\text{ mA}$	—	-1.09	—	mV/ $^\circ\text{C}$

TA78L10S

Electrical Characteristics

(Unless otherwise specified, $V_{IN} = 16\text{ V}$, $I_{OUT} = 40\text{ mA}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$)

Characteristics	Symbol	Test Circuit	Test Condition		Min	Typ.	Max	Unit
Output voltage	V _{OUT}	1	T _j = 25°C		9.6	10	10.4	V
Line regulation	Reg.line	1	T _j = 25°C	12.5 V ≤ V _{IN} ≤ 25 V	—	80	230	mV
				13 V ≤ V _{IN} ≤ 25 V	—	30	170	
Load regulation	Reg.load	1	T _j = 25°C	1.0 mA ≤ I _{OUT} ≤ 100 mA	—	18	90	mV
				1.0 mA ≤ I _{OUT} ≤ 40 mA	—	8.5	45	
Output voltage	V _{OUT}	1	T _j = 25°C	12.5 V ≤ V _{IN} ≤ 25 V, 1.0 mA ≤ I _{OUT} ≤ 40 mA	9.5	—	10.5	V
				1.0 mA ≤ I _{OUT} ≤ 70 mA	9.5	—	10.5	
Quiescent current	I _B	1	T _j = 25°C	—	3.2	6.5	mA	
			T _j = 125°C	—	—	6.0		
Quiescent current change	ΔI _B	1	T _j = 25°C	13 V ≤ V _{IN} ≤ 25 V	—	—	1.5	mA
				1.0 mA ≤ I _{OUT} ≤ 40 mA	—	—	0.1	
Output noise voltage	V _{NO}	2	T _a = 25°C, 10 Hz ≤ f ≤ 100 kHz		—	70	—	μV _{rms}
Long term stability	ΔV _{OUT} /Δt	1	—		—	22	—	mV/kh
Ripple rejection	R.R.	3	f = 120 Hz, 13 V ≤ V _{IN} ≤ 24 V, T _j = 25°C		36	43	—	dB
Dropout voltage	V _D	1	T _j = 25°C, I _{OUT} = 100 mA		—	1.7	—	V
Average temperature coefficient of output voltage	T _{CV0}	1	I _{OUT} = 5 mA		—	-1.21	—	mV/°C

TA78L12S

Electrical Characteristics

(Unless otherwise specified, $V_{IN} = 19\text{ V}$, $I_{OUT} = 40\text{ mA}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$)

Characteristics	Symbol	Test Circuit	Test Condition		Min	Typ.	Max	Unit
Output voltage	V _{OUT}	1	T _j = 25°C		11.5	12	12.5	V
Line regulation	Reg.line	1	T _j = 25°C	14.5 V ≤ V _{IN} ≤ 27 V	—	120	250	mV
				16 V ≤ V _{IN} ≤ 27 V	—	100	200	
Load regulation	Reg.load	1	T _j = 25°C	1.0 mA ≤ I _{OUT} ≤ 100 mA	—	20	100	mV
				1.0 mA ≤ I _{OUT} ≤ 40 mA	—	10	50	
Output voltage	V _{OUT}	1	T _j = 25°C	14.5 V ≤ V _{IN} ≤ 27 V, 1.0 mA ≤ I _{OUT} ≤ 40 mA	11.4	—	12.6	V
				1.0 mA ≤ I _{OUT} ≤ 70 mA	11.4	—	12.6	
Quiescent current	I _B	1	T _j = 25°C		—	3.2	6.5	mA
			T _j = 125°C		—	—	6.0	
Quiescent current change	ΔI _B	1	T _j = 25°C	16 V ≤ V _{IN} ≤ 27 V	—	—	1.5	mA
				1.0 mA ≤ I _{OUT} ≤ 40 mA	—	—	0.1	
Output noise voltage	V _{NO}	2	T _a = 25°C, 10 Hz ≤ f ≤ 100 kHz		—	80	—	μV _{rms}
Long term stability	ΔV _{OUT} /Δt	1	—		—	24	—	mV/kh
Ripple rejection	R.R.	3	f = 120 Hz, 15 V ≤ V _{IN} ≤ 25 V, T _j = 25°C		36	41	—	dB
Dropout voltage	V _D	1	T _j = 25°C, I _{OUT} = 100 mA		—	1.7	—	V
Average temperature coefficient of output voltage	T _{CV0}	1	I _{OUT} = 5 mA		—	-1.45	—	mV/°C


TA78L15S

Electrical Characteristics

(Unless otherwise specified, $V_{IN} = 23\text{ V}$, $I_{OUT} = 40\text{ mA}$, $C_{IN} = 0.33\text{ }\mu\text{F}$, $C_{OUT} = 0.1\text{ }\mu\text{F}$, $0^\circ\text{C} \leq T_j \leq 125^\circ\text{C}$)


Characteristics	Symbol	Test Circuit	Test Condition		Min	Typ.	Max	Unit
Output voltage	V _{OUT}	1	T _j = 25°C		14.4	15	15.6	V
Line regulation	Reg.line	1	T _j = 25°C	17.5 V ≤ V _{IN} ≤ 30 V	—	130	300	mV
				20 V ≤ V _{IN} ≤ 30 V	—	110	250	
Load regulation	Reg.load	1	T _j = 25°C	1.0 mA ≤ I _{OUT} ≤ 100 mA	—	25	150	mV
				1.0 mA ≤ I _{OUT} ≤ 40 mA	—	12	75	
Output voltage	V _{OUT}	1	T _j = 25°C	17.5 V ≤ V _{IN} ≤ 30 V, 1.0 mA ≤ I _{OUT} ≤ 40 mA	14.25	—	15.75	V
				1.0 mA ≤ I _{OUT} ≤ 70 mA	14.25	—	15.75	
Quiescent current	I _B	1	T _j = 25°C	—	3.3	6.5	mA	
			T _j = 125°C	—	—	6.0		
Quiescent current change	ΔI _B	1	T _j = 25°C	20 V ≤ V _{IN} ≤ 30 V	—	—	1.5	mA
				1.0 mA ≤ I _{OUT} ≤ 40 mA	—	—	0.1	
Output noise voltage	V _{NO}	2	T _a = 25°C, 10 Hz ≤ f ≤ 100 kHz		—	90	—	μV _{rms}
Long term stability	ΔV _{OUT} /Δt	1	—		—	30	—	mV/kh
Ripple rejection	R.R.	3	f = 120 Hz, 18.5 V ≤ V _{IN} ≤ 28.5 V, T _j = 25°C		34	40	—	dB
Dropout voltage	V _D	1	T _j = 25°C, I _{OUT} = 100 mA		—	1.7	—	V
Average temperature coefficient of output voltage	T _{CVO}	1	I _{OUT} = 5 mA		—	-1.82	—	mV/°C

Test Circuit 1 / Standard Application

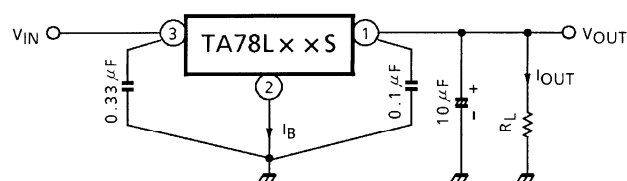


Test Circuit 2







V_{NO}


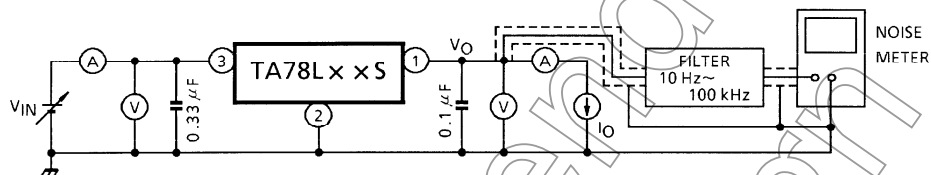


Test Circuit 3

R.R.

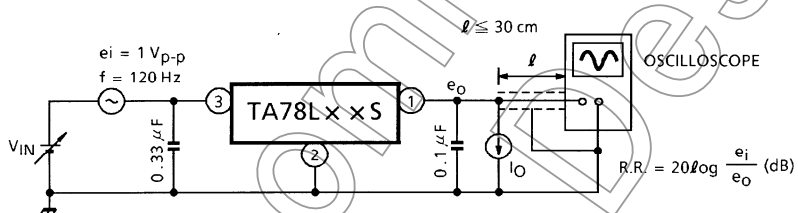

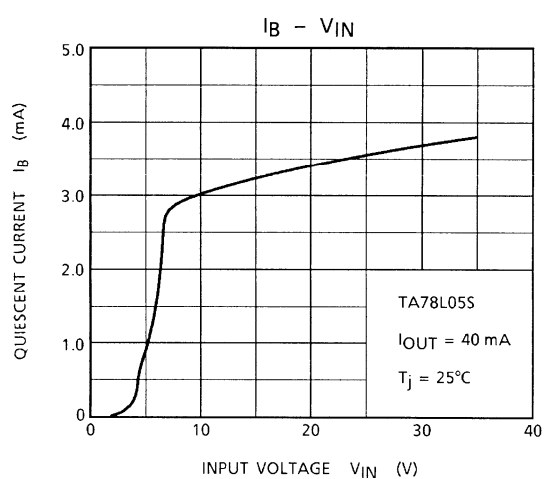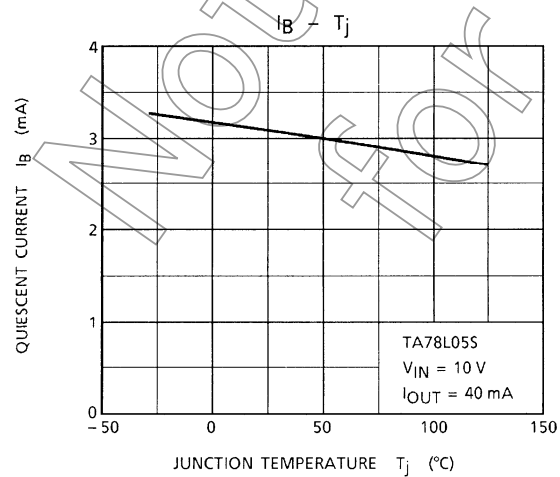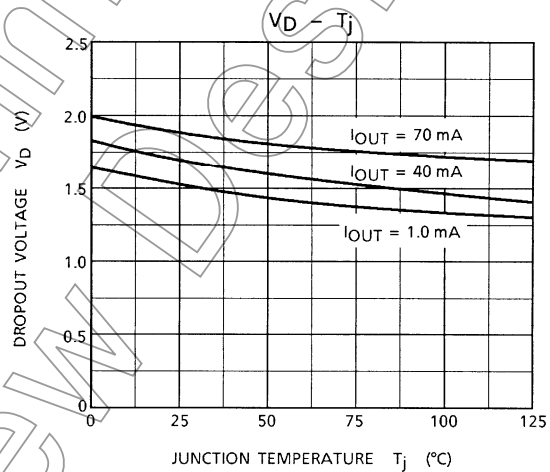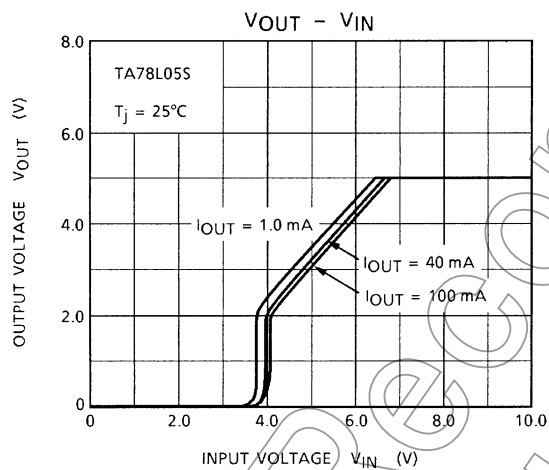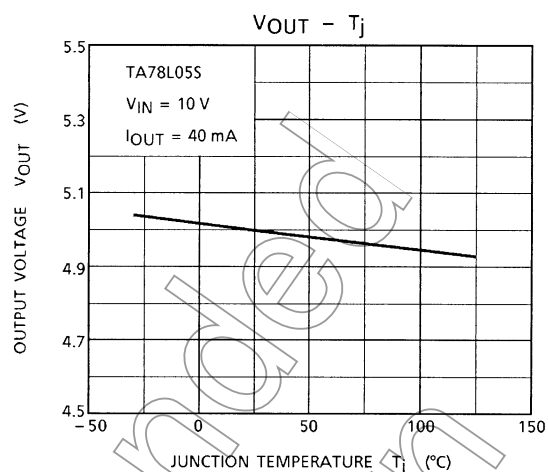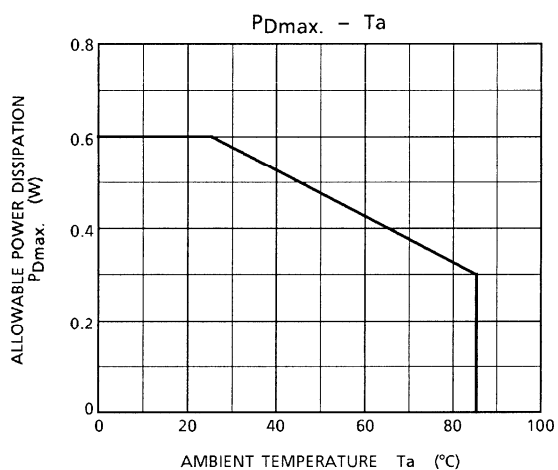


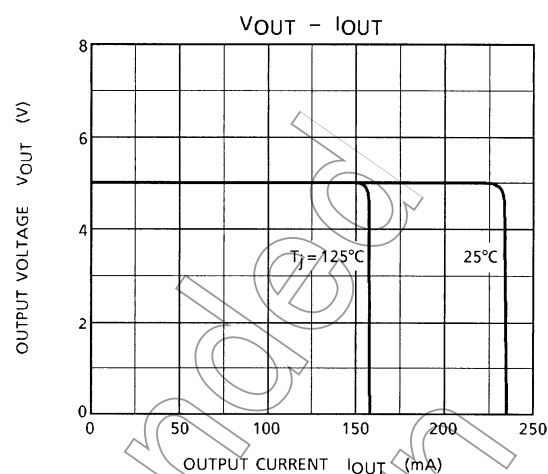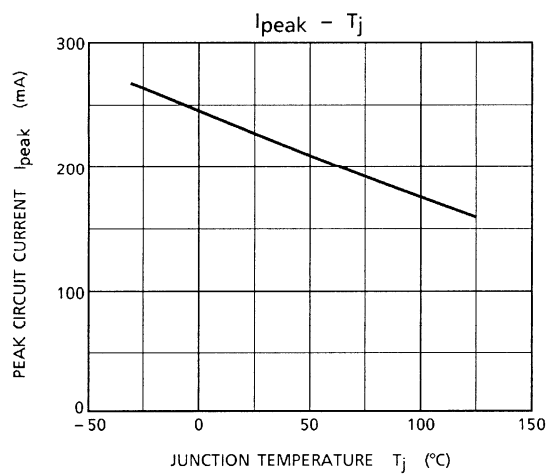

Not Recommended for New Design

Usage Precautions

Destruction of the IC may occur if high voltage in excess of the IC output voltage (typ. value) is applied to the IC output terminal. Where this possibility exists, connect a Zener diode between the output terminal and GND to prevent any application of excessive voltage.

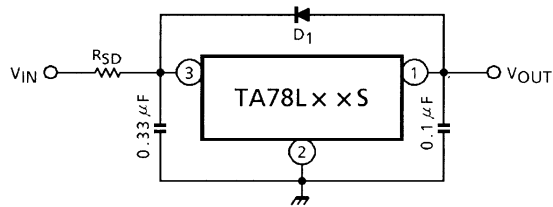

D₁ : IC protective diode

When surge voltage is applied to IC output terminal or $V_{IN} < V_{OUT}$ at the time of power ON/OFF, always connect the high speed switching diode D₁.

R_{SD} : Power limiting resistor

If V_{IN} is too high, always connect R_{SD} in order to reduce power consumption of IC.

- Low voltage

Do not apply voltage to the Product that is lower than the minimum operating voltage, or the Product's protective functions will not operate properly and the Product may be permanently damaged.

- Overcurrent Protection

The overcurrent protection circuits in the Product are designed to temporarily protect Product from minor overcurrent of brief duration. When the overcurrent protective function in the Product activates, immediately cease application of overcurrent to Product. Improper usage of Product, such as application of current to Product exceeding the absolute maximum ratings, could cause the overcurrent protection circuit not to operate properly and/or damage Product permanently even before the protection circuit starts to operate.


- Overheating Protection

The thermal shutdown circuits in the Product are designed to temporarily protect Product from minor overheating of brief duration. When the overheating protective function in the Product activates, immediately correct the overheating situation. Improper usage of Product, such as the application of heat to Product exceeding the absolute maximum ratings, could cause the overheating protection circuit not to operate properly and/or damage Product permanently even before the protection circuit starts to operate.

Package Dimensions

SSIP3-P-1.27A

Unit : mm

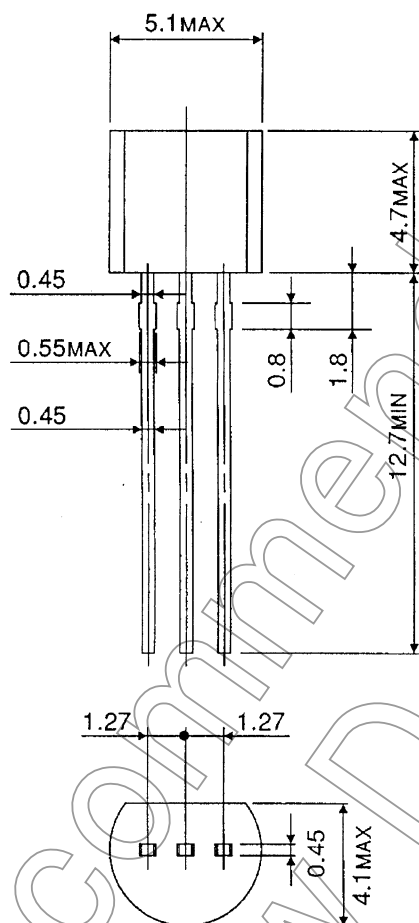

Weight : 0.21 g (Typ.)

RESTRICTIONS ON PRODUCT USE

- Toshiba Corporation, and its subsidiaries and affiliates (collectively "TOSHIBA"), reserve the right to make changes to the information in this document, and related hardware, software and systems (collectively "Product") without notice.
- This document and any information herein may not be reproduced without prior written permission from TOSHIBA. Even with TOSHIBA's written permission, reproduction is permissible only if reproduction is without alteration/omission.
- Though TOSHIBA works continually to improve Product's quality and reliability, Product can malfunction or fail. Customers are responsible for complying with safety standards and for providing adequate designs and safeguards for their hardware, software and systems which minimize risk and avoid situations in which a malfunction or failure of Product could cause loss of human life, bodily injury or damage to property, including data loss or corruption. Before creating and producing designs and using, customers must also refer to and comply with (a) the latest versions of all relevant TOSHIBA information, including without limitation, this document, the specifications, the data sheets and application notes for Product and the precautions and conditions set forth in the "TOSHIBA Semiconductor Reliability Handbook" and (b) the instructions for the application that Product will be used with or for. Customers are solely responsible for all aspects of their own product design or applications, including but not limited to (a) determining the appropriateness of the use of this Product in such design or applications; (b) evaluating and determining the applicability of any information contained in this document, or in charts, diagrams, programs, algorithms, sample application circuits, or any other referenced documents; and (c) validating all operating parameters for such designs and applications. **TOSHIBA ASSUMES NO LIABILITY FOR CUSTOMERS' PRODUCT DESIGN OR APPLICATIONS.**
- Product is intended for use in general electronics applications (e.g., computers, personal equipment, office equipment, measuring equipment, industrial robots and home electronics appliances) or for specific applications as expressly stated in this document. Product is neither intended nor warranted for use in equipment or systems that require extraordinarily high levels of quality and/or reliability and/or a malfunction or failure of which may cause loss of human life, bodily injury, serious property damage or serious public impact ("Unintended Use"). Unintended Use includes, without limitation, equipment used in nuclear facilities, equipment used in the aerospace industry, medical equipment, equipment used for automobiles, trains, ships and other transportation, traffic signaling equipment, equipment used to control combustions or explosions, safety devices, elevators and escalators, devices related to electric power, and equipment used in finance-related fields. Do not use Product for Unintended Use unless specifically permitted in this document.
- Do not disassemble, analyze, reverse-engineer, alter, modify, translate or copy Product, whether in whole or in part.
- Product shall not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable laws or regulations.
- The information contained herein is presented only as guidance for Product use. No responsibility is assumed by TOSHIBA for any infringement of patents or any other intellectual property rights of third parties that may result from the use of Product. No license to any intellectual property right is granted by this document, whether express or implied, by estoppel or otherwise.
- **ABSENT A WRITTEN SIGNED AGREEMENT, EXCEPT AS PROVIDED IN THE RELEVANT TERMS AND CONDITIONS OF SALE FOR PRODUCT, AND TO THE MAXIMUM EXTENT ALLOWABLE BY LAW, TOSHIBA (1) ASSUMES NO LIABILITY WHATSOEVER, INCLUDING WITHOUT LIMITATION, INDIRECT, CONSEQUENTIAL, SPECIAL, OR INCIDENTAL DAMAGES OR LOSS, INCLUDING WITHOUT LIMITATION, LOSS OF PROFITS, LOSS OF OPPORTUNITIES, BUSINESS INTERRUPTION AND LOSS OF DATA, AND (2) DISCLAIMS ANY AND ALL EXPRESS OR IMPLIED WARRANTIES AND CONDITIONS RELATED TO SALE, USE OF PRODUCT, OR INFORMATION, INCLUDING WARRANTIES OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY OF INFORMATION, OR NONINFRINGEMENT.**
- Do not use or otherwise make available Product or related software or technology for any military purposes, including without limitation, for the design, development, use, stockpiling or manufacturing of nuclear, chemical, or biological weapons or missile technology products (mass destruction weapons). Product and related software and technology may be controlled under the Japanese Foreign Exchange and Foreign Trade Law and the U.S. Export Administration Regulations. Export and re-export of Product or related software or technology are strictly prohibited except in compliance with all applicable export laws and regulations.
- Please contact your TOSHIBA sales representative for details as to environmental matters such as the RoHS compatibility of Product. Please use Product in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. TOSHIBA assumes no liability for damages or losses occurring as a result of noncompliance with applicable laws and regulations.