

## Standard Packages

| Type      | Marking   | Ordering Code | $R_{25\text{ min}}$                               | $R_{25\text{ max}}$ | Package              |
|-----------|-----------|---------------|---------------------------------------------------|---------------------|----------------------|
|           |           |               | (in $\Omega$ with $I_{\text{op}} = 1\text{ mA}$ ) |                     |                      |
| KT 100    | KT 100    | Q62705-K331   | 1940                                              | 2060                | TO-92                |
| KT 110    | T1        | Q62705-K332   | 1940                                              | 2060                | TO-92 Mini           |
| KT 130    | T1        | Q62705-K333   | 1940                                              | 2060                | SOT-23 <sup>1)</sup> |
| KT 210    | N1        | Q62705-K334   | 970                                               | 1030                | TO-92 Mini           |
| KT 230    | N1        | Q62705-K335   | 970                                               | 1030                | SOT-23 <sup>1)</sup> |
| KTY 10-5  | KTY 10-5  | Q62705-K110   | 1950                                              | 1990                | TO-92                |
| KTY 10-6  | KTY 10-6  | Q62705-K132   | 1980                                              | 2020                | TO-92                |
| KTY 10-62 | KTY 10-62 | Q62705-K71    | 1990                                              | 2010                | TO-92                |
| KTY 10-7  | KTY 10-7  | Q62705-K111   | 2010                                              | 2050                | TO-92                |
| KTY 11-5  | T5        | Q62705-K245   | 1950                                              | 1990                | TO-92 Mini           |
| KTY 11-6  | T6        | Q62705-K246   | 1980                                              | 2020                | TO-92 Mini           |
| KTY 11-7  | T7        | Q62705-K247   | 2010                                              | 2050                | TO-92 Mini           |
| KTY 13-5  | T5        | Q62705-K249   | 1950                                              | 1990                | SOT-23 <sup>1)</sup> |
| KTY 13-6  | T6        | Q62705-K250   | 1980                                              | 2020                | SOT-23 <sup>1)</sup> |
| KTY 13-7  | T7        | Q62705-K251   | 2010                                              | 2050                | SOT-23 <sup>1)</sup> |
| KTY 21-5  | N5        | Q62705-K258   | 975                                               | 995                 | TO-92 Mini           |
| KTY 21-6  | N6        | Q62705-K259   | 990                                               | 1010                | TO-92 Mini           |
| KTY 21-7  | N7        | Q62705-K260   | 1005                                              | 1025                | TO-92 Mini           |
| KTY 23-5  | N5        | Q62705-K262   | 975                                               | 995                 | SOT-23 <sup>1)</sup> |
| KTY 23-6  | N6        | Q62705-K263   | 990                                               | 1010                | SOT-23 <sup>1)</sup> |
| KTY 23-7  | N7        | Q62705-K264   | 1005                                              | 1025                | SOT-23 <sup>1)</sup> |

## Custom Packages

| Type                     | Marking | Ordering Code | $R_{25 \text{ min}}$                               | $R_{25 \text{ max}}$ | Screw Thread |
|--------------------------|---------|---------------|----------------------------------------------------|----------------------|--------------|
|                          |         |               | (in $\Omega$ with $I_{\text{op}} = 1 \text{ mA}$ ) |                      |              |
| KTY 16-6                 | none    | Q62705-K128   | 1980                                               | 2020                 | –            |
| KTY 19-6M                | KTY 19M | Q62705-K271   | 1980                                               | 2020                 | ISO M10x1    |
| KTY 19-6Z                | KTY 19Z | Q62705-K272   | 1980                                               | 2020                 | NPTF 1/8x27  |
| Connector set for KTY 19 |         | Q62901-B80    |                                                    |                      |              |

<sup>1)</sup> Electrical contact between Pin1 and Pin2 (refer to package outlines drawing).

## Absolute Maximum Ratings

| Parameter                                                                               | Symbol             | KT 1x0<br>KTY 1x-x | KT 2x0<br>KTY 2x-x | Unit |
|-----------------------------------------------------------------------------------------|--------------------|--------------------|--------------------|------|
| Maximum operating voltage <sup>1)</sup><br>$T_A \leq 25\text{ °C}, t \leq 10\text{ ms}$ | $V_{\text{opmax}}$ | 25                 |                    | V    |
| Maximum operating current                                                               | $I_{\text{opmax}}$ | 5                  | 7                  | mA   |
| Peak operating current<br>$T_A \leq 25\text{ °C}, t \leq 10\text{ ms}$                  | $I_{\text{opp}}$   | 7                  | 10                 | mA   |
| Operating temperature range                                                             | $T_{\text{op}}$    | – 50 ... + 150     |                    | °C   |
| Storage temperature range                                                               | $T_{\text{stg}}$   | – 50 ... + 150     |                    | °C   |

<sup>1)</sup> When the temperature sensor is operated with long supply leads, it should be protected through the parallel connection of a > 10 nF capacitor to prevent damage to the sensor through induced voltage peaks.

## Electrical Characteristics

$I_{\text{op}} = 1\text{ mA}$

| Thermal Time Constant ( $\tau$ ); (63% of $\Delta T$ ) | $\tau_{\text{air}}$ (typ.) | $\tau_{\text{oil}}$ (typ.) | Unit |
|--------------------------------------------------------|----------------------------|----------------------------|------|
| KT 100, KTY 10-x                                       | 40                         | 4                          | s    |
| KT 110, KT 210, KTY 11-x, KTY 21-x                     | 11                         | 1.5                        |      |
| KT 130, KT 230, KTY 13-x, KTY 23-x                     | 7                          | 1                          |      |
| KTY 16-6                                               | 40                         | 4                          |      |
| KTY 19-6M/Z                                            | 40                         | 4                          |      |

## General Technical Data: KT- and KTY-Series Temperature Sensors

These temperature sensors are designed for the measurement, control and regulation of air, gases and liquids within the temperature range of  $-50\text{ °C}$  to  $+150\text{ °C}$ . The temperature sensing element is an n-conducting silicon crystal in planar technology. The gentle curvature of the characteristic,  $R_T = f(T_A)$ , is described as a regression parabola in the following expressions.

The resistance of the sensor can be calculated for various temperatures from the following second order equation, valid over the temperature range  $-30\text{ °C}$  to  $+130\text{ °C}$ .

$$R_T = R_{25} \times (1 + \alpha \times \Delta T_A + \beta \times \Delta T_A^2) = f(T_A)$$

$$\text{with: } \alpha = 7.88 \cdot 10^{-3} \text{ K}^{-1}; \beta = 1.937 \cdot 10^{-5} \text{ K}^{-2}$$

The temperature factor  $k_T$  can be derived from this:

$$k_T = \frac{R_T}{R_{25}} = 1 + \alpha \times \Delta T_A + \beta \times \Delta T_A^2 = f(T_A)$$

The temperature at the sensor can be calculated from the change in the sensors resistance from the following equation, which approximates the characteristic curve.

$$T = \left( 25 + \frac{\sqrt{\alpha^2 - 4 \times \beta + 4 \times \beta \times k_T} - \alpha}{2 \times \beta} \right) \text{°C}$$


**Table 1**  
**Spread of the Temperature Factor  $k_T$**

| $T_A$<br>°C | $k_T$             |       |       |
|-------------|-------------------|-------|-------|
|             | min.              | typ.  | max.  |
| – 50        | 0.506             | 0.518 | 0.530 |
| – 40        | 0.559             | 0.570 | 0.581 |
| – 30        | 0.615             | 0.625 | 0.635 |
| – 20        | 0.676             | 0.685 | 0.694 |
| – 10        | 0.741             | 0.748 | 0.755 |
| 0           | 0.810             | 0.815 | 0.821 |
| 10          | 0.883             | 0.886 | 0.890 |
| 20          | 0.960             | 0.961 | 0.962 |
| 25          | 1.0 <sup>1)</sup> |       |       |
| 30          | 1.039             | 1.040 | 1.041 |
| 40          | 1.119             | 1.123 | 1.126 |
| 50          | 1.204             | 1.209 | 1.215 |
| 60          | 1.291             | 1.300 | 1.308 |
| 70          | 1.383             | 1.394 | 1.405 |
| 80          | 1.478             | 1.492 | 1.506 |
| 90          | 1.577             | 1.594 | 1.611 |
| 100         | 1.680             | 1.700 | 1.720 |
| 110         | 1.786             | 1.810 | 1.833 |
| 120         | 1.896             | 1.923 | 1.951 |
| 130         | 2.010             | 2.041 | 2.072 |
| 140         | 2.093             | 2.128 | 2.163 |
| 150         | 2.196             | 2.235 | 2.274 |

1) Normalising point


**Sensor Resistance  $R_T = k_T \times R_{25} = f(T_A)$**

$I_B = 1 \text{ mA}$ ; Example:  $R_{25} = 2000 \Omega$

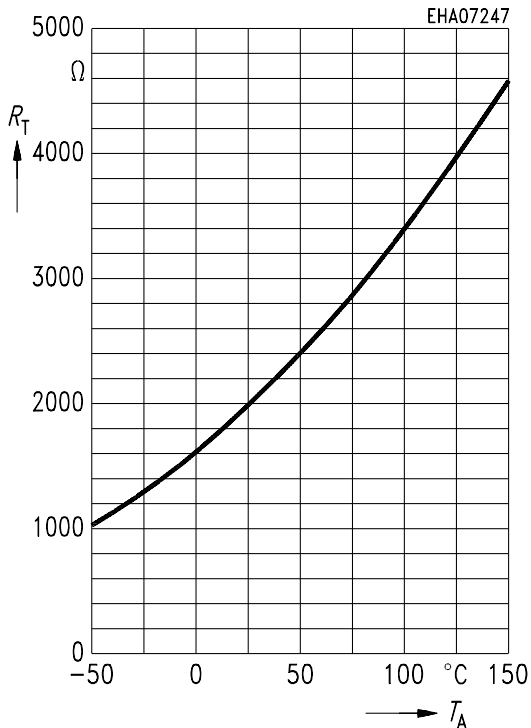


**Sensor Resistance  $R_T = k_T \times R_{25} = f(T_A)$**

$I_B = 1 \text{ mA}$ ; Example:  $R_{25} = 1000 \Omega$

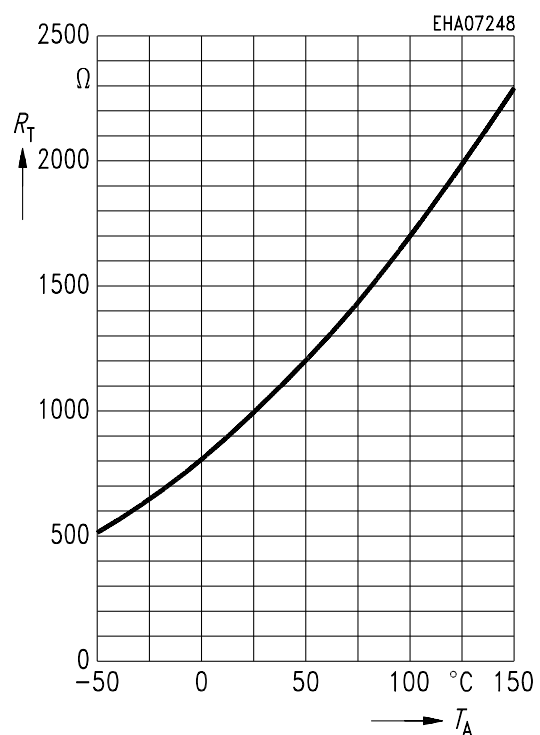


**Typical Dependence of Sensor Resistance on Supply Current**

Example: KTY 10-6 in oil at  $T_A = 25^{\circ}\text{C}$

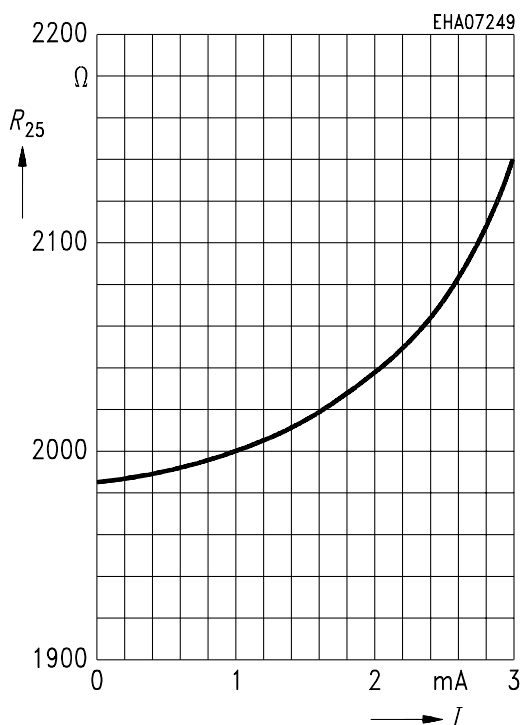


**Typical Dependence of Sensor Resistance on Supply Current**

Example: KTY 21-6 in oil at  $T_A = 25^{\circ}\text{C}$

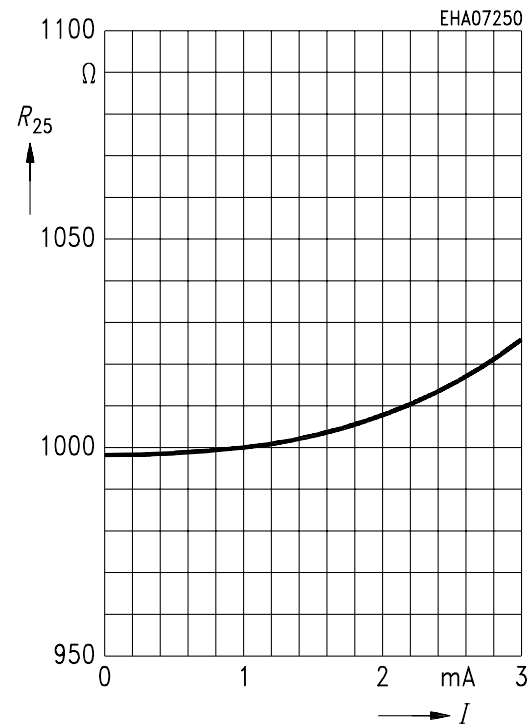


## Typical Deviation of Sensor Resistance from the Basic Resistance $R_{25}$ ( $I_B = 1\text{mA}$ ) Versus Supply Current

Example: KTY 10-6 in oil at  $T_A = 25^\circ\text{C}$

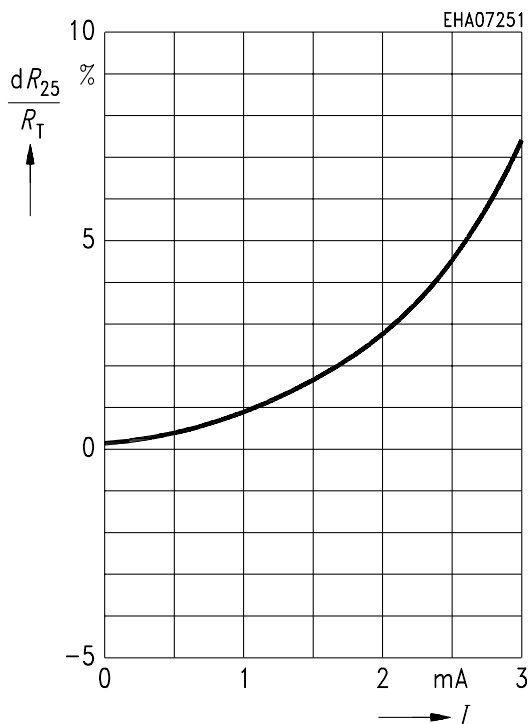


## Typical Deviation of Sensor Resistance from the Basic Resistance $R_{25}$ ( $I_B = 1\text{mA}$ ) Versus Supply Current


Example: KTY 21-6 in oil at  $T_A = 25^\circ\text{C}$

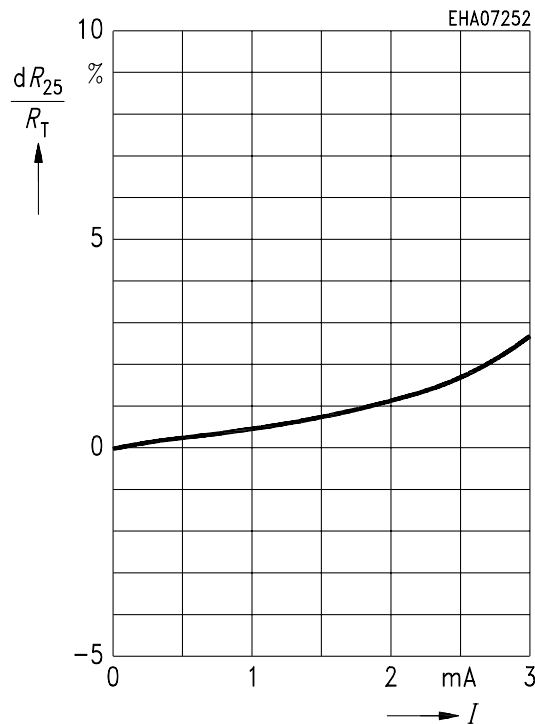

## Typical Relationship of the Temperature Factor

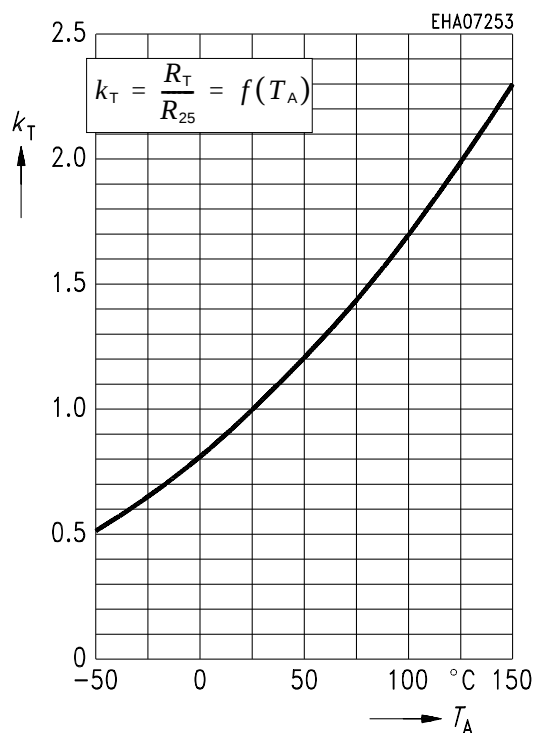


## Typical Relationship of the Temperature Factor

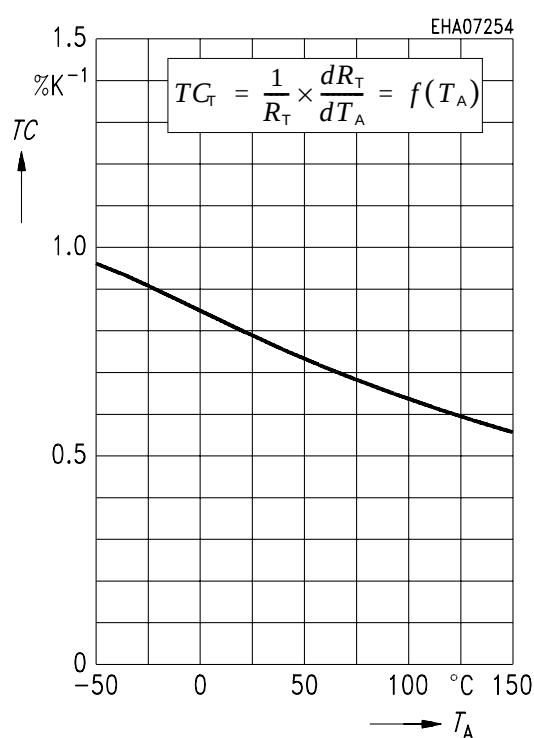


## Definition of the Thermal Time Constant $\tau$

$$\Delta T_A = T_{A2} - T_{A1}; \tau = t_1 - t_0$$

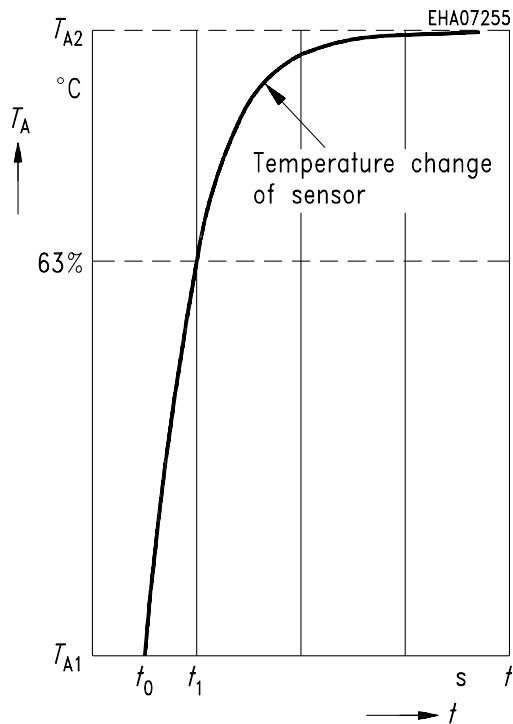


## Thermal Time constant

$$\tau = 5 \text{ s}$$

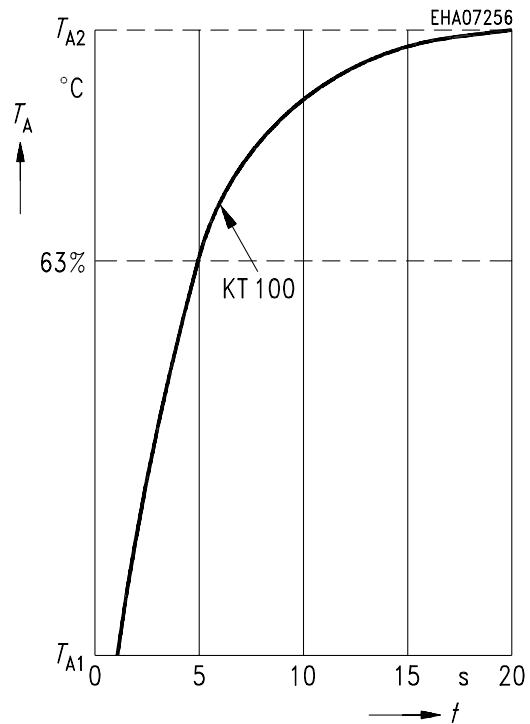


## Peak Current in Air

$$R_{25} = 2000 \Omega; \hat{I} = f(T_A)$$

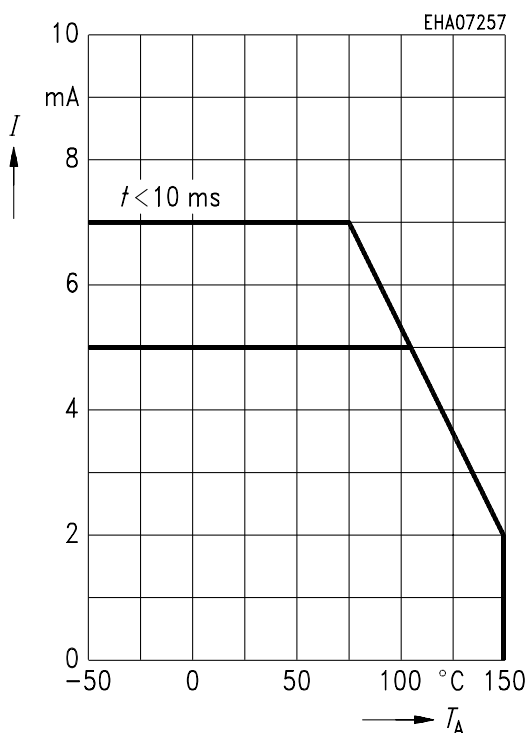

## Peak Current in Air


$$R_{25} = 1000 \Omega; \hat{I} = f(T_A)$$

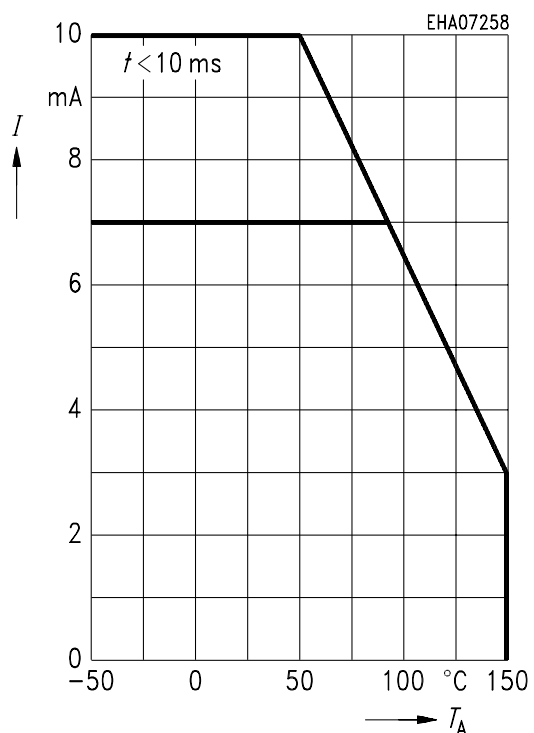

## Package Outlines

### Modified TO-92


### KT 100 KTY 10-x

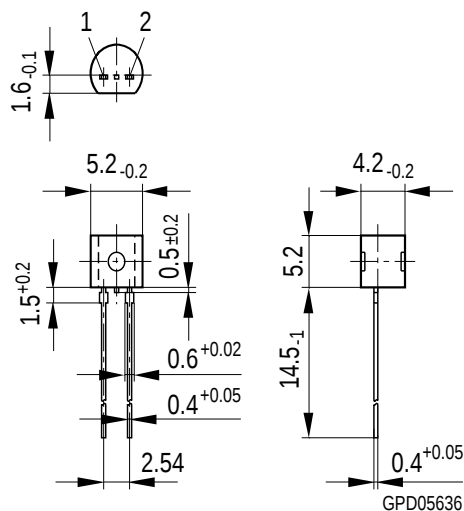

Weight approx. 0.25 g

### TO-92 Mini

### KT 110, KT 210 KTY 11-x, KTY 2x-x

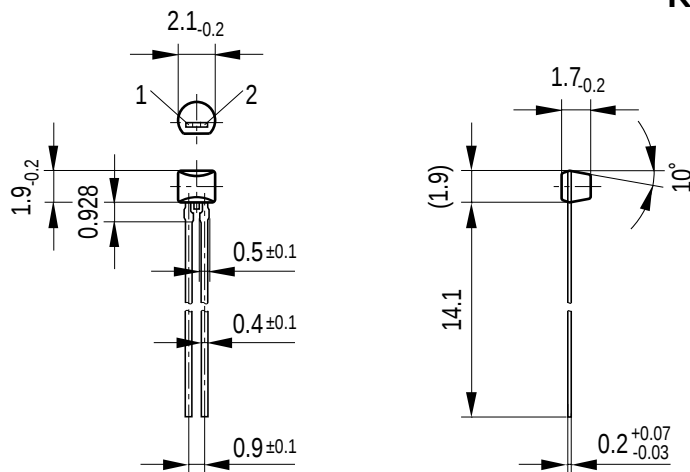

Weight approx. 0.02 g

## Sorts of Packing

Package outlines for tubes, trays etc. are contained in our Data Book "Package Information".



Dimensions in mm

## SOT-23

(Small Outline Transistor)

KT 130, KT 230

KTY 13-x, KTY 23-x

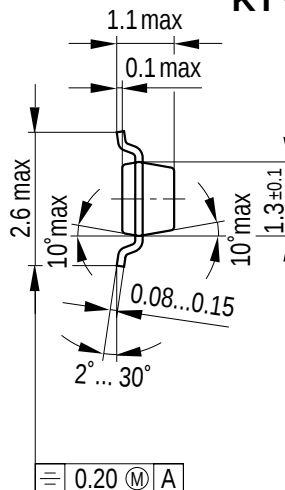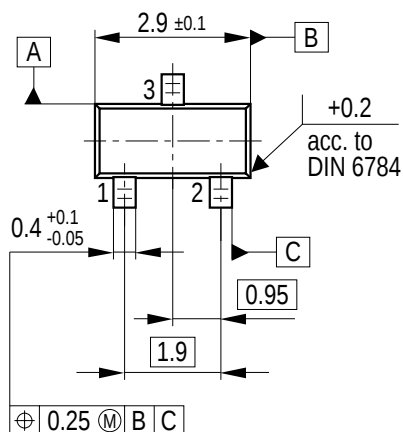


Weight approx. 0.01 g

Pins 1 - 2: R<sub>25</sub>

## Ni-plated Brass Tube Housing with Tefzel Isolated Leadwires

KTY 16-6

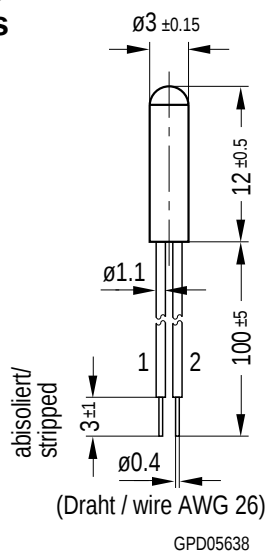

Weight approx. 0.07 g

## Sorts of Packing


Package outlines for tubes, trays etc. are contained in our Data Book "Package Information".

SMD = Surface Mounted Device

Dimensions in mm

**Stainless Steel Housing,  
BSS303 (equiv. DIN 1.4305)**

**KTY 19-6M/Z**

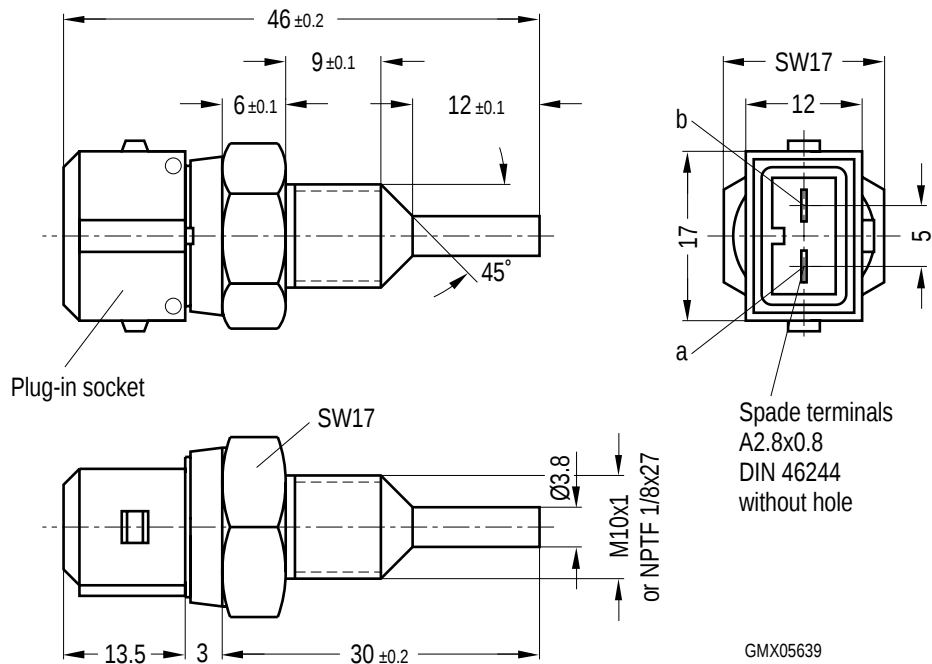

Weight approx. 20 g

## Sorts of Packing

Package outlines for tubes, trays etc. are contained in our Data Book "Package Information".

Dimensions in mm