

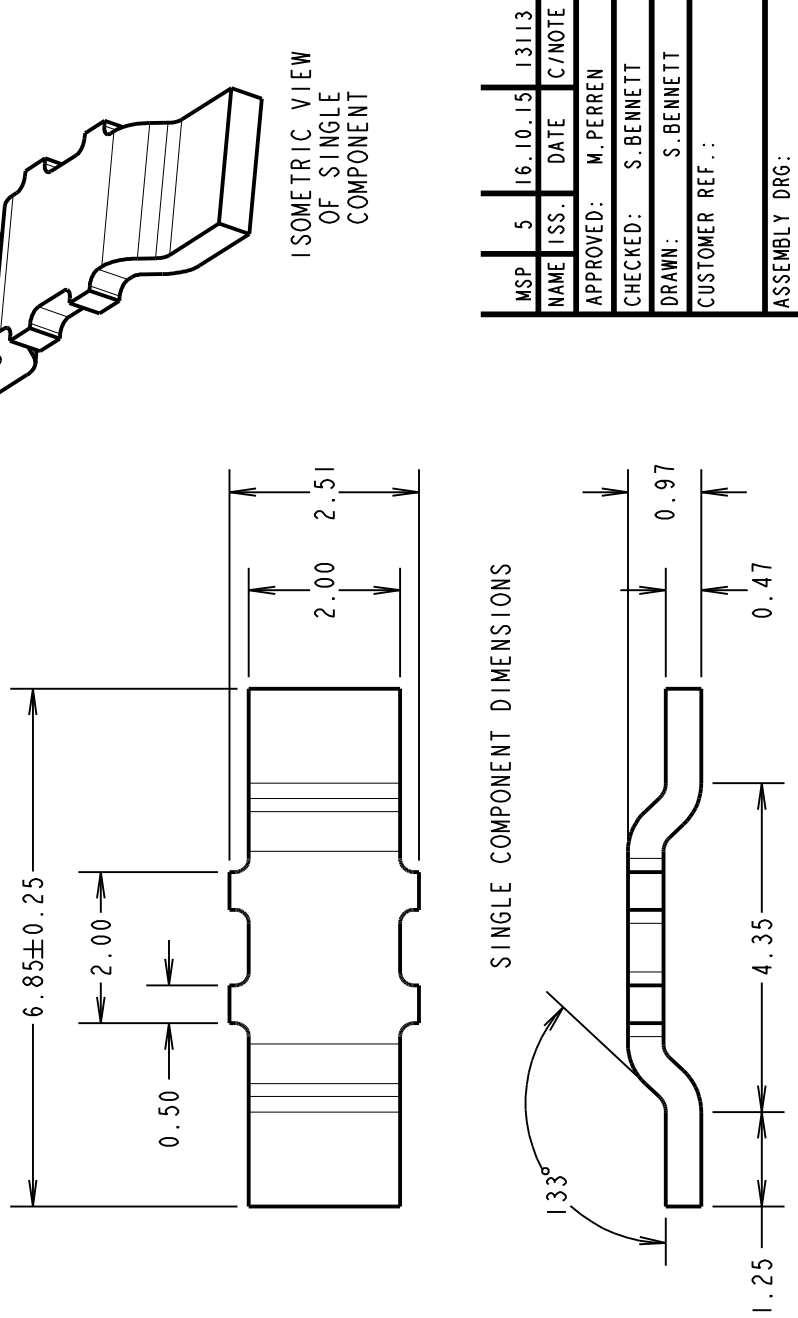


Customer Information Sheet

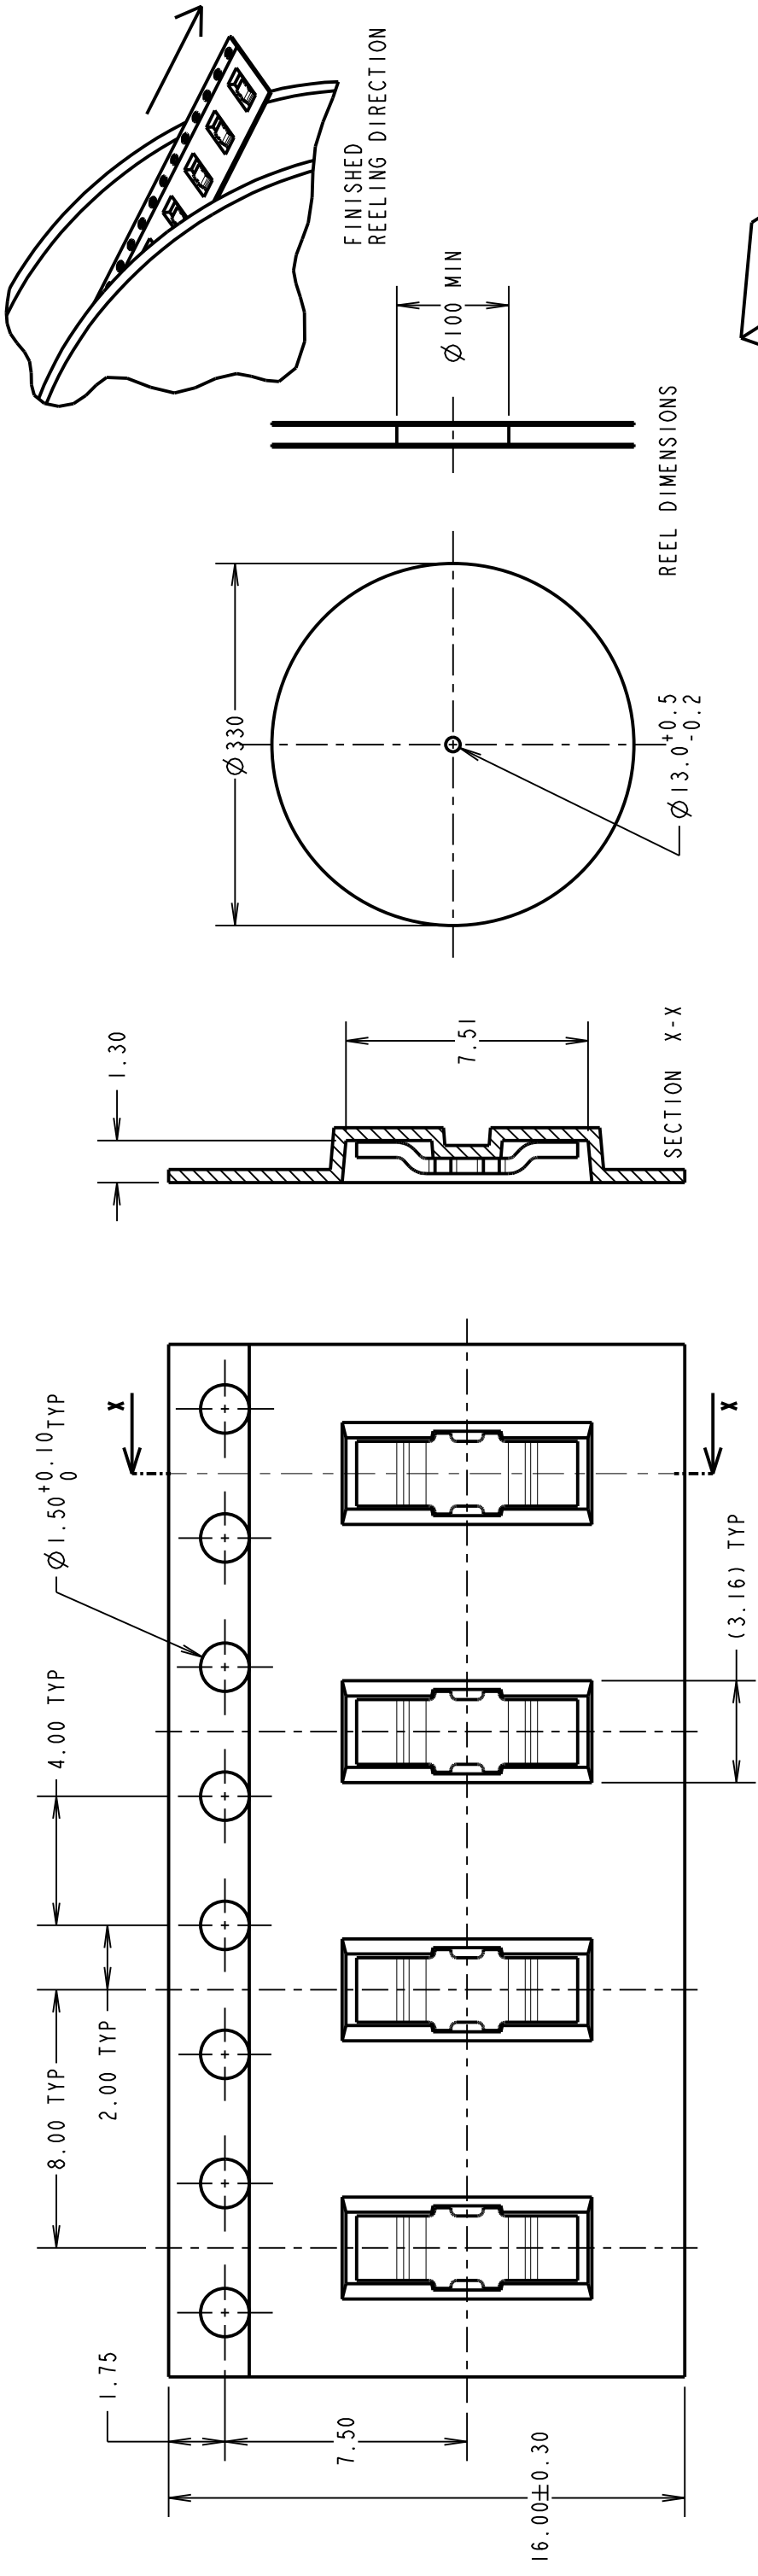

NOTES:
1. QUANTITY OF COMPONENTS PER REEL = 4,000.
2. THIS PRODUCT IS TAPED AND REELED IN GENERAL ACCORDANCE WITH EIA-481 (ELECTRONIC INDUSTRIES ASSOCIATION).

COMPONENT SPECIFICATION:
MATERIAL = BRASS CW508L
H110 TO BS EN 1652
COMPOSITION (IN ACCORDANCE WITH BS EN 1652)
FINISH = 100% TIN OVER NICKEL
ELECTRICAL:
CURRENT RATING = 10A (30°C TEMP RISE)
CONTACT RESISTANCE = 20mΩ MAX
ENVIRONMENTAL:
OPERATING TEMPERATURE = -40°C TO +125°C

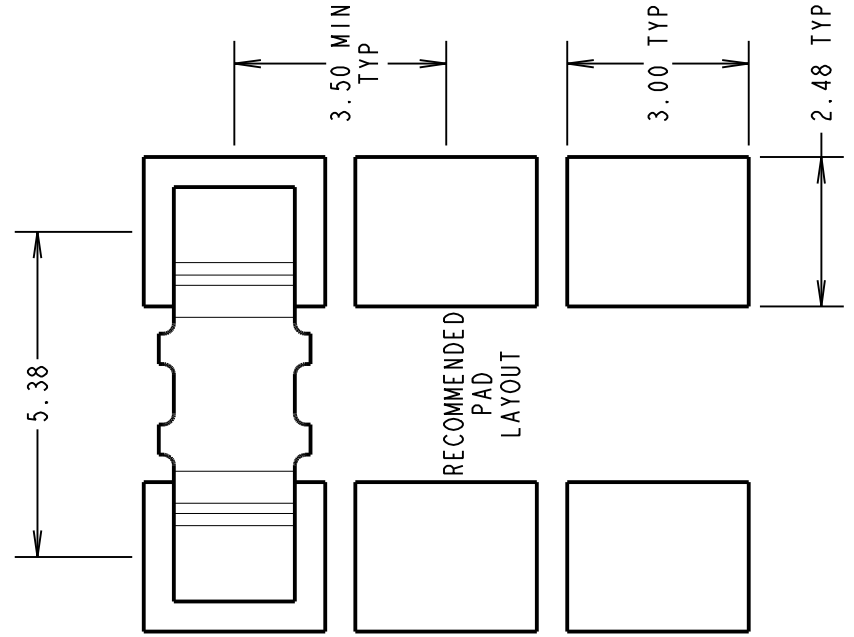

MSP	5	16.10.15	13113
NAME	ISS.	DATE	C/NOTE
APPROVED:	M. PERREN		
CHECKED:	S. BENNETT		
DRAWN:	S. BENNETT		
CUSTOMER REF.:			
ASSEMBLY DRG:			

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

HARWIN

www.harwin.com
technical@harwin.com

TOLERANCES
X. = $\pm 1\text{mm}$
X.X = $\pm 0.50\text{mm}$
X.XX = $\pm 0.10\text{mm}$
X.XXX = $\pm 0.01\text{mm}$
ANGLES = $\pm 5^\circ$
UNLESS STATED

MATERIAL:
SEE ABOVE

FINISH:
SEE ABOVE

S/AREA:
SEE ABOVE mm²

TITLE:
SMT JUMPER LINK
(TAPE AND REELED)

DRAWING NUMBER:
S1911-46R

SHT
2 OF 2

Downloaded from Arrow.com