Pin Configuration

SOT23-3/SC70-3

PT7M7803
PT7M7809



PT7M7810



SOT143-4

PT7M7811



PT7M7812



SOT23-5

PT7M7811



PT7M7812



PT7M7823



PT7M7824



PT7M7825



© Diodes Incorporated

Downloaded from Arrow.com.

Pin Description

Pin	Type	Description
$\overline{MR}$	I	**Manual-Reset: (CMOS).** Active low. Pull low to force a reset. Reset remains asserted for the duration of the Reset Timeout Period after MR transitions from low to high. Leave unconnected or connected to VCC if not used.
VCC	Power	**Supply Voltage.** Reset is asserted when V_{CC} drops below the Reset Threshold Voltage (V_{RST}). Reset remains asserted until V_{CC} rises above V_{RST} and keep asserted for the duration of the Reset Timeout Period (t_{RS}) once V_{CC} rises above V_{RST}.
GND	-	**Ground Reference** for all signals.
WDI	I	**Watchdog Input (CMOS).** If WDI remains high or low for the duration of the watchdog timeout period (t_{WD}), the internal watchdog timer trigger a reset output. Floating WDI or connecting WDI to a high-impedance three-state buffer disables the watchdog feature. The internal watchdog timer clears whenever reset is asserted or WDI occurs a rising or falling edge.
$\overline{RESET}$	O	**Active-Low Reset Output (Push-Pull or Open-Drain).** It goes low when Vcc is below the reset threshold. It remains low for about 200ms after one of the following occurs: Vcc rises above the reset threshold (VRST), the watchdog triggers a reset, or MR goes from low to high.
RESET	O	**The inverse of $\overline{RESET}$,** active high. Whenever $\overline{RESET}$ is high, RESET is low.
NC	-	**No connection.**

© Diodes Incorporated

Downloaded from Arrow.com.

Block Diagram

PT7M7823/24/25 Block Diagram

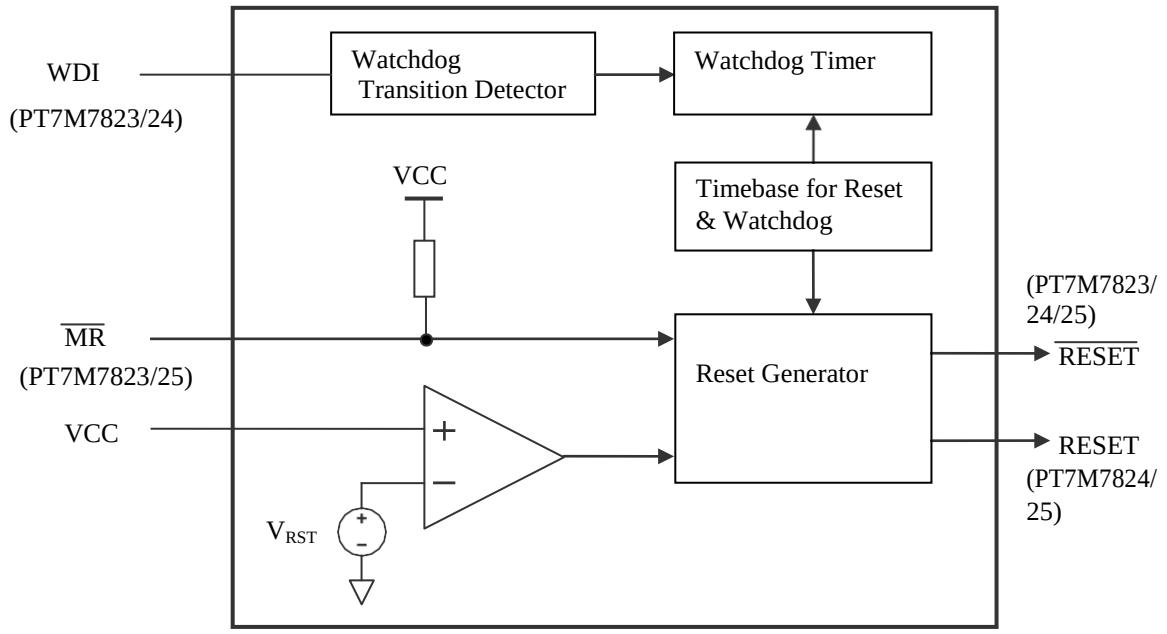

© Diodes Incorporated
Downloaded from Arrow.com.

PT7M7803/09/10/11/12 Block Diagram

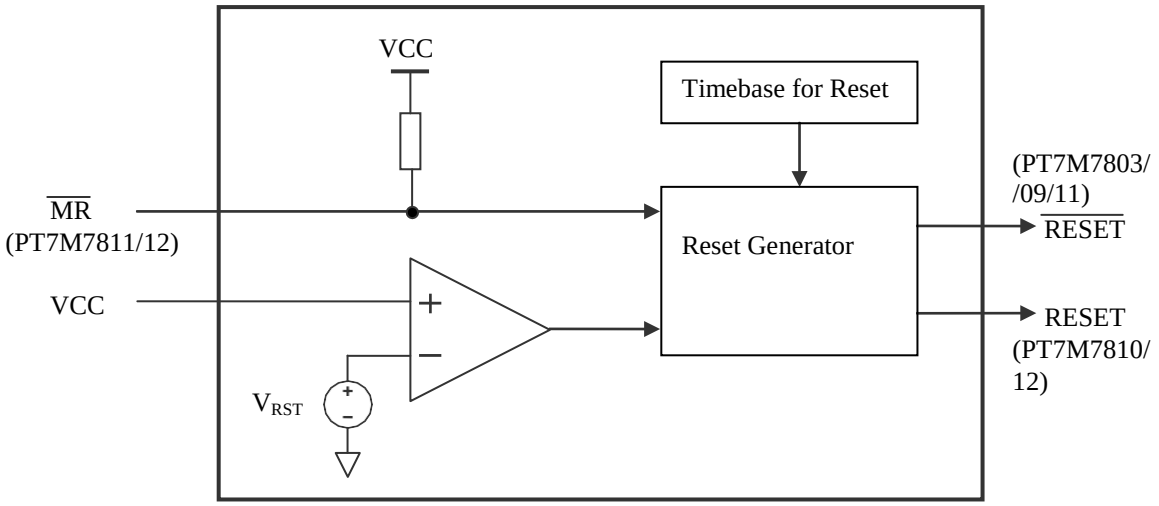

© Diodes Incorporated

Downloaded from Arrow.com.

Maximum Ratings

Storage Temperature .....-65°C to +150°C
Ambient Temperature with Power Applied..... -40°C to +85°C
Supply Voltage to Ground Potential (Vcc to GND) .....-0.3V to +7.0V
DC Input Voltage (All inputs except Vcc and GND).....-0.3V to V_{CC}+0.3V
Open-drain RESET .....-0.3V to +7.0V
DC Output Current (All outputs) 20mA
Power Dissipation ..... 320mW (Depend on package)

Note:
Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

Recommended Operation Conditions

Sym	Description	Test Conditions	Min.	Typ.	Max.	Unit
V_{CC}	Supply Voltage for 78xxL/M/J	-	4.5	5.0	5.5	V
	Supply Voltage for 78xxT/S	-	3.0	3.3	5.5	V
	Supply Voltage for 78xxR/Z/Y/K/G	-	2.7	3.0	5.5	V
V_{IH}	Input High Voltage (WDI, $\overline{MR}$)	-	$0.7V_{CC}$	-	V_{CC}	V
	Input High Voltage for Open-drain RESET		0	--	5.5	V
V_{IL}	Input Low Voltage	-	-	-	$0.3V_{CC}$	V
T_A	Operating Temperature	-	-40	-	85	℃

© Diodes Incorporated

Downloaded from Arrow.com.

DC Electrical Characteristics

(V_{CC} = V_{RN} + 5% to 5.5V, T_A= -40~85℃, unless otherwise noted.)(Note 1)

Symbol	Description	Test Conditions		Min.	Typ.	Max.	Unit
V_{CC}	Operating Voltage Range	-		1.0	-	5.5	V
I_{CC}	Supply Current	Vcc = 5V, No load	7803/09/10/11/12	-	10	30	µA
			7823/24/25	-	13	36	
V_{IH}	Input High Voltage	Pin: $\overline{MR}$, WDI		0.7V_{CC}	-	V_{CC}	V
V_{IL}	Input Low Voltage	Pin: $\overline{MR}$, WDI		-	-	0.3V_{CC}	V
V_{RST}	Threshold Voltage(Falling-edge)(**Note 2**)	T_A= 25℃	78xx	V_{RN} - 1.5%	V_{RN}	V_{RN} + 1.5%	V
		T_A= -40 ~ 85℃		V_{RN} - 2.5%	V_{RN}	V_{RN} + 2.5%	
V_{RTH}	Reset Threshold Hysteresis (**Note 2**)	Vcc varies between V_{RN} ± 5%	7823/24/25L/M	-	12	-	mV
			7823/24/25 T/S/R/K/Z/Y	-	4	-	
			Others	-	50	-	
V_{OH}	Output High Voltage(Except 7823/24/25)	Vcc ≥ 4.5V Isource=800µA		Vcc-1.5	-	-	V
		Vcc ≥ 2.7V Isource=500µA		0.8×Vcc	-	-	
		Vcc ≥ 1.8V Isource=150µA		0.8×Vcc	-	-	
		Vcc ≥ 1.0V Isource=4µA		0.8×Vcc	-	-	
	Output High Voltage(7823/24/25)	7823/24/25L/M, Vcc=V_{RST} Isource=120µA		Vcc-1.5	-	-	V
		7823/24/25T/S/R/K, Vcc=V_{RST} Isource=30µA		0.8×Vcc	-	-	V
V_{OL}	Output Low Voltage	Vcc ≥ 4.5V Isink=3.2mA		-	-	0.4	V
		Vcc ≥ 2.7V Isink=1.2mA		-	-	0.3	
		Vcc ≥ 1.0V Isink=100µA		-	-	0.3	
I_{LKG}	Open-Drain Output Leakage Current	V_{CC} > $V_{TH(MAX)}$ for 7803		-	-	1	µA
I_{WDI}	Average WDI Input Current (**Note 3**)	WDI connected to V_{CC}: 5.5V		-	120	160	µA
		WDI connected to GND		-20	-15	-	
I_{source}	$\overline{RESET}$ Output Short-Circuit Current (only for PT7M7823/24/25)	PT7M782xL/M, $\overline{RESET}$=0V, Vcc=5.5V		-	-	800	µA
		PT7M782xT/S/R/K/Z/Y, RESET=0V, Vcc=3.6V		-	-	400	
r	MR pull-up resistor (internal)	PT7M7811/7812		10	20	40	kΩ
		PT7M7823/7824/7825		35	52	75	

Note: 1. Parameters of room temperature guaranteed by production test and parameters of full-temperature guaranteed by design.
2. Valid for both RESET and RESET. V_{RST} (V_{RTH}-) is the Reset threshold voltage when V_{CC} from high to low level, and V_{RTH}+ is the Reset threshold voltage when V_{CC} from low to high level. V_{RN} is nominal reset threshold voltage.
3. WDI is internally serviced within the watchdog period if WDI is left unconnected.

© Diodes Incorporated
Downloaded from Arrow.com.

AC Electrical Characteristics

Symbol	Description	Test Conditions	Min.	Typ.	Max.	Unit
t_{RS}	Reset Pulse Width	$\overline{MR}$ from low to High.	140	200	400	ms
t_{WD}	Watchdog Timeout Period	WDI, $\overline{MR}$ tied to Vcc, Vcc>V_{RN}+5%.	1.12	1.6	2.25	s
t_{MR}	$\overline{MR}$ Pulse Width	-	200	-	-	ns
t_{MD}	$\overline{MR}$ to $\overline{RESET}$ Delay	Vcc=5V	-	-	250	ns
t_{WP}	WDI Pulse Width	-	150	-	-	ns

Watchdog Timing Diagram

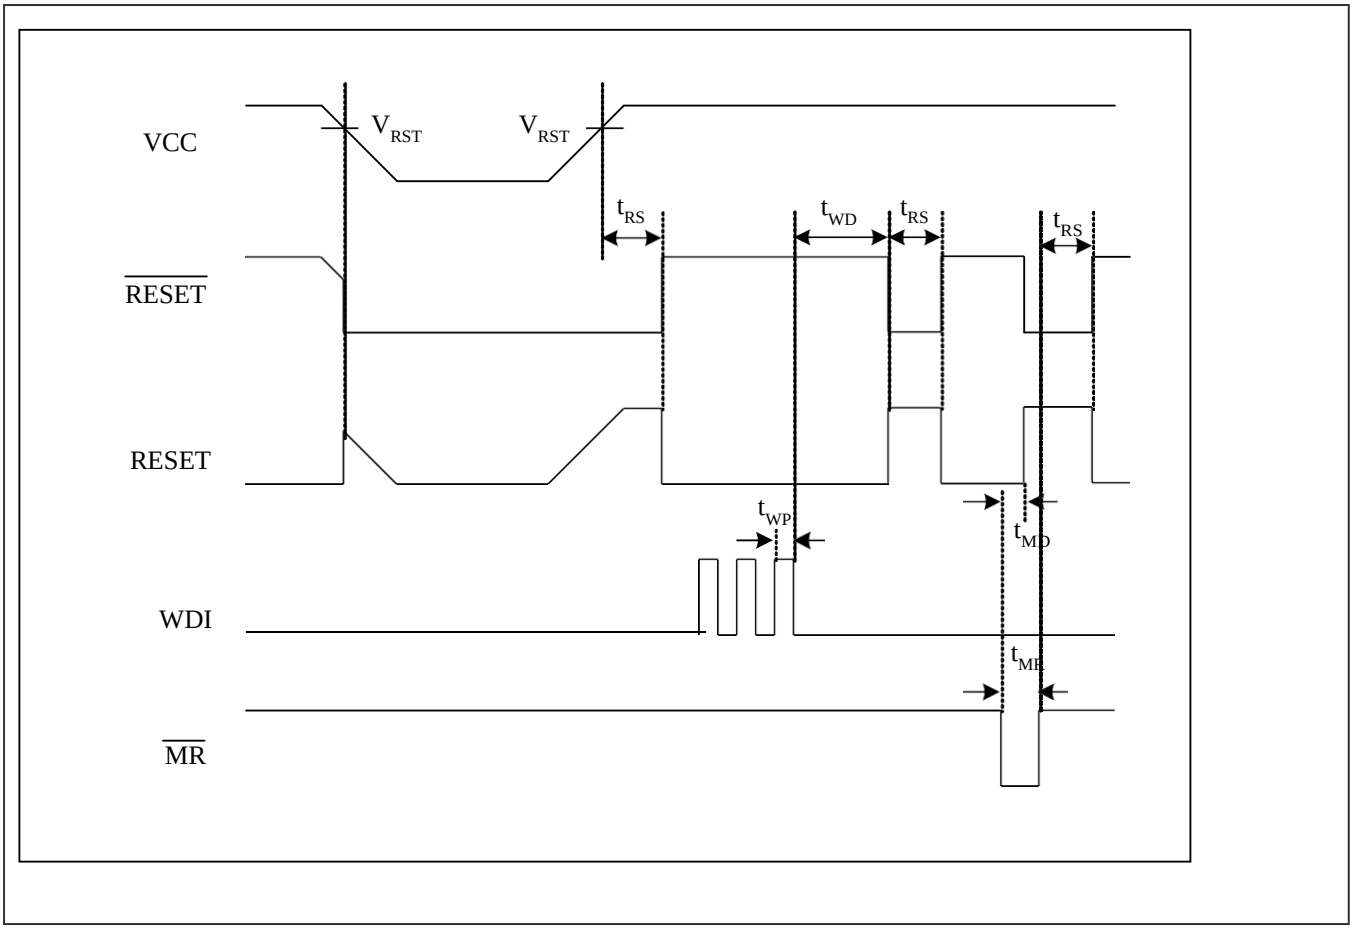

© Diodes Incorporated

Downloaded from Arrow.com.

Functional Description

Reset Output

A microprocessor (µP) reset input starts the µP in a known state. Whenever the µP is in an unknown state, it should be held in reset. The supervisory circuits assert reset during power-up and prevent code execution errors during power-down or brownout conditions.

On power-up, once Vcc reaches about 1.0V, $\overline{\text{RESET}}$ is a guaranteed logic low of 0.4V or less. As Vcc rises, $\overline{\text{RESET}}$ stays low. When Vcc rises above the reset threshold, an internal timer releases $\overline{\text{RESET}}$ after about 200ms. $\overline{\text{RESET}}$ pulses low whenever Vcc drops below the reset threshold, i.e. brownout condition. If brownout occurs in the middle of a previously initiated reset pulse, the pulse continues for at least another 200ms. On power-down, once Vcc falls below the reset threshold, $\overline{\text{RESET}}$ stays low and is guaranteed to be 0.4V or less until Vcc drops below 1.0V. Watchdog Timing Diagram shows the timing relationship.

The active-high RESET output is simply the inverse of the $\overline{\text{RESET}}$ output, and is guaranteed to be valid with Vcc down to 1.0V.

Watchdog Timer

The PT7M78xx watchdog circuit monitors the µP activity. If the µP does not toggle the watch-dog input (WDI) within 1.6s, reset asserts. As long as reset is asserted or the WDI input is toggled, the watchdog timer will stay clear and will not count. As soon as reset is released, the timer will start counting. WDI input pulses as short as 150ns can be detected.
Disable the watchdog function by leaving WDI unconnected or by three-stating driver connected to WDI.
Do not apply voltage level on DCI over Vcc.

Manual Reset

The manual-reset input ($\overline{\text{MR}}$) allows reset to be triggered by a push button switch. $\overline{\text{MR}}$ has an internal pullup resistor, so it can be left open when not used. Do not apply voltage level over Vcc.

Typical Application Circuit

PT7M7803 Application Circuit

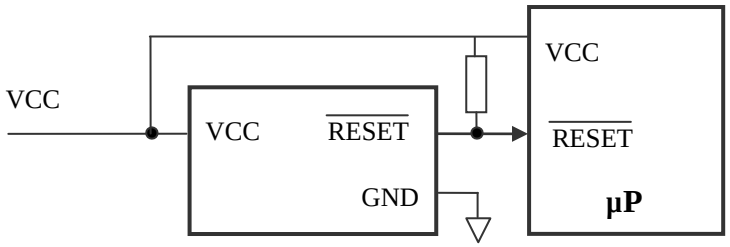

PT7M7809 (10) Application Circuit

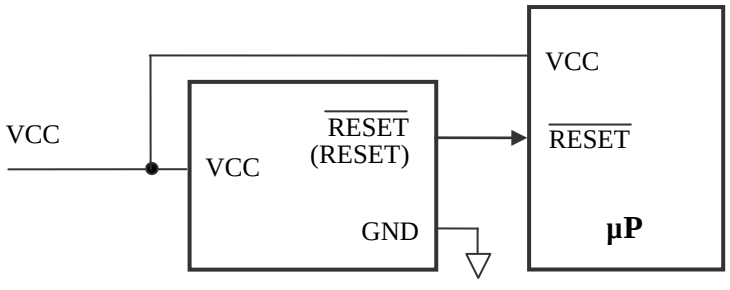

© Diodes Incorporated

Downloaded from Arrow.com.

PT7M7811 (12) Application Circuit

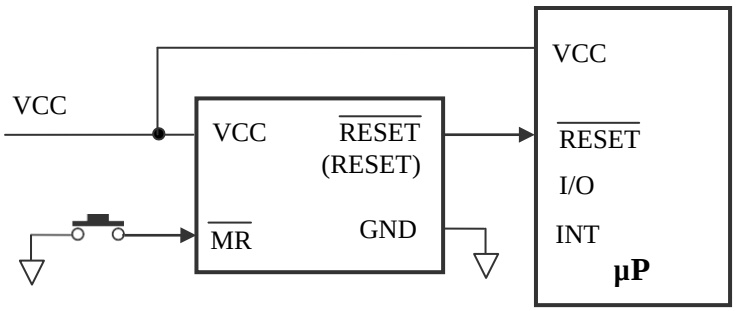

PT7M7823 Application Circuit

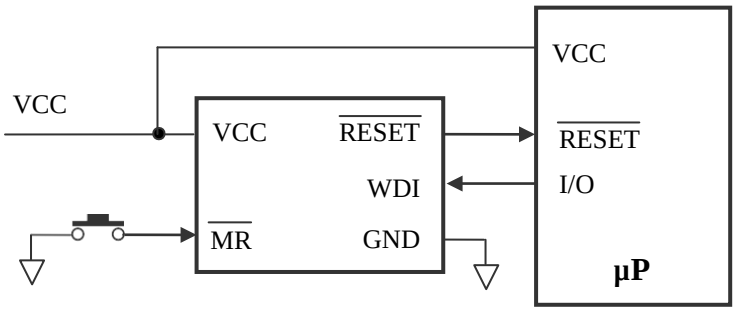

PT7M7824 Application Circuit

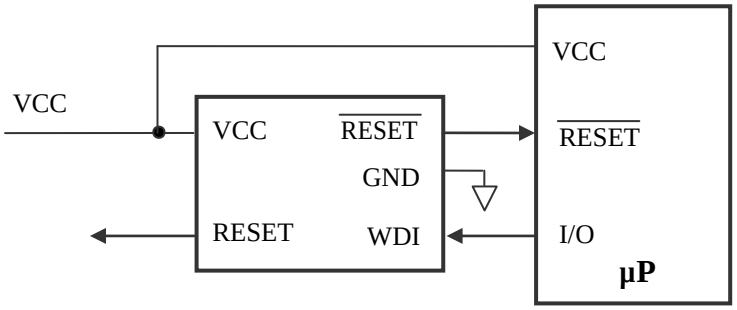

PT7M7825 Application Circuit

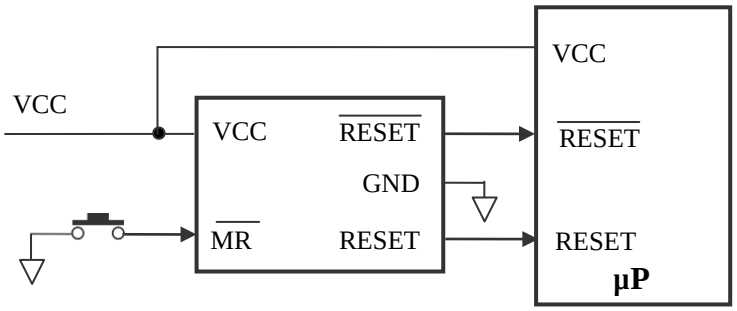

© Diodes Incorporated
Downloaded from Arrow.com.

Mechanical Information

T (SOT23)

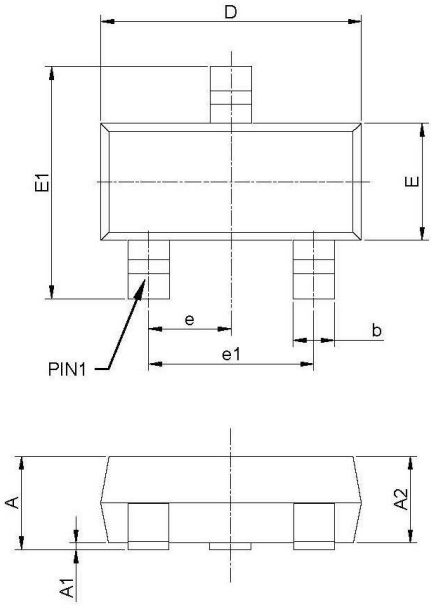

PKG. DIMENSIONS(MM)		
SYMBOL	Min	Max
A	0.75	1.17
A1	0.00	0.15
A2	0.70	1.10
b	0.30	0.51
c	0.08	0.20
D	2.80	3.04
E	1.20	1.40
E1	2.10	2.64
e	0.95 BSC	
e1	1.90 BSC	
L	0.30	0.60
θ	0°	8°

Notes:

1. Comply with TO-236H/AA,except A1 Min,A2 Max,b Max and L Min.
2.PACKAGE OUTLINE DIMENSIONS DO NOT INCLUDE MOLD FLASH AND METAL BURR

PERICOM Enabling Serial Connectivity

DATE: 03/29/16

DESCRIPTION: 3-Pin, Small Outline Transistor Plastic Package (SOT23)

PACKAGE CODE: T (T3)

DOCUMENT CONTROL#: PD-2142 REVISION: A

16-0079

© Diodes Incorporated

Downloaded from Arrow.com.

C (SC70)

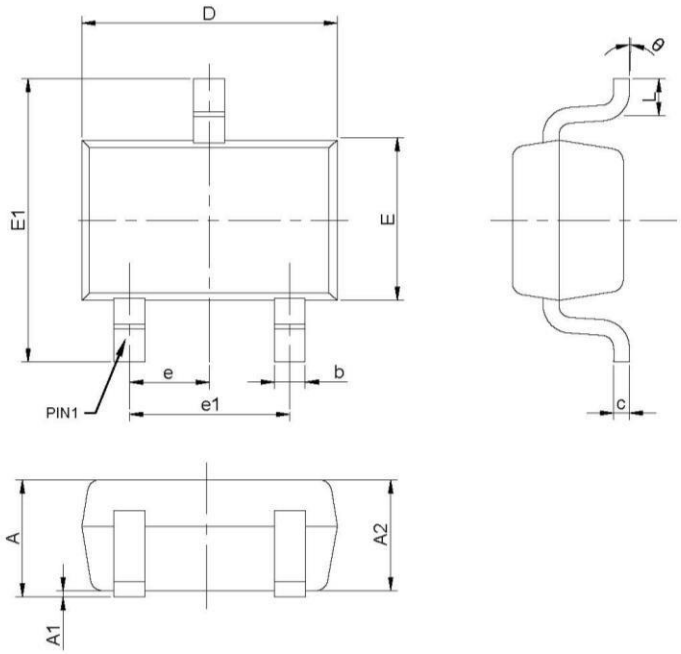

PKG. DIMENSIONS(MM)		
SYMBOL	Min	Max
A	-	1.10
A1	0.00	0.10
A2	0.70	1.00
b	0.15	0.40
c	0.08	0.22
D	1.80	2.20
E	1.10	1.40
E1	1.75	2.45
e	0.65 BSC	
e1	1.30 BSC	
L	0.26	0.46
θ	0°	8°

Note:

1. Comply with MO-203C,except b Max,D Min,D Max,E1 Min and E1 Max.
2.PACKAGE OUTLINE DIMENSIONS DO NOT INCLUDE MOLD FLASH AND METAL BURR

PERICOM Enabling Serial Connectivity — DATE: 03/29/16

DESCRIPTION: 3-Pin, SOT323 (SC70)

PACKAGE CODE: C (C3)

DOCUMENT CONTROL#: PD-2147 REVISION: A

16-0077

© Diodes Incorporated

Downloaded from Arrow.com.

TA (SOT23)

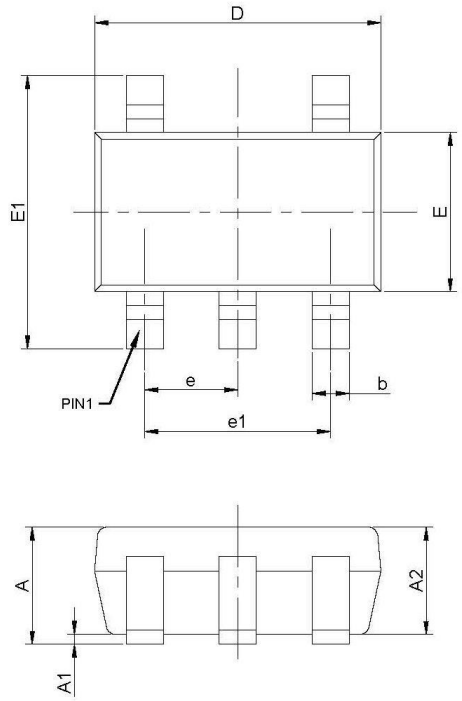

PKG. DIMENSIONS(MM)		
SYMBOL	Min	Max
A	-	1.45
A1	0.00	0.15
A2	0.90	1.30
b	0.30	0.50
c	0.08	0.22
D	2.75	3.05
E	1.45	1.75
E1	2.60	3.00
e	0.95 BSC	
e1	1.90 BSC	
L	0.30	0.60
θ	0°	8°

Note:

1. Ref: JEDEC MO-178C/AA
2.PACKAGE OUTLINE DIMENSIONS DO NOT INCLUDE MOLD FLASH AND METAL BUR

PERICOM Enabling Serial Connectivity

DATE: 03/29/16

DESCRIPTION: 5-Pin, Small Outline Transistor Plastic Package (SOT23)

PACKAGE CODE: TA (TA5)

DOCUMENT CONTROL #: PD-2144 REVISION: A

16-0081

© Diodes Incorporated

Downloaded from Arrow.com.

TB (SOT143)

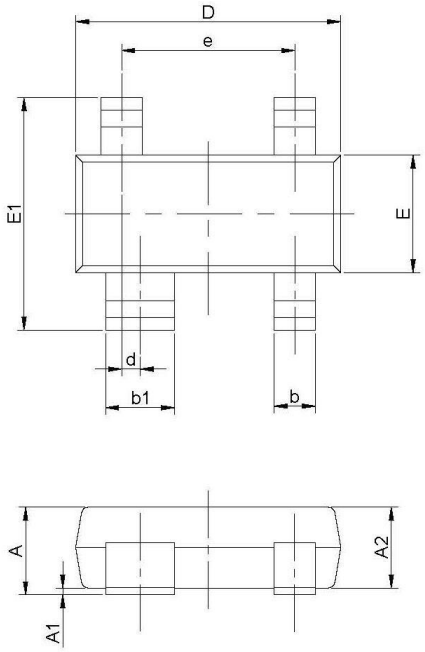



PKG. DIMENSIONS(MM)		
SYMBOL	Min	Max
A	0.80	1.22
A1	0.00	0.15
A2	0.75	1.07
b	0.30	0.50
b1	0.75	0.90
c	0.08	0.20
D	2.80	3.04
d	0.20 BSC	
E	1.20	1.40
E1	2.10	2.64
e	1.92 BSC	
L	0.30	0.60
θ	0°	8°

Note:

1. Comply with TO-253D/AA,except A1 Min,b1 Min, b1 Max,and L Min.
2.PACKAGE OUTLINE DIMENSIONS DO NOT INCLUDE MOLD FLASH AND METAL BURR

PERICOM Enabling Serial Connectivity — DATE: 03/29/16

DESCRIPTION: 4-Pin, SOT143

PACKAGE CODE: TB (TB4)

DOCUMENT CONTROL#: PD-2146 — REVISION: A

16-0083

© Diodes Incorporated

Downloaded from Arrow.com.

For latest package info.

please check: http://www.diodes.com/design/support/packaging/pericom-packaging/packaging-mechanicals-and-thermal-characteristics/

Ordering Information

Part Number	Package Code	Package	Status
PT7M7803XTEX	T	3-Pin, Small Outline Transistor Plastic (SOT23), Tape & Reel	NRND
PT7M7809XTEX	T	3-Pin, Small Outline Transistor Plastic (SOT23), Tape & Reel	NRND
PT7M7810XTEX	T	3-Pin, Small Outline Transistor Plastic (SOT23), Tape & Reel	NRND
PT7M7803XC3EX	C3	3-Pin, SOT323 (SC70), Tape & Reel	NRND
PT7M7809XC3EX	C3	3-Pin, SOT323 (SC70), Tape & Reel	End of life
PT7M7810XC3EX	C3	3-Pin, SOT323 (SC70), Tape & Reel	End of life
PT7M7811XTAEX	TA	5-Pin, Small Outline Transistor Plastic Package (SOT23), Tape & Reel	NRND
PT7M7812XTAEX	TA	5-Pin, Small Outline Transistor Plastic Package (SOT23), Tape & Reel	End of life
PT7M7823XTAEX	TA	5-Pin, Small Outline Transistor Plastic Package (SOT23), Tape & Reel	NRND
PT7M7824XTAEX	TA	5-Pin, Small Outline Transistor Plastic Package (SOT23), Tape & Reel	NRND
PT7M7825XTAEX	TA	5-Pin, Small Outline Transistor Plastic Package (SOT23), Tape & Reel	NRND
PT7M7811XTBEX	TB	4-Pin (SOT143), Tape & Reel	NRND
PT7M7812XTBEX	TB	4-Pin (SOT143), Tape & Reel	End of life
*PT7M7809XUWF	UWF	Wafer form	End of life

Note:

- Thermal characteristics can be found on the company web site at www.pericom.com/packaging/
- E = Pb-free and Green
- Adding X Suffix= Tape/Reel
- "*" for UWF package, please check the storage with related sales.

Suffix: X—Monitored Voltage

X	L	M	T	S	R	Z	Y	J	K	G
Reset Threshold (V)	4.63	4.38	3.08	2.93	2.63	2.32	2.20	4.00	2.25	2.80

© Diodes Incorporated

Downloaded from Arrow.com.

Marking Information

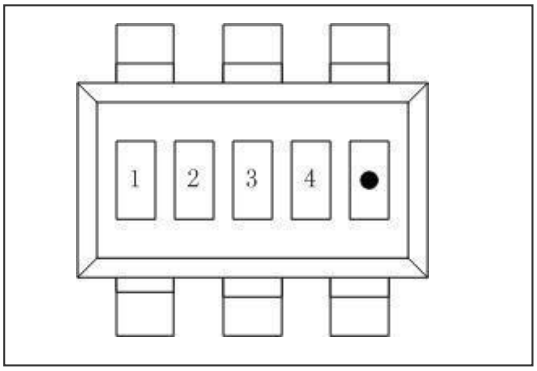

Code	Description
1 2	Part Number
3	Year
4	Work Week
●	Only for PT7M7809M

Part Number Code

Code 1 2	Part No	Code 1 2	Part No	Code 1 2	Part No	Code 1 2	Part No
AA	PT7M7809L	AO	PT7M7811L	BC	PT7M7803L	BQ	PT7M7824L
AB	PT7M7809M	AP	PT7M7811M	BD	PT7M7803M	BR	PT7M7824M
AC	PT7M7809T	AQ	PT7M7811T	BE	PT7M7803T	BS	PT7M7824T
AD	PT7M7809S	AR	PT7M7811S	BF	PT7M7803S	BT	PT7M7824S
AE	PT7M7809R	AS	PT7M7811R	BG	PT7M7803R	BU	PT7M7824R
AF	PT7M7809Z	AT	PT7M7811Z	BH	PT7M7803Z	BV	PT7M7824Z
AG	PT7M7809Y	AU	PT7M7811Y	BI	PT7M7803Y	BW	PT7M7824Y
jm	PT7M7809J	sf	PT7M7811J	sc	PT7M7803J	si	PT7M7824J
pE	PT7M7809G					mQ	PT7M7824K
AH	PT7M7810L	AV	PT7M7812L	BJ	PT7M7823L	BX	PT7M7825L
AI	PT7M7810M	AW	PT7M7812M	BK	PT7M7823M	BY	PT7M7825M
AJ	PT7M7810T	AX	PT7M7812T	BL	PT7M7823T	BZ	PT7M7825T
AK	PT7M7810S	AY	PT7M7812S	BM	PT7M7823S	CA	PT7M7825S
AL	PT7M7810R	AZ	PT7M7812R	BN	PT7M7823R	CB	PT7M7825R
AM	PT7M7810Z	BA	PT7M7812Z	BO	PT7M7823Z	CC	PT7M7825Z
AN	PT7M7810Y	BB	PT7M7812Y	BP	PT7M7823Y	CD	PT7M7825Y
se	PT7M7810J	sg	PT7M7812J	sh	PT7M7823J	sj	PT7M7825J
				mP	PT7M7823K		

© Diodes Incorporated

Downloaded from Arrow.com.

IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or

2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2020, Diodes Incorporated

www.diodes.com

Downloaded from Arrow.com.