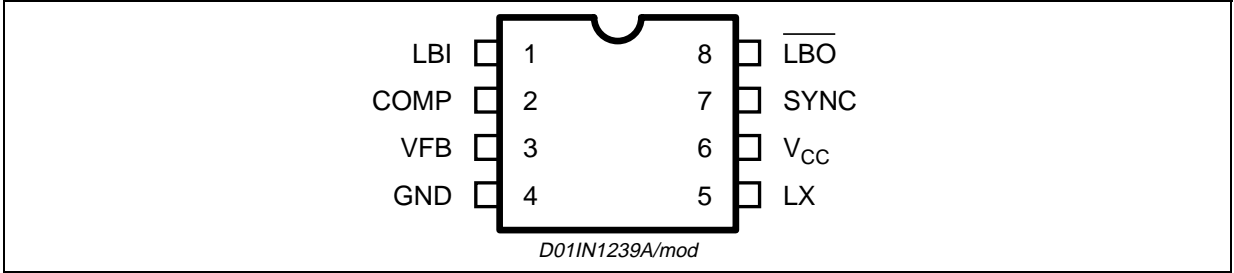


Table 2. Absolute Maximum Ratings

| Symbol | Parameter | Value | Unit |
|---------------------------------|---|-------------------------|------|
| V ₆ | Input voltage | -0.3 to 6 | V |
| V ₅ | Output switching voltage | -1 to V _{CC} | V |
| V ₁ , V ₈ | Low Battery Input, Low Battery Output | -0.3 to V _{CC} | V |
| V ₃ | Feedback voltage | -0.3 to V _{CC} | V |
| V ₂ | Error Amplifier Output Voltage | -0.3 to V _{CC} | V |
| V ₇ | Synchronization / Mode Selector | -0.3 to V _{CC} | V |
| P _{tot} | Power dissipation at Tamb=70°C | 0.45 | W |
| T _j | Junction operating temperature range | -40 to 150 | °C |
| T _{stg} | Storage temperature range | -65 to 150 | °C |
| LX Pin | Maximum Withstanding Voltage Range Test Condition: CDF-AEC-Q100-002- "Human Body Model" Acceptance Criteria: "Normal Performance" | ±1000 | V |
| Other pins | | ±2000 | V |

Figure 3. Pin Connection**Table 3. Thermal Data**

| Symbol | Parameter | Value | Unit |
|-----------------------|--|-------|------|
| R _{th j-amb} | Thermal Resistance Junction to Ambient | 180 | °C/W |

Table 4. Pin Functions

| N | Name | Description |
|---|------|---|
| 1 | LBI | Battery low voltage detector input. The internal threshold is set to 0.6V. The external threshold can be adjusted by using an external resistor divider. |
| 2 | COMP | Error amplifier output. Compensate it with a 220pF capacitor |
| 3 | VFB | Error amplifier input. The output voltage can be adjusted by using an external resistor divider connected to this pin (V _{FB} = 0.6V). |
| 4 | GND | Ground. |
| 5 | LX | Switch node connection to the inductor. |
| 6 | VCC | Input voltage. |
| 7 | SYNC | This pin allows to select Low Noise/ Low Consumption Mode or to synchronize the device. |
| 8 | LBO | Battery low voltage detector output. If the voltage at the LBI pin drops below the internal threshold, LBO goes low. The LBO is an open drain output. A pull_up resistor should be connected between the pin and the output voltage |

Table 5. ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$, $V_{CC} = 3.6\text{V}$ unless otherwise specified)

| Symbol | Parameter | Test Condition | Min | Typ | Max | Unit |
|---------------------------------|---|--|-------|------|-----------------|-------|
| V _{CC} | Operating input voltage | After Turn On | 2.7 | | 5.5 | V |
| V _{CC ON} | Turn On threshold | | | 2.8 | | V |
| V _{CC OFF} | Turn Off threshold | | | 2.65 | | V |
| V _{CC hys} | Hysteresis | | | 150 | | mV |
| R _p | High side Ron | V _{CC} = 3.6V, I _{LX} =100mA | | 240 | | mΩ |
| R _n | Low side Ron | V _{CC} = 3.6V, I _{LX} =100mA | | 215 | | mΩ |
| I _{lim} | Peak current limit | V _{CC} = 3.6V | | 1.2 | | A |
| | Valley current limit | V _{CC} = 3.6V | | 1.4 | | A |
| V _{out} | Output voltage range | | 0.6 | | V _{CC} | V |
| f _{osc} | Oscillator frequency | | | 600 | | KHz |
| f _{sync} | Sync mode clock (*) | | 500 | | 1400 | KHz |
| DC CHARACTERISTICS | | | | | | |
| I _q | Quiescent current (low noise mode) | V _{sync} = 0V, no load, V _{FB} > 0.6V | | 230 | | μA |
| | Quiescent current (low consumption mode) | V _{sync} = V _{CC} , no load, V _{FB} > 0.6V | | 25 | | μA |
| I _{sh} | Shutdown current | V _{CC} < 2.7V, V _{FB} > 0.6V | | 0.2 | | μA |
| I _{LX} | LX leakage current (*) | V _{CC} < 2.7V, V _{LX} = V _{CC} | | 1 | | μA |
| | | V _{CC} < 2.7V, V _{LX} = 0V | | 1 | | μA |
| ERROR AMPLIFIER CHARACTERISTICS | | | | | | |
| V _{fb} | Voltage feedback | | 0.593 | 0.6 | 0.607 | V |
| I _{fb} | Feedback input current (*) | V _{FB} = 0.6V | | 25 | | nA |
| SYNC/MODE FUNCTION | | | | | | |
| V _{sync_H} | Sync mode threshold high | | | | 1.3 | V |
| V _{sync_L} | Sync mode threshold low | | 0.5 | | | V |
| LB SECTION | | | | | | |
| V _{LBI} | LBI Threshold | | | 0.6 | | V |
| V _{LBO} | $\overline{\text{LBO}}$ Logic Low | I _{sink} = 1mA, V _{CC} = 3.6V, V _{LBI} < 0.6V | | 0.2 | 0.4 | V |
| I _{LK-LBO} | $\overline{\text{LBO}}$ Leakage Current (*) | V _{LBO} = 3.6V, V _{CC} = 3.6V, V _{LBI} > 0.6V | | | 50 | nA |
| PROTECTIONS | | | | | | |
| HOVP | Hard overvoltage threshold | | | 10 | | %Vout |

(*) Guaranteed by design

Figure 4. MSOP8 Mechanical Data & Package Dimensions

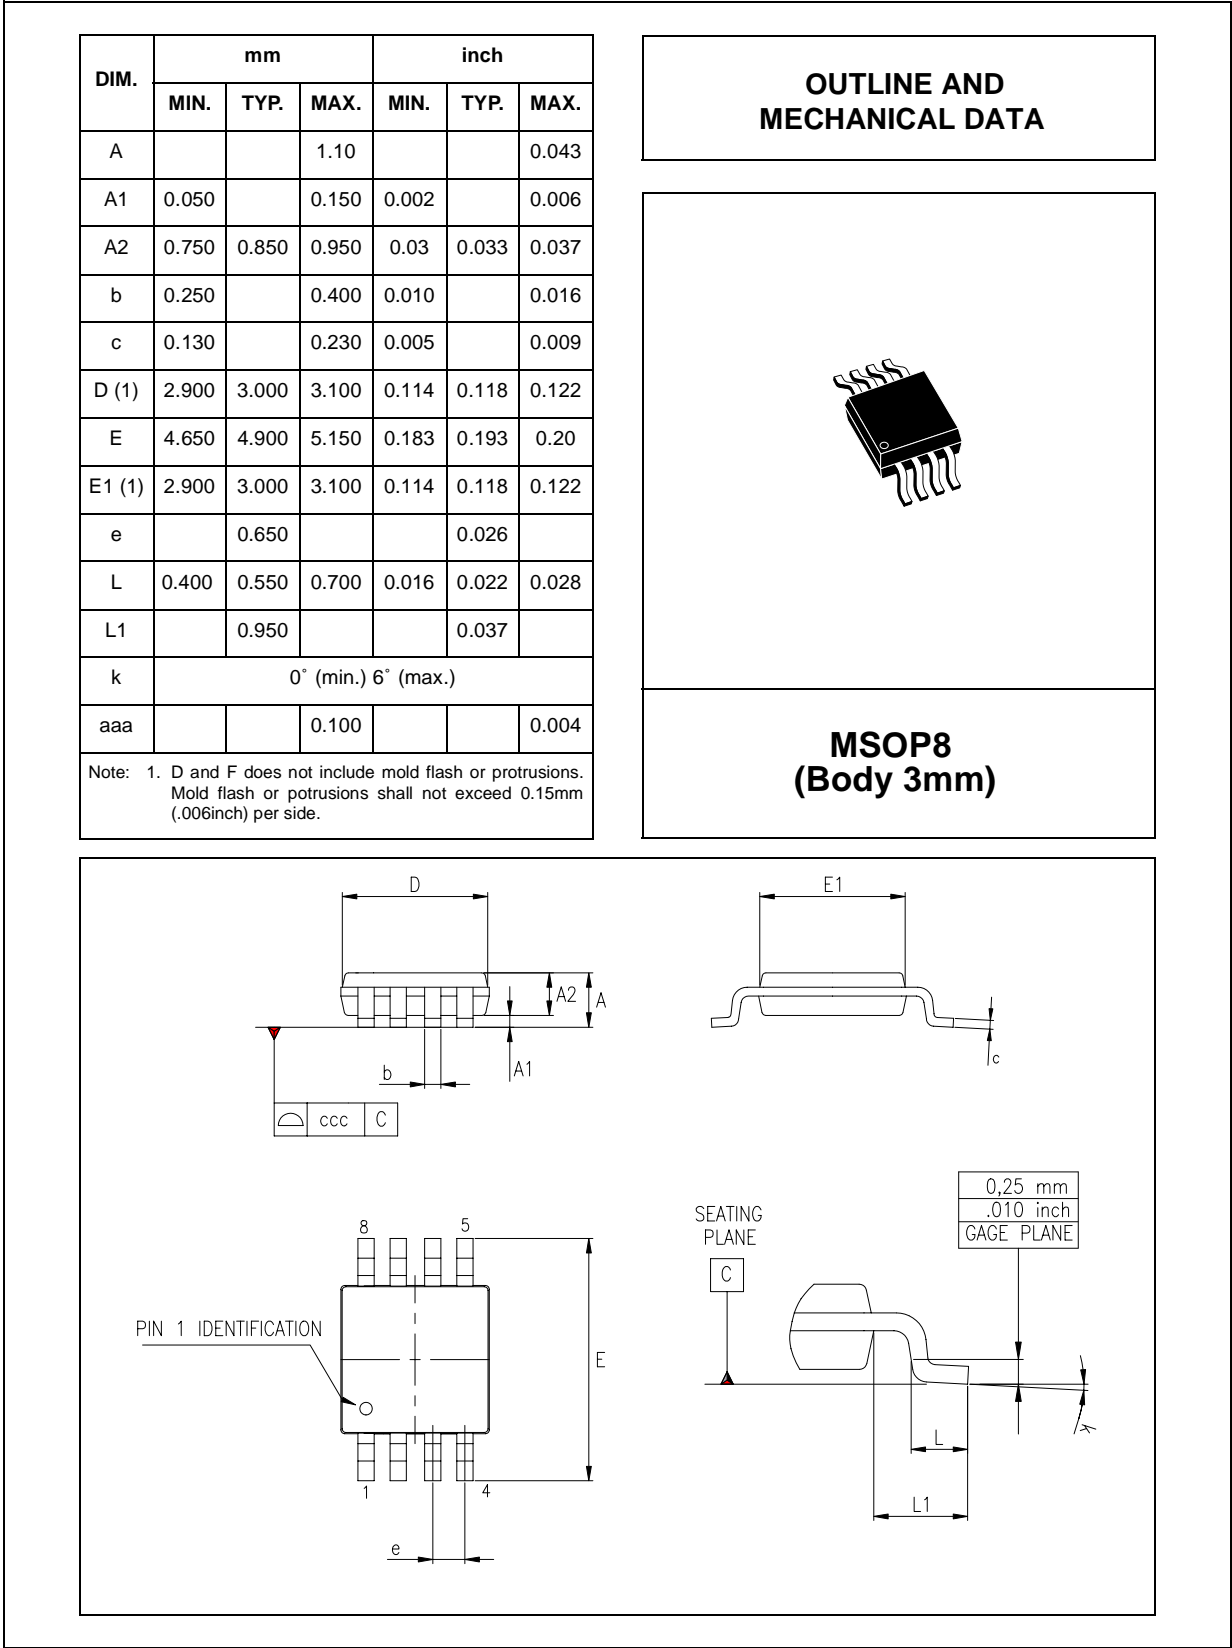


Table 6. Revision History

| Date | Revision | Description of Changes |
|----------------|-----------------|---------------------------------|
| January 2004 | 2 | First Issue in EDOCS DMS |
| September 2004 | 3 | Changed Style-sheet and Table 2 |

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics.
All other names are the property of their respective owners

© 2004 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -
Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com