



RoHS
Compliant

11.5 x 4.7 x 4.2 mm

Technical drawing of a rectangular plate with a central oval hole. The drawing shows three dimensions:

- Overall width: 0.500 ± 0.024 (12.7 ± 0.6)
- Inner width: 0.45 ± 0.006 (11.4 ± 0.15)
- Thickness: 0.19 ± 0.006 (4.7 ± 0.15)

Technical drawing of a mechanical part showing dimensions for width, height, and thickness.

Width dimensions:

- Overall width: 0.406 max. (10.3)

Height dimensions:

- Overall height: 0.16 max. (4.2)

Thickness dimensions (both sides):


- Maximum thickness: 0.004 max. (0.1 max.)
- Minimum thickness: 0.000 min. (0.0 min.)

0.192 ± 0.008
(4.88 ± 0.2)


0.024 + 0.008 / -0.004
(0.6 + 0.2 / -0.1)

Dimensions: Inches (mm)

REFLOW PROFILE:

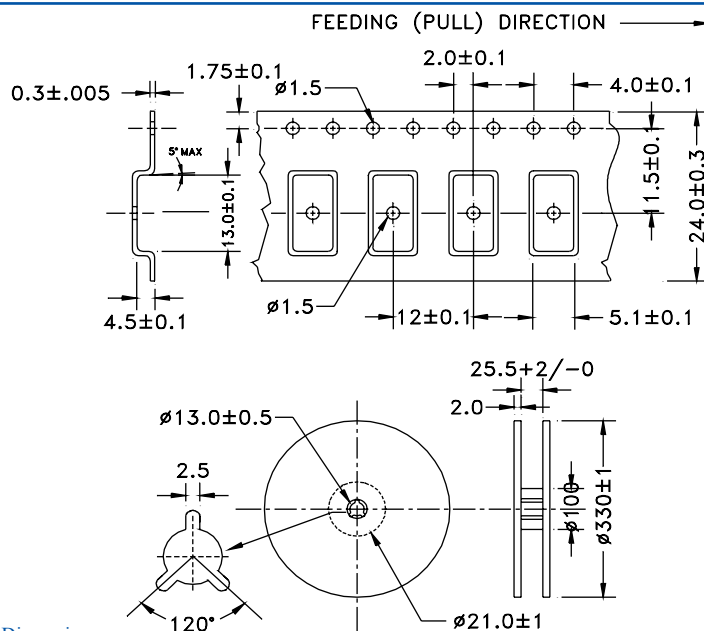

Dimensions: mm

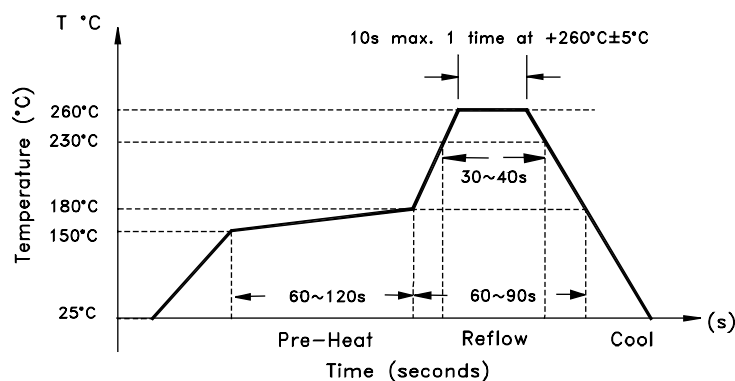

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.



ABRACON CORPORATION

Visit www.abracon.com for Terms & Conditions of Sale

Revised: 04.07.11

30332 Esperanza, Rancho Santa Margarita, California 92688

tel 949-546-8000 | fax 949-546-8001 | www.abracon.com