

FTR-K1 Series

■ Specifications

Item			FTR-K1 AK () T	FTR-K1 CK () W	Remarks / conditions
Contact data	Configuration		1 form A	1 form C	
	Construction		Single		
	Material		AgSnO ₂		
	Resistance		Max. 100mΩ at 1A, 6VDC		Initial
	Contact rating		16A, 250VAC / 24VDC		Resistive
	Max. carrying current		20A		
	Max. inrush current		80A, 250VAC		
	Max. switching voltage		440VAC / 300VDC		
	Max. switching power		4,000VA / 384W		
	Min. switching load *1		100mA, 5VDC		
Coil	Rated power (20°C)		400mW (430mW at 48V coil, 420mW at 60V/110V coil)		
	Operate power (20°C)		196mW (211mW at 48V coil, 206mW at 60V/110V coil)		
	Operating temperature range		-40°C ~ +85°C		No frost
Timing data	Operate		Max. 15ms		without bounce
	Release		Max. 5ms		without bounce, no diode
Life	Mechanical		Min. 20 x 10 ⁶ operations		
	Electrical	AC contact rating	Min. 100 x 10 ³ ops.	Min. 50 x 10 ³ ops.	
		DC contact rating	Min. 100 x 10 ³ ops.	Min. 30 x 10 ³ ops.	
		Peak inrush	Min. 10 x 10 ³ ops. (only make contact)		at 85°C, VDE#0435 (80A 250VAC)
		Lamp (UL TV-5)	Min. 25 x 10 ³ ops.	Min. 25 x 10 ³ ops. (only make contact)	
Insulation	Insulation resistance		Min. 1000MΩ at 500VDC		Initial
	Dielectric strength	Open contacts	1000VAC (50/60Hz), 1 minute		
		Coil contact	5000VAC (50/60Hz), 1 minute		
	Surge strength	Coil to contacts	10,000V / 1.2 x 50μs standard wave		
	Clearance		10mm		
	Creepage		10mm		
	EN61810-1, VDE0435	Voltage	250V		
		Pollution	3		
		Material group	III a		
		Category	C / 250 (reference voltage) (VDE0110b)		
Other	Vibration resistance	Misoperation ≥1us	10 to 55 to 10Hz single amplitude 0.35mm		
		Endurance	10 to 55 to 10Hz single amplitude 0.75mm		
	Shock resistance	Misoperation ≥1us	Min. 100m/s ² (11 ± 1ms)		
		Endurance	Min. 1,000m/s ² (6 ± 1ms)		
	Dimensions / weight		12.7 x 29.0 x 15.7 mm / approx. 13g		
	Sealing		Flux proof, RTII		

Need to consider the heat from PCB when max. current is more than 10A.

*1: Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions

FTR-K1 Series

■ Coil Data

Coil code	Rated Coil Voltage (VDC)	Coil Resistance +/-10% (Ω)	Must Operate Voltage* (VDC)	Must Release Voltage* (VDC)	Rated Power (mW)
005	5	62	3.5	0.5	400
006	6	90	4.2	0.6	
009	9	202	6.3	0.9	
012	12	360	8.4	1.2	
018	18	810	12.6	1.8	
022	22	1,210	15.4	2.2	
024	24	1,440	16.8	2.4	
028	28	1,960	19.6	2.8	
048	48	5,360	33.6	4.8	430
060	60	8,570	42.0	6.0	420
110	110	28,800	77.0	11.0	

Note: All values in the table are valid at 20°C and zero contact current, unless otherwise specified.

* : Specified operate values are valid for pulse wave voltage.

Note: Please use at rated coil voltage. Please refer to characteristic data and set up adequate voltage in case of use at over voltage.


■ Safety Standards

Type	Compliance	Contact rating	
		1A	1C
UL	UL 508	Flammability: UL 94-V0 (plastics)	
	E63614	FTR-K1AK () T(-GW) 16A, 24VDC (resistive) 16A, 277VAC (resistive) 20A, 277VAC (resistive) 1 hp 277VAC, 1/2hp 125VAC TV-5, 120VAC 25,000 cycles Pilot duty: A300	FTR-K1CK () W(-GW) 16A, 277VAC/24VDC (resistive) 20A, 277VAC (resistive) 1 hp 277VAC, 1/2hp 125VAC 1/8 hp, 125VAC TV-5, 250VAC, 25,000 cycles (make contact) Pilot duty: B300
CSA	C22.2 No. 14		FTR-K1CK () W(-GW) 16A, 277VAC/24VDC (resistive) 20A, 277VAC (resistive) 1hp 277VAC, 1/2hp 125VAC 1/8hp 125VAC TV-5, 120VAC (make contact) Pilot duty: B300
	LR 40304		
VDE	IEC/EN61810-1 EN60065 clause 14.6.1 (1a only) EN60335-1 clause 15.3; 16.3; 29.1; 29.2; 29.3 EN60730-1 clause 12.2; 13.2; 20.1; 20.2; 20.3	FTR-K1AK () T(-GW) 16A, 250VAC ($\cos\phi=1$), 85°C 3.5A, 250VAC ($\cos\phi=0.4$), 85°C 16A, 24VDC (0ms), 85°C 5A/80A, 250VAC 10,000 times, 85°C	FTR-K1CK () W(-GW) 16A, 250VAC ($\cos\phi=1$), 85°C 3.5A, 250VAC ($\cos\phi=0.4$), 85°C 16A, 24VDC (0ms), 85°C
CQC	GB/T21711.1 GB15092.1 12002083788	FTR-K1AK () T 12A, 240VAC 72LRA/12FLA 240VAC	FTR-K1CK () W 16A, 250VAC


FTR-K1 Series

■ Dimensions

- Dimensions (FTR-K1AK()T)

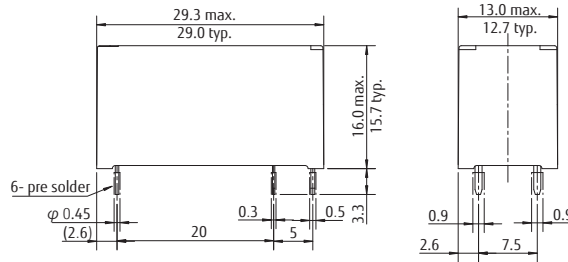


- Dimensions (FTR-K1CK()W)

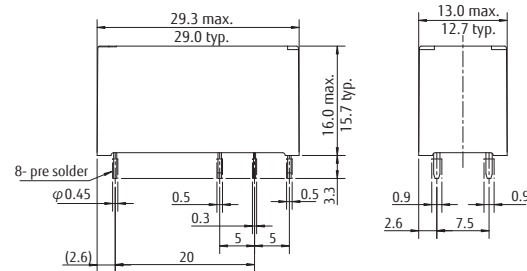


*Dimensions of the terminals do not include thickness of pre-solder.


- Schematics
(BOTTOM VIEW) (FTR-K1AK()T)




- Schematics
(BOTTOM VIEW) (FTR-K1CK()W)



- PC Board Mounting Hole Layout
(BOTTOM VIEW) (FTR-K1AK()T)



- PC Board Mounting Hole Layout
(BOTTOM VIEW) (FTR-K1CK()W)



Tolerance of PC board mounting hole layout : ± 0.1 unless otherwise specified.









(): Reference value

Unit: mm

FTR-K1 Series

■ Characteristic Data (Reference)

* Characteristic data is not guaranteed value but measured values of samples from production line.

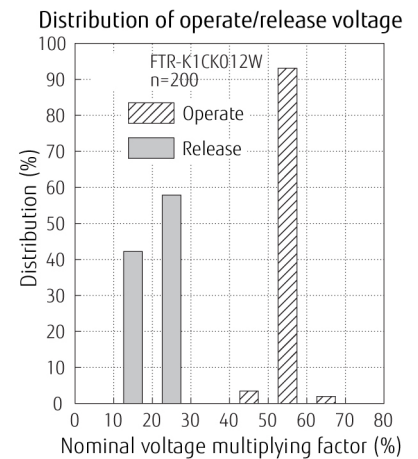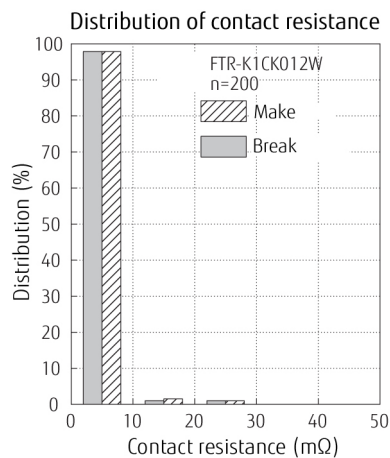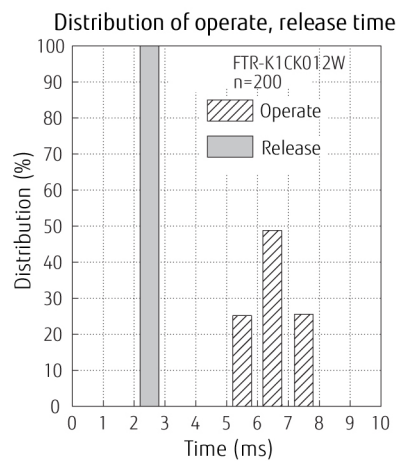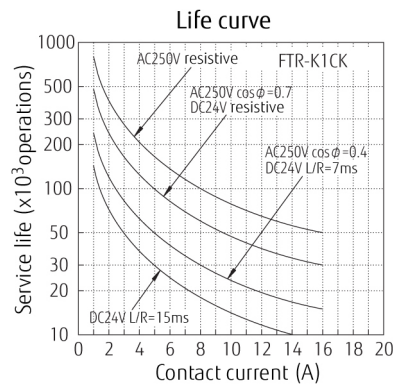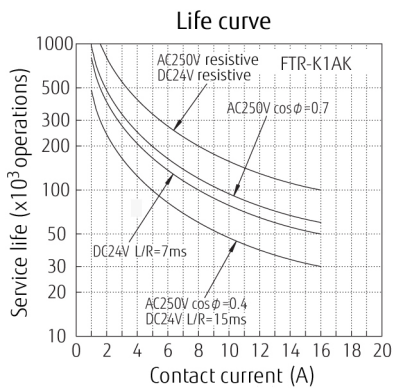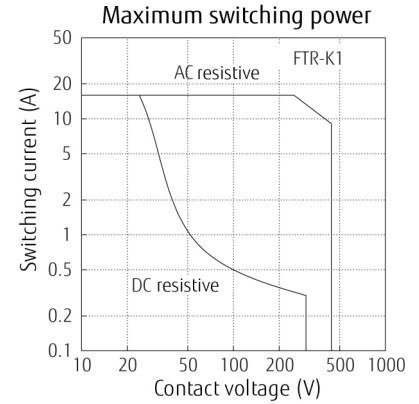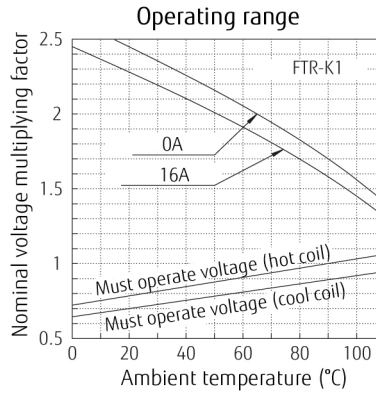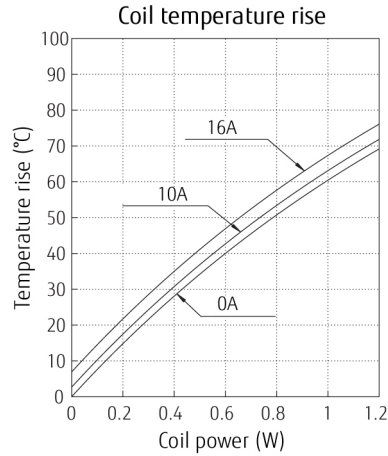

FTR-K1 Series

CAUTIONS

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is prohibited.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

GENERAL INFORMATION

1. ROHS Compliance

- All relays produced by Fujitsu Components are compliant with RoHS directive 2011/65/EU, including commission delegated directive 2015/863.

2. Recommended lead free solder condition

- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.
- Recommended solder for assembly: Sn-3.0Ag-0.5Cu.

Flow Solder Condition:

Pre-Heating: maximum 120°C
within 90 sec.

Soldering: dip within 5 sec. at 255°C±5°C solder bath

Relay must be cooled by air immediately after soldering

Solder by Soldering Iron:

Soldering Iron: 30-60W

Temperature: maximum 340-360°C

Duration: maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

FTR-K1 Series

Fujitsu Components International Headquarter Offices

Japan FUJITSU COMPONENT LIMITED Shinagawa Seaside Park Tower 19F, 12-4, Higashi-shinagawa 4-chome, Shinagawa-ku, Tokyo, 140-0002, Japan Tel: (81-3) 3450-1682 Fax: (81-3) 3474-2385 Email: fcl-contact@cs.jp.fujitsu.com Web: www.fujitsu.com/jp/fcl/	Asia Pacific FUJITSU COMPONENTS ASIA, LTD. 102E Pasir Panjang Road #01-01 Citilink Warehouse Complex Singapore 118529 Tel: (65) 6375-8560 Fax: (65) 6273-3021 Email: fcal@sg.fujitsu.com Web: www.fujitsu.com/sg/products/devices/components	Korea FUJITSU COMPONENTS KOREA LIMITED Alpha Tower #403, 645 Sampyeong-dong, Bundang-gu, Seongnam-si, Gyeonggi-do, 13524 Korea Tel: (82) 31-708-7108 Fax: (82) 31-709-7108 Email: fcal@sg.fujitsu.com www.fujitsu.com/sg/products/devices/components/
North and South America FUJITSU COMPONENTS AMERICA, INC 2290 North First Street, Suite 212 San Jose, CA 95131, USA Tel: (1-408) 745-4900 Fax: (1-408) 745-4970 Email: components@us.fujitsu.com Web: us.fujitsu.com/components	China FUJITSU ELECTRONIC COMPONENTS (SHANGHAI) CO., LTD. Unit 4306, InterContinental Center 100 Yu Tong Road, Shanghai 200070, China Tel: (86-21) 3253 0998 Fax: (86-21) 3253 0997 Email: fcsh@cn.fujitsu.com Web: www.fujitsu.com/cn/products/devices/components	
Europe FUJITSU COMPONENTS EUROPE B.V. Diamantlaan 25 2132 WV Hoofddorp Netherlands Tel: (31-23) 5560910 Fax: (31-23) 5560950 Email: info@fceu.fujitsu.com Web: www.fujitsu.com/uk/components	Hong Kong FUJITSU COMPONENTS HONG KONG CO., LTD Unit 506, Inter-Continental Plaza No.94 Granville Road, Tsim Sha Tsui, Kowloon, Hong Kong Tel: (852) 2881-8495 Tex: (852) 2894-9512 Email: fcal@sg.fujitsu.com Web: www.fujitsu.com/sg/products/devices/components/	

©2019 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes.

The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability for any representation of warrant of any kind, express or implied, including warranties of any kind for merchantability or fitness for particular use, with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. November 13, 2019