
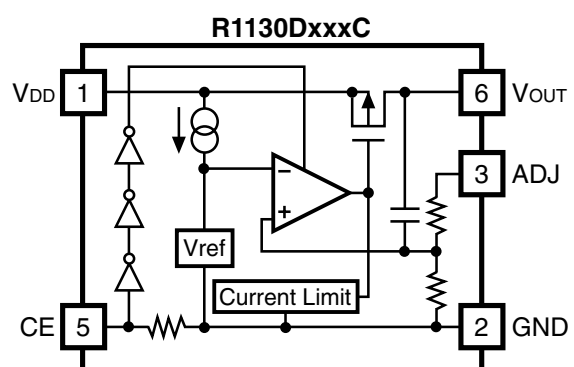
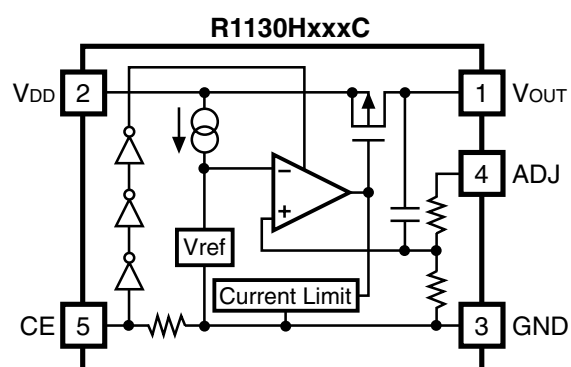
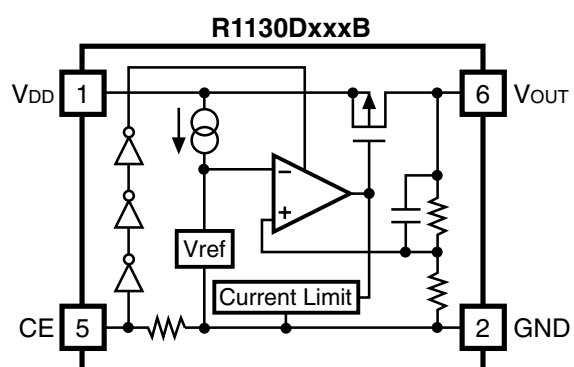
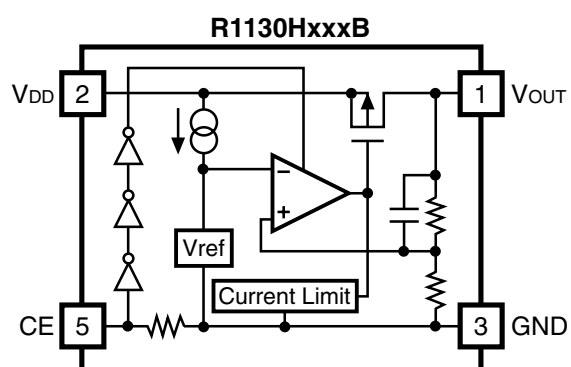
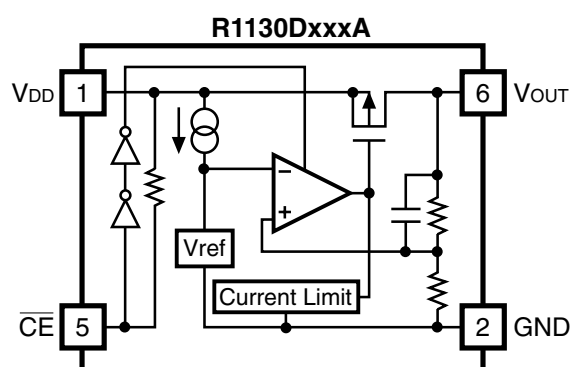


BLOCK DIAGRAMS

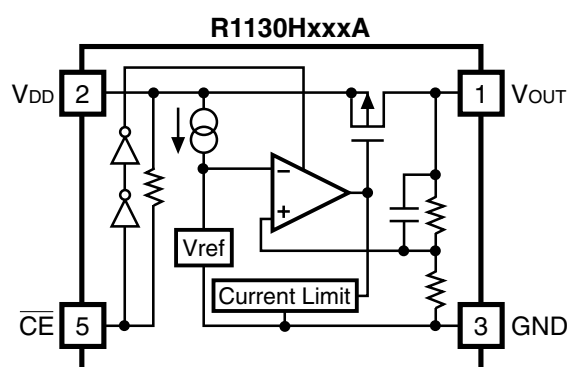



SELECTION GUIDE

The output voltage, chip-enable polarity, the taping type can be selected at the user’s request. The selection can be made with designating the part number as follows;

R1130xxxx-xx ← Part Number
↑ ↑ ↑ ↑
a b c d

Code	Contents
a	Package Type; H: SOT-89-5, D: HSON-6P
b	Serial Number for Voltage Setting
c	Designation of option; A: Fixed Output Voltage Regulator with $\overline{\text{CE}}$ pin (“L” enable) B: Fixed Output Voltage Regulator with CE pin (“H” enable) C: Output Voltage Adjustable Regulator with CE pin (“H” enable)
d	Designation of Taping Type; T1 or T2 (Refer to Taping Specifications) for SOT-89-5 TR or TL for HSON-6P

PIN CONFIGURATION

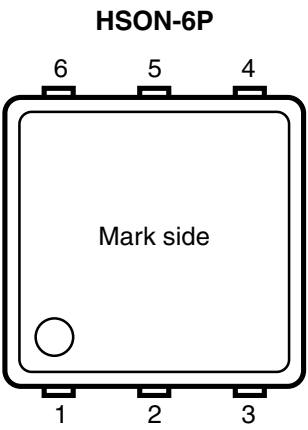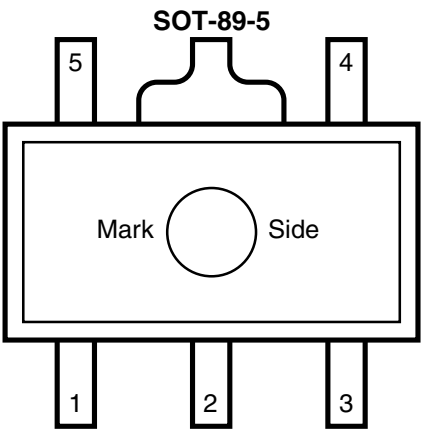

PIN DESCRIPTION

SOT-89-5

Pin No.	Symbol	Description
1	V _{OUT}	Voltage Regulator Output Pin
2	V _{DD}	Input Pin
3	GND	Ground Pin
4	N.C. (A/B type)	No Connection
	ADJ (C type)	Adjustable Regulator feedback Input Pin (Connect to resistor voltage divider.)
5	$\overline{\text{CE}}$ (A type) or CE (B/C type)	Chip Enable Pin

HSO6P

Pin No.	Symbol	Description
1	V _{DD}	Input Pin
2	GND	Ground Pin
3	N.C. (A/B type)	No Connection
	ADJ (C type)	Adjustable Regulator feedback Input Pin (Connect to resistor voltage divider.)
4	N.C.	No Connection
5	$\overline{\text{CE}}$ (A type) or CE (B/C type)	Chip Enable Pin
6	V _{OUT}	Voltage Regulator Output Pin

ABSOLUTE MAXIMUM RATINGS

Symbol	Item	Rating	Unit
V _{IN}	Input Voltage	9.0	V
V _{CE}	Input Voltage ($\overline{\text{CE}}$ or CE Input Pin)	-0.3 ~ V _{IN} +0.3	V
V _{ADJ}	Input Voltage (ADJ Input Pin)	-0.3 ~ V _{IN} +0.3	V
V _{OUT}	Output Voltage	-0.3 ~ V _{IN} +0.3	V
I _{OUT}	Output Current	450	mA
P _D	Power Dissipation (SOT-89-5)	500	mW
P _D	Power Dissipation (HSO6P)	400	mW
T _{opt}	Operating Temperature	-40 ~ 85	°C
T _{stg}	Storage Temperature	-55 ~ 125	°C

ELECTRICAL CHARACTERISTICS

• R1130xxxxA (T_{opt} = 25°C)

Symbol	Item	Conditions	Min.	Typ.	Max.	Unit
V _{IN}	Input Voltage		2.5		8.0	V
I _{SS1}	Supply Current 1	V _{IN} -V _{OUT} =1.0V V _{IN} =GND		50	100	μA
I _{stby}	Standby Current	V _{IN} -V _{OUT} =1.0V V _{IN} =V _{CE}		0.1	1.0	μA
V _{OUT}	Output voltage	V _{IN} -V _{OUT} =1.0V 1mA≤I _{OUT} ≤80mA	x0.98	Set V _{OUT}	x1.02	V
I _{OUT1}	Output Current	Refer to the table of Input Voltage by Set Output Voltage	300			mA
$\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$	Load regulation	V _{IN} -V _{OUT} =1.0V 1mA≤I _{OUT} ≤80mA		40	80	mV
V _{DIF}	Dropout Voltage	I _{OUT} =100mA	Refer to the Table of Dropout Volt- age by Set Output Voltage			
$\frac{\Delta V_{OUT}}{\Delta V_{IN}}$	Line regulation	I _{OUT} =80mA, Set V _{OUT} ≥2.0V: V _{OUT} +0.5V≤V _{IN} ≤8.0V Set V _{OUT} ≤1.9V: 2.5V≤V _{IN} ≤8.0V		0.1	0.2	%/V
RR	Ripple Rejection	f=1kHz, Ripple 0.5Vp-p, I _{OUT} =80mA Set V _{OUT} ≥1.8V: V _{IN} -V _{OUT} =1.0V Set V _{OUT} ≤1.7V: V _{IN} =2.8V		60		dB
$\frac{\Delta V_{OUT}}{\Delta T}$	Output Voltage Temperature Coefficient	I _{OUT} =10mA, V _{IN} -V _{OUT} =1.0V -40°C≤T _{opt} ≤85°C		±100		ppm /°C
I _{lim}	Short Current Limit	Set V _{OUT} ≤3.9V, V _{OUT} =0V		70		mA
		Set V _{OUT} ≥4.0V, V _{OUT} =0V		50		
R _{PU}	Pull-up resistance for $\overline{CE}$ pin		2.5	5.0	10.0	MΩ
V _{CEH}	$\overline{CE}$ Input Voltage “H”	V _{IN} =2.5V	1.5		V _{IN}	V
V _{CEL}	$\overline{CE}$ Input Voltage “L”	V _{IN} =2.5V	0.00		0.25	V

R1130xxxxA/B/C

• R1130xxxxB (Topt=25°C)

Symbol	Item	Conditions	Min.	Typ.	Max.	Unit
V _{IN}	Input Voltage		2.5		8.0	V
I _{SS1}	Supply Current 1	V _{IN} -V _{OUT} =1.0V V _{IN} =V _{CE}		50	100	μA
I _{stby}	Standby Current	V _{IN} -V _{OUT} =1.0V V _{IN} =GND		0.1		μA
V _{OUT}	Output voltage	V _{IN} -V _{OUT} =1.0V 1mA≤I _{OUT} ≤80mA	x0.98	Set V _{OUT}	x1.02	V
I _{OUT1}	Output Current	Refer to the table of Input Voltage by Set Output Voltage	300			mA
$\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$	Load regulation	V _{IN} -V _{OUT} =1.0V 1mA≤I _{OUT} ≤80mA		40	80	mV
V _{DIF}	Dropout Voltage	I _{OUT} =100mA	Refer to the Table of Dropout Voltage by Set Output Voltage			
$\frac{\Delta V_{OUT}}{\Delta V_{IN}}$	Line regulation	I _{OUT} =80mA Set V _{OUT} ≥2.0V: V _{OUT} +0.5V≤V _{IN} ≤8V Set V _{OUT} ≤1.9V: 2.5V≤V _{IN} ≤8.0V		0.1	0.2	%/V
RR	Ripple Rejection	f=1kHz, Ripple 0.5Vp-p, I _{OUT} =80mA Set V _{OUT} ≥1.8V: V _{IN} -V _{OUT} =1.0V Set V _{OUT} ≤1.7V: V _{IN} =2.8V		60		dB
$\frac{\Delta V_{OUT}}{\Delta T_{opt}}$	Output Voltage Temperature Coefficient	I _{OUT} =10mA, V _{IN} -V _{OUT} =1.0V -40°C≤T _{opt} ≤85°C		±100		ppm /°C
I _{lim}	Short Current Limit	Set V _{OUT} ≤3.9V, V _{OUT} =0V		70		mA
		Set V _{OUT} ≥4.0V, V _{OUT} =0V		50		
R _{PD}	Pull-down resistance for CE pin		2.5	5.0	10.0	MΩ
V _{CEH}	CE Input Voltage “H”	V _{IN} =2.5V	1.5		V _{IN}	V
V _{CEL}	CE Input Voltage “L”	V _{IN} =2.5V	0.00		0.25	V

• Dropout Voltage by Set Output Voltage

(Topt=25°C)

Output Voltage V _{OUT} (V)	Dropout Voltage (V)	
	Typ.	Max.
V _{OUT} =1.5	1.00	1.05
V _{OUT} =1.6	0.90	0.95
V _{OUT} =1.7	0.80	0.85
V _{OUT} =1.8	0.70	0.75
V _{OUT} =1.9	0.60	0.65
V _{OUT} =2.0	0.50	0.60
V _{OUT} =2.1	0.40	0.55
2.2V≤V _{OUT} ≤2.5V	0.30	0.49
2.6V≤V _{OUT} ≤3.3V	0.25	0.34
3.4V≤V _{OUT} ≤5.0V	0.20	0.28

• Input Voltage by Set Output Voltage

(Topt=25°C)


Output Voltage V _{OUT} (V)	Input Voltage (V)
1.5V≤V _{OUT} ≤1.9V	V _{IN} =V _{OUT} +1.5V
2.0V≤V _{OUT} ≤2.7V	V _{IN} =V _{OUT} +1.3V
2.8V≤V _{OUT} ≤5.0V	V _{IN} =V _{OUT} +1.0V

R1130xxxxA/B/C


• R1130xxxxC (Topt=25°C)

Symbol	Item	Conditions	Min.	Typ.	Max.	Unit
V _{IN}	Input voltage		2.5		8.0	V
I _{SS1}	Supply Current	V _{IN} -V _{OUT} =1.0V, V _{IN} =V _{CE}		50	100	μA
I _{stby}	Standby Current	V _{IN} -V _{OUT} =1.0V, V _{IN} =GND		0.1	1.0	μA
V _{OUT}	Reference Voltage for Adjustable Voltage Regulator	V _{OUT} =V _{ADJ} , V _{IN} -V _{OUT} =1.0V I _{OUT} =80mA	1.764	1.800	1.836	V
I _{OUT1}	Output Current	V _{OUT} =V _{ADJ} , V _{IN} -V _{OUT} =1.5V	300			mA
$\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$	Load regulation	V _{IN} =2.5V, V _{OUT} =V _{ADJ} 1mA≤I _{OUT} ≤80mA		40	80	mV
V _{DIF}	Dropout Voltage	I _{OUT} =100mA, V _{OUT} =V _{ADJ}		0.70	0.75	V
$\frac{\Delta V_{OUT}}{\Delta V_{IN}}$	Line regulation	I _{OUT} =80mA, V _{OUT} =V _{ADJ} 2.5V≤V _{IN} ≤8V		0.1	0.2	%/V
RR	Ripple Rejection	f=1kHz, Ripple 0.5Vp-p, I _{OUT} =80mA, V _{IN} -V _{OUT} =1.0V, V _{OUT} =V _{ADJ} , I _{OUT} =80mA		60		dB
$\frac{\Delta V_{OUT}}{\Delta T_{opt}}$	Output Voltage Temperature Coefficient	I _{OUT} =10mA, V _{IN} -V _{OUT} =1.0V -40°C≤T _{opt} ≤85°C		±100		ppm/°C
I _{lim}	Short Current Limit	V _{OUT} =0V		70		mA
R _{PD}	Pull-down resistance for CE pin		2.5	5.0	10.0	MΩ
V _{CEH}	CE Input Voltage “H”	V _{IN} =2.5V	1.5		V _{IN}	V
V _{CEL}	CE Input Voltage “L”	V _{IN} =2.5V	0.00		0.25	V


TEST CIRCUITS (Pin number is applied to R1130H Series)

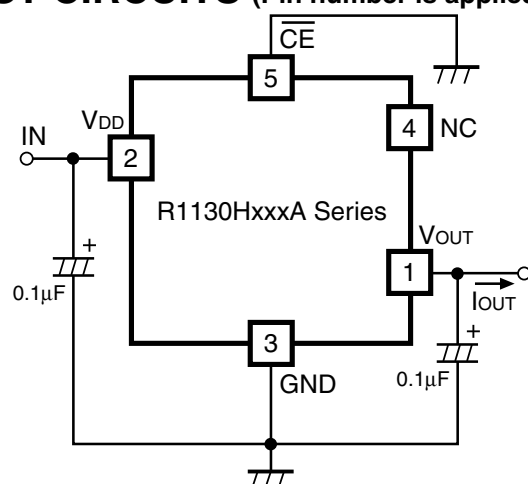


Standard Test Circuit

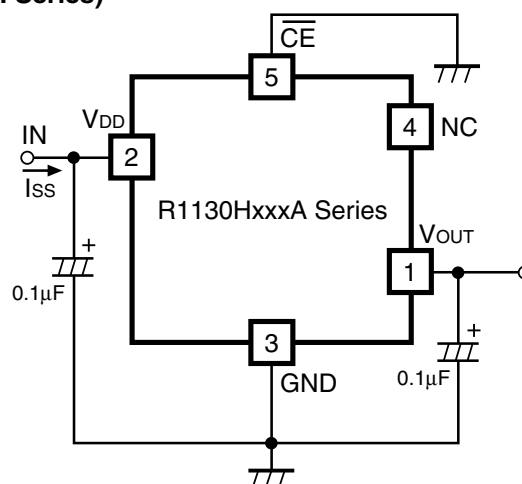


Test Circuit Supply Current

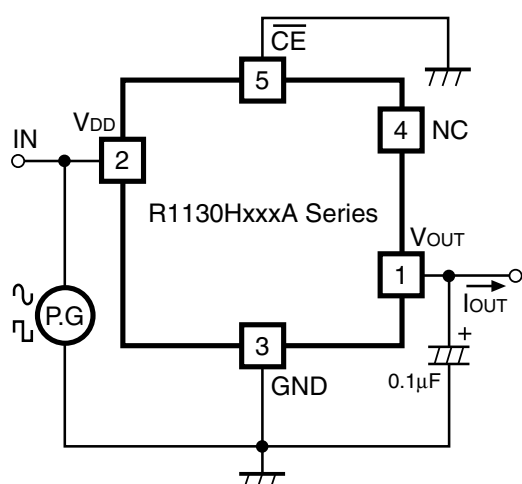


Test Circuit for Ripple Rejection and Input Transient Response

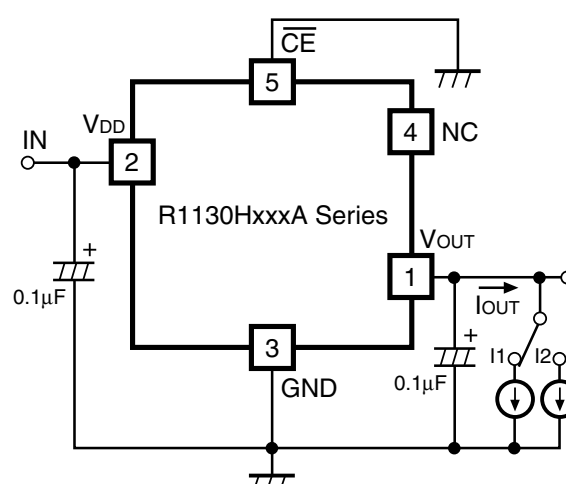


Test Circuit for Load Transient Response

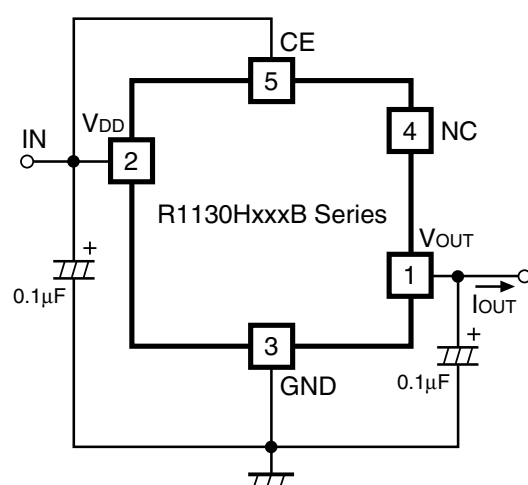


Standard Test Circuit

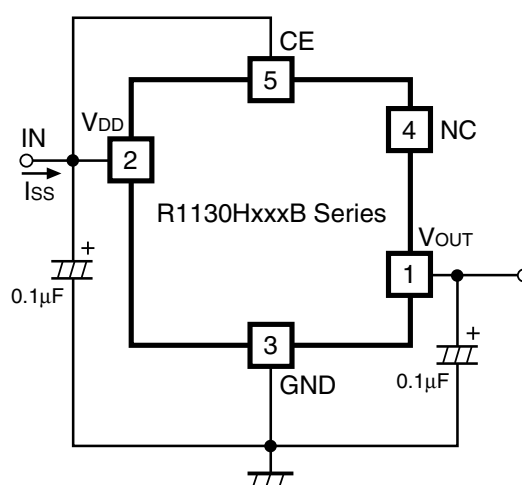


Test Circuit Supply Current

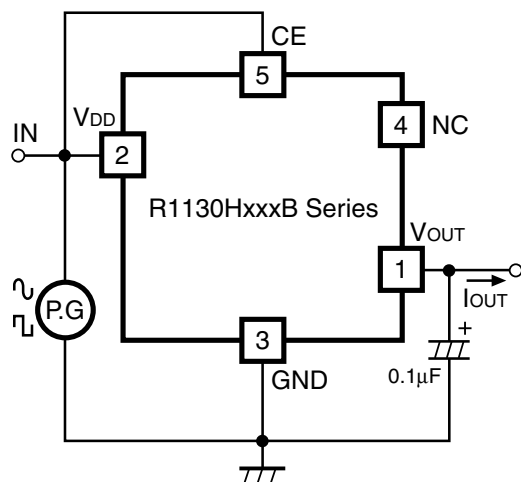


Test Circuit for Ripple Rejection and Input Transient Response

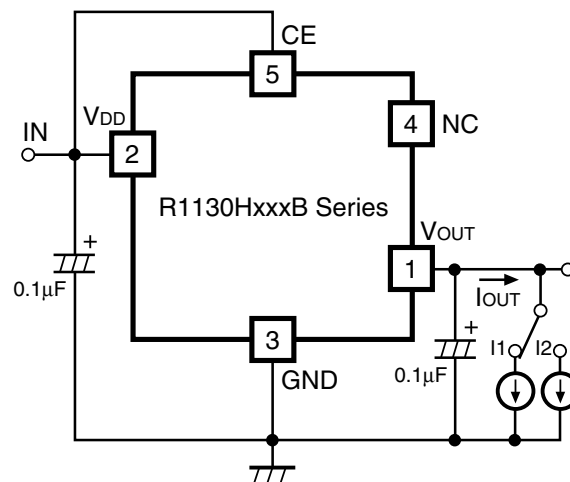


Test Circuit for Load Transient Response

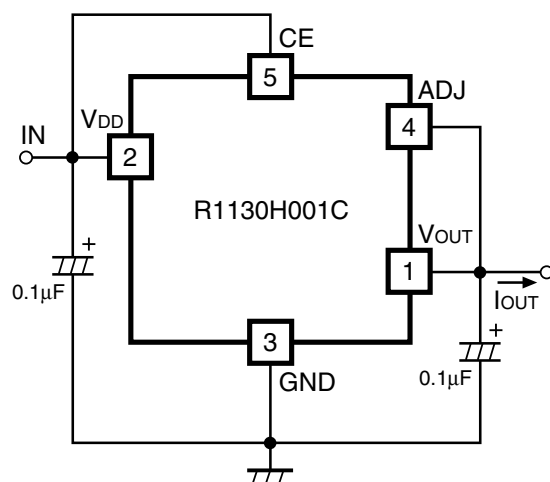


Standard Test Circuit

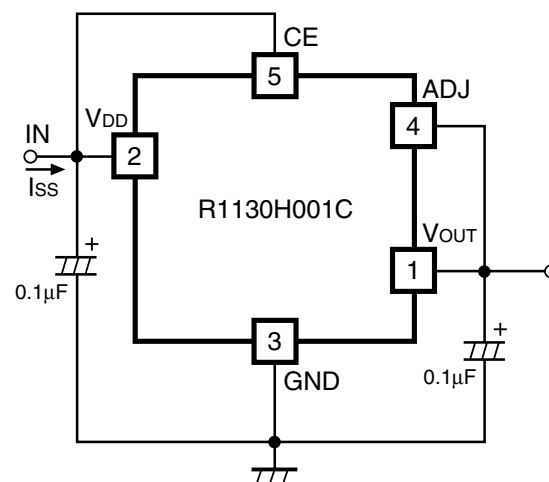

Test Circuit Supply Current

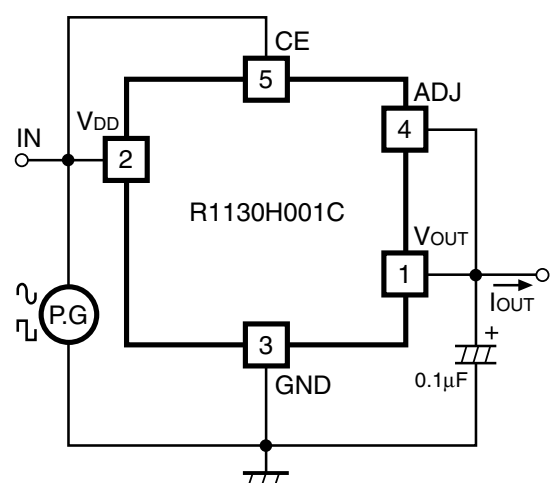




Test Circuit for Ripple Rejection and Input Transient Response

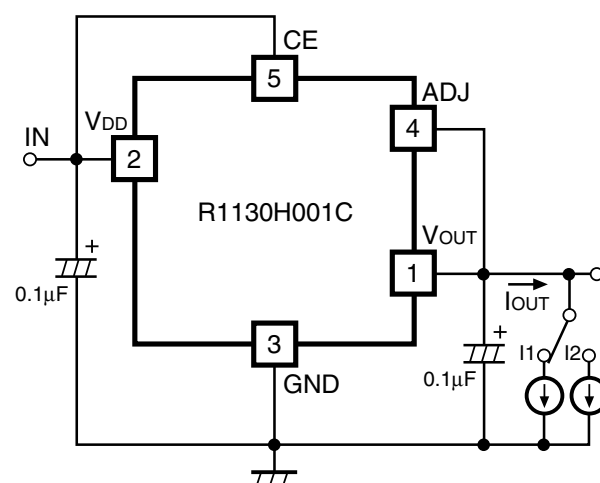



Test Circuit for Load Transient Response

TYPICAL CHARACTERISTICS


1) Output Voltage vs. Output Current (Topt=25°C)

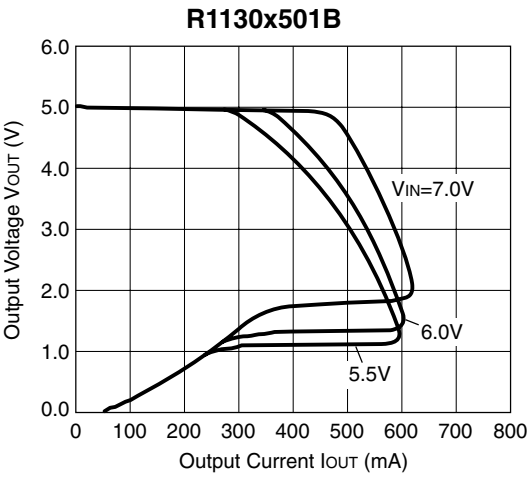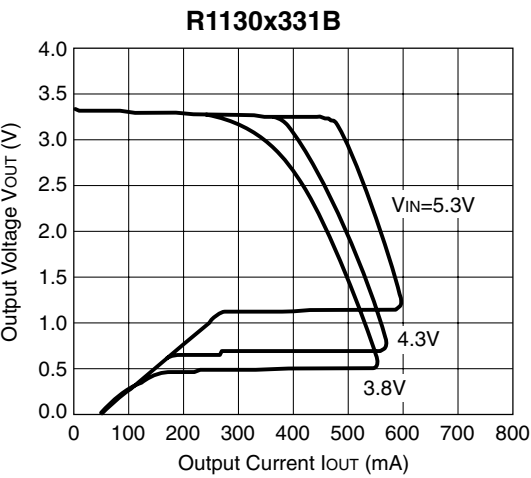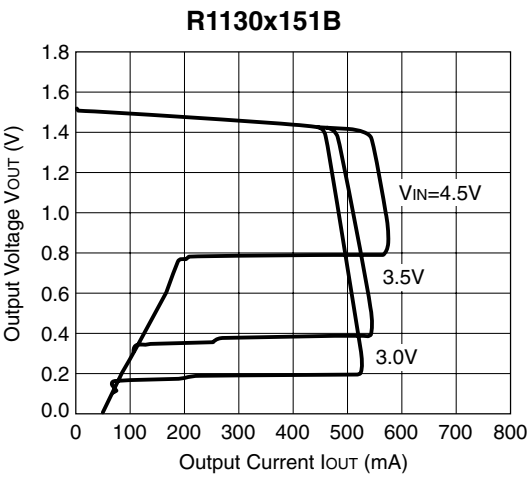




2) Input Voltage vs. Output Voltage (Topt=25°C)

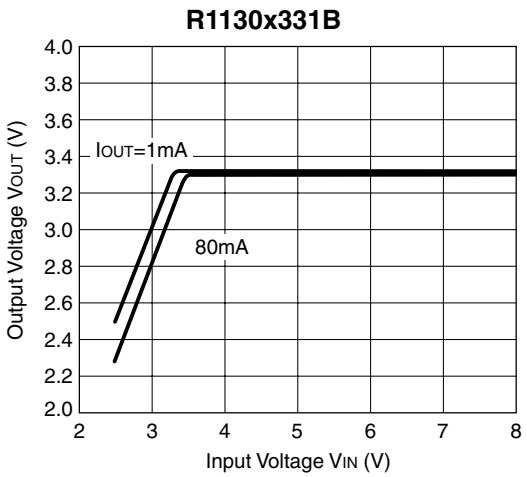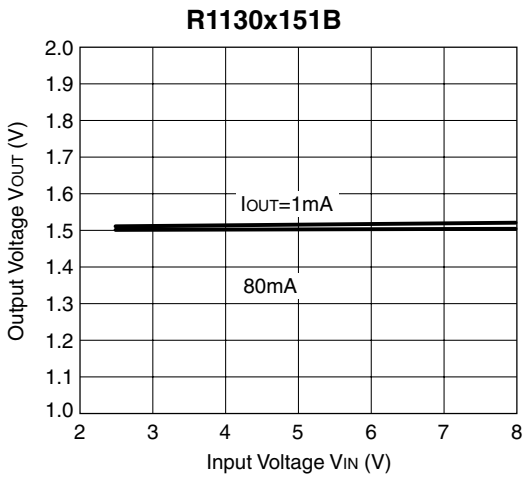




R1130xxxxA/B/C

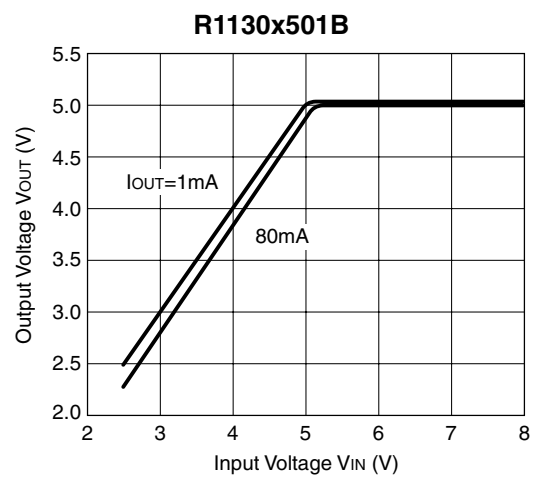



3) Dropout Voltage vs. Output Current

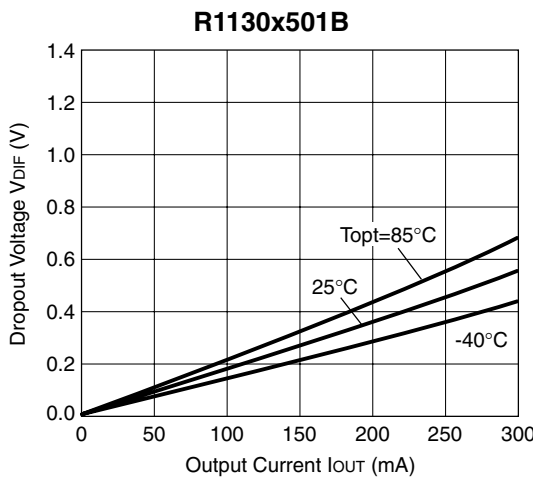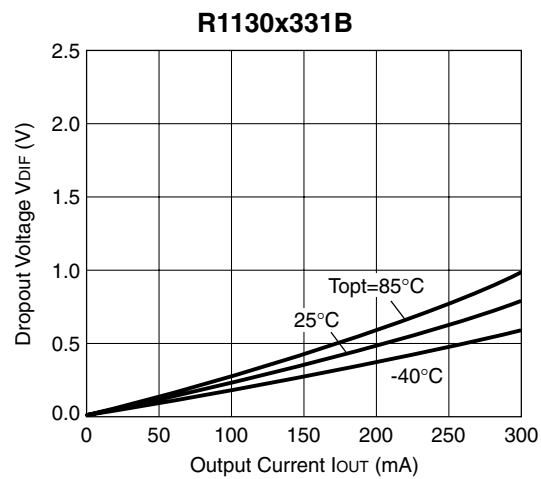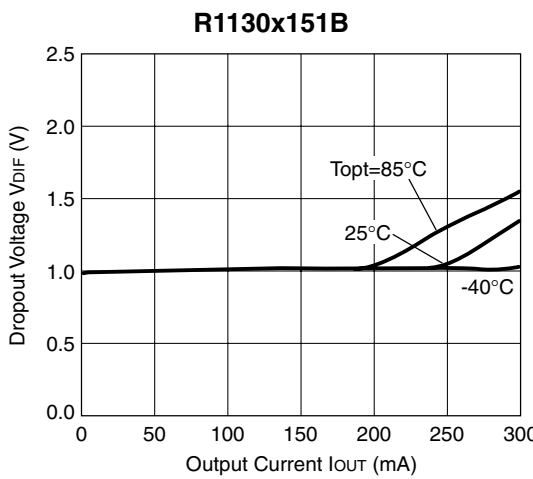


4) Output Voltage vs. Temperature

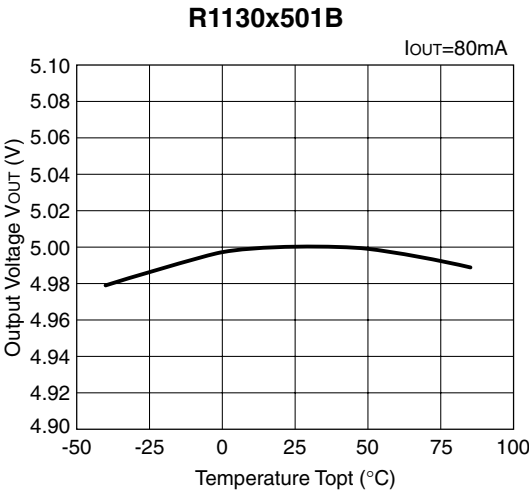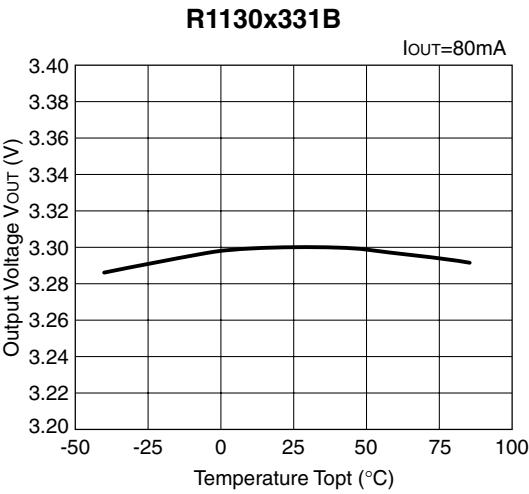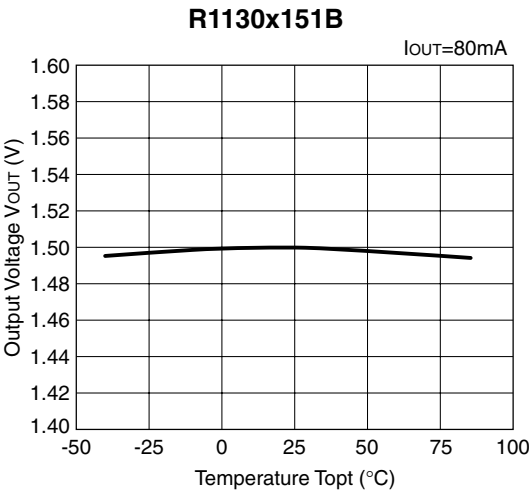




5) Supply Current vs. Input Voltage ($T_{OUT}=25^{\circ}C$)

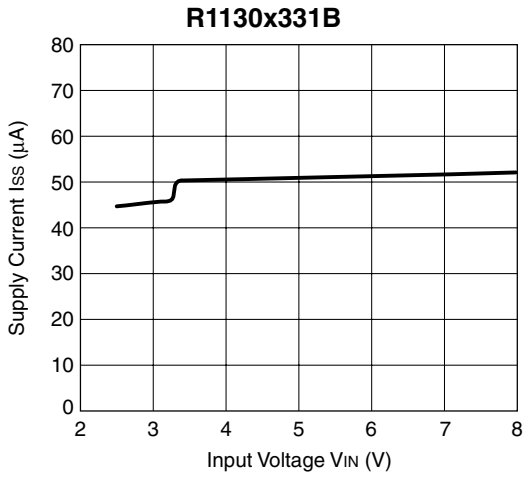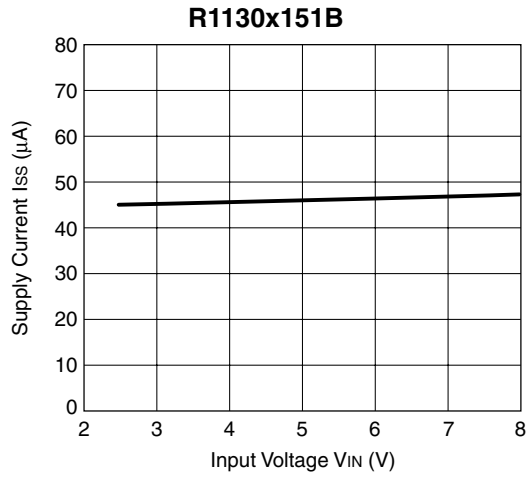




R1130xxxxA/B/C

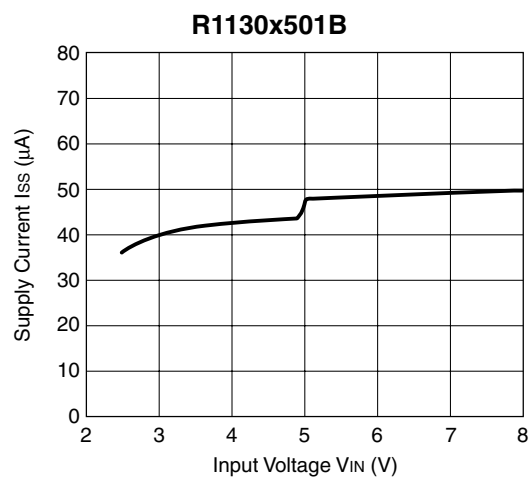



6) Supply Current vs. Temperature

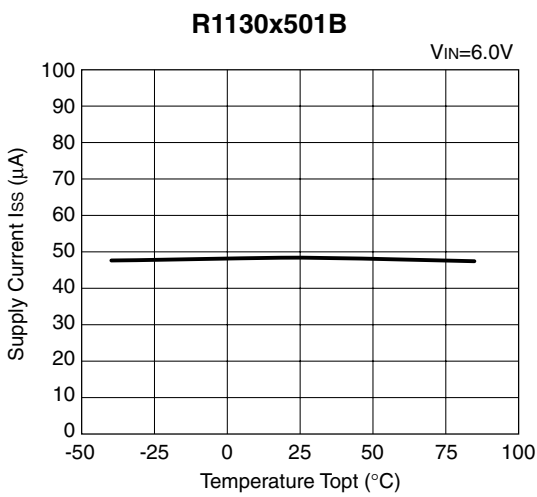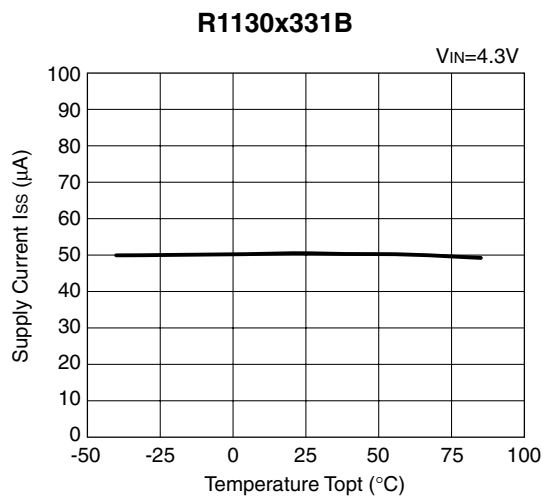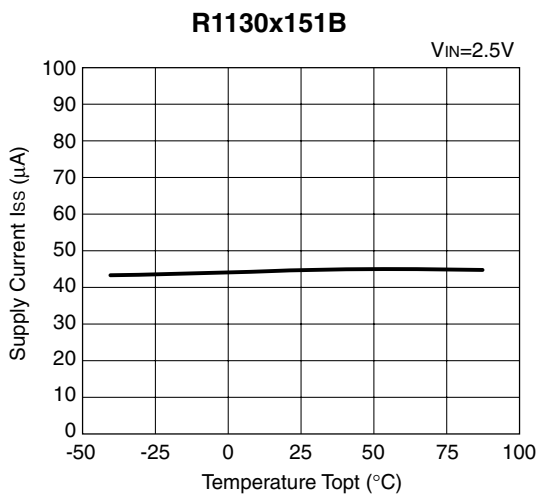


7) Ripple Rejection vs. Frequency

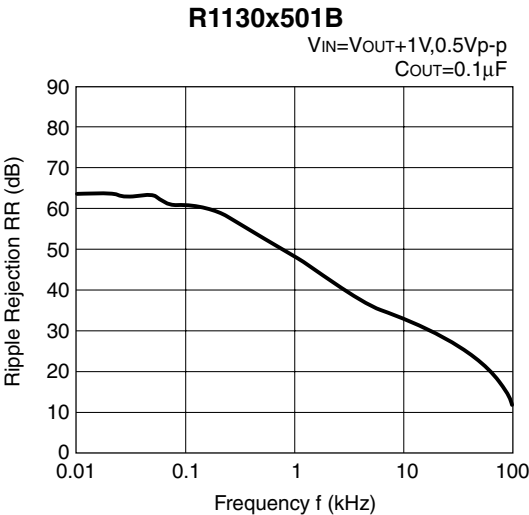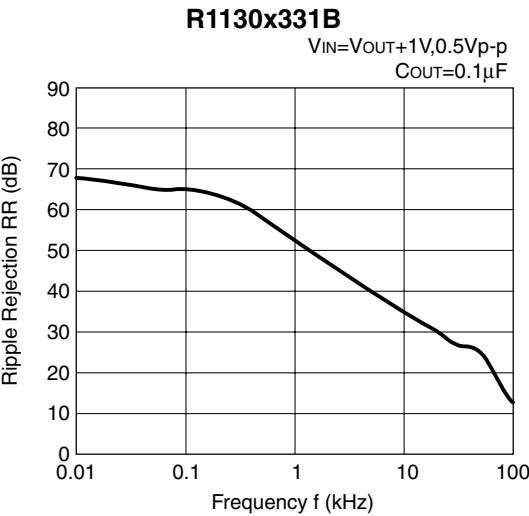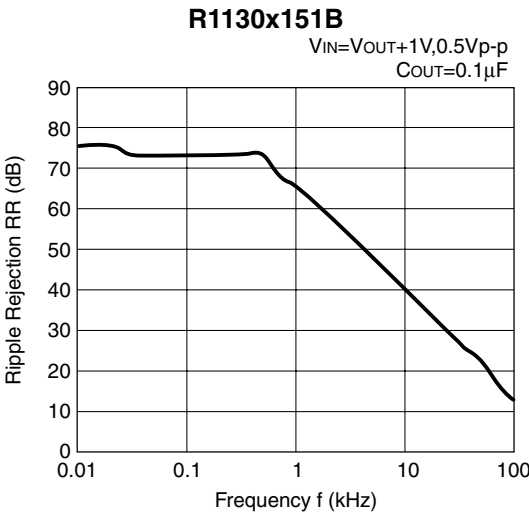

8) Ripple Rejection vs. Input Voltage

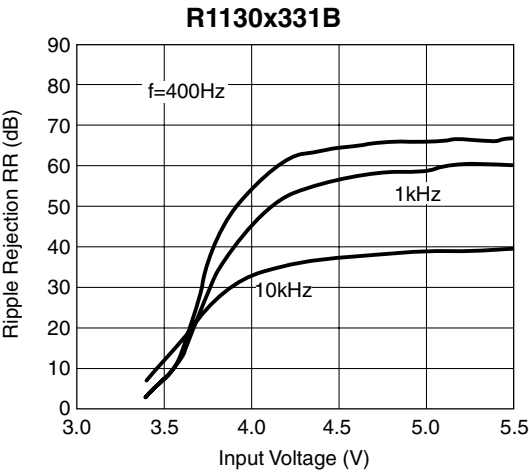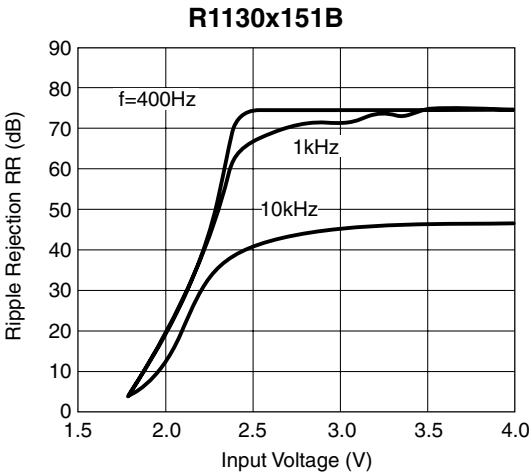


R1130xxxxA/B/C

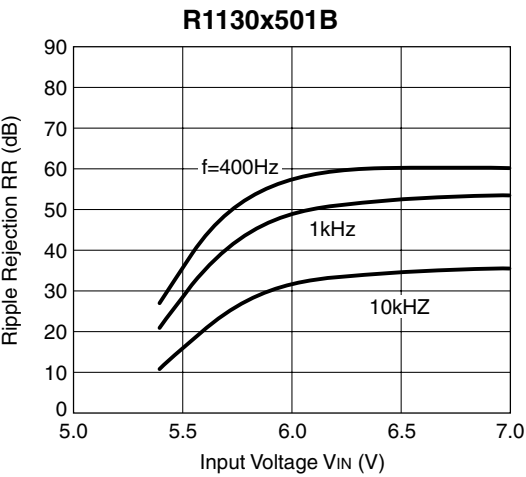


9) Input Transient Response


R1130x151B

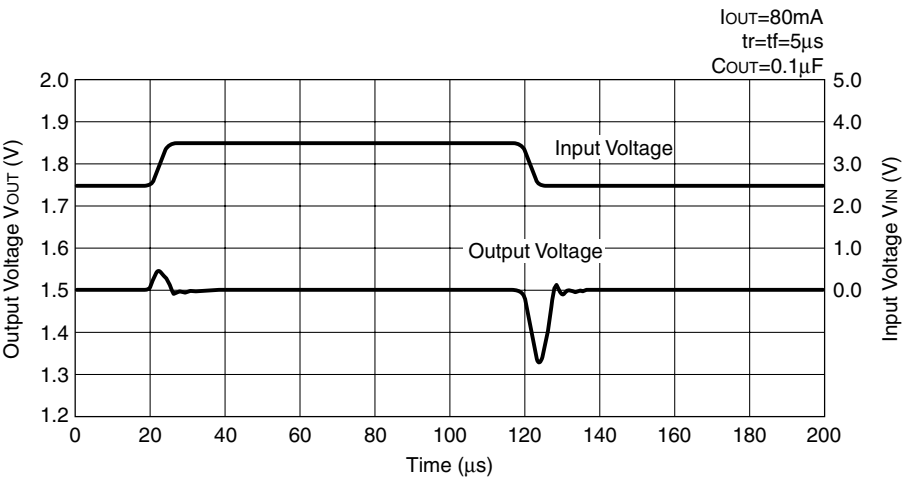

R1130x331B

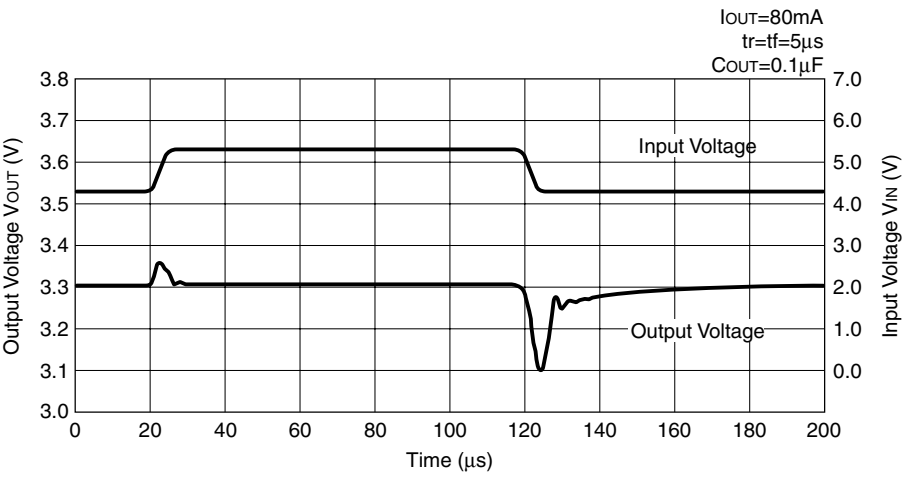


R1130x501B

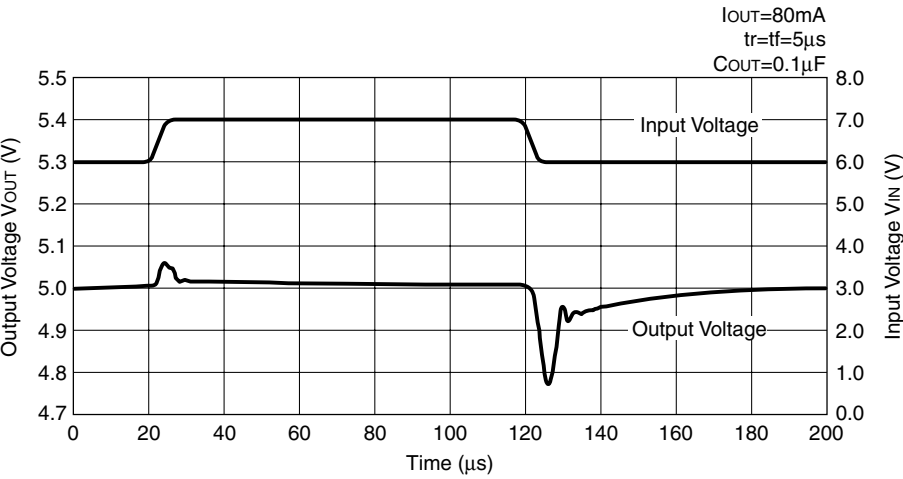


R1130xxxxA/B/C

10) Load Transient Response


R1130x151B

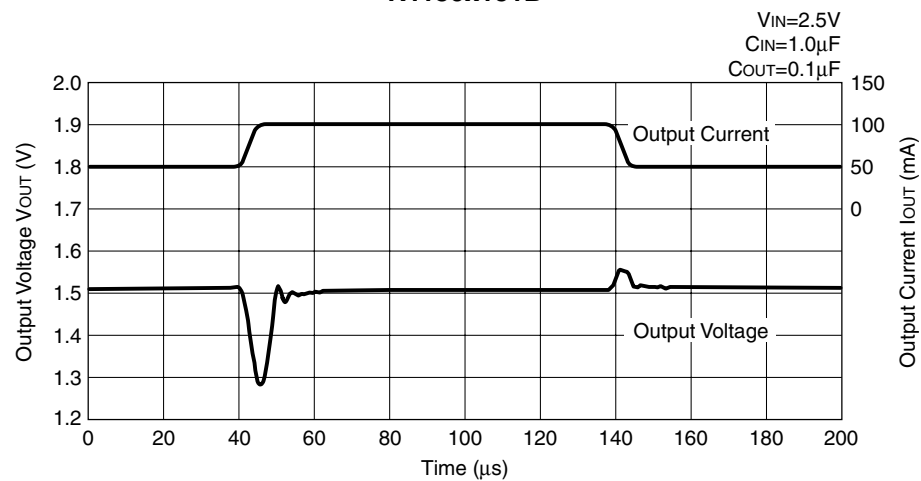

R1130x331B

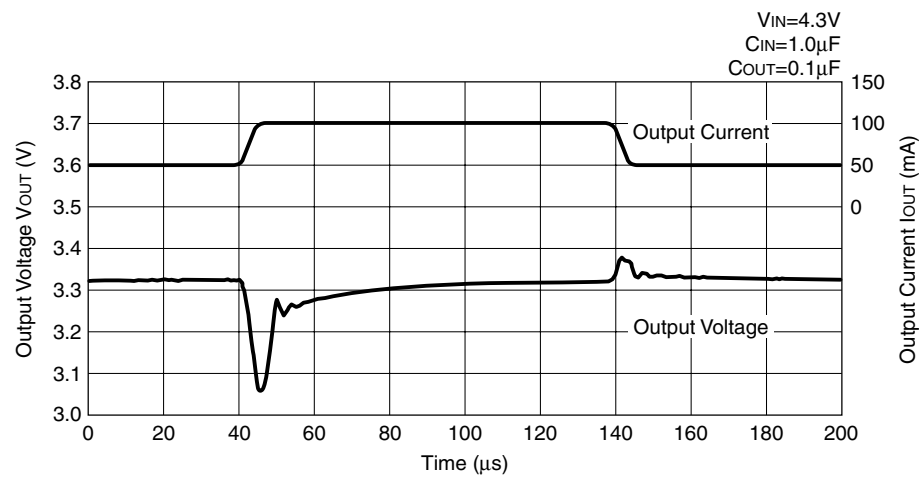


R1130x501B

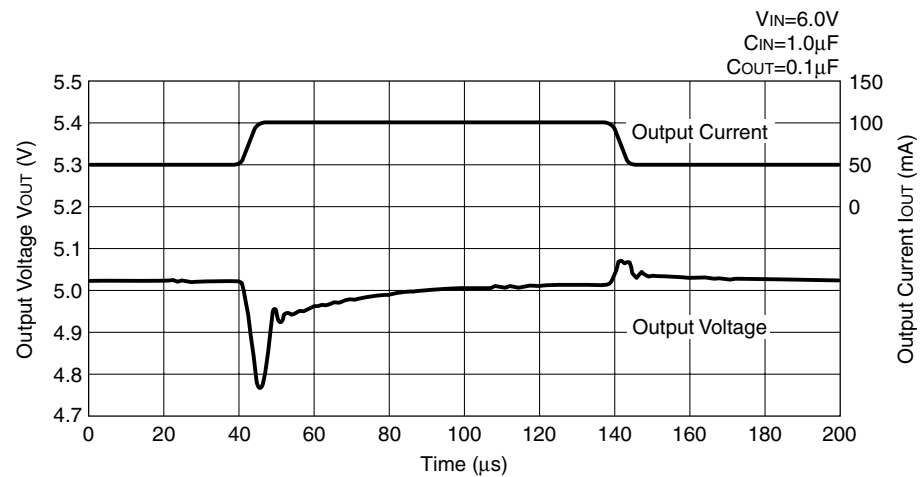

APPENDIX

* Technical Notes on Output Voltage Setting of C type

Figure 1. Adjustable Regulator (C type)

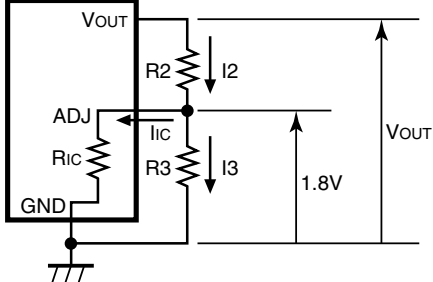

The Output Voltage of Regulator in R1130xxxxC may be adjustable for any output voltage between its 1.8V reference and its V_{DD} setting level. An external pair of resistors is required, as shown in Figure 1.

The complete equation for the output voltage is described step by step as follows;

$I_2 = I_{IC} + I_3$ (1)

$I_3 = 1.8/R_3$ (2)

Thus,

$I_2 = I_{IC} + 1.8/R_3$ (3)

Therefore,

$V_{OUT} = 1.8 + R_2 \times I_2$ (4)

Put Equation (3) into Equation (4), then

$V_{OUT} = 1.8 + R_2 \times (I_{IC} + 1.8/R_3)$
 $= 1.8 \times (1 + R_2/R_3) + R_2 \times I_{IC}$ (5)

In 2nd term, or $R_2 \times I_{IC}$ will produce an error in V_{OUT} .



In Equation (5),

$I_{IC} = 1.8/R_{IC}$ (6)

$R_2 \times I_{IC} = R_2 \times 1.8/R_{IC}$
 $= 1.8 \times R_2/R_{IC}$ (7)

For better accuracy, choosing $R_2 (<< R_{IC})$ reduces this error.


* Adjustable Resistor Dependence of Output Voltage

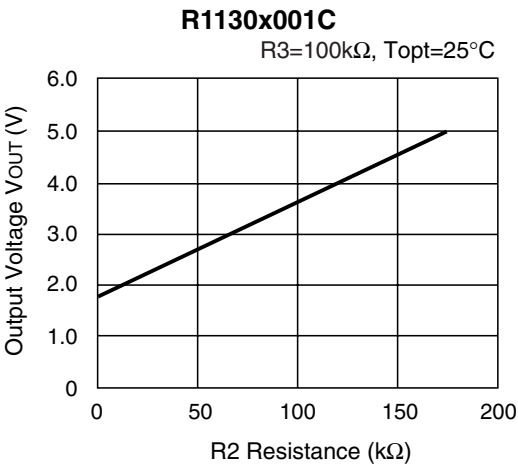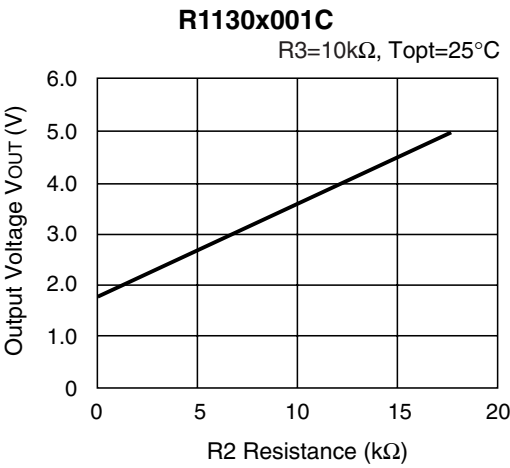

R1130xxxxA/B/C


TYPICAL APPLICATION

R1130xxxxA

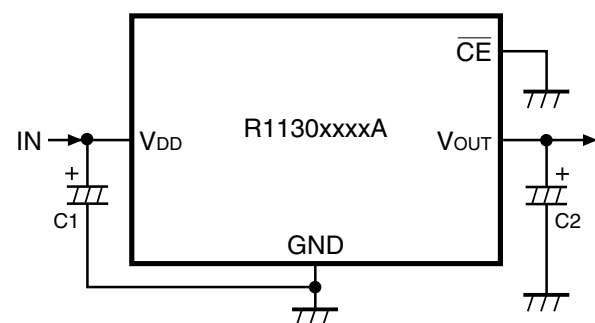


$C1=C2=0.1\mu\text{F}$

R1130xxxxB

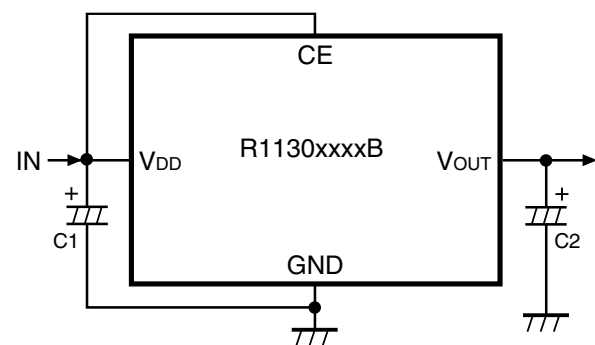

$C1=C2=0.1\mu\text{F}$

R1130xxxxC

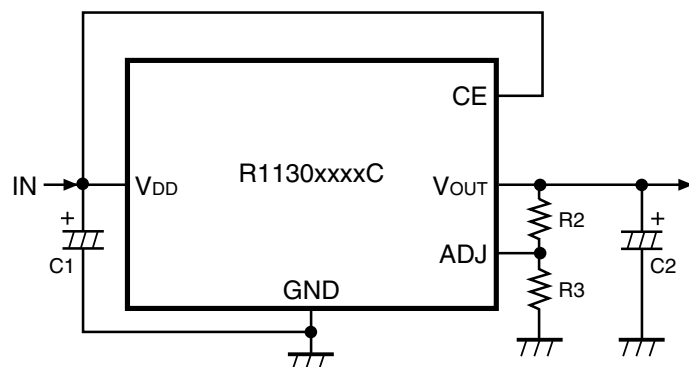


$C1=C2=0.1\mu\text{F}$, R2, R3: Refer to the Technical Notes on Output Voltage setting of C type.


● SOT-89-5

Unit: mm

PACKAGE DIMENSIONS

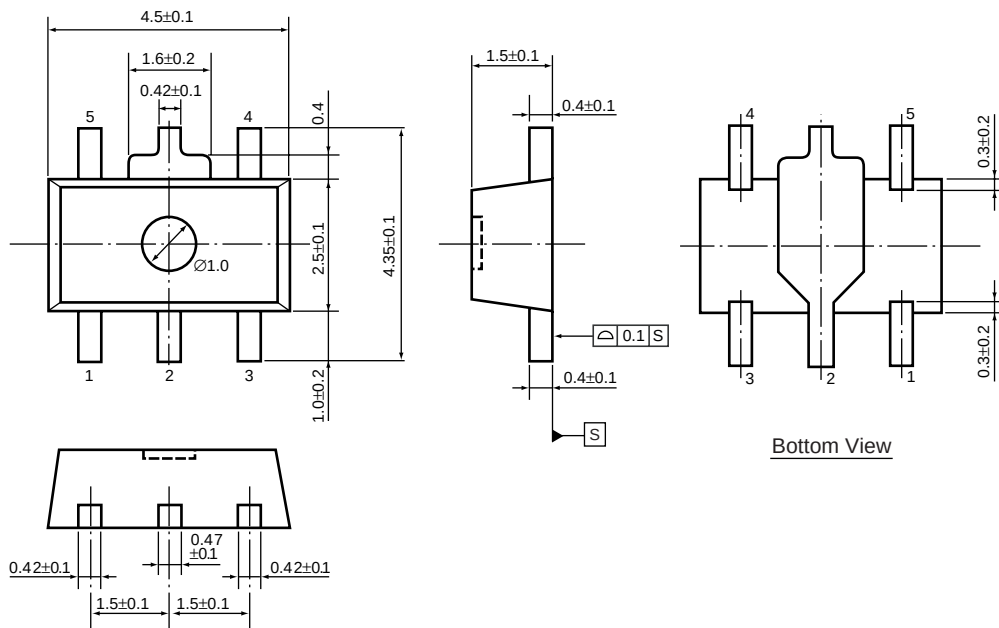


TAPING SPECIFICATION (T1: Standard Type)

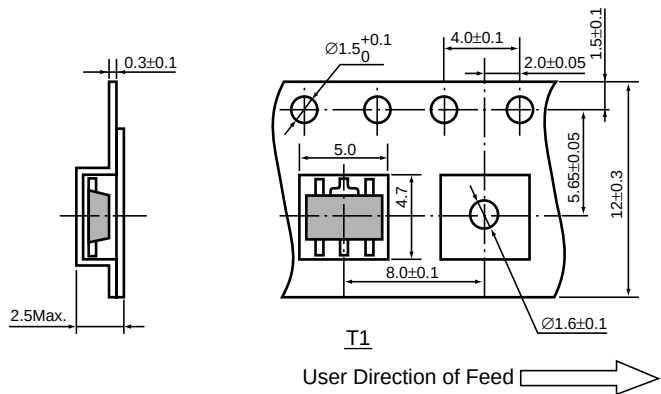

TAPING REEL DIMENSIONS REUSE REEL (EIAJ-RRM-12Bc)

(1reel=1000pcs)

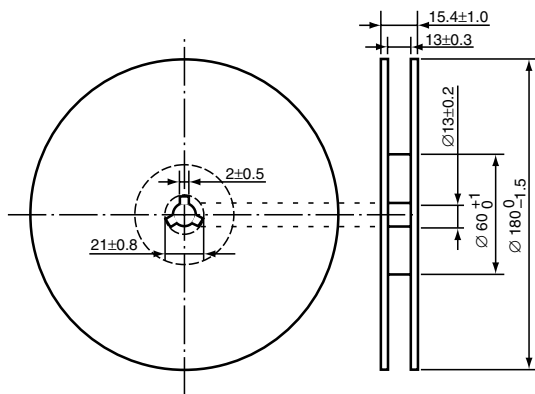

POWER DISSIPATION (SOT-89-5)

This specification is at mounted on board. Power Dissipation (P_D) depends on conditions of mounting on board. This specification is based on the measurement at the condition below:


Measurement Conditions

	High Wattage Land Pattern	Standard Land Pattern
Environment	Mounting on Board (Wind velocity=0m/s)	Mounting on Board (Wind velocity=0m/s)
Board Material	Glass cloth epoxy plastic (Double sided)	Glass cloth epoxy plastic (Double sided)
Board Dimensions	30mm × 30mm × 1.6mm	50mm × 50mm × 1.6mm
Copper Ratio	Top side : Approx. 20% , Back side : Approx. 100%	Top side : Approx. 10% , Back side : Approx. 100%
Through-hole	φ0.85mm × 10pcs	-


Measurement Result

(T_{opt}=25°C,T_{jmax}=125°C)

	High Wattage Land Pattern	Standard Land Pattern	Free Air
Power Dissipation	1300mW	900mW	500mW
Thermal Resistance	77°C/W	111°C/W	200°C/W

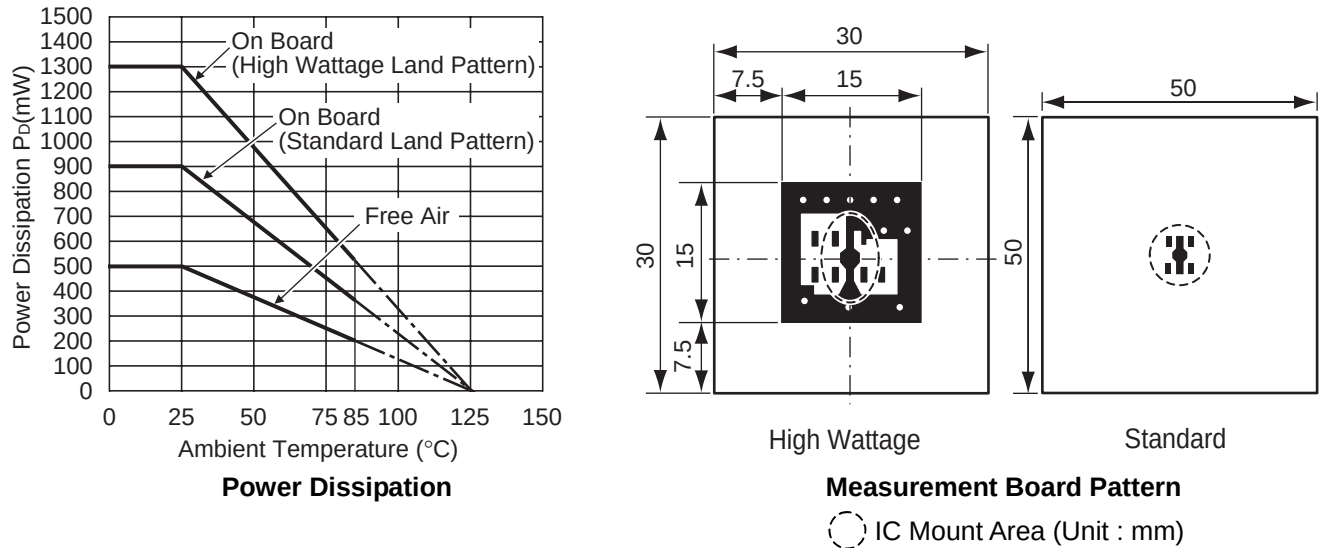


RECOMMENDED LAND PATTERN (SOT-89-5)

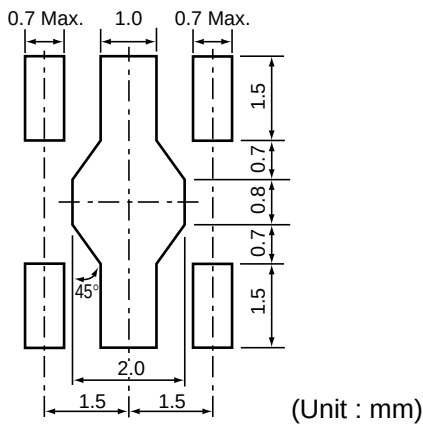


PE-HSON-6-0611

Unit: mm



(1reel=3000pcs)

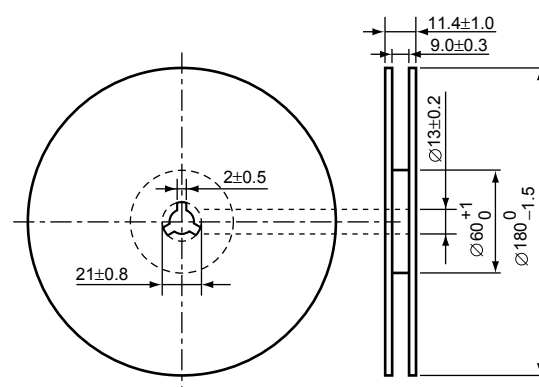**RICOH**

POWER DISSIPATION (HSON-6)


This specification is at mounted on board. Power Dissipation (P_D) depends on conditions of mounting on board. This specification is based on the measurement at the condition below:

Measurement Conditions


	Standard Land Pattern
Environment	Mounting on Board (Wind velocity=0m/s)
Board Material	Glass cloth epoxy plactic (Double sided)
Board Dimensions	40mm × 40mm × 1.6mm
Copper Ratio	Top side : Approx. 50% , Back side : Approx. 50%
Through-hole	φ0.5mm × 44pcs

Measurement Result

	Standard Land Pattern	Free Air
Power Dissipation	900mW	400mW
Thermal Resistance	θja=(125-25°C)/0.9W=111°C/W	250°C/W

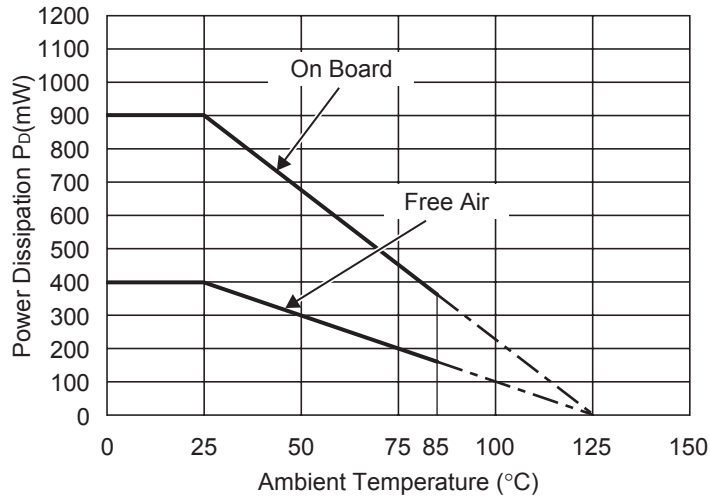

Power Dissipation

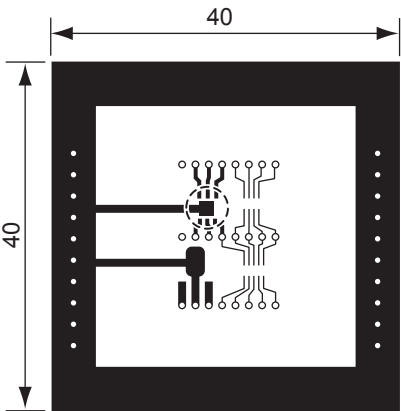

Measurement Board Pattern

○ IC Mount Area Unit : mm

RECOMMENDED LAND PATTERN

