

# High-Speed, Micropower, Low-Voltage, SOT23, Rail-to-Rail I/O Comparators

## ABSOLUTE MAXIMUM RATINGS

Supply Voltage (V<sub>CC</sub> to V<sub>EE</sub>) .....6V  
 IN<sub>-</sub>, IN<sub>+</sub> to V<sub>EE</sub> .....-0.3V to (V<sub>CC</sub> + 0.3V)  
 Current into Input Pins .....±20mA  
 OUT<sub>-</sub> to V<sub>EE</sub>  
   MAX987/MAX991/MAX995 .....-0.3V to (V<sub>CC</sub> + 0.3V)  
   MAX988/MAX992/MAX996 .....-0.3V to +6V  
 OUT<sub>-</sub> Short-Circuit Duration to V<sub>EE</sub> or V<sub>CC</sub> .....10s  
 Continuous Power Dissipation (T<sub>A</sub> = +70°C)  
   5-Pin SC70 (derate 3.1mW/°C above +70°C).....247mW

5-Pin SOT23 (derate 7.10mW/°C above +70°C).....571mW  
 8-Pin SOT23 (derate 9.1mW/°C above +70°C).....727mW  
 8-Pin SO (derate 5.88mW/°C above +70°C).....471mW  
 8-Pin µMAX (derate 4.5mW/°C above +70°C).....362mW  
 14-Pin TSSOP (derate 9.1mW/°C above +70°C) .....727mW  
 14-Pin SO (derate 8.33mW/°C above +70°C).....667mW  
 Operating Temperature Range .....-40°C to +85°C  
 Storage Temperature Range .....-65°C to +150°C  
 Lead Temperature (soldering, 10s) .....+300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS (Note 1)

(V<sub>CC</sub> = +2.7V to +5.5V, V<sub>EE</sub> = 0V, V<sub>CM</sub> = 0V, T<sub>A</sub> = -40°C to +85°C, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.)

| PARAMETER                                           | SYMBOL            | CONDITIONS                                                                 |                                 | MIN                    | TYP   | MAX                    | UNITS |
|-----------------------------------------------------|-------------------|----------------------------------------------------------------------------|---------------------------------|------------------------|-------|------------------------|-------|
| Supply Voltage                                      | V <sub>CC</sub>   | Inferred from PSRR test                                                    |                                 | 2.5                    |       | 5.5                    | V     |
| Supply Current per Comparator                       | I <sub>CC</sub>   | V <sub>CC</sub> = 5V                                                       | T <sub>A</sub> = +25°C          |                        | 53    | 80                     | µA    |
|                                                     |                   |                                                                            | T <sub>A</sub> = -40°C to +85°C |                        |       | 96                     |       |
|                                                     |                   | V <sub>CC</sub> = 2.7V                                                     | T <sub>A</sub> = +25°C          |                        | 48    | 80                     |       |
|                                                     |                   |                                                                            | T <sub>A</sub> = -40°C to +85°C |                        |       | 96                     |       |
| Power-Supply Rejection Ratio                        | PSRR              | 2.5V ≤ V <sub>CC</sub> ≤ 5.5V                                              |                                 | 55                     | 80    |                        | dB    |
| Common-Mode Voltage Range (Note 2)                  | V <sub>CMR</sub>  | T <sub>A</sub> = +25°C                                                     |                                 | V <sub>EE</sub> - 0.25 |       | V <sub>CC</sub> + 0.25 | V     |
|                                                     |                   | T <sub>A</sub> = -40°C to +85°C                                            |                                 | V <sub>EE</sub>        |       | V <sub>CC</sub>        |       |
| Input Offset Voltage (Note 3)                       | V <sub>OS</sub>   | Full common-mode range                                                     | T <sub>A</sub> = +25°C          |                        | ±0.5  | ±5                     | mV    |
|                                                     |                   |                                                                            | T <sub>A</sub> = -40°C to +85°C |                        |       | ±7                     |       |
| Input Hysteresis                                    | V <sub>HYST</sub> |                                                                            |                                 |                        | ±2.5  |                        | mV    |
| Input Bias Current (Note 4)                         | I <sub>B</sub>    |                                                                            |                                 |                        | 0.001 | 10                     | nA    |
| Input Offset Current                                | I <sub>OS</sub>   |                                                                            |                                 |                        | 0.5   |                        | pA    |
| Input Capacitance                                   | C <sub>IN</sub>   |                                                                            |                                 |                        | 1.0   |                        | pF    |
| Common-Mode Rejection Ratio                         | CMRR              |                                                                            |                                 | 50                     | 80    |                        | dB    |
| Output Leakage Current (MAX988/MAX992/MAX996 only)  | I <sub>LEAK</sub> | V <sub>OUT</sub> = high                                                    |                                 |                        |       | 1.0                    | µA    |
| Output Short-Circuit Current                        | I <sub>SC</sub>   | Sourcing or sinking, V <sub>OUT</sub> = V <sub>EE</sub> or V <sub>CC</sub> | V <sub>CC</sub> = 5V            |                        | 95    |                        | mA    |
|                                                     |                   |                                                                            | V <sub>CC</sub> = 2.7V          |                        | 35    |                        |       |
| OUT Output-Voltage Low                              | V <sub>OL</sub>   | V <sub>CC</sub> = 5V, I <sub>SINK</sub> = 8mA                              | T <sub>A</sub> = +25°C          |                        | 0.2   | 0.4                    | V     |
|                                                     |                   |                                                                            | T <sub>A</sub> = -40°C to +85°C |                        |       | 0.55                   |       |
|                                                     |                   | V <sub>CC</sub> = 2.7V, I <sub>SINK</sub> = 3.5mA                          | T <sub>A</sub> = +25°C          |                        | 0.15  | 0.3                    |       |
|                                                     |                   |                                                                            | T <sub>A</sub> = -40°C to +85°C |                        |       | 0.4                    |       |
| OUT Output-Voltage High (MAX987/MAX991/MAX995 Only) | V <sub>OH</sub>   | V <sub>CC</sub> = 5V, I <sub>SOURCE</sub> = 8mA                            | T <sub>A</sub> = +25°C          | 4.6                    | 4.85  |                        | V     |
|                                                     |                   |                                                                            | T <sub>A</sub> = -40°C to +85°C | 4.45                   |       |                        |       |
|                                                     |                   | V <sub>CC</sub> = 2.7V, I <sub>SOURCE</sub> = 3.5mA                        | T <sub>A</sub> = +25°C          | 2.4                    | 2.55  |                        |       |
|                                                     |                   |                                                                            | T <sub>A</sub> = -40°C to +85°C | 2.3                    |       |                        |       |

# High-Speed, Micropower, Low-Voltage, SOT23, Rail-to-Rail I/O Comparators

## ELECTRICAL CHARACTERISTICS (continued)

( $V_{CC} = +2.7V$  to  $+5.5V$ ,  $V_{EE} = 0V$ ,  $V_{CM} = 0V$ ,  $T_A = -40^{\circ}C$  to  $+85^{\circ}C$ , unless otherwise noted. Typical values are at  $T_A = +25^{\circ}C$ .)

| PARAMETER                                        | SYMBOL | CONDITIONS                                                    |                                                   |                        | MIN | TYP | MAX | UNITS |
|--------------------------------------------------|--------|---------------------------------------------------------------|---------------------------------------------------|------------------------|-----|-----|-----|-------|
| OUT Rise Time<br>(MAX987/MAX991/<br>MAX995 Only) | tRISE  | VCC = 5.0V                                                    |                                                   | C <sub>L</sub> = 15pF  |     | 15  |     | ns    |
|                                                  |        |                                                               |                                                   | C <sub>L</sub> = 50pF  |     | 20  |     |       |
|                                                  |        |                                                               |                                                   | C <sub>L</sub> = 200pF |     | 40  |     |       |
| OUT Fall Time                                    | tFALL  | VCC = 5.0V                                                    |                                                   | C <sub>L</sub> = 15pF  |     | 15  |     | ns    |
|                                                  |        |                                                               |                                                   | C <sub>L</sub> = 50pF  |     | 20  |     |       |
|                                                  |        |                                                               |                                                   | C <sub>L</sub> = 200pF |     | 40  |     |       |
| Propagation Delay                                | tPD-   | C <sub>L</sub> = 15pF,<br>VCC = 5V                            | MAX987/MAX991/<br>MAX995 only                     | 10mV overdrive         |     | 210 |     | ns    |
|                                                  |        |                                                               |                                                   | 100mV overdrive        |     | 120 |     |       |
|                                                  |        |                                                               | MAX988/MAX992/<br>MAX996 only,<br>RPULLUP = 5.1kΩ | 10mV overdrive         |     | 210 |     |       |
|                                                  |        |                                                               |                                                   | 100mV overdrive        |     | 120 |     |       |
|                                                  | tPD+   | MAX987/MAX991/MAX995<br>only, C <sub>L</sub> = 15pF, VCC = 5V | 10mV overdrive                                    |                        |     | 210 |     |       |
|                                                  |        |                                                               | 100mV overdrive                                   |                        |     | 120 |     |       |
| Power-Up Time                                    | tPU    |                                                               |                                                   |                        |     | 25  |     | μs    |

**Note 1:** All device specifications are 100% production tested at  $T_A = +25^{\circ}C$ . Limits over the extended temperature range are guaranteed by design, not production tested.

**Note 2:** Inferred from the  $V_{OS}$  test. Either or both inputs can be driven 0.3V beyond either supply rail without output phase reversal.

**Note 3:**  $V_{OS}$  is defined as the center of the hysteresis band at the input.

**Note 4:**  $I_B$  is defined as the average of the two input bias currents ( $I_{B-}$ ,  $I_{B+}$ ).


MAX987/MAX988/MAX991/MAX992/MAX995/MAX996

# High-Speed, Micropower, Low-Voltage, SOT23, Rail-to-Rail I/O Comparators


## Typical Operating Characteristics

( $V_{CC} = +5V$ ,  $V_{CM} = 0V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)


**SUPPLY CURRENT PER COMPARATOR  
vs. TEMPERATURE**

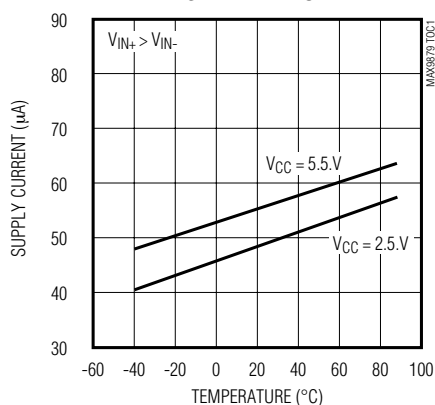


**SUPPLY CURRENT PER COMPARATOR  
vs. OUTPUT TRANSITION FREQUENCY**

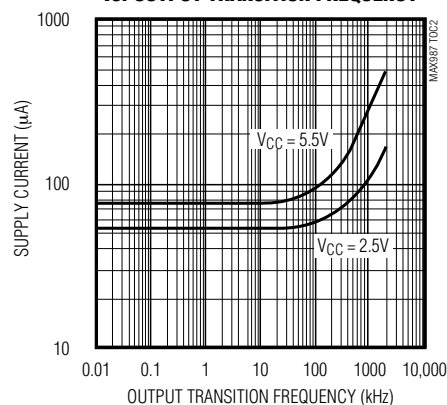


**OUTPUT HIGH VOLTAGE  
vs. OUTPUT SOURCE CURRENT**

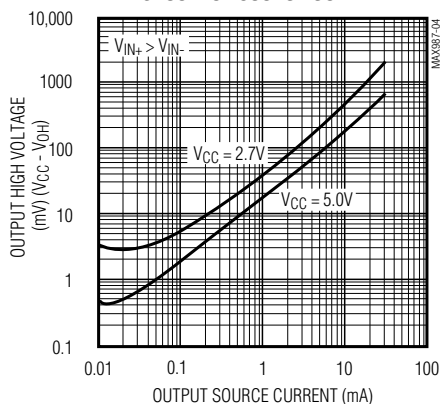


**OUTPUT LOW VOLTAGE  
vs. OUTPUT SINK CURRENT**

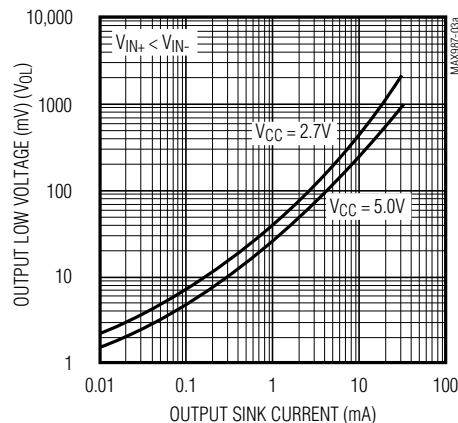

**OUTPUT SHORT-CIRCUIT  
CURRENT vs. TEMPERATURE**

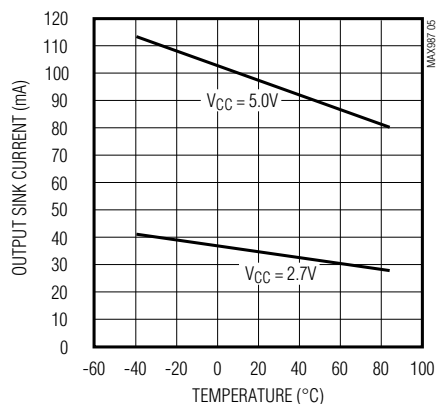







**INPUT OFFSET VOLTAGE  
vs. TEMPERATURE**

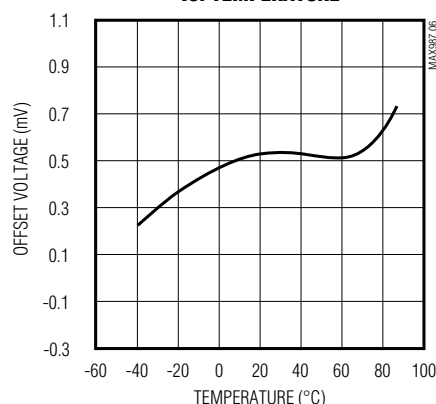

# High-Speed, Micropower, Low-Voltage, SOT23, Rail-to-Rail I/O Comparators

## Typical Operating Characteristics (continued)

( $V_{CC} = +5V$ ,  $V_{CM} = 0V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

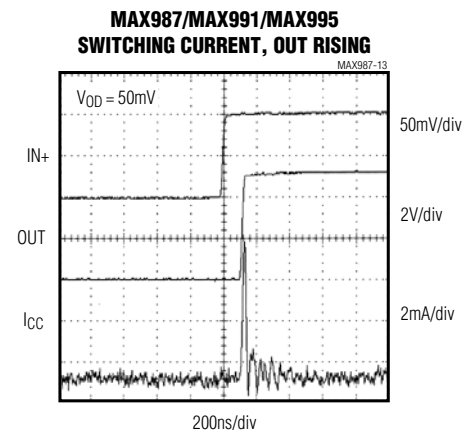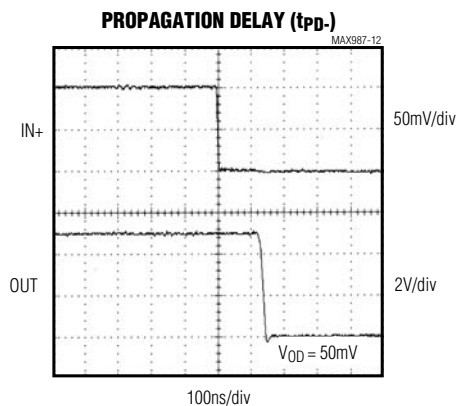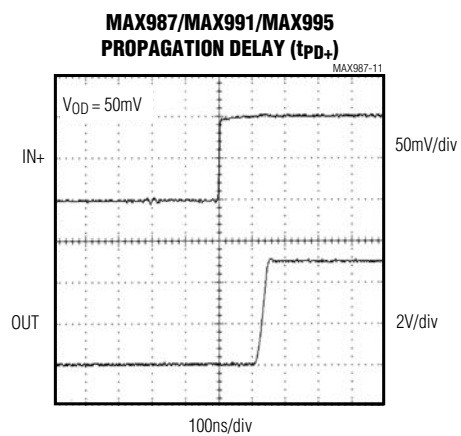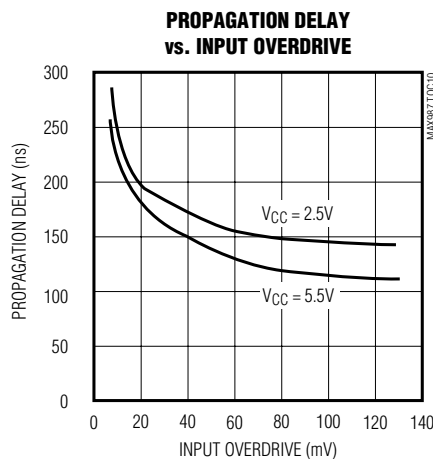
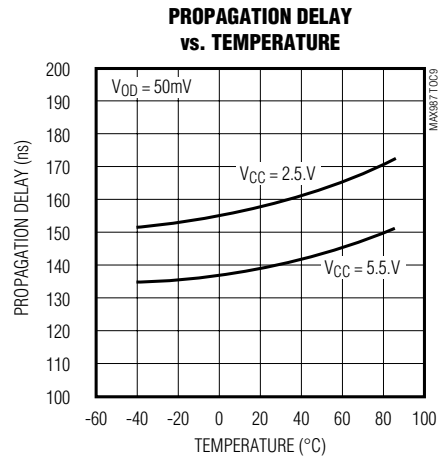
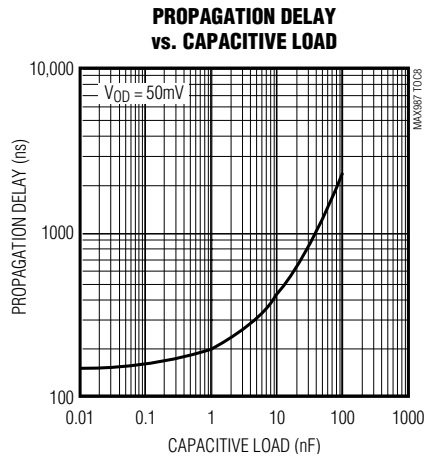


MAX987/MAX988/MAX991/MAX992/MAX995/MAX996

# High-Speed, Micropower, Low-Voltage, SOT23, Rail-to-Rail I/O Comparators

## Typical Operating Characteristics (continued)

( $V_{CC} = +5V$ ,  $V_{CM} = 0V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

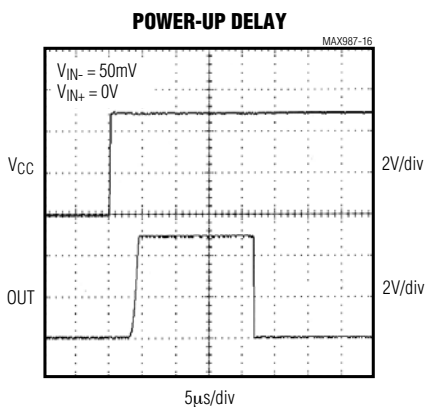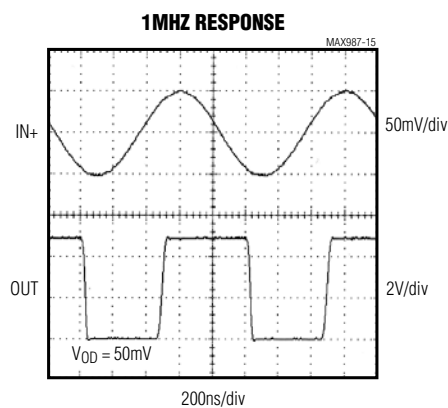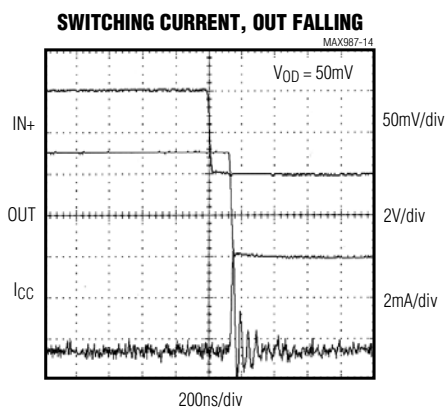

# High-Speed, Micropower, Low-Voltage, SOT23, Rail-to-Rail I/O Comparators

## Pin Description

| PIN              |         |                         |                  | NAME            | FUNCTION                                 |
|------------------|---------|-------------------------|------------------|-----------------|------------------------------------------|
| MAX987<br>MAX988 |         | MAX991<br>MAX996        | MAX995<br>MAX996 |                 |                                          |
| SOT23/<br>SC70   | SO      | SO/ $\mu$ MAX/<br>SOT23 | SO/<br>TSSOP     |                 |                                          |
| 1                | 6       | —                       | —                | OUT             | Comparator Output                        |
| 2                | 7       | 8                       | 4                | V <sub>CC</sub> | Positive Supply Voltage                  |
| 3                | 3       | —                       | —                | IN+             | Comparator Noninverting Input            |
| 4                | 2       | —                       | —                | IN-             | Comparator Inverting Input               |
| 5                | 4       | 4                       | 11               | V <sub>EE</sub> | Negative Supply Voltage                  |
| —                | —       | 1                       | 1                | OUTA            | Comparator A Output                      |
| —                | —       | 2                       | 2                | INA-            | Comparator A Inverting Input             |
| —                | —       | 3                       | 3                | INA+            | Comparator A Noninverting Input          |
| —                | —       | 5                       | 5                | INB+            | Comparator B Noninverting Input          |
| —                | —       | 6                       | 6                | INB-            | Comparator B Inverting Input             |
| —                | —       | 7                       | 7                | OUTB            | Comparator B Output                      |
| —                | —       | —                       | 8                | OUTC            | Comparator C Output                      |
| —                | —       | —                       | 9                | INC-            | Comparator C Inverting Input             |
| —                | —       | —                       | 10               | INC+            | Comparator C Noninverting Input          |
| —                | —       | —                       | 12               | IND+            | Comparator D Noninverting Input          |
| —                | —       | —                       | 13               | IND-            | Comparator D Inverting Input             |
| —                | —       | —                       | 14               | OUTD            | Comparator D Output                      |
| —                | 1, 5, 8 | —                       | —                | N.C.            | No Connection. Not internally connected. |

MAX987/MAX988/MAX991/MAX992/MAX995/MAX996

# High-Speed, Micropower, Low-Voltage, SOT23, Rail-to-Rail I/O Comparators

## Detailed Description

The MAX987/MAX988/MAX991/MAX992/MAX995/MAX996 are single/dual/quad low-power, low-voltage comparators. They have an operating supply voltage range between +2.5V and +5.5V and consume only 48µA per comparator, while achieving 120ns propagation delay. Their common-mode input voltage range extends 0.25V beyond each rail. Internal hysteresis ensures clean output switching, even with slow-moving input signals. Large internal output drivers allow rail-to-rail output swing with up to 8mA loads.

The output stage employs a unique design that minimizes supply-current surges while switching, virtually eliminating the supply glitches typical of many other comparators. The MAX987/MAX991/MAX995 have a push-pull output structure that sinks as well as sources current. The MAX988/MAX992/MAX996 have an open-drain output stage that can be pulled beyond VCC to an absolute maximum of 6V above VEE.

### Input Stage Circuitry

The devices' input common-mode range extends from -0.25V to (VCC + 0.25V). These comparators may operate at any differential input voltage within these limits. Input bias current is typically 1.0pA if the input voltage is between the supply rails. Comparator inputs are protected from overvoltage by internal body diodes connected to the supply rails. As the input voltage exceeds the supply rails, these body diodes become forward biased and begin to conduct. Consequently, bias currents increase exponentially as the input voltage exceeds the supply rails.

### Output Stage Circuitry

These comparators contain a unique output stage capable of rail-to-rail operation with up to 8mA loads. Many comparators consume orders of magnitude more current during switching than during steady-state operation. However, with this family of comparators, the supply-current change during an output transition is extremely small. The *Typical Operating Characteristics* Supply Current vs. Output Transition Frequency graph shows the minimal supply-current increase as the output switching frequency approaches 1MHz. This characteristic eliminates the need for power-supply filter capacitors to reduce glitches created by comparator switching currents. Battery life increases substantially in high-speed, battery-powered applications.

## Applications Information

### Additional Hysteresis

#### MAX987/MAX991/MAX995

The MAX987/MAX991/MAX995 have ±2.5mV internal hysteresis. Additional hysteresis can be generated with three resistors using positive feedback (Figure 1). Unfortunately, this method also slows hysteresis response time. Use the following procedure to calculate resistor values for the MAX987/MAX991/MAX995.

- 1) Select R3. Leakage current at IN is under 10nA; therefore, the current through R3 should be at least 1µA to minimize errors caused by leakage current. The current through R3 at the trip point is  $(V_{REF} - V_{OUT}) / R3$ . Considering the two possible output states and solving for R3 yields two formulas:  $R3 = V_{REF} / 1\mu A$  or  $R3 = (V_{REF} - V_{CC}) / 1\mu A$ . Use the smaller of the two resulting resistor values. For example, if  $V_{REF} = 1.2V$  and  $V_{CC} = 5V$ , then the two R3 resistor values are 1.2MΩ and 3.8MΩ. Choose a 1.2MΩ standard value for R3.
- 2) Choose the hysteresis band required ( $V_{HB}$ ). For this example, choose 50mV.
- 3) Calculate R1 according to the following equation:

$$R1 = R3 \times (V_{HB} / V_{CC})$$

For this example, insert the values  $R1 = 1.2M\Omega \times (50mV / 5V) = 12k\Omega$ .

- 4) Choose the trip point for  $V_{IN}$  rising ( $V_{THR}$ ;  $V_{THF}$  is the trip point for  $V_{IN}$  falling). This is the threshold voltage at which the comparator switches its output from low to high as  $V_{IN}$  rises above the trip point. For this example, choose 3V.

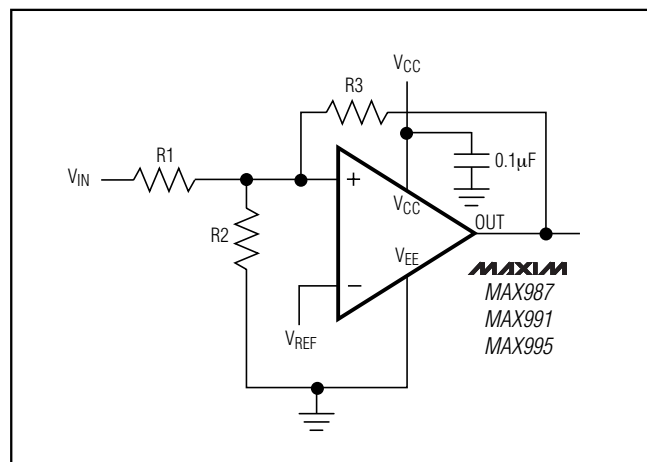


Figure 1. Additional Hysteresis (MAX987/MAX991/MAX995)

# High-Speed, Micropower, Low-Voltage, SOT23, Rail-to-Rail I/O Comparators

- 5) Calculate R2 as shown. For this example, choose an 8.2kΩ standard value:

$$R2 = \frac{1}{\left(\frac{V_{THR}}{V_{REF} \times R1}\right) - \frac{1}{R1} - \frac{1}{R3}}$$

$$R2 = \frac{1}{\left(\frac{3.0V}{1.2 \times 12k\Omega}\right) - \frac{1}{12k\Omega} - \frac{1}{2.2M\Omega}} = 8.03k\Omega$$

- 6) Verify trip voltages and hysteresis as follows:

$$V_{IN} \text{ rising: } V_{THR} = V_{REF} \times R1 \times \left(\frac{1}{R1} + \frac{1}{R2} + \frac{1}{R3}\right)$$

$$V_{IN} \text{ falling: } V_{THF} = V_{THR} - \left(\frac{R1 \times V_{CC}}{R3}\right)$$

$$\text{Hysteresis} = V_{THR} - V_{THF}$$

## MAX988/MAX992/MAX996

The MAX988/MAX992/MAX996 have ±2.5mV internal hysteresis. They have open-drain outputs and require an external pullup resistor (Figure 2). Additional hysteresis can be generated using positive feedback, but the formulas differ slightly from those of the MAX987/MAX991/MAX995.

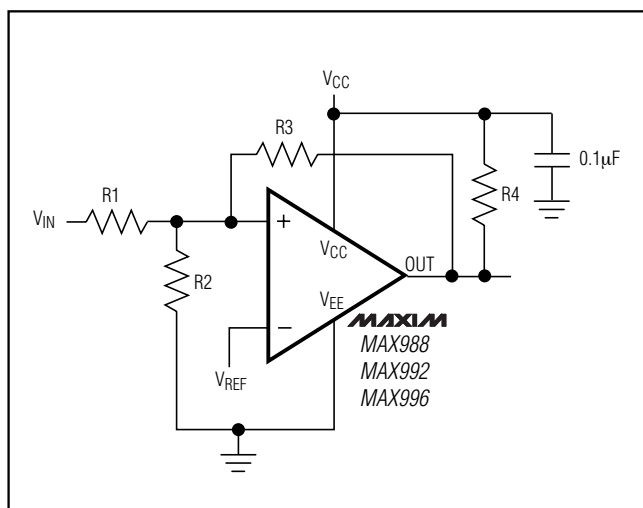


Figure 2. Additional Hysteresis (MAX988/MAX992/MAX996)

Use the following procedure to calculate resistor values:

- 1) Select R3 according to the formulas  $R3 = V_{REF} / 1\mu A$  or  $R3 = (V_{REF} - V_{CC}) / 1\mu A - R4$ . Use the smaller of the two resulting resistor values.
- 2) Choose the hysteresis band required ( $V_{HB}$ ). For this example, choose 50mV.
- 3) Calculate R1 according to the following equation:  
$$R1 = (R3 + R4) \times (V_{HB} / V_{CC})$$
- 4) Choose the trip point for  $V_{IN}$  rising ( $V_{THR}$ ;  $V_{THF}$  is the trip point for  $V_{IN}$  falling). This is the threshold voltage at which the comparator switches its output from low to high as  $V_{IN}$  rises above the trip point.
- 5) Calculate R2 as follows:

$$R2 = \frac{1}{\left(\frac{V_{THR}}{V_{REF} \times R1}\right) - \frac{1}{R1} - \frac{1}{R3 + R4}}$$

- 6) Verify trip voltages and hysteresis as follows:

$$V_{IN} \text{ rising: } V_{THR} = V_{REF} \times R1 \times \left(\frac{1}{R1} + \frac{1}{R2} + \frac{1}{R3 + R4}\right)$$

$$V_{IN} \text{ falling: } V_{THF} = V_{THR} - \left(\frac{R1 \times V_{CC}}{R3 + R4}\right)$$

$$\text{Hysteresis} = V_{THR} - V_{THF}$$

## Circuit Layout and Bypassing

These comparators' high-gain bandwidth requires design precautions to maximize their high-speed capability. The recommended precautions are:

- 1) Use a PCB with an unbroken, low-inductance ground plane.
- 2) Place a decoupling capacitor (a 0.1µF ceramic capacitor is a good choice) as close to  $V_{CC}$  as possible.
- 3) On the inputs and outputs, keep lead lengths short to avoid unwanted parasitic feedback around the comparators.
- 4) Solder the devices directly to the PCB instead of using a socket.

# High-Speed, Micropower, Low-Voltage, SOT23, Rail-to-Rail I/O Comparators

## Zero-Crossing Detector

Figure 3 shows a zero-crossing detector application. The MAX987's inverting input is connected to ground, and its noninverting input is connected to a 100mVp-p signal source. As the signal at the noninverting input crosses 0V, the comparator's output changes state.

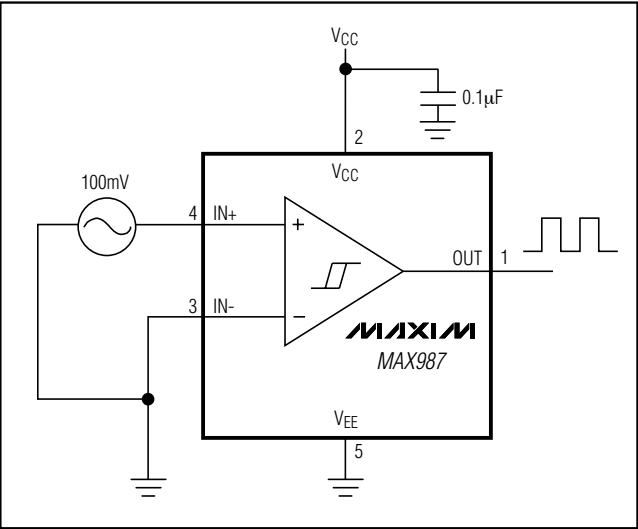


Figure 3. Zero-Crossing Detector

## Logic-Level Translator

Figure 4 shows an application that converts 5V logic levels to 3V logic levels. The MAX988 is powered by the +5V supply voltage, and the pullup resistor for the MAX988's open-drain output is connected to the +3V supply voltage. This configuration allows the full 5V logic swing without creating overvoltage on the 3V logic inputs. For 3V to 5V logic-level translation, simply connect the +3V supply to VCC and the +5V supply to the pullup resistor.


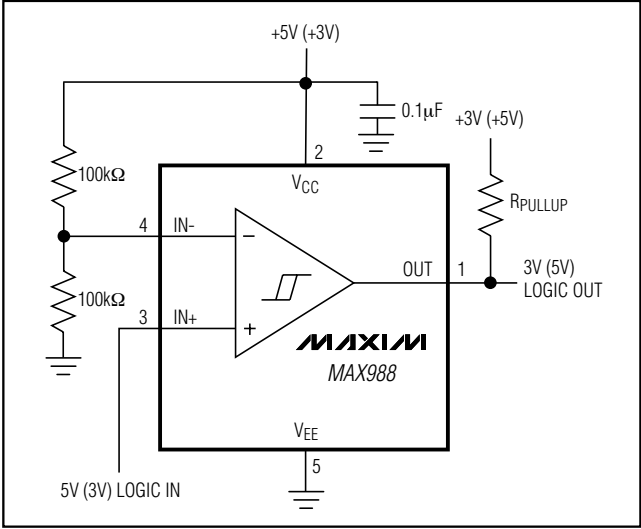



Figure 4. Logic-Level Translator

## Pin Configurations (continued)

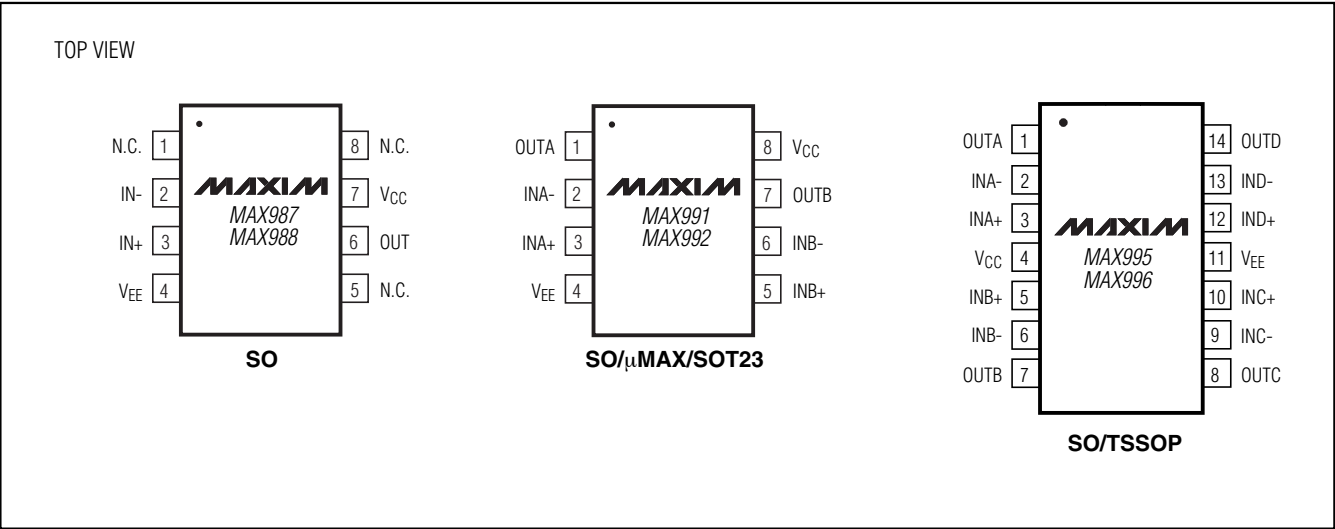

# High-Speed, Micropower, Low-Voltage, SOT23, Rail-to-Rail I/O Comparators

## Typical Application Circuit

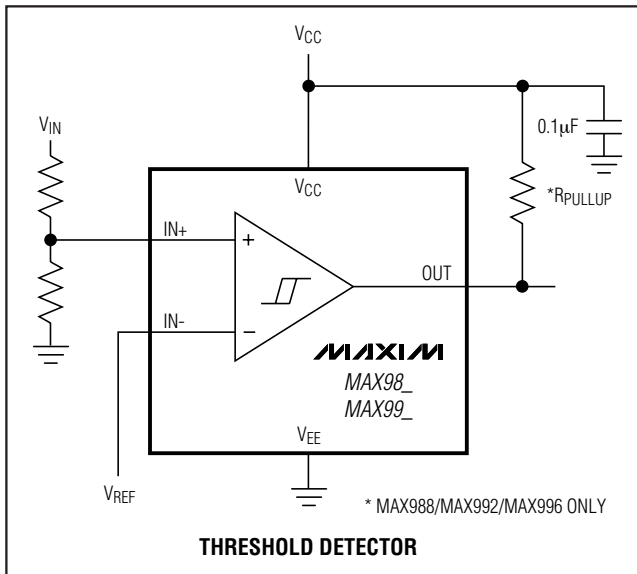


## Ordering Information (continued)

| PART        | PIN-PACKAGE | PKG CODE | TOP MARK |
|-------------|-------------|----------|----------|
| MAX988EXK-T | 5 SC70-5    | X5-1     | ABN      |
| MAX988EUK-T | 5 SOT23-5   | U5-1     | ABZC     |
| MAX988ESA   | 8 SO        | S8-2     | —        |
| MAX991EKA-T | 8 SOT23-8   | K8-5     | AAEB     |
| MAX991EUA-T | 8 µMAX-8    | U8-1     | —        |
| MAX991ESA   | 8 SO        | S8-2     | —        |
| MAX992EKA-T | 8 SOT23-8   | K8-5     | AAEC     |
| MAX992EUA-T | 8 µMAX-8    | U8-1     | —        |
| MAX992ESA   | 8 SO        | S8-2     | —        |
| MAX995EUD   | 14 TSSOP    | U14-1    | —        |
| MAX995ESD   | 14 SO       | S14-4    | —        |
| MAX996EUD   | 14 TSSOP    | U14-1    | —        |
| MAX996ESD   | 14 SO       | S14-4    | —        |

**Note:** All devices specified over the  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$  operating temperature range.


## Tape-and-Reel Information

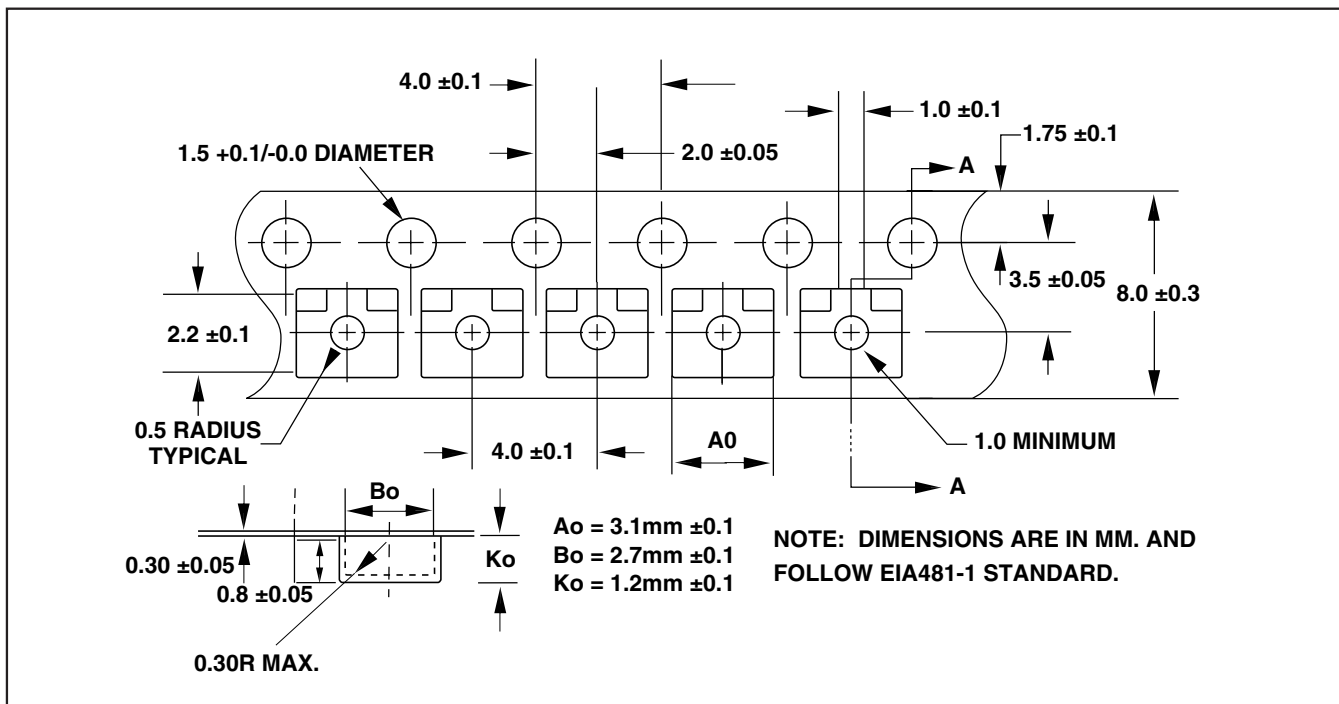

# High-Speed, Micropower, Low-Voltage, SOT23, Rail-to-Rail I/O Comparators

## Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

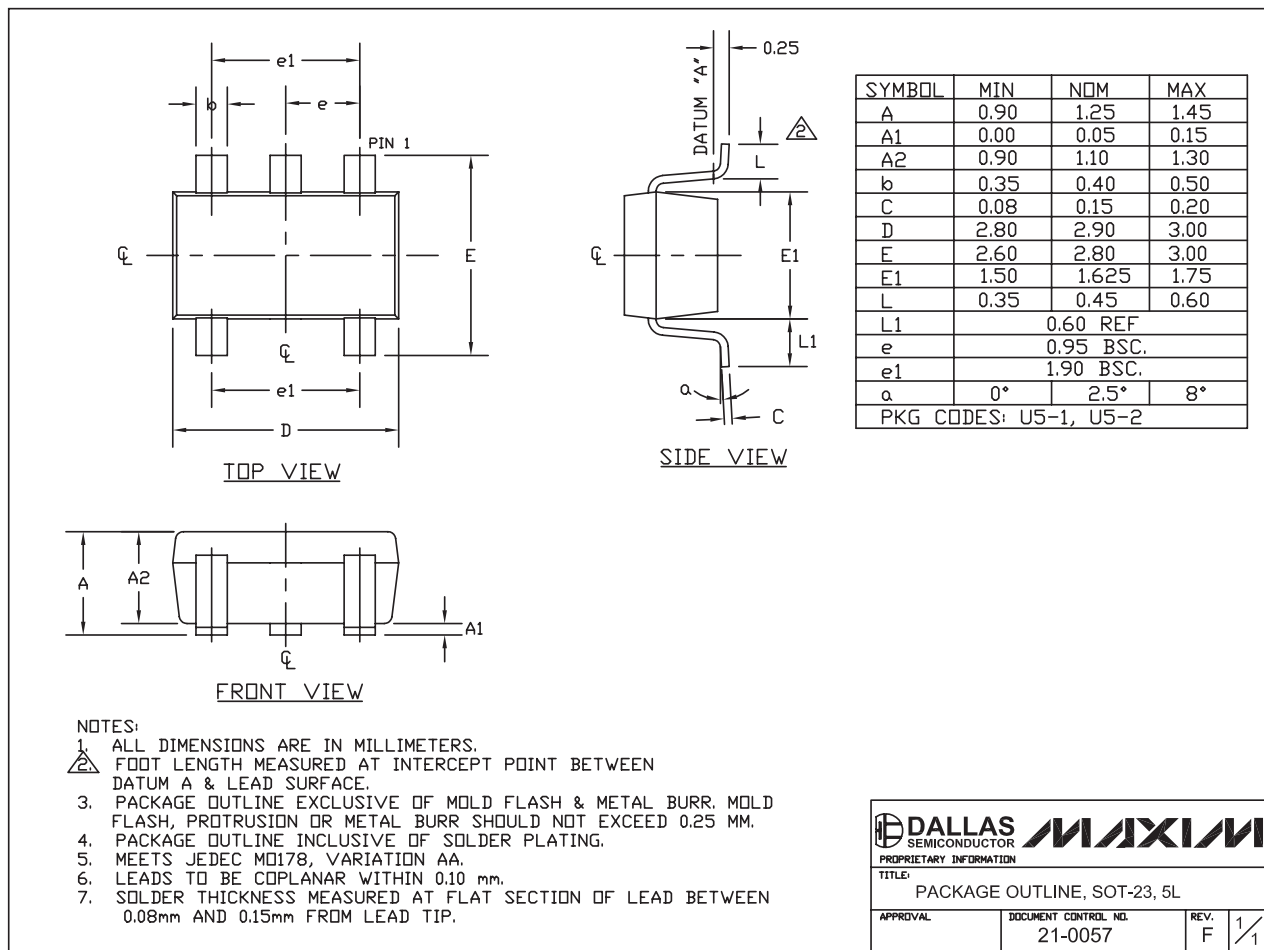


SOT-23 5L .EPS

# High-Speed, Micropower, Low-Voltage, SOT23, Rail-to-Rail I/O Comparators

## Package Information (continued)

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

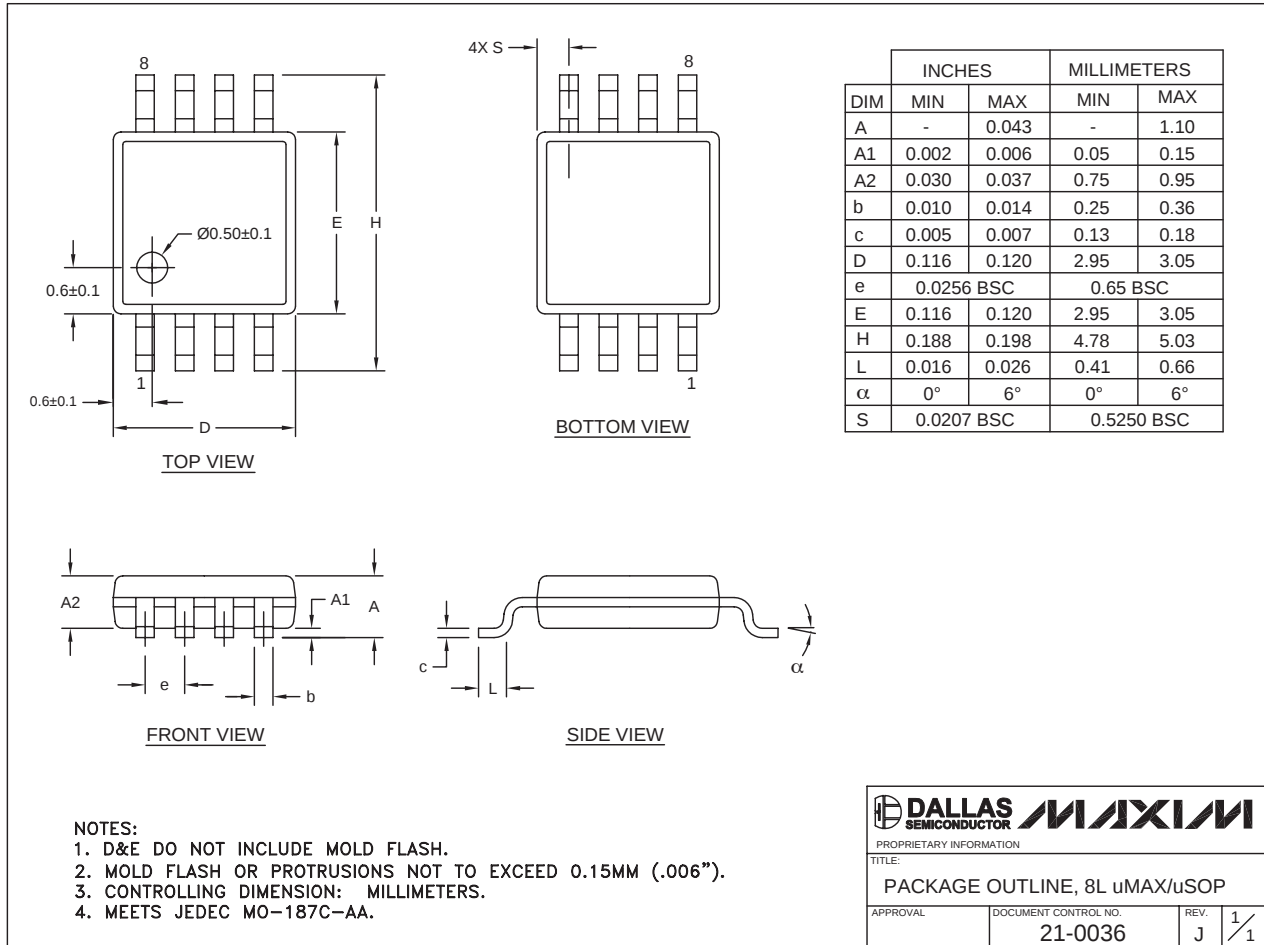

## Revision History

Pages changed at Rev 2: 1-6, 8-13

Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600 13

© 2007 Maxim Integrated Products

MAXIM is a registered trademark of Maxim Integrated Products, Inc.

MAX987/MAX988/MAX991/MAX992/MAX995/MAX996

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.