


■ CHARACTERISTICS SPECIFICATION TABLE

L		Q	L, Q measuring	Self-resonant	DC resistance	Rated current	Part No.
			frequency	frequency			
(μH)	Tolerance	min.	(MHz)	(MHz)min.	(Ω) max.	(mA)max.	
10	±5%	50	2.52	20	1.6	250	NL453232T-100J-PF
12	±5%	50	2.52	18	2	225	NL453232T-120J-PF
15	±5%	50	2.52	17	2.5	200	NL453232T-150J-PF
18	±5%	50	2.52	15	2.8	190	NL453232T-180J-PF
22	±5%	50	2.52	13	3.2	180	NL453232T-220J-PF
27	±5%	50	2.52	12	3.6	170	NL453232T-270J-PF
33	±5%	50	2.52	11	4	160	NL453232T-330J-PF
39	±5%	50	2.52	10	4.5	150	NL453232T-390J-PF
47	±5%	50	2.52	10	5	140	NL453232T-470J-PF
56	±5%	50	2.52	9	5.5	135	NL453232T-560J-PF
68	±5%	50	2.52	9	6	130	NL453232T-680J-PF
82	±5%	50	2.52	8	7	120	NL453232T-820J-PF
100	±5%	40	0.796	8	8	110	NL453232T-101J-PF
120	±5%	40	0.796	6	8	110	NL453232T-121J-PF
150	±5%	40	0.796	5	9	105	NL453232T-151J-PF
180	±5%	40	0.796	5	9.5	102	NL453232T-181J-PF
220	±5%	40	0.796	4	10	100	NL453232T-221J-PF
270	±5%	40	0.796	4	12	92	NL453232T-271J-PF
330	±5%	40	0.796	3.5	14	85	NL453232T-331J-PF
390	±5%	40	0.796	3	16	80	NL453232T-391J-PF
470	±5%	40	0.796	3	26	62	NL453232T-471J-PF
560	±5%	30	0.796	3	30	50	NL453232T-561J-PF
680	±5%	30	0.796	3	30	50	NL453232T-681J-PF
820	±5%	30	0.796	2.5	35	30	NL453232T-821J-PF
1000	±5%	30	0.252	2.5	40	30	NL453232T-102J-PF

Measurement equipment

Measurement item	Product No.	Manufacturer
L, Q	4294A	Keysight Technologies
Self-resonant frequency	E5063A	Keysight Technologies
DC resistance	AX-114N	ADEX


^{*} Equivalent measurement equipment may be used.



(2/6)




L FREQUENCY CHARACTERISTICS

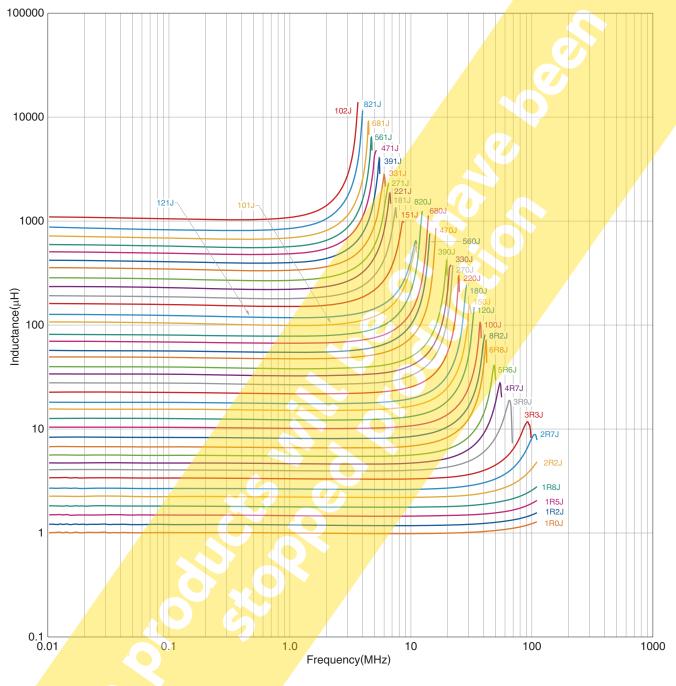

Measurement equipment

Product No. Manufacturer Keysight Technologies




(3/6)

^{*} Equivalent measurement equipment may be used.




Q FREQUENCY CHARACTERISTICS

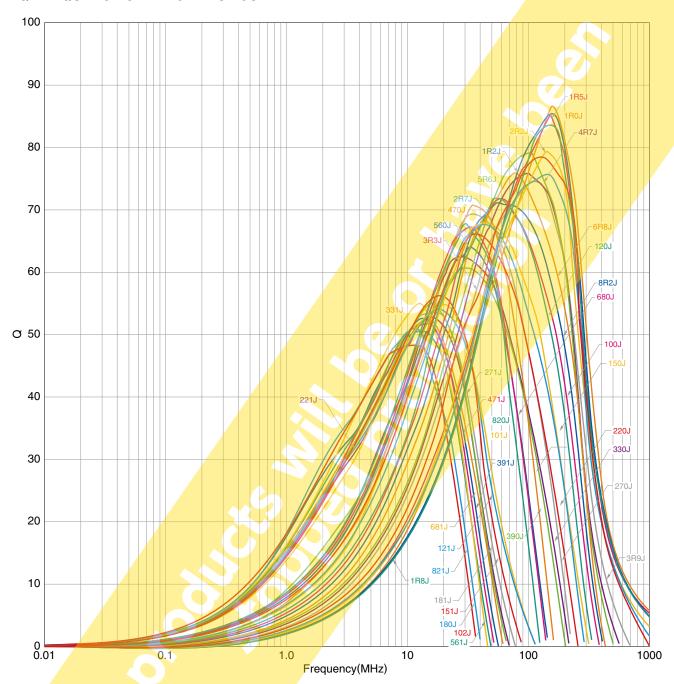

Measurement equipment

Product No. Manufacturer Keysight Technologies




(4/6)

^{*} Equivalent measurement equipment may be used.




■ SHAPE & DIMENSIONS

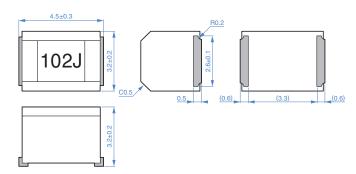

Dimensions in mm


■ PACKAGING STYLE

□REEL DIMENSIONS

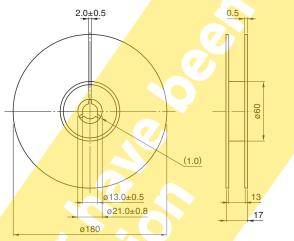


Dimensions in mm

RECOMMENDED LAND PATTERN




Dimensions in mm

TAPE DIMENSIONS

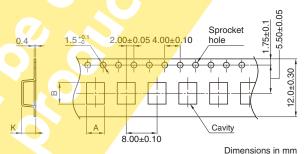

Type	Α	В	K
NL453232	3.6	4.9	3.2

RECOMMENDED REFLOW PROFILE

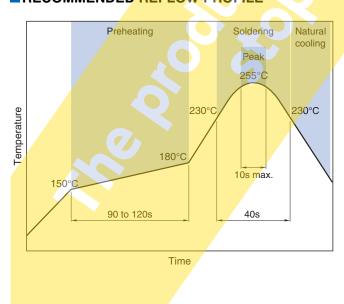

PACKAGE QUANTITY

Package guantity	500 pcs/reel

■ TEMPERATURE RANGE, INDIVIDUAL WEIGHT

Operating	Storage	Individual
temperature range*	temperature range**	weight
−40 to +105 °C	−40 to +105 °C	180 mg

Operating temperature range includes self-temperature rise.

Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use. Please note that the contents may change without any prior notice due to reasons such as upgrading.

^{**} The storage temperature range is for after the assembly.



REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this products.

REMINDERS The storage period is within 6 months. Be sure to follow the storage conditions (temperature: 5 to 40°C, humidity: 10 to 75% RH or less). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. On not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.). Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C. Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur. ○ When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions. Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design. Carefully lay out the coil for the circuit board design of the non-magnetic shield type. A malfunction may occur due to magnetic interference. Use a wrist band to discharge static electricity in your body through the grounding wire. On not expose the products to magnets or magnetic fields. One not use for a purpose outside of the contents regulated in the delivery specifications.

ment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.

The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality requires a more attingent level of sofety or reliability or whose failure, meltingtion at trouble could so use serious demand to society.

The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equip-

ity require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.

If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us.

- (1) Aerospace/aviation equipment
- (2) Transportation equipment (cars, electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.

Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use.

Please note that the contents may change without any prior notice due to reasons such as upgrading.

(6/6)