

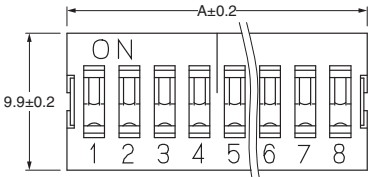



Dimensions (Unit: mm)


● Flat Actuator
A6E-□101-N

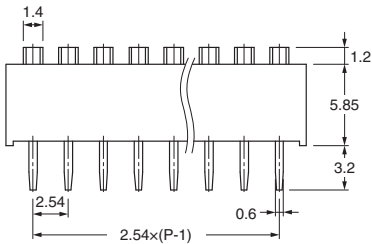


● Raised Actuator
A6E-□104-N




Flat Actuator



Raised Actuator



PCB Dimensions (Reference)
(Top View)




No. of poles	Model		Dimension A
	Flat	Raised	
2	A6E-2101-N	A6E-2104-N	6.44
3	A6E-3101-N	A6E-3104-N	8.98
4	A6E-4101-N	A6E-4104-N	11.52
5	A6E-5101-N	A6E-5104-N	14.06
6	A6E-6101-N	A6E-6104-N	16.60
7	A6E-7101-N	A6E-7104-N	19.14
8	A6E-8101-N	A6E-8104-N	21.68
9	A6E-9101-N	A6E-9104-N	24.22
10	A6E-0101-N	A6E-0104-N	26.76

Note:Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.

Internal Connections

Contact Form
(Top View)



Safety Precautions

★ Be sure to read the Safety precautions common to all DIP Switches for correct use.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

OMRON Corporation
Electronic and Mechanical Components Company

Contact: www.omron.com/ecb

Cat. No. A237-E1-02
0117(0115)