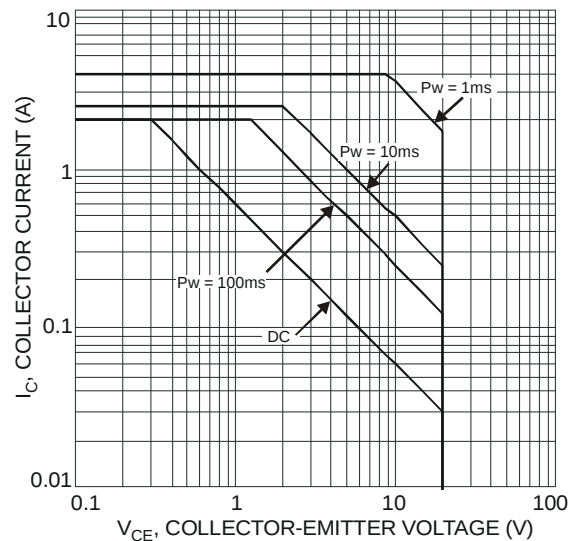
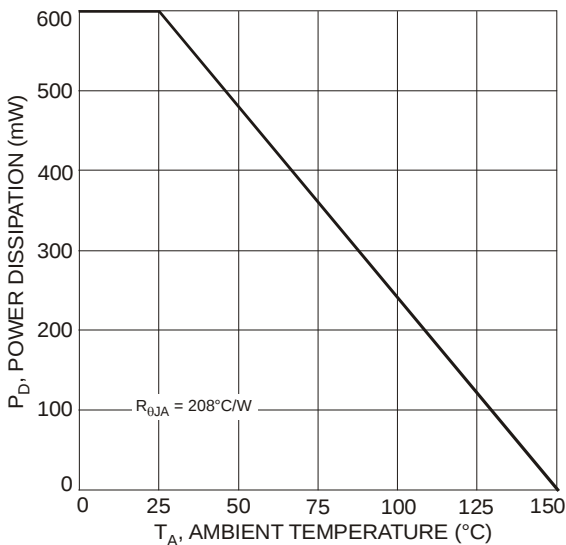


Electrical Characteristics @T_A = 25°C unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
OFF CHARACTERISTICS						
Collector-Base Breakdown Voltage	V _{(BR)CBO}	20	—	—	V	I _C = 100μA, I _E = 0
Collector-Emitter Breakdown Voltage (Note 4)	V _{(BR)CEO}	20	—	—	V	I _C = 10mA, I _B = 0
Emitter-Base Breakdown Voltage	V _{(BR)EBO}	5	—	—	V	I _E = 100μA, I _C = 0
Collector Cutoff Current	I _{CBO}	—	—	100 50	nA μA	V _{CB} = 20V, I _E = 0 V _{CB} = 20V, I _E = 0, T _A = 150°C
Collector Cutoff Current	I _{CES}	—	—	100	nA	V _{CE} = 20V, V _{BE} = 0
Emitter Cutoff Current	I _{EBO}	—	—	100	nA	V _{EB} = 5V, I _C = 0
ON CHARACTERISTICS (Note 4)						
DC Current Gain	h _{FE}	220 220 220 200 120	— — — — —	— — — — —	—	V _{CE} = 2V, I _C = 1mA V _{CE} = 2V, I _C = 100mA V _{CE} = 2V, I _C = 500mA V _{CE} = 2V, I _C = 1A V _{CE} = 2V, I _C = 2A
Collector-Emitter Saturation Voltage	V _{CE(SAT)}	— — — — —	— — — — —	55 95 180 175 355 350	mV	I _C = 100mA, I _B = 1mA I _C = 500mA, I _B = 50mA I _C = 1A, I _B = 50mA I _C = 1A, I _B = 100mA I _C = 2A, I _B = 100mA I _C = 2A, I _B = 200mA
Collector-Emitter Saturation Resistance	R _{CE(SAT)}	—	—	175	mΩ	I _C = 1A, I _B = 100mA
Base-Emitter Saturation Voltage	V _{BE(SAT)}	—	—	1.1 1.2	V	I _C = 1A, I _B = 50mA I _C = 1A, I _B = 100mA
Base-Emitter Turn On Voltage	V _{BE(ON)}	—	—	1.1	V	V _{CE} = 5V, I _C = 1A
SMALL SIGNAL CHARACTERISTICS						
Output Capacitance	C _{obo}	—	16	—	pF	V _{CB} = 10V, f = 1.0MHz
Current Gain-Bandwidth Product	f _T	—	260	—	MHz	V _{CE} = 10V, I _C = 50mA, f = 100MHz
SWITCHING CHARACTERISTICS						
Turn-On Time	t _{on}	—	60	—	ns	V _{CC} = 10V I _C = 1A, I _{B1} = I _{B2} = 50mA
Delay Time	t _d	—	20	—	ns	
Rise Time	t _r	—	40	—	ns	
Turn-Off Time	t _{off}	—	225	—	ns	
Storage Time	t _s	—	205	—	ns	
Fall Time	t _f	—	20	—	ns	

Notes: 4. Measured under pulsed conditions. Pulse width = 300μs. Duty cycle ≤2%.



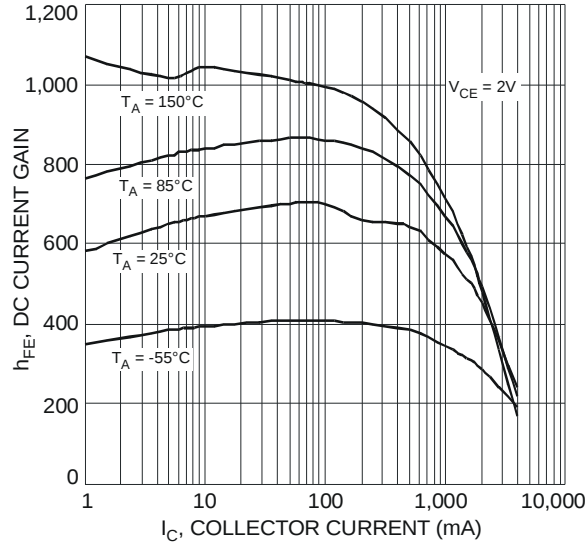


Fig. 3 Typical DC Current Gain vs. Collector Current

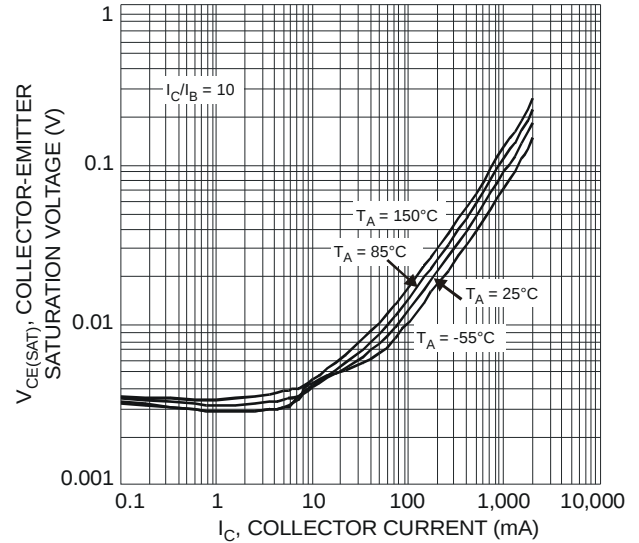


Fig. 4 Typical Collector-Emitter Saturation Voltage vs. Collector Current

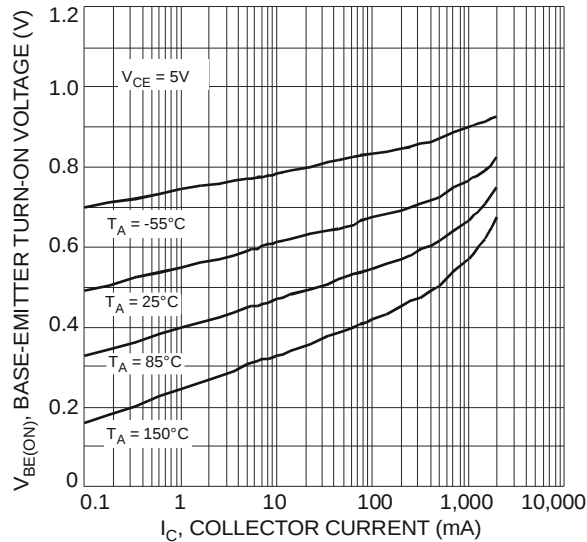


Fig. 5 Typical Base-Emitter Turn-On Voltage vs. Collector Current

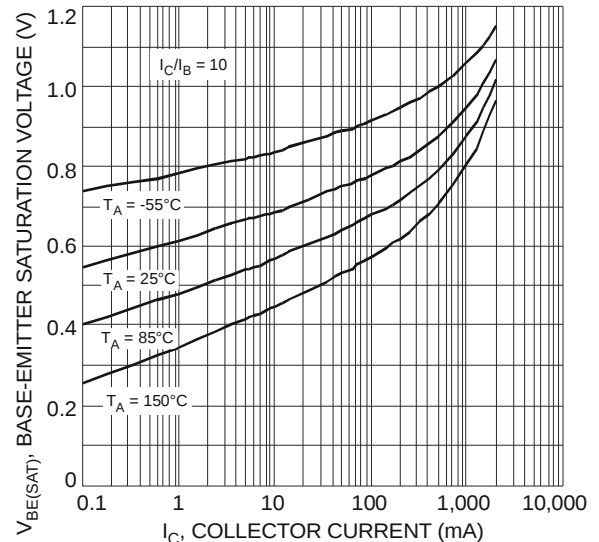


Fig. 6 Typical Base-Emitter Saturation Voltage vs. Collector Current


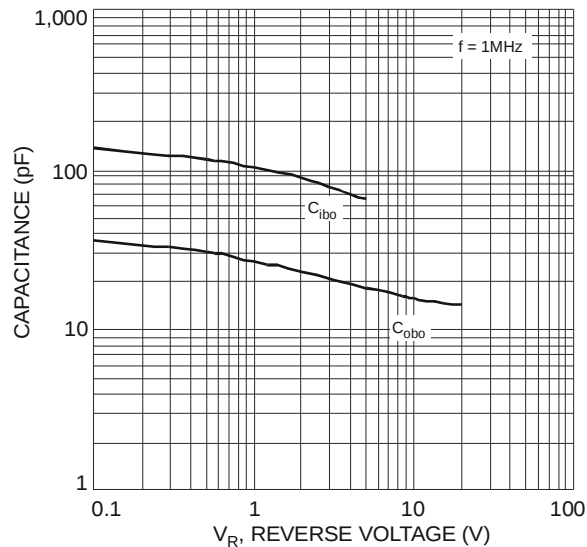


Fig. 7 Typical Capacitance Characteristics

Suggested Pad Layout



Dimensions	Value (in mm)
Z	2.2
G	1.2
X	0.375
Y	0.5
C1	1.7
C2	0.5

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.