

# LT6230/LT6230-10

# LT6231/LT6232

## ABSOLUTE MAXIMUM RATINGS (Note 1)

|                                               |                                           |                                           |                                            |
|-----------------------------------------------|-------------------------------------------|-------------------------------------------|--------------------------------------------|
| Total Supply Voltage ( $V^+$ to $V^-$ ) ..... | 12.6V                                     | Junction Temperature (DD Package).....    | 125°C                                      |
| Input Current (Note 2).....                   | $\pm 40\text{mA}$                         | Storage Temperature Range .....           | $-65^\circ\text{C}$ to $150^\circ\text{C}$ |
| Output Short-Circuit Duration (Note 3) .....  | Indefinite                                | Storage Temperature Range                 |                                            |
| Operating Temperature Range (Note 4)....      | $-40^\circ\text{C}$ to $85^\circ\text{C}$ | (DD Package) .....                        | $-65^\circ\text{C}$ to $125^\circ\text{C}$ |
| Specified Temperature Range (Note 5) ....     | $-40^\circ\text{C}$ to $85^\circ\text{C}$ | Lead Temperature (Soldering, 10 sec)..... | $300^\circ\text{C}$                        |
| Junction Temperature .....                    | $150^\circ\text{C}$                       |                                           |                                            |

## PIN CONFIGURATION

|                                                                                                                                                            |                                                                                                                                                                                                                                                                  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>TOP VIEW</p> <p>S6 PACKAGE<br/>6-LEAD PLASTIC TSOT-23<br/><math>T_{JMAX} = 150^\circ\text{C}</math>, <math>\theta_{JA} = 250^\circ\text{C/W}</math></p> | <p>TOP VIEW</p> <p>DD PACKAGE<br/>8-LEAD (3mm <math>\times</math> 3mm) PLASTIC DFN<br/><math>T_{JMAX} = 125^\circ\text{C}</math>, <math>\theta_{JA} = 160^\circ\text{C/W}</math><br/>UNDERSIDE METAL CONNECTED TO <math>V^-</math> (PCB CONNECTION OPTIONAL)</p> |
| <p>TOP VIEW</p> <p>S8 PACKAGE<br/>8-LEAD PLASTIC SO<br/><math>T_{JMAX} = 150^\circ\text{C}</math>, <math>\theta_{JA} = 200^\circ\text{C/W}</math></p>      | <p>TOP VIEW</p> <p>GN PACKAGE<br/>16-LEAD NARROW PLASTIC SSOP<br/><math>T_{JMAX} = 150^\circ\text{C}</math>, <math>\theta_{JA} = 135^\circ\text{C/W}</math></p>                                                                                                  |

## ORDER INFORMATION

| LEAD FREE FINISH | TAPE AND REEL      | PART MARKING* | PACKAGE DESCRIPTION            | SPECIFIED TEMPERATURE RANGE |
|------------------|--------------------|---------------|--------------------------------|-----------------------------|
| LT6230CS6#PBF    | LT6230CS6#TRPBF    | LTAJF         | 6-Lead Plastic TSOT-23         | 0°C to 70°C                 |
| LT6230IS6#PBF    | LT6230IS6#TRPBF    | LTAJF         | 6-Lead Plastic TSOT-23         | -40°C to 85°C               |
| LT6230CS6-10#PBF | LT6230CS6-10#TRPBF | LTAJK         | 6-Lead Plastic TSOT-23         | 0°C to 70°C                 |
| LT6230IS6-10#PBF | LT6230IS6-10#TRPBF | LTAJK         | 6-Lead Plastic TSOT-23         | -40°C to 85°C               |
| LT6231CS8#PBF    | LT6231CS8#TRPBF    | 6231          | 8-Lead Plastic SO              | 0°C to 70°C                 |
| LT6231IS8#PBF    | LT6231IS8#TRPBF    | 6231I         | 8-Lead Plastic SO              | -40°C to 85°C               |
| LT6231CDD#PBF    | LT6231CDD#TRPBF    | LAEU          | 8-Lead (3mm × 3mm) Plastic DFN | 0°C to 70°C                 |
| LT6231IDD#PBF    | LT6231IDD#TRPBF    | LAEU          | 8-Lead (3mm × 3mm) Plastic DFN | -40°C to 85°C               |
| LT6232CGN#PBF    | LT6232CGN#TRPBF    | 6232          | 16-Lead Narrow Plastic SSOP    | 0°C to 70°C                 |
| LT6232IGN#PBF    | LT6232IGN#TRPBF    | 6232I         | 16-Lead Narrow Plastic SSOP    | -40°C to 85°C               |

Consult LTC Marketing for parts specified with wider operating temperature ranges. \*The temperature grade is identified by a label on the shipping container. Consult LTC Marketing for information on non-standard lead based finish parts.

For more information on lead free part marking, go to: <http://www.linear.com/leadfree/>

For more information on tape and reel specifications, go to: <http://www.linear.com/tapeandreeel/>

## ELECTRICAL CHARACTERISTICS $T_A = 25^\circ\text{C}$ , $V_S = 5\text{V}$ , $0\text{V}$ ; $V_S = 3.3\text{V}$ , $0\text{V}$ ; $V_{CM} = V_{OUT} = \text{half supply}$ , ENABLE = 0V, unless otherwise noted.

| SYMBOL    | PARAMETER                                                                                      | CONDITIONS                                                                                   | MIN  | TYP | MAX  | UNITS                  |
|-----------|------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|------|-----|------|------------------------|
| $V_{OS}$  | Input Offset Voltage                                                                           | LT6230S6, LT6230S6-10                                                                        |      | 100 | 500  | $\mu\text{V}$          |
|           |                                                                                                | LT6231S8, LT6232GN                                                                           |      | 50  | 350  | $\mu\text{V}$          |
|           |                                                                                                | LT6231DD                                                                                     |      | 75  | 450  | $\mu\text{V}$          |
|           | Input Offset Voltage Match (Channel-to-Channel) (Note 6)                                       |                                                                                              |      | 100 | 600  | $\mu\text{V}$          |
| $I_B$     | Input Bias Current                                                                             |                                                                                              |      | 5   | 10   | $\mu\text{A}$          |
|           |                                                                                                | $I_B$ Match (Channel-to-Channel) (Note 6)                                                    |      | 0.1 | 0.9  | $\mu\text{A}$          |
| $I_{OS}$  | Input Offset Current                                                                           |                                                                                              |      | 0.1 | 0.6  | $\mu\text{A}$          |
|           | Input Noise Voltage                                                                            | 0.1Hz to 10Hz                                                                                |      | 180 |      | nV <sub>P-P</sub>      |
| $e_n$     | Input Noise Voltage Density                                                                    | $f = 10\text{kHz}$ , $V_S = 5\text{V}$                                                       |      | 1.1 | 1.7  | nV/ $\sqrt{\text{Hz}}$ |
| $i_n$     | Input Noise Current Density, Balanced Source<br>Input Noise Current Density, Unbalanced Source | $f = 10\text{kHz}$ , $V_S = 5\text{V}$ , $R_S = 10\text{k}$                                  |      | 1   |      | pA/ $\sqrt{\text{Hz}}$ |
|           |                                                                                                | $f = 10\text{kHz}$ , $V_S = 5\text{V}$ , $R_S = 10\text{k}$                                  |      | 2.4 |      | pA/ $\sqrt{\text{Hz}}$ |
|           | Input Resistance                                                                               | Common Mode                                                                                  |      | 6.5 |      | M $\Omega$             |
|           |                                                                                                | Differential Mode                                                                            |      | 7.5 |      | k $\Omega$             |
| $C_{IN}$  | Input Capacitance                                                                              | Common Mode                                                                                  |      | 2.9 |      | pF                     |
|           |                                                                                                | Differential Mode                                                                            |      | 7.7 |      | pF                     |
| $A_{VOL}$ | Large-Signal Gain                                                                              | $V_S = 5\text{V}$ , $V_O = 0.5\text{V}$ to $4.5\text{V}$ , $R_L = 10\text{k}$ to $V_S/2$     | 105  | 200 |      | V/mV                   |
|           |                                                                                                | $V_S = 5\text{V}$ , $V_O = 0.5\text{V}$ to $4.5\text{V}$ , $R_L = 1\text{k}$ to $V_S/2$      | 21   | 40  |      | V/mV                   |
|           |                                                                                                | $V_S = 5\text{V}$ , $V_O = 1\text{V}$ to $4\text{V}$ , $R_L = 100\Omega$ to $V_S/2$          | 5.4  | 9   |      | V/mV                   |
|           |                                                                                                | $V_S = 3.3\text{V}$ , $V_O = 0.65\text{V}$ to $2.65\text{V}$ , $R_L = 10\text{k}$ to $V_S/2$ | 90   | 175 |      | V/mV                   |
|           |                                                                                                | $V_S = 3.3\text{V}$ , $V_O = 0.65\text{V}$ to $2.65\text{V}$ , $R_L = 1\text{k}$ to $V_S/2$  | 16.5 | 32  |      | V/mV                   |
| $V_{CM}$  | Input Voltage Range                                                                            | Guaranteed by CMRR, $V_S = 5\text{V}$ , $0\text{V}$                                          | 1.5  |     | 4    | V                      |
|           |                                                                                                | Guaranteed by CMRR, $V_S = 3.3\text{V}$ , $0\text{V}$                                        | 1.15 |     | 2.65 | V                      |
| CMRR      | Common Mode Rejection Ratio                                                                    | $V_S = 5\text{V}$ , $V_{CM} = 1.5\text{V}$ to $4\text{V}$                                    | 90   | 115 |      | dB                     |
|           |                                                                                                | $V_S = 3.3\text{V}$ , $V_{CM} = 1.15\text{V}$ to $2.65\text{V}$                              | 90   | 115 |      | dB                     |
|           | CMRR Match (Channel-to-Channel) (Note 6)                                                       | $V_S = 5\text{V}$ , $V_{CM} = 1.5\text{V}$ to $4\text{V}$                                    | 84   | 120 |      | dB                     |

# LT6230/LT6230-10

## LT6231/LT6232

### ELECTRICAL CHARACTERISTICS

$T_A = 25^\circ\text{C}$ ,  $V_S = 5\text{V}$ ,  $0\text{V}$ ;  $V_S = 3.3\text{V}$ ,  $0\text{V}$ ;  $V_{CM} = V_{OUT} = \text{half supply}$ ,  
 $\overline{\text{ENABLE}} = 0\text{V}$ , unless otherwise noted.

| SYMBOL                         | PARAMETER                                                             | CONDITIONS                                                                                              | MIN                  | TYP         | MAX | UNITS            |
|--------------------------------|-----------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|----------------------|-------------|-----|------------------|
| PSRR                           | Power Supply Rejection Ratio                                          | $V_S = 3\text{V to } 10\text{V}$                                                                        | 90                   | 115         |     | dB               |
|                                | PSRR Match (Channel-to-Channel) (Note 6)                              | $V_S = 3\text{V to } 10\text{V}$                                                                        | 84                   | 115         |     | dB               |
|                                | Minimum Supply Voltage (Note 7)                                       |                                                                                                         | 3                    |             |     | V                |
| $V_{OL}$                       | Output Voltage Swing Low (Note 8)                                     | No Load                                                                                                 |                      | 4           | 40  | mV               |
|                                |                                                                       | $I_{SINK} = 5\text{mA}$                                                                                 |                      | 85          | 190 | mV               |
|                                |                                                                       | $V_S = 5\text{V}$ , $I_{SINK} = 20\text{mA}$                                                            |                      | 240         | 460 | mV               |
|                                |                                                                       | $V_S = 3.3\text{V}$ , $I_{SINK} = 15\text{mA}$                                                          |                      | 185         | 350 | mV               |
| $V_{OH}$                       | Output Voltage Swing High (Note 8)                                    | No Load                                                                                                 |                      | 5           | 50  | mV               |
|                                |                                                                       | $I_{SOURCE} = 5\text{mA}$                                                                               |                      | 90          | 200 | mV               |
|                                |                                                                       | $V_S = 5\text{V}$ , $I_{SOURCE} = 20\text{mA}$                                                          |                      | 325         | 600 | mV               |
|                                |                                                                       | $V_S = 3.3\text{V}$ , $I_{SOURCE} = 15\text{mA}$                                                        |                      | 250         | 400 | mV               |
| $I_{SC}$                       | Short-Circuit Current                                                 | $V_S = 5\text{V}$                                                                                       | $\pm 30$             | $\pm 45$    |     | mA               |
|                                |                                                                       | $V_S = 3.3\text{V}$                                                                                     | $\pm 25$             | $\pm 40$    |     | mA               |
| $I_S$                          | Supply Current per Amplifier<br>Disabled Supply Current per Amplifier |                                                                                                         |                      | 3.15        | 3.5 | mA               |
|                                |                                                                       | $\overline{\text{ENABLE}} = V^+ - 0.35\text{V}$                                                         |                      | 0.2         | 10  | $\mu\text{A}$    |
| $I_{\overline{\text{ENABLE}}}$ | $\overline{\text{ENABLE}}$ Pin Current                                | $\overline{\text{ENABLE}} = 0.3\text{V}$                                                                |                      | -25         | -75 | $\mu\text{A}$    |
| $V_L$                          | $\overline{\text{ENABLE}}$ Pin Input Voltage Low                      |                                                                                                         |                      |             | 0.3 | V                |
| $V_H$                          | $\overline{\text{ENABLE}}$ Pin Input Voltage High                     |                                                                                                         | $V^+ - 0.35\text{V}$ |             |     | V                |
|                                | Output Leakage Current                                                | $\overline{\text{ENABLE}} = V^+ - 0.35\text{V}$ , $V_O = 1.5\text{V to } 3.5\text{V}$                   |                      | 0.2         | 10  | $\mu\text{A}$    |
| $t_{ON}$                       | Turn-On Time                                                          | $\overline{\text{ENABLE}} = 5\text{V to } 0\text{V}$ , $R_L = 1\text{k}$ , $V_S = 5\text{V}$            |                      | 300         |     | ns               |
| $t_{OFF}$                      | Turn-Off Time                                                         | $\overline{\text{ENABLE}} = 0\text{V to } 5\text{V}$ , $R_L = 1\text{k}$ , $V_S = 5\text{V}$            |                      | 41          |     | $\mu\text{s}$    |
| GBW                            | Gain-Bandwidth Product                                                | Frequency = 1MHz, $V_S = 5\text{V}$<br>LT6230-10                                                        |                      | 200<br>1300 |     | MHz<br>MHz       |
|                                |                                                                       |                                                                                                         |                      |             |     |                  |
| SR                             | Slew Rate                                                             | $V_S = 5\text{V}$ , $A_V = -1$ , $R_L = 1\text{k}$ , $V_O = 1.5\text{V to } 3.5\text{V}$                | 42                   | 60          |     | V/ $\mu\text{s}$ |
|                                |                                                                       | LT6230-10, $V_S = 5\text{V}$ , $A_V = -10$ , $R_L = 1\text{k}$ ,<br>$V_O = 1.5\text{V to } 3.5\text{V}$ |                      | 250         |     | V/ $\mu\text{s}$ |
| FPBW                           | Full-Power Bandwidth                                                  | $V_S = 5\text{V}$ , $V_{OUT} = 3V_{P-P}$ (Note 9)                                                       | 4.8                  | 6.3         |     | MHz              |
|                                |                                                                       | LT6230-10, $HD2 = HD3 = \leq 1\%$                                                                       |                      | 11          |     | MHz              |
| $t_S$                          | Settling Time (LT6230, LT6231, LT6232)                                | 0.1%, $V_S = 5\text{V}$ , $V_{STEP} = 2\text{V}$ , $A_V = -1$ , $R_L = 1\text{k}$                       |                      | 55          |     | ns               |

# ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the  $0^{\circ}\text{C} < T_A < 70^{\circ}\text{C}$  temperature range.  $V_S = 5\text{V}$ ,  $0\text{V}$ ;  $V_S = 3.3\text{V}$ ,  $0\text{V}$ ;  $V_{CM} = V_{OUT} = \text{half supply}$ ,  $\overline{\text{ENABLE}} = 0\text{V}$ , unless otherwise noted.

| SYMBOL                         | PARAMETER                                                | CONDITIONS                                                                                    | MIN | TYP                  | MAX  | UNIT                           |
|--------------------------------|----------------------------------------------------------|-----------------------------------------------------------------------------------------------|-----|----------------------|------|--------------------------------|
| $V_{OS}$                       | Input Offset Voltage                                     | LT6230CS6, LT6230CS6-10                                                                       | ●   |                      | 600  | $\mu\text{V}$                  |
|                                |                                                          | LT6231CS8, LT6232CGN                                                                          | ●   |                      | 450  | $\mu\text{V}$                  |
|                                |                                                          | LT6231CDD                                                                                     | ●   |                      | 550  | $\mu\text{V}$                  |
|                                | Input Offset Voltage Match (Channel-to-Channel) (Note 6) |                                                                                               | ●   |                      | 800  | $\mu\text{V}$                  |
| $V_{OS\ TC}$                   | Input Offset Voltage Drift (Note 10)                     | $V_{CM} = \text{Half Supply}$                                                                 | ●   | 0.5                  | 3    | $\mu\text{V}/^{\circ}\text{C}$ |
| $I_B$                          | Input Bias Current                                       |                                                                                               | ●   |                      | 11   | $\mu\text{A}$                  |
|                                | $I_B$ Match (Channel-to-Channel) (Note 6)                |                                                                                               | ●   |                      | 1    | $\mu\text{A}$                  |
| $I_{OS}$                       | Input Offset Current                                     |                                                                                               | ●   |                      | 0.7  | $\mu\text{A}$                  |
| $A_{VOL}$                      | Large-Signal Gain                                        | $V_S = 5\text{V}$ , $V_O = 0.5\text{V}$ to $4.5\text{V}$ , $R_L = 10\text{k}$ to $V_S/2$      | ●   | 78                   |      | $\text{V}/\text{mV}$           |
|                                |                                                          | $V_S = 5\text{V}$ , $V_O = 0.5\text{V}$ to $4.5\text{V}$ , $R_L = 1\text{k}$ to $V_S/2$       | ●   | 17                   |      | $\text{V}/\text{mV}$           |
|                                |                                                          | $V_S = 5\text{V}$ , $V_O = 1\text{V}$ to $4\text{V}$ , $R_L = 100\Omega$ to $V_S/2$           | ●   | 4.1                  |      | $\text{V}/\text{mV}$           |
|                                |                                                          | $V_S = 3.3\text{V}$ , $V_O = 0.65\text{V}$ to $2.65\text{V}$ , $R_L = 10\text{k}$ to $V_S/2$  | ●   | 66                   |      | $\text{V}/\text{mV}$           |
| $V_{CM}$                       | Input Voltage Range                                      | Guaranteed by CMRR                                                                            |     |                      |      |                                |
|                                |                                                          | $V_S = 5\text{V}$ , $0\text{V}$                                                               | ●   | 1.5                  | 4    | $\text{V}$                     |
|                                |                                                          | $V_S = 3.3\text{V}$ , $0\text{V}$                                                             | ●   | 1.15                 | 2.65 | $\text{V}$                     |
| CMRR                           | Common Mode Rejection Ratio                              | $V_S = 5\text{V}$ , $V_{CM} = 1.5\text{V}$ to $4\text{V}$                                     | ●   | 90                   |      | $\text{dB}$                    |
|                                |                                                          | $V_S = 3.3\text{V}$ , $V_{CM} = 1.15\text{V}$ to $2.65\text{V}$                               | ●   | 85                   |      | $\text{dB}$                    |
|                                | CMRR Match (Channel-to-Channel) (Note 6)                 | $V_S = 5\text{V}$ , $V_{CM} = 1.5\text{V}$ to $4\text{V}$                                     | ●   | 84                   |      | $\text{dB}$                    |
| PSRR                           | Power Supply Rejection Ratio                             | $V_S = 3\text{V}$ to $10\text{V}$                                                             | ●   | 85                   |      | $\text{dB}$                    |
|                                | PSRR Match (Channel-to-Channel) (Note 6)                 | $V_S = 3\text{V}$ to $10\text{V}$                                                             | ●   | 79                   |      | $\text{dB}$                    |
|                                | Minimum Supply Voltage (Note 7)                          |                                                                                               | ●   | 3                    |      | $\text{V}$                     |
| $V_{OL}$                       | Output Voltage Swing Low (Note 8)                        | No Load                                                                                       | ●   |                      | 50   | $\text{mV}$                    |
|                                |                                                          | $I_{SINK} = 5\text{mA}$                                                                       | ●   |                      | 200  | $\text{mV}$                    |
|                                |                                                          | $V_S = 5\text{V}$ , $I_{SINK} = 20\text{mA}$                                                  | ●   |                      | 500  | $\text{mV}$                    |
|                                |                                                          | $V_S = 3.3\text{V}$ , $I_{SINK} = 15\text{mA}$                                                | ●   |                      | 380  | $\text{mV}$                    |
| $V_{OH}$                       | Output Voltage Swing High (Note 8)                       | No Load                                                                                       | ●   |                      | 60   | $\text{mV}$                    |
|                                |                                                          | $I_{SOURCE} = 5\text{mA}$                                                                     | ●   |                      | 215  | $\text{mV}$                    |
|                                |                                                          | $V_S = 5\text{V}$ , $I_{SOURCE} = 20\text{mA}$                                                | ●   |                      | 650  | $\text{mV}$                    |
|                                |                                                          | $V_S = 3.3\text{V}$ , $I_{SOURCE} = 15\text{mA}$                                              | ●   |                      | 430  | $\text{mV}$                    |
| $I_{SC}$                       | Short-Circuit Current                                    | $V_S = 5\text{V}$                                                                             | ●   | $\pm 25$             |      | $\text{mA}$                    |
|                                |                                                          | $V_S = 3.3\text{V}$                                                                           | ●   | $\pm 20$             |      | $\text{mA}$                    |
| $I_S$                          | Supply Current per Amplifier                             |                                                                                               | ●   |                      | 4.2  | $\text{mA}$                    |
|                                | Disabled Supply Current per Amplifier                    | $\overline{\text{ENABLE}} = V^+ - 0.25\text{V}$                                               | ●   | 1                    |      | $\mu\text{A}$                  |
| $I_{\overline{\text{ENABLE}}}$ | $\overline{\text{ENABLE}}$ Pin Current                   | $\overline{\text{ENABLE}} = 0.3\text{V}$                                                      | ●   |                      | -85  | $\mu\text{A}$                  |
| $V_L$                          | $\overline{\text{ENABLE}}$ Pin Input Voltage Low         |                                                                                               | ●   |                      | 0.3  | $\text{V}$                     |
| $V_H$                          | $\overline{\text{ENABLE}}$ Pin Input Voltage High        |                                                                                               | ●   | $V^+ - 0.25\text{V}$ |      | $\text{V}$                     |
|                                | Output Leakage Current                                   | $\overline{\text{ENABLE}} = V^+ - 0.25\text{V}$ , $V_O = 1.5\text{V}$ to $3.5\text{V}$        | ●   | 1                    |      | $\mu\text{A}$                  |
| $t_{ON}$                       | Turn-On Time                                             | $\overline{\text{ENABLE}} = 5\text{V}$ to $0\text{V}$ , $R_L = 1\text{k}$ , $V_S = 5\text{V}$ | ●   | 300                  |      | $\text{ns}$                    |
| $t_{OFF}$                      | Turn-Off Time                                            | $\overline{\text{ENABLE}} = 0\text{V}$ to $5\text{V}$ , $R_L = 1\text{k}$ , $V_S = 5\text{V}$ | ●   | 65                   |      | $\mu\text{s}$                  |
| SR                             | Slew Rate                                                | $V_S = 5\text{V}$ , $A_V = -1$ , $R_L = 1\text{k}$ , $V_O = 1.5\text{V}$ to $3.5\text{V}$     | ●   | 35                   |      | $\text{V}/\mu\text{s}$         |
|                                |                                                          | LT6230-10, $A_V = -10$ , $R_L = 1\text{k}$ , $V_O = 1.5\text{V}$ to $3.5\text{V}$             | ●   | 225                  |      | $\text{V}/\mu\text{s}$         |
| FPBW                           | Full-Power Bandwidth (Note 9)                            | $V_S = 5\text{V}$ , $V_{OUT} = 3V_{P-P}$ ; LT6230C, LT6231C, LT6232C                          | ●   | 3.7                  |      | $\text{MHz}$                   |

# LT6230/LT6230-10

## LT6231/LT6232

**ELECTRICAL CHARACTERISTICS** The ● denotes the specifications which apply over the  $-40^{\circ}\text{C} < T_A < 85^{\circ}\text{C}$  temperature range.  $V_S = 5\text{V}$ ,  $0\text{V}$ ;  $V_S = 3.3\text{V}$ ,  $0\text{V}$ ;  $V_{CM} = V_{OUT} = \text{half supply}$ ,  $\overline{\text{ENABLE}} = 0\text{V}$ , unless otherwise noted. (Note 5)

| SYMBOL                         | PARAMETER                                                | CONDITIONS                                                                                    | MIN | TYP                 | MAX  | UNITS                          |
|--------------------------------|----------------------------------------------------------|-----------------------------------------------------------------------------------------------|-----|---------------------|------|--------------------------------|
| $V_{OS}$                       | Input Offset Voltage                                     | LT6230IS6, LT6230IS6-10                                                                       | ●   |                     | 700  | $\mu\text{V}$                  |
|                                |                                                          | LT6231IS8, LT6232IGN                                                                          | ●   |                     | 550  | $\mu\text{V}$                  |
|                                |                                                          | LT6231IDD                                                                                     | ●   |                     | 650  | $\mu\text{V}$                  |
|                                | Input Offset Voltage Match (Channel-to-Channel) (Note 6) |                                                                                               | ●   |                     | 1000 | $\mu\text{V}$                  |
| $V_{OS\text{ TC}}$             | Input Offset Voltage Drift (Note 10)                     | $V_{CM} = \text{Half Supply}$                                                                 | ●   | 0.5                 | 3    | $\mu\text{V}/^{\circ}\text{C}$ |
| $I_B$                          | Input Bias Current                                       |                                                                                               | ●   |                     | 12   | $\mu\text{A}$                  |
|                                | $I_B$ Match (Channel-to-Channel) (Note 6)                |                                                                                               | ●   |                     | 1.1  | $\mu\text{A}$                  |
| $I_{OS}$                       | Input Offset Current                                     |                                                                                               | ●   |                     | 0.8  | $\mu\text{A}$                  |
| $A_{VOL}$                      | Large-Signal Gain                                        | $V_S = 5\text{V}$ , $V_O = 0.5\text{V}$ to $4.5\text{V}$ , $R_L = 10\text{k}$ to $V_S/2$      | ●   | 72                  |      | $\text{V}/\text{mV}$           |
|                                |                                                          | $V_S = 5\text{V}$ , $V_O = 0.5\text{V}$ to $4.5\text{V}$ , $R_L = 1\text{k}$ to $V_S/2$       | ●   | 16                  |      | $\text{V}/\text{mV}$           |
|                                |                                                          | $V_S = 5\text{V}$ , $V_O = 1\text{V}$ to $4\text{V}$ , $R_L = 100\Omega$ to $V_S/2$           | ●   | 3.6                 |      | $\text{V}/\text{mV}$           |
|                                |                                                          | $V_S = 3.3\text{V}$ , $V_O = 0.65\text{V}$ to $2.65\text{V}$ , $R_L = 10\text{k}$ to $V_S/2$  | ●   | 60                  |      | $\text{V}/\text{mV}$           |
|                                |                                                          | $V_S = 3.3\text{V}$ , $V_O = 0.65\text{V}$ to $2.65\text{V}$ , $R_L = 1\text{k}$ to $V_S/2$   | ●   | 12                  |      | $\text{V}/\text{mV}$           |
| $V_{CM}$                       | Input Voltage Range                                      | Guaranteed by CMRR                                                                            |     |                     |      |                                |
|                                |                                                          | $V_S = 5\text{V}$ , $0\text{V}$                                                               | ●   | 1.5                 | 4    | $\text{V}$                     |
|                                |                                                          | $V_S = 3.3\text{V}$ , $0\text{V}$                                                             | ●   | 1.15                | 2.65 | $\text{V}$                     |
| CMRR                           | Common Mode Rejection Ratio                              | $V_S = 5\text{V}$ , $V_{CM} = 1.5\text{V}$ to $4\text{V}$                                     | ●   | 90                  |      | $\text{dB}$                    |
|                                |                                                          | $V_S = 3.3\text{V}$ , $V_{CM} = 1.15\text{V}$ to $2.65\text{V}$                               | ●   | 85                  |      | $\text{dB}$                    |
|                                | CMRR Match (Channel-to-Channel) (Note 6)                 | $V_S = 5\text{V}$ , $V_{CM} = 1.5\text{V}$ to $4\text{V}$                                     | ●   | 84                  |      | $\text{dB}$                    |
| PSRR                           | Power Supply Rejection Ratio                             | $V_S = 3\text{V}$ to $10\text{V}$                                                             | ●   | 85                  |      | $\text{dB}$                    |
|                                | PSRR Match (Channel-to-Channel) (Note 6)                 | $V_S = 3\text{V}$ to $10\text{V}$                                                             | ●   | 79                  |      | $\text{dB}$                    |
|                                | Minimum Supply Voltage (Note 7)                          |                                                                                               | ●   | 3                   |      | $\text{V}$                     |
|                                |                                                          |                                                                                               | ●   |                     |      |                                |
| $V_{OL}$                       | Output Voltage Swing Low (Note 8)                        | No Load                                                                                       | ●   |                     | 60   | $\text{mV}$                    |
|                                |                                                          | $I_{SINK} = 5\text{mA}$                                                                       | ●   |                     | 210  | $\text{mV}$                    |
|                                |                                                          | $V_S = 5\text{V}$ , $I_{SINK} = 15\text{mA}$                                                  | ●   |                     | 510  | $\text{mV}$                    |
|                                |                                                          | $V_S = 3.3\text{V}$ , $I_{SINK} = 15\text{mA}$                                                | ●   |                     | 390  | $\text{mV}$                    |
|                                |                                                          |                                                                                               | ●   |                     |      |                                |
| $V_{OH}$                       | Output Voltage Swing High (Note 6)                       | No Load                                                                                       | ●   |                     | 70   | $\text{mV}$                    |
|                                |                                                          | $I_{SOURCE} = 5\text{mA}$                                                                     | ●   |                     | 220  | $\text{mV}$                    |
|                                |                                                          | $V_S = 5\text{V}$ , $I_{SOURCE} = 20\text{mA}$                                                | ●   |                     | 675  | $\text{mV}$                    |
|                                |                                                          | $V_S = 3.3\text{V}$ , $I_{SOURCE} = 15\text{mA}$                                              | ●   |                     | 440  | $\text{mV}$                    |
|                                |                                                          |                                                                                               | ●   |                     |      |                                |
| $I_{SC}$                       | Short-Circuit Current                                    | $V_S = 5\text{V}$                                                                             | ●   | $\pm 15$            |      | $\text{mA}$                    |
|                                |                                                          | $V_S = 3.3\text{V}$                                                                           | ●   | $\pm 15$            |      | $\text{mA}$                    |
| $I_S$                          | Supply Current per Amplifier                             |                                                                                               | ●   |                     | 4.4  | $\text{mA}$                    |
|                                | Disabled Supply Current per Amplifier                    | $\overline{\text{ENABLE}} = V^+ - 0.2\text{V}$                                                | ●   | 1                   |      | $\mu\text{A}$                  |
| $I_{\overline{\text{ENABLE}}}$ | $\overline{\text{ENABLE}}$ Pin Current                   | $\overline{\text{ENABLE}} = 0.3\text{V}$                                                      | ●   |                     | -100 | $\mu\text{A}$                  |
| $V_L$                          | $\overline{\text{ENABLE}}$ Pin Input Voltage Low         |                                                                                               | ●   |                     | 0.3  | $\text{V}$                     |
| $V_H$                          | $\overline{\text{ENABLE}}$ Pin Input Voltage High        |                                                                                               | ●   | $V^+ - 0.2\text{V}$ |      | $\text{V}$                     |
|                                | Output Leakage Current                                   | $\overline{\text{ENABLE}} = V^+ - 0.2\text{V}$ , $V_O = 1.5\text{V}$ to $3.5\text{V}$         | ●   | 1                   |      | $\mu\text{A}$                  |
| $t_{ON}$                       | Turn-On Time                                             | $\overline{\text{ENABLE}} = 5\text{V}$ to $0\text{V}$ , $R_L = 1\text{k}$ , $V_S = 5\text{V}$ | ●   | 300                 |      | $\text{ns}$                    |
| $t_{OFF}$                      | Turn-Off Time                                            | $\overline{\text{ENABLE}} = 0\text{V}$ to $5\text{V}$ , $R_L = 1\text{k}$ , $V_S = 5\text{V}$ | ●   | 72                  |      | $\mu\text{s}$                  |
| SR                             | Slew Rate                                                | $V_S = 5\text{V}$ , $A_V = -1$ , $R_L = 1\text{k}$ , $V_O = 1.5\text{V}$ to $3.5\text{V}$     | ●   | 31                  |      | $\text{V}/\mu\text{s}$         |
|                                |                                                          | LT6230-10, $A_V = -10$ , $R_L = 1\text{k}$ , $V_O = 1.5\text{V}$ to $3.5\text{V}$             | ●   | 185                 |      | $\text{V}/\mu\text{s}$         |
| FPBW                           | Full-Power Bandwidth (Note 9)                            | $V_S = 5\text{V}$ , $V_{OUT} = 3\text{V}_{P-P}$ ; LT6230I, LT6231I, LT6232I                   | ●   | 3.3                 |      | $\text{MHz}$                   |

# ELECTRICAL CHARACTERISTICS

$T_A = 25^\circ\text{C}$ ,  $V_S = \pm 5\text{V}$ ,  $V_{CM} = V_{OUT} = 0\text{V}$ ,  $\overline{\text{ENABLE}} = 0\text{V}$ , unless otherwise noted.

| SYMBOL                         | PARAMETER                                                | CONDITIONS                                                                     | MIN         | TYP         | MAX | UNITS                        |
|--------------------------------|----------------------------------------------------------|--------------------------------------------------------------------------------|-------------|-------------|-----|------------------------------|
| $V_{OS}$                       | Input Offset Voltage                                     | LT6230, LT6230-10                                                              |             | 100         | 500 | $\mu\text{V}$                |
|                                |                                                          | LT6231S8, LT6232GN                                                             |             | 50          | 350 | $\mu\text{V}$                |
|                                |                                                          | LT6231DD                                                                       |             | 75          | 450 | $\mu\text{V}$                |
|                                | Input Offset Voltage Match (Channel-to-Channel) (Note 6) |                                                                                |             | 100         | 600 | $\mu\text{V}$                |
| $I_B$                          | Input Bias Current                                       |                                                                                |             | 5           | 10  | $\mu\text{A}$                |
|                                | $I_B$ Match (Channel-to-Channel) (Note 6)                |                                                                                |             | 0.1         | 0.9 | $\mu\text{A}$                |
| $I_{OS}$                       | Input Offset Current                                     |                                                                                |             | 0.1         | 0.6 | $\mu\text{A}$                |
|                                | Input Noise Voltage                                      | 0.1Hz to 10Hz                                                                  |             | 180         |     | $\text{nV}_{P-P}$            |
| $e_n$                          | Input Noise Voltage Density                              | $f = 10\text{kHz}$                                                             |             | 1.1         | 1.7 | $\text{nV}/\sqrt{\text{Hz}}$ |
| $i_n$                          | Input Noise Current Density, Balanced Source             | $f = 10\text{kHz}$ , $R_S = 10\text{k}$                                        |             | 1           |     | $\text{pA}/\sqrt{\text{Hz}}$ |
|                                | Input Noise Current Density, Unbalanced Source           | $f = 10\text{kHz}$ , $R_S = 10\text{k}$                                        |             | 2.4         |     | $\text{pA}/\sqrt{\text{Hz}}$ |
|                                | Input Resistance                                         | Common Mode                                                                    |             | 6.5         |     | $\text{M}\Omega$             |
|                                |                                                          | Differential Mode                                                              |             | 7.5         |     | $\text{k}\Omega$             |
| $C_{IN}$                       | Input Capacitance                                        | Common Mode                                                                    |             | 2.4         |     | $\text{pF}$                  |
|                                |                                                          | Differential Mode                                                              |             | 6.5         |     | $\text{pF}$                  |
| $A_{VOL}$                      | Large-Signal Gain                                        | $V_O = \pm 4.5\text{V}$ , $R_L = 10\text{k}$                                   | 140         | 260         |     | $\text{V}/\text{mV}$         |
|                                |                                                          | $V_O = \pm 4.5\text{V}$ , $R_L = 1\text{k}$                                    | 35          | 65          |     | $\text{V}/\text{mV}$         |
|                                |                                                          | $V_O = \pm 2\text{V}$ , $R_L = 100\Omega$                                      | 8.5         | 16          |     | $\text{V}/\text{mV}$         |
| $V_{CM}$                       | Input Voltage Range                                      | Guaranteed by CMRR                                                             | -3          |             | 4   | V                            |
| CMRR                           | Common Mode Rejection Ratio                              | $V_{CM} = -3\text{V}$ to $4\text{V}$                                           | 95          | 120         |     | dB                           |
|                                | CMRR Match (Channel-to-Channel) (Note 6)                 | $V_{CM} = -3\text{V}$ to $4\text{V}$                                           | 89          | 125         |     | dB                           |
| PSRR                           | Power Supply Rejection Ratio                             | $V_S = \pm 1.5\text{V}$ to $\pm 5\text{V}$                                     | 90          | 115         |     | dB                           |
|                                | PSRR Match (Channel-to-Channel) (Note 6)                 | $V_S = \pm 1.5\text{V}$ to $\pm 5\text{V}$                                     | 84          | 115         |     | dB                           |
| $V_{OL}$                       | Output Voltage Swing Low (Note 8)                        | No Load                                                                        |             | 4           | 40  | mV                           |
|                                |                                                          | $I_{SINK} = 5\text{mA}$                                                        |             | 85          | 190 | mV                           |
|                                |                                                          | $I_{SINK} = 20\text{mA}$                                                       |             | 240         | 460 | mV                           |
| $V_{OH}$                       | Output Voltage Swing High (Note 8)                       | No Load                                                                        |             | 5           | 50  | mV                           |
|                                |                                                          | $I_{SOURCE} = 5\text{mA}$                                                      |             | 90          | 200 | mV                           |
|                                |                                                          | $I_{SOURCE} = 20\text{mA}$                                                     |             | 325         | 600 | mV                           |
| $I_{SC}$                       | Short-Circuit Current                                    |                                                                                | $\pm 30$    |             |     | mA                           |
| $I_S$                          | Supply Current per Amplifier                             |                                                                                |             | 3.3         | 3.9 | mA                           |
|                                | Disabled Supply Current per Amplifier                    | $\overline{\text{ENABLE}} = 4.65\text{V}$                                      |             | 0.2         |     | $\mu\text{A}$                |
| $I_{\overline{\text{ENABLE}}}$ | $\overline{\text{ENABLE}}$ Pin Current                   | $\overline{\text{ENABLE}} = 0.3\text{V}$                                       |             | -35         | -85 | $\mu\text{A}$                |
| $V_L$                          | $\overline{\text{ENABLE}}$ Pin Input Voltage Low         |                                                                                |             |             | 0.3 | V                            |
| $V_H$                          | $\overline{\text{ENABLE}}$ Pin Input Voltage High        |                                                                                | 4.65        |             |     | V                            |
|                                | Output Leakage Current                                   | $\overline{\text{ENABLE}} = V^+ - 4.65\text{V}$ , $V_O = \pm 1\text{V}$        |             | 0.2         | 10  | $\mu\text{A}$                |
| $t_{ON}$                       | Turn-On Time                                             | $\overline{\text{ENABLE}} = 5\text{V}$ to $0\text{V}$ , $R_L = 1\text{k}$      |             | 300         |     | ns                           |
| $t_{OFF}$                      | Turn-Off Time                                            | $\overline{\text{ENABLE}} = 0\text{V}$ to $5\text{V}$ , $R_L = 1\text{k}$      |             | 62          |     | $\mu\text{s}$                |
| GBW                            | Gain-Bandwidth Product                                   | Frequency = $1\text{MHz}$<br>LT6230-10                                         | 150<br>1000 | 215<br>1450 |     | MHz<br>MHz                   |
|                                |                                                          | $A_V = -1$ , $R_L = 1\text{k}$ , $V_O = -2\text{V}$ to $2\text{V}$             | 50          | 70          |     | $\text{V}/\mu\text{s}$       |
| SR                             | Slew Rate                                                | LT6230-10, $A_V = -10$ , $R_L = 1\text{k}$ , $V_O = -2\text{V}$ to $2\text{V}$ |             | 320         |     | $\text{V}/\mu\text{s}$       |
|                                |                                                          | $V_{OUT} = 3V_{P-P}$ (Note 9)                                                  | 5.3         | 7.4         |     | MHz                          |
| FPBW                           | Full-Power Bandwidth                                     | LT6230-10, $\text{HD2} = \text{HD3} \leq 1\%$                                  |             | 11          |     | MHz                          |
| $t_S$                          | Settling Time (LT6230, LT6231, LT6232)                   | 0.1%, $V_{STEP} = 2\text{V}$ , $A_V = -1$ , $R_L = 1\text{k}$                  |             | 50          |     | ns                           |

# LT6230/LT6230-10

## LT6231/LT6232

**ELECTRICAL CHARACTERISTICS** The ● denotes the specifications which apply over the  $0^{\circ}\text{C} < T_A < 70^{\circ}\text{C}$  temperature range.  $V_S = \pm 5\text{V}$ ,  $V_{CM} = V_{OUT} = 0\text{V}$ ,  $\text{ENABLE} = 0\text{V}$ , unless otherwise noted.

| SYMBOL              | PARAMETER                                                             | CONDITIONS                                                                                                                               |             | MIN            | TYP | MAX               | UNITS                                                                |
|---------------------|-----------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|-------------|----------------|-----|-------------------|----------------------------------------------------------------------|
| $V_{OS}$            | Input Offset Voltage                                                  | LT6230CS6, LT6230CS6-10<br>LT6231CS8, LT6232CGN<br>LT6231CDD                                                                             | ●<br>●<br>● |                |     | 600<br>450<br>550 | $\mu\text{V}$<br>$\mu\text{V}$<br>$\mu\text{V}$                      |
|                     | Input Offset Voltage Match (Channel-to-Channel) (Note 6)              |                                                                                                                                          | ●           |                |     | 800               | $\mu\text{V}$                                                        |
| $V_{OS\ TC}$        | Input Offset Voltage Drift (Note 10)                                  |                                                                                                                                          | ●           | 0.5            |     | 3                 | $\mu\text{V}/^{\circ}\text{C}$                                       |
| $I_B$               | Input Bias Current                                                    |                                                                                                                                          | ●           |                |     | 11                | $\mu\text{A}$                                                        |
|                     | $I_B$ Match (Channel-to-Channel) (Note 6)                             |                                                                                                                                          | ●           |                |     | 1                 | $\mu\text{A}$                                                        |
| $I_{OS}$            | Input Offset Current                                                  |                                                                                                                                          | ●           |                |     | 0.7               | $\mu\text{A}$                                                        |
| $A_{VOL}$           | Large-Signal Gain                                                     | $V_O = \pm 4.5\text{V}$ , $R_L = 10\text{k}$<br>$V_O = \pm 4.5\text{V}$ , $R_L = 1\text{k}$<br>$V_O = \pm 2\text{V}$ , $R_L = 100\Omega$ | ●<br>●<br>● | 100<br>27<br>6 |     |                   | $\text{V}/\text{mV}$<br>$\text{V}/\text{mV}$<br>$\text{V}/\text{mV}$ |
| $V_{CM}$            | Input Voltage Range                                                   | Guaranteed by CMRR                                                                                                                       | ●           | -3             |     | 4                 | V                                                                    |
| CMRR                | Common Mode Rejection Ratio                                           | $V_{CM} = -3\text{V}$ to $4\text{V}$                                                                                                     | ●           | 95             |     |                   | dB                                                                   |
|                     | CMRR Match (Channel-to-Channel) (Note 6)                              | $V_{CM} = -3\text{V}$ to $4\text{V}$                                                                                                     | ●           | 89             |     |                   | dB                                                                   |
| PSRR                | Power Supply Rejection Ratio                                          | $V_S = \pm 1.5\text{V}$ to $\pm 5\text{V}$                                                                                               | ●           | 85             |     |                   | dB                                                                   |
|                     | PSRR Match (Channel-to-Channel) (Note 6)                              | $V_S = \pm 1.5\text{V}$ to $\pm 5\text{V}$                                                                                               | ●           | 79             |     |                   | dB                                                                   |
| $V_{OL}$            | Output Voltage Swing Low (Note 8)                                     | No Load<br>$I_{SINK} = 5\text{mA}$<br>$I_{SINK} = 20\text{mA}$                                                                           | ●<br>●<br>● |                |     | 50<br>200<br>500  | mV<br>mV<br>mV                                                       |
| $V_{OH}$            | Output Voltage Swing High (Note 8)                                    | No Load<br>$I_{SOURCE} = 5\text{mA}$<br>$I_{SOURCE} = 20\text{mA}$                                                                       | ●<br>●<br>● |                |     | 60<br>215<br>650  | mV<br>mV<br>mV                                                       |
| $I_{SC}$            | Short-Circuit Current                                                 |                                                                                                                                          | ●           | $\pm 25$       |     |                   | mA                                                                   |
| $I_S$               | Supply Current per Amplifier<br>Disabled Supply Current per Amplifier | $\text{ENABLE} = 4.75\text{V}$                                                                                                           | ●<br>●      |                | 1   | 4.6               | mA<br>$\mu\text{A}$                                                  |
| $I_{\text{ENABLE}}$ | ENABLE Pin Current                                                    | $\text{ENABLE} = 0.3\text{V}$                                                                                                            | ●           |                |     | -95               | $\mu\text{A}$                                                        |
| $V_L$               | ENABLE Pin Input Voltage Low                                          |                                                                                                                                          | ●           |                |     | 0.3               | V                                                                    |
| $V_H$               | ENABLE Pin Input Voltage High                                         |                                                                                                                                          | ●           | 4.75           |     |                   | V                                                                    |
|                     | Output Leakage Current                                                | $\text{ENABLE} = 4.75\text{V}$ , $V_O = \pm 1\text{V}$                                                                                   | ●           |                | 1   |                   | $\mu\text{A}$                                                        |
| $t_{ON}$            | Turn-On Time                                                          | $\text{ENABLE} = 5\text{V}$ to $0\text{V}$ , $R_L = 1\text{k}$                                                                           | ●           |                | 300 |                   | ns                                                                   |
| $t_{OFF}$           | Turn-Off Time                                                         | $\text{ENABLE} = 0\text{V}$ to $5\text{V}$ , $R_L = 1\text{k}$                                                                           | ●           |                | 85  |                   | $\mu\text{s}$                                                        |
| SR                  | Slew Rate                                                             | $A_V = -1$ , $R_L = 1\text{k}$ , $V_O = -2\text{V}$ to $2\text{V}$                                                                       | ●           | 44             |     |                   | $\text{V}/\mu\text{s}$                                               |
|                     |                                                                       | LT6230-10, $A_V = -10$ , $R_L = 1\text{k}$ , $V_O = -2\text{V}$ to $2\text{V}$                                                           | ●           |                | 315 |                   | $\text{V}/\mu\text{s}$                                               |
| FPBW                | Full-Power Bandwidth                                                  | $V_{OUT} = 3V_{P-P}$ (Note 9) LT6230C, LT6231C, LT6232C                                                                                  | ●           | 4.66           |     |                   | MHz                                                                  |

# ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the  $-40^{\circ}\text{C} < T_A < 85^{\circ}\text{C}$  temperature range.  $V_S = \pm 5\text{V}$ ,  $V_{CM} = V_{OUT} = 0\text{V}$ ,  $\text{ENABLE} = 0\text{V}$ , unless otherwise noted. (Note 5)

| SYMBOL              | PARAMETER                                                | CONDITIONS                                                                     | MIN | TYP      | MAX  | UNITS                          |
|---------------------|----------------------------------------------------------|--------------------------------------------------------------------------------|-----|----------|------|--------------------------------|
| $V_{OS}$            | Input Offset Voltage                                     | LT6230I, LT6230I-10                                                            | ●   |          | 700  | $\mu\text{V}$                  |
|                     |                                                          | LT6231IS8, LT6232IGN                                                           | ●   |          | 550  | $\mu\text{V}$                  |
|                     |                                                          | LT6231IDD                                                                      | ●   |          | 650  | $\mu\text{V}$                  |
|                     | Input Offset Voltage Match (Channel-to-Channel) (Note 6) |                                                                                | ●   |          | 1000 | $\mu\text{V}$                  |
| $V_{OS\ TC}$        | Input Offset Voltage Drift (Note 10)                     |                                                                                | ●   | 0.5      | 3    | $\mu\text{V}/^{\circ}\text{C}$ |
| $I_B$               | Input Bias Current                                       |                                                                                | ●   |          | 12   | $\mu\text{A}$                  |
|                     | $I_B$ Match (Channel-to-Channel) (Note 6)                |                                                                                | ●   |          | 1.1  | $\mu\text{A}$                  |
| $I_{OS}$            | Input Offset Current                                     |                                                                                | ●   |          | 0.8  | $\mu\text{A}$                  |
| $A_{VOL}$           | Large-Signal Gain                                        | $V_O = \pm 4.5\text{V}$ , $R_L = 10\text{k}$                                   | ●   | 93       |      | $\text{V}/\text{mV}$           |
|                     |                                                          | $V_O = \pm 4.5\text{V}$ , $R_L = 1\text{k}$                                    | ●   | 25       |      | $\text{V}/\text{mV}$           |
|                     |                                                          | $V_O = \pm 1.5\text{V}$ , $R_L = 100\Omega$                                    | ●   | 4.8      |      | $\text{V}/\text{mV}$           |
| $V_{CM}$            | Input Voltage Range                                      | Guaranteed by CMRR                                                             | ●   | -3       | 4    | V                              |
| CMRR                | Common Mode Rejection Ratio                              | $V_{CM} = -3\text{V}$ to $4\text{V}$                                           | ●   | 95       |      | dB                             |
|                     | CMRR Match (Channel-to-Channel) (Note 6)                 | $V_{CM} = -3\text{V}$ to $4\text{V}$                                           | ●   | 89       |      | dB                             |
| PSRR                | Power Supply Rejection Ratio                             | $V_S = \pm 1.5\text{V}$ to $\pm 5\text{V}$                                     | ●   | 85       |      | dB                             |
|                     | PSRR Match (Channel-to-Channel) (Note 6)                 | $V_S = \pm 1.5\text{V}$ to $\pm 5\text{V}$                                     | ●   | 79       |      | dB                             |
| $V_{OL}$            | Output Voltage Swing Low (Note 8)                        | No Load                                                                        | ●   |          | 60   | mV                             |
|                     |                                                          | $I_{SINK} = 5\text{mA}$                                                        | ●   |          | 210  | mV                             |
|                     |                                                          | $I_{SINK} = 15\text{mA}$                                                       | ●   |          | 510  | mV                             |
| $V_{OH}$            | Output Voltage Swing High (Note 8)                       | No Load                                                                        | ●   |          | 70   | mV                             |
|                     |                                                          | $I_{SOURCE} = 5\text{mA}$                                                      | ●   |          | 220  | mV                             |
|                     |                                                          | $I_{SOURCE} = 20\text{mA}$                                                     | ●   |          | 675  | mV                             |
| $I_{SC}$            | Short-Circuit Current                                    |                                                                                | ●   | $\pm 15$ |      | mA                             |
| $I_S$               | Supply Current per Amplifier                             | $\text{ENABLE} = 4.8\text{V}$                                                  | ●   |          | 4.85 | mA                             |
|                     | Disabled Supply Current per Amplifier                    |                                                                                | ●   | 1        |      | $\mu\text{A}$                  |
| $I_{\text{ENABLE}}$ | ENABLE Pin Current                                       | $\text{ENABLE} = 0.3\text{V}$                                                  | ●   |          | -110 | $\mu\text{A}$                  |
| $V_L$               | ENABLE Pin Input Voltage Low                             |                                                                                | ●   |          | 0.3  | V                              |
| $V_H$               | ENABLE Pin Input Voltage High                            |                                                                                | ●   | 4.8      |      | V                              |
|                     | Output Leakage Current                                   | $\text{ENABLE} = 4.8\text{V}$ , $V_O = \pm 1\text{V}$                          | ●   | 1        |      | $\mu\text{A}$                  |
| $t_{ON}$            | Turn-On Time                                             | $\text{ENABLE} = 5\text{V}$ to $0\text{V}$ , $R_L = 1\text{k}$                 | ●   | 300      |      | ns                             |
| $t_{OFF}$           | Turn-Off Time                                            | $\text{ENABLE} = 0\text{V}$ to $5\text{V}$ , $R_L = 1\text{k}$                 | ●   | 72       |      | $\mu\text{s}$                  |
| SR                  | Slew Rate                                                | $A_V = -1$ , $R_L = 1\text{k}$ , $V_O = -2\text{V}$ to $2\text{V}$             | ●   | 37       |      | $\text{V}/\mu\text{s}$         |
|                     |                                                          | LT6230-10, $A_V = -10$ , $R_L = 1\text{k}$ , $V_O = -2\text{V}$ to $2\text{V}$ | ●   | 260      |      | $\text{V}/\mu\text{s}$         |
| FPBW                | Full-Power Bandwidth (Note 9)                            | $V_{OUT} = 3V_{P-P}$ ; LT6230I, LT6231I, LT6232I                               | ●   | 3.9      |      | MHz                            |

**Note 1:** Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

**Note 2:** Inputs are protected by back-to-back diodes. If the differential input voltage exceeds 0.7V, the input current must be limited to less than 40mA.

**Note 3:** A heat sink may be required to keep the junction temperature below the absolute maximum rating when the output is shorted indefinitely.

**Note 4:** The LT6230C/LT6230I the LT6231C/LT6231I, and LT6232C/LT6232I are guaranteed functional over the temperature range of  $-40^{\circ}\text{C}$  and  $85^{\circ}\text{C}$ .

**Note 5:** The LT6230C/LT6231C/LT6232C are guaranteed to meet specified performance from  $0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$ . The LT6230C/LT6231C/LT6232C are designed, characterized and expected to meet specified performance from  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ , but are not tested or QA sampled at these temperatures. The LT6230I/LT6231I/LT6232I are guaranteed to meet specified performance from  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ .



## ELECTRICAL CHARACTERISTICS

**Note 6:** Matching parameters are the difference between the two amplifiers A and D and between B and C of the LT6232; between the two amplifiers of the LT6231. CMRR and PSRR match are defined as follows: CMRR and PSRR are measured in  $\mu\text{V/V}$  on the matched amplifiers. The difference is calculated between the matching sides in  $\mu\text{V/V}$ . The result is converted to dB.

**Note 7:** Minimum supply voltage is guaranteed by power supply rejection ratio test.

**Note 8:** Output voltage swings are measured between the output and power supply rails.


**Note 9:** Full-power bandwidth is calculated from the slew rate:

$$\text{FPBW} = \text{SR}/2\pi V_P$$


**Note 10:** This parameter is not 100% tested.

## TYPICAL PERFORMANCE CHARACTERISTICS


(LT6230/LT6231/LT6232)

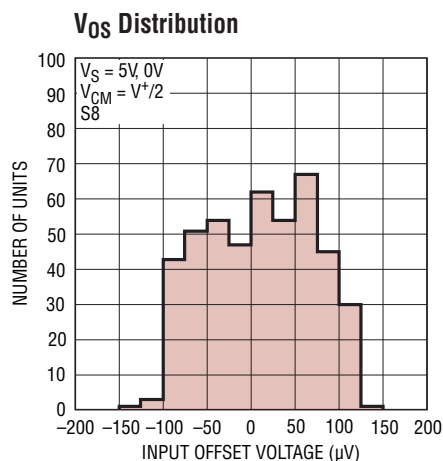


623012 G01

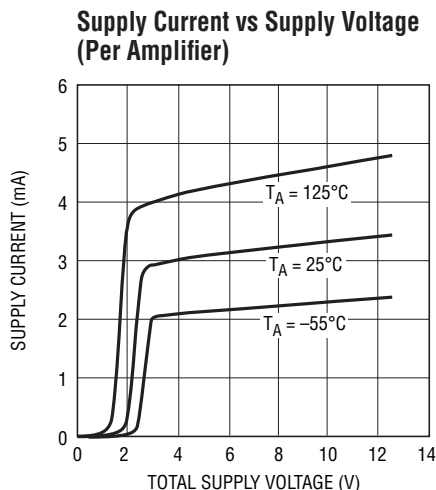


623012 G02

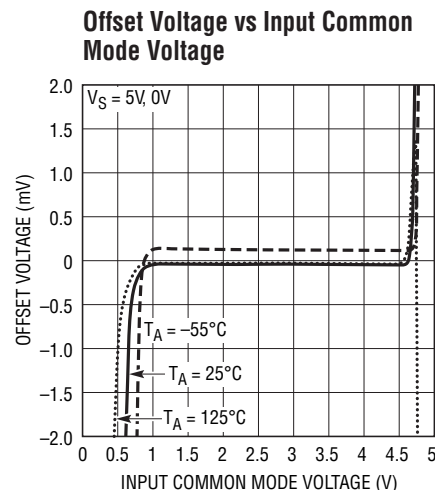


623012 G03

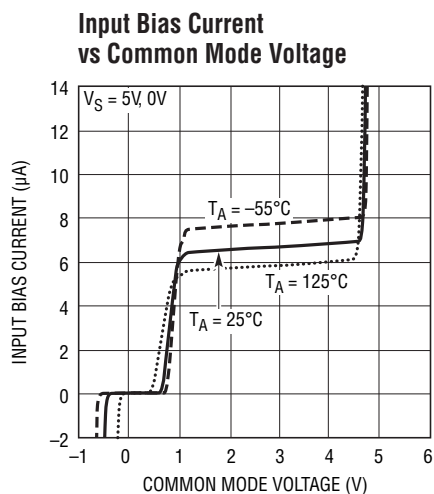

623012 G04

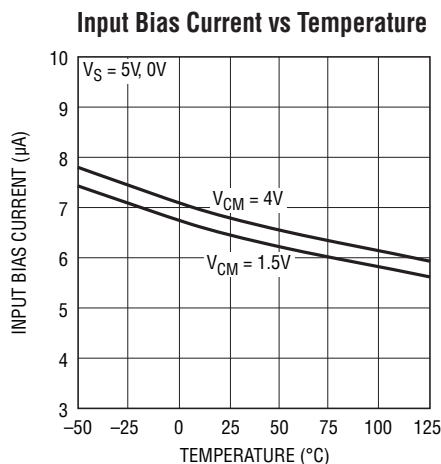

623012 G05

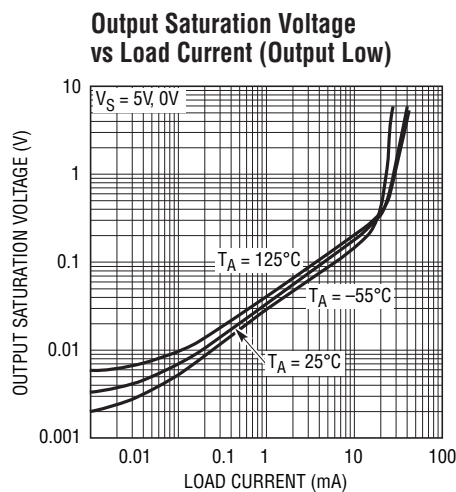


623012 G06


# TYPICAL PERFORMANCE CHARACTERISTICS

(LT6230/LT6231/LT6232)


Output Saturation Voltage  
vs Load Current (Output High)

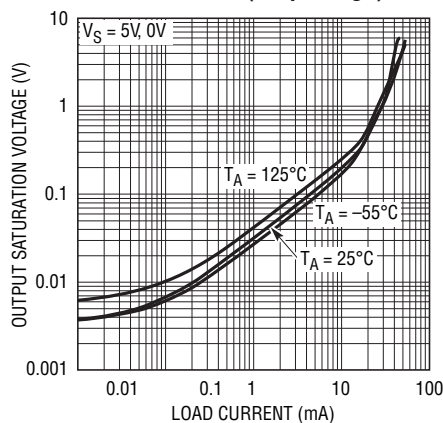


Minimum Supply Voltage

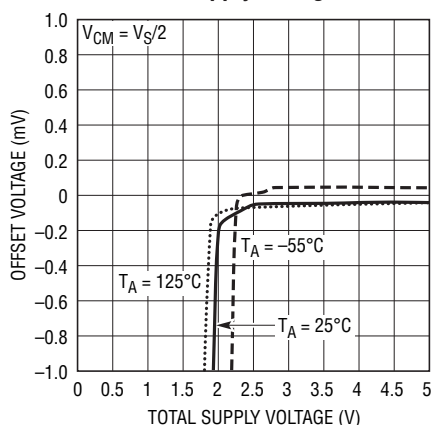


Output Short-Circuit Current  
vs Power Supply Voltage

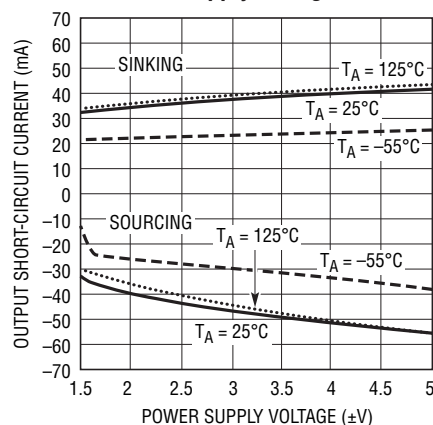


Open-Loop Gain

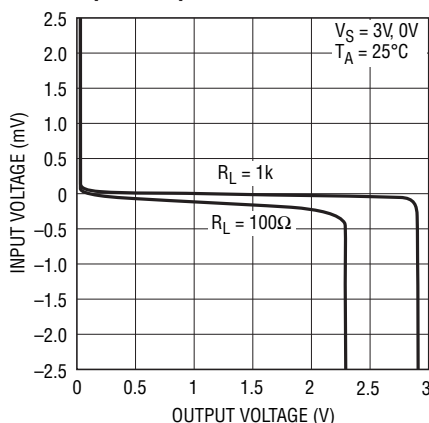


Open-Loop Gain

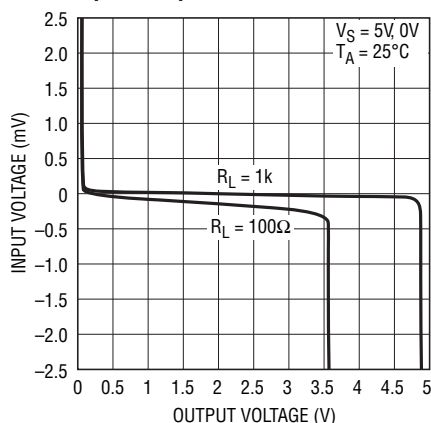


Open-Loop Gain

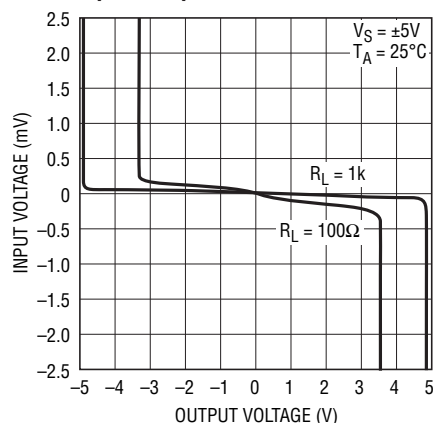


Offset Voltage vs Output Current

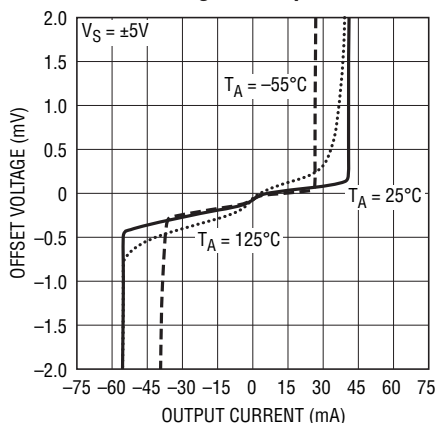

Warm-Up Drift vs Time

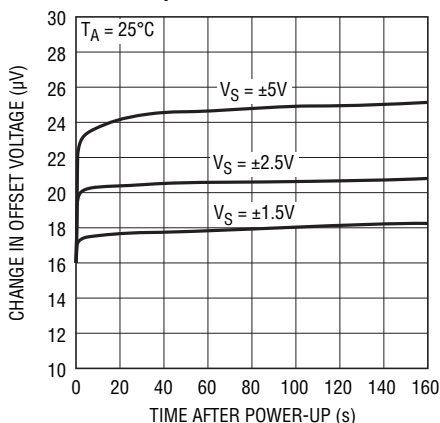


Total Noise vs Total Source  
Resistance

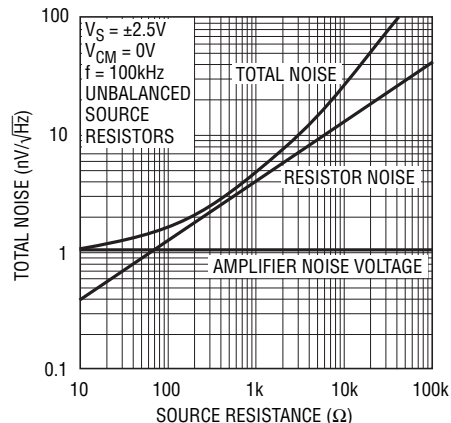


## TYPICAL PERFORMANCE CHARACTERISTICS

(LT6230/LT6231/LT6232)


**Noise Voltage and Unbalanced Noise Current vs Frequency**

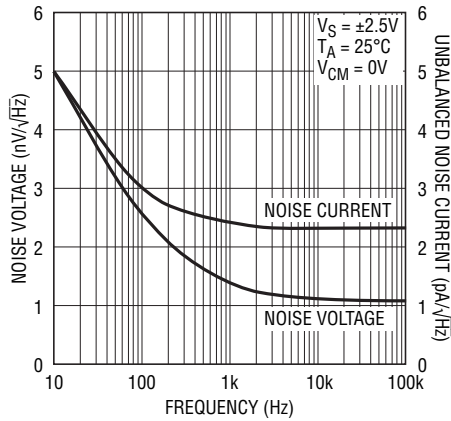


**0.1Hz to 10Hz Output Voltage Noise**

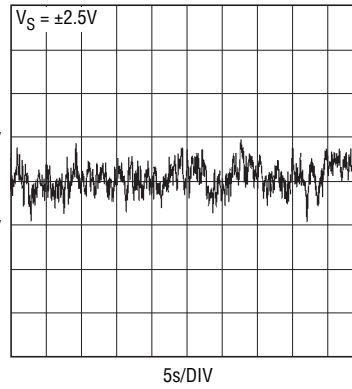


**Gain Bandwidth and Phase Margin vs Temperature**

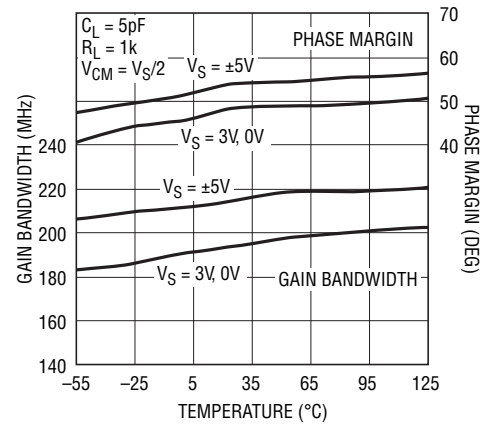


**Open-Loop Gain vs Frequency**

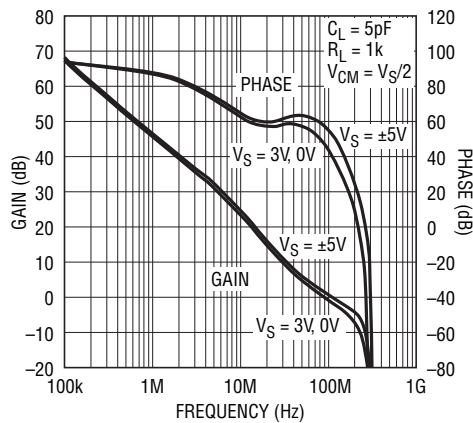


**Gain Bandwidth and Phase Margin vs Supply Voltage**

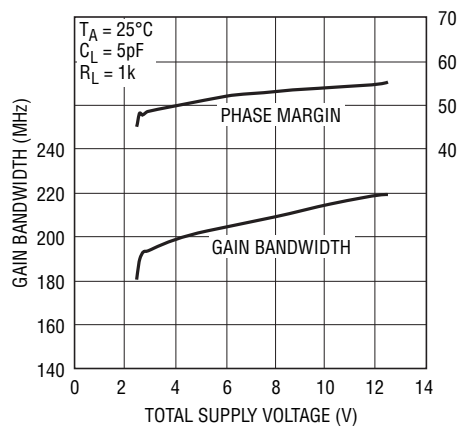


**Slew Rate vs Temperature**

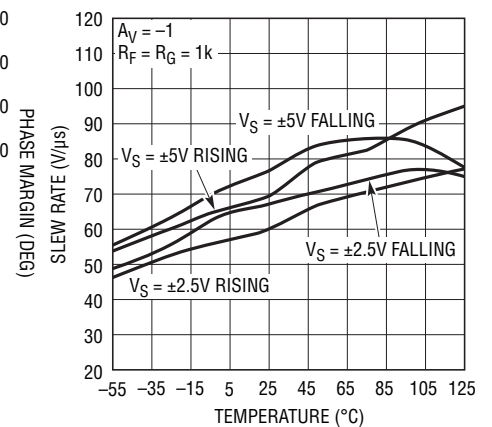


**Output Impedance vs Frequency**

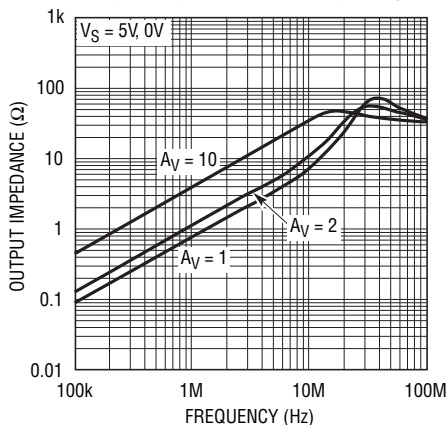

**Common Mode Rejection Ratio vs Frequency**

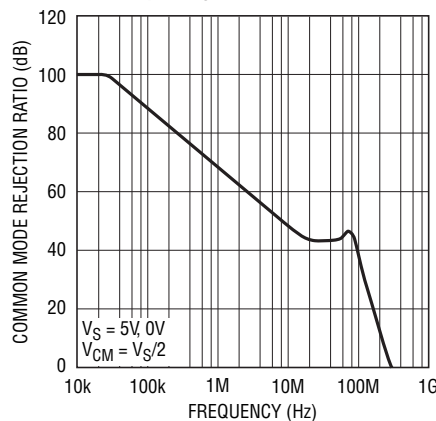


**Channel Separation vs Frequency**

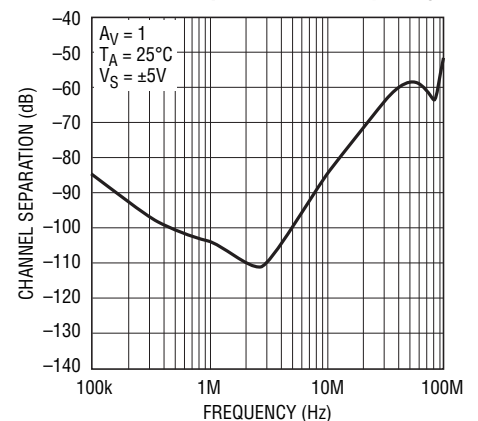

# TYPICAL PERFORMANCE CHARACTERISTICS


(LT6230/LT6231/LT6232)

**Power Supply Rejection Ratio vs Frequency**

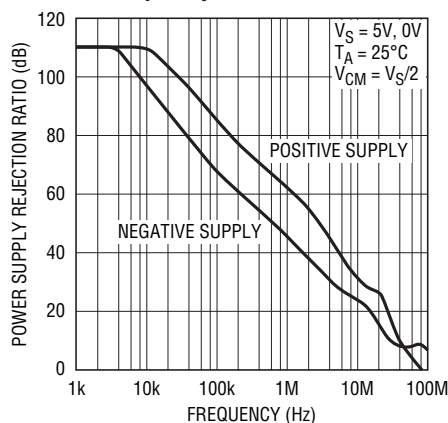


623012 G25

**Series Output Resistance and Overshoot vs Capacitive Load**

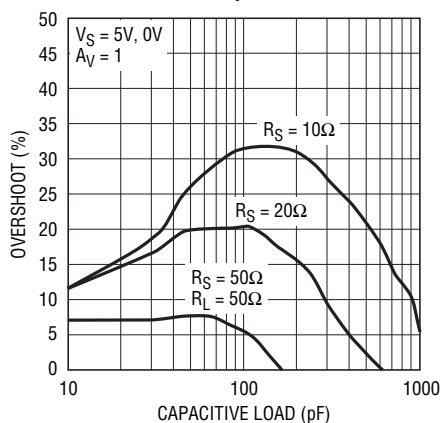


623012 G26

**Series Output Resistance and Overshoot vs Capacitive Load**

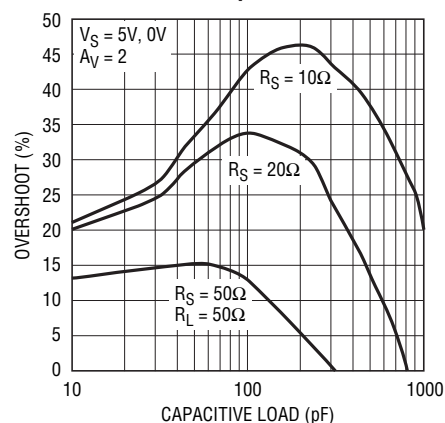


623012 G27

**Settling Time vs Output Step (Noninverting)**

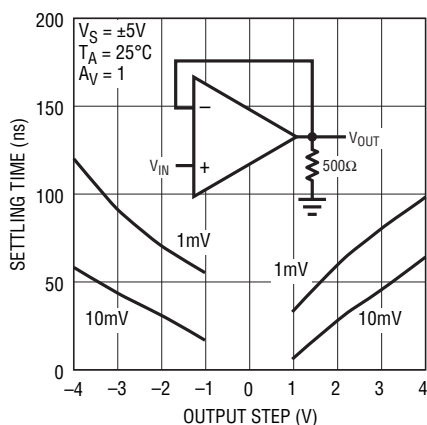


623012 G28

**Settling Time vs Output Step (Inverting)**

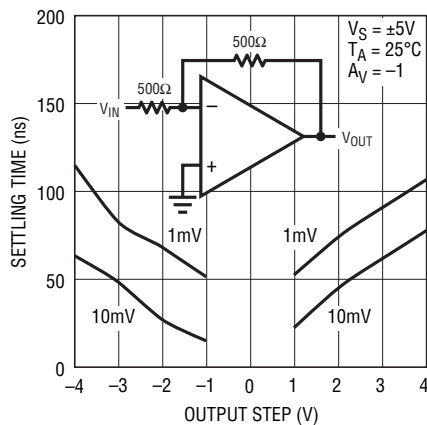


623012 G29

**Maximum Undistorted Output Signal vs Frequency**

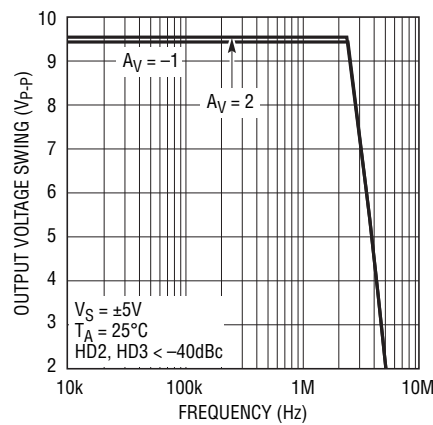


623012 G30

**Distortion vs Frequency**

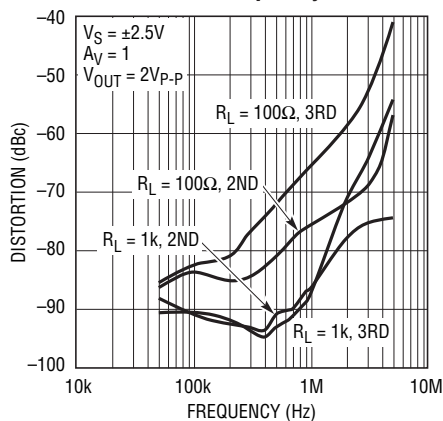


623012 G31

**Distortion vs Frequency**

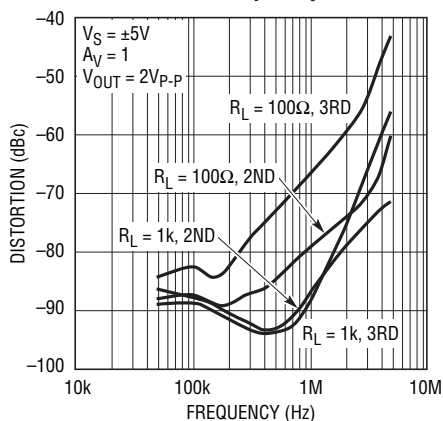

623012 G32

**Distortion vs Frequency**

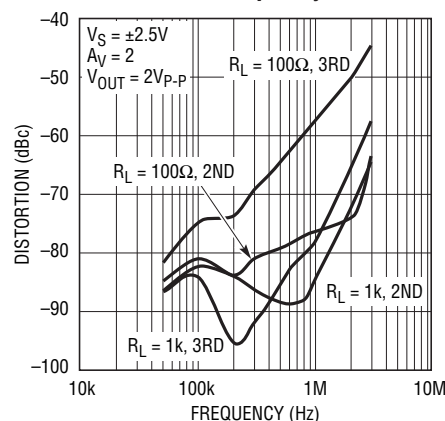


623012 G33

623012fc


## TYPICAL PERFORMANCE CHARACTERISTICS

(LT6230/LT6231/LT6232)


Distortion vs Frequency

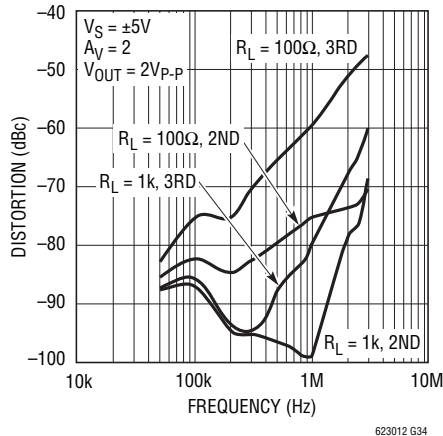


Large-Signal Response

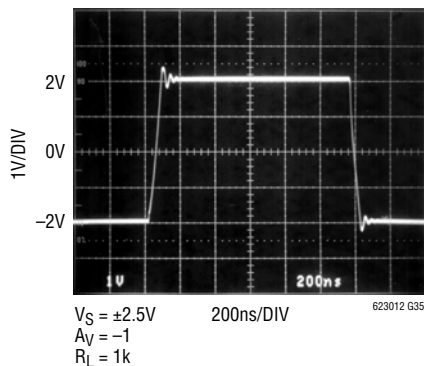


Small-Signal Response

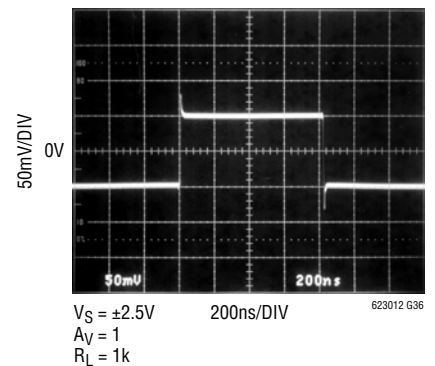

Large-Signal Response

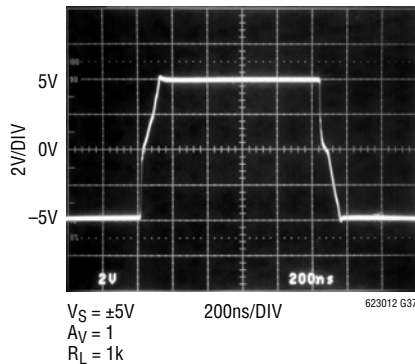


Output Overdrive Recovery

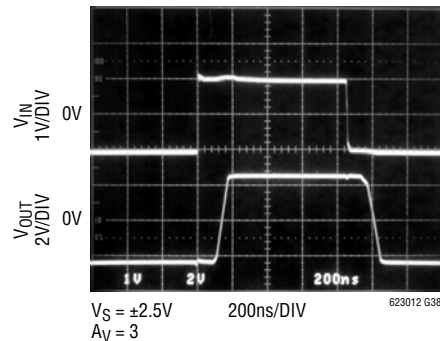


### (LT6230) ENABLE Characteristics


Supply Current vs ENABLE Pin Voltage

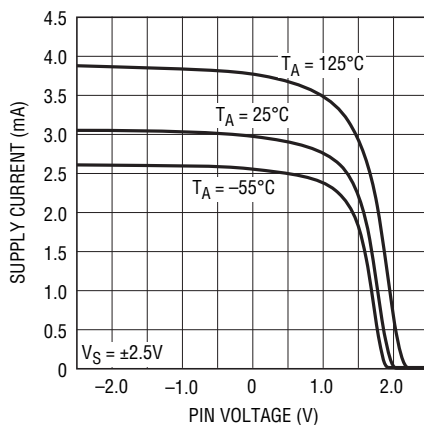

ENABLE Pin Current vs ENABLE Pin Voltage

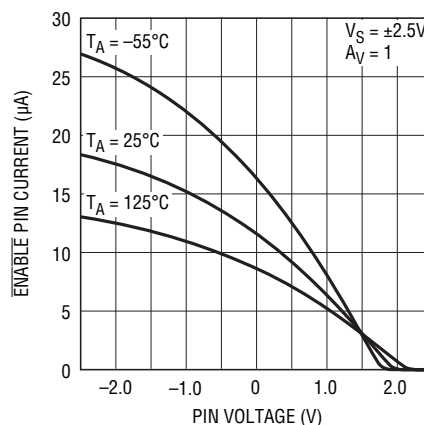


ENABLE Pin Response Time

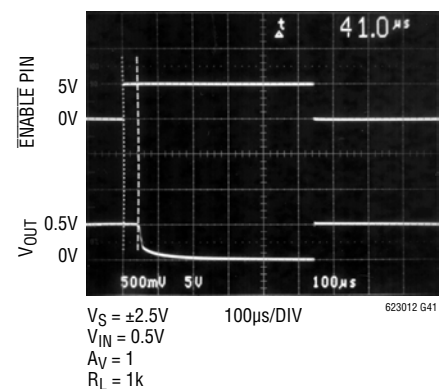


# TYPICAL PERFORMANCE CHARACTERISTICS

(LT6230-10)


**Gain Bandwidth and Phase Margin vs Temperature**

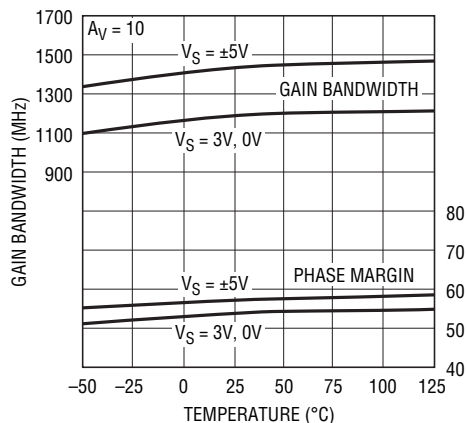


**Slew Rate vs Temperature**

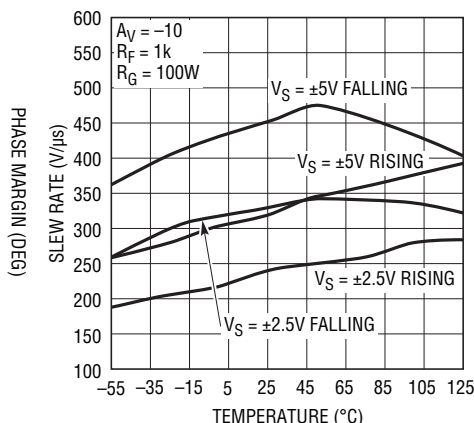


**Series Output Resistor and Overshoot vs Capacitive Load**

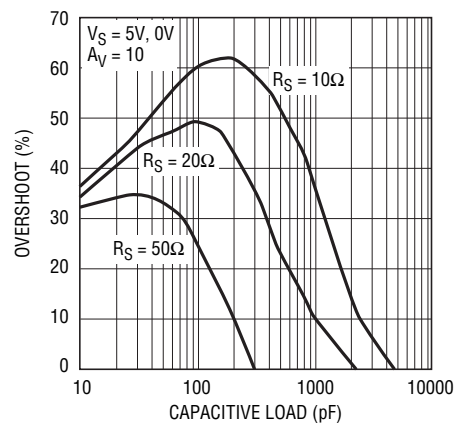


**Open-Loop Gain and Phase vs Frequency**

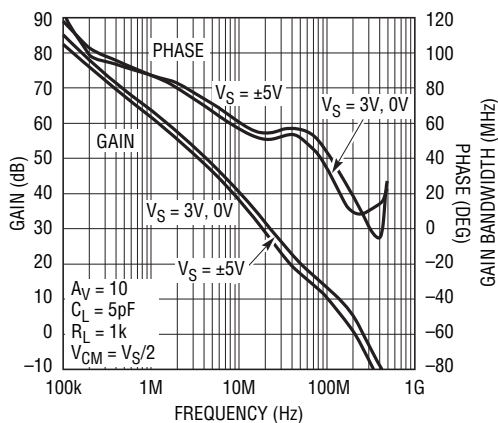


**Gain Bandwidth and Phase Margin vs Supply Voltage**

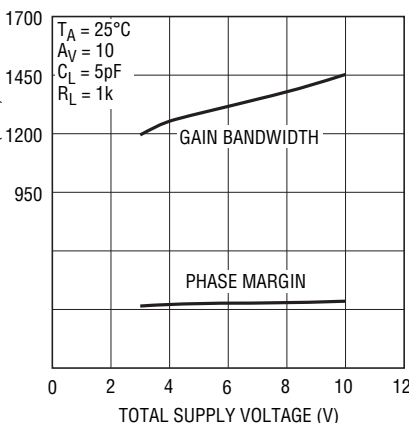


**Gain Bandwidth vs Resistor Load**

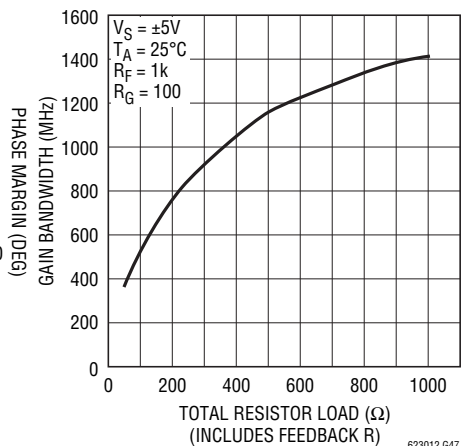


**Common Mode Rejection Ratio vs Frequency**

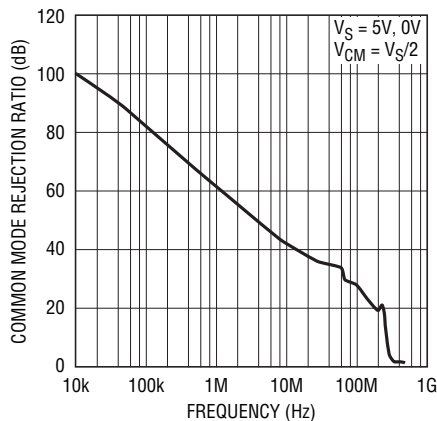

**Maximum Undistorted Output Signal vs Frequency**





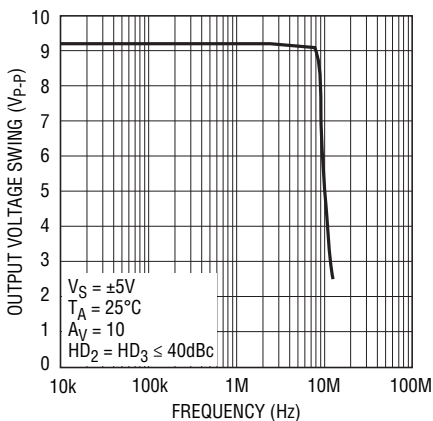


**2nd and 3rd Harmonic Distortion vs Frequency**

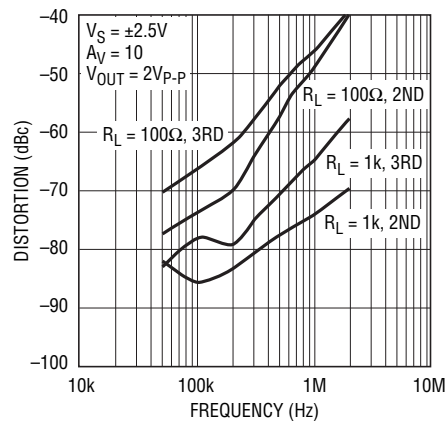

623012fc

TYPICAL PERFORMANCE CHARACTERISTICS  
(LT6230-10)

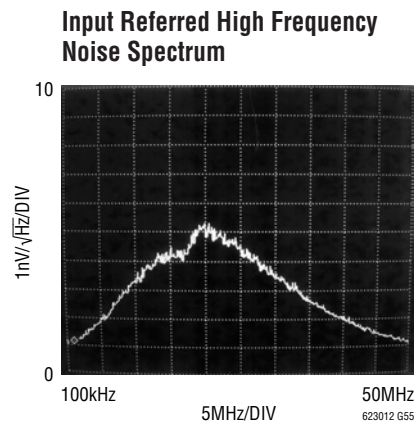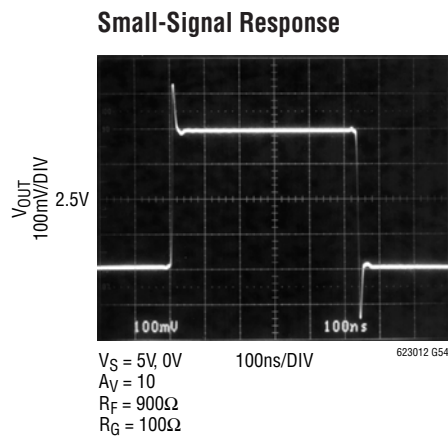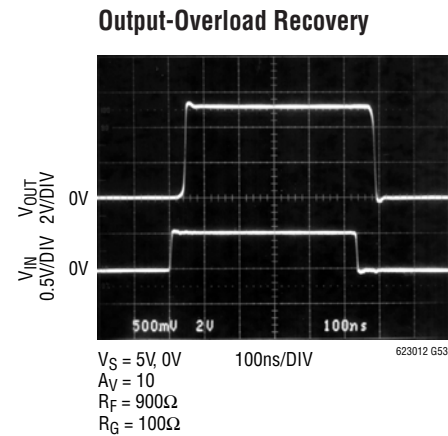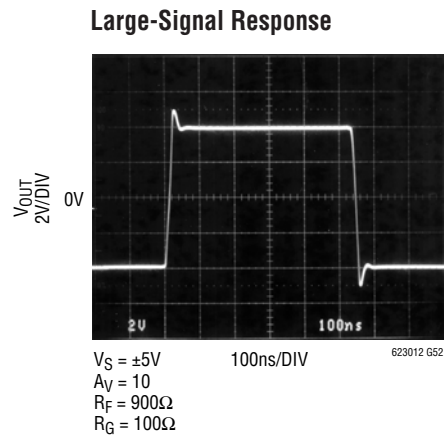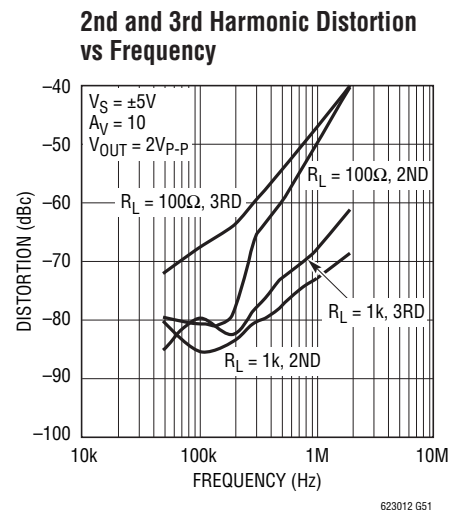



## APPLICATIONS INFORMATION

### Amplifier Characteristics

Figure 1 is a simplified schematic of the LT6230/LT6231/LT6232, which has a pair of low noise input transistors Q1 and Q2. A simple current mirror, Q3/Q4, converts the differential signal to a single-ended output, and these transistors are degenerated to reduce their contribution to the overall noise.

Capacitor C1 reduces the unity-cross frequency and improves the frequency stability without degrading the gain bandwidth of the amplifier. Capacitor C<sub>M</sub> sets the overall amplifier gain bandwidth. The differential drive generator supplies current to transistors Q5 and Q6 that swing the output from rail-to-rail.

### Input Protection

There are back-to-back diodes, D1 and D2 across the + and – inputs of these amplifiers to limit the differential input voltage to  $\pm 0.7V$ . The inputs of the LT6230/LT6231/LT6232 do not have internal resistors in series with the input transistors. This technique is often used to protect the input devices from overvoltage that causes excessive current to flow. The addition of these resistors would significantly degrade the low noise voltage of these amplifiers. For instance, a  $100\Omega$  resistor in series with each input would generate  $1.8nV/\sqrt{Hz}$  of noise, and the total amplifier noise voltage would rise from  $1.1nV/\sqrt{Hz}$  to  $2.1nV/\sqrt{Hz}$ . Once the input differential voltage exceeds  $\pm 0.7V$ , steady-state current conducted through the protection diodes should

be limited to  $\pm 40mA$ . This implies  $25\Omega$  of protection resistance is necessary per volt of overdrive beyond  $\pm 0.7V$ . These input diodes are rugged enough to handle transient currents due to amplifier slew rate overdrive and clipping without protection resistors.

The photo of Figure 2 shows the output response to an input overdrive with the amplifier connected as a voltage follower. With the input signal low, current source I<sub>1</sub> saturates and the differential drive generator drives Q6 into saturation so the output voltage swings all the way to V<sup>-</sup>. The input can swing positive until transistor Q2 saturates into current mirror Q3/Q4. When saturation occurs, the output tries to phase invert, but diode D2 conducts current from the signal source to the output through the feedback connection. The output is clamped a diode drop below the input. In this photo, the input signal generator is limiting at about 20mA.

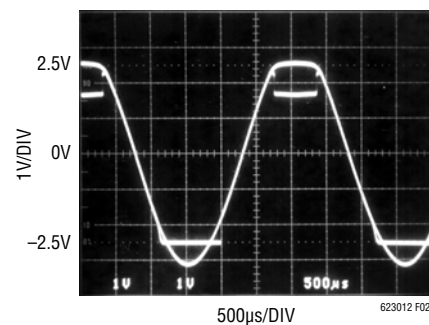


Figure 2. V<sub>S</sub> =  $\pm 2.5V$ , A<sub>V</sub> = 1 with Large Overdrive

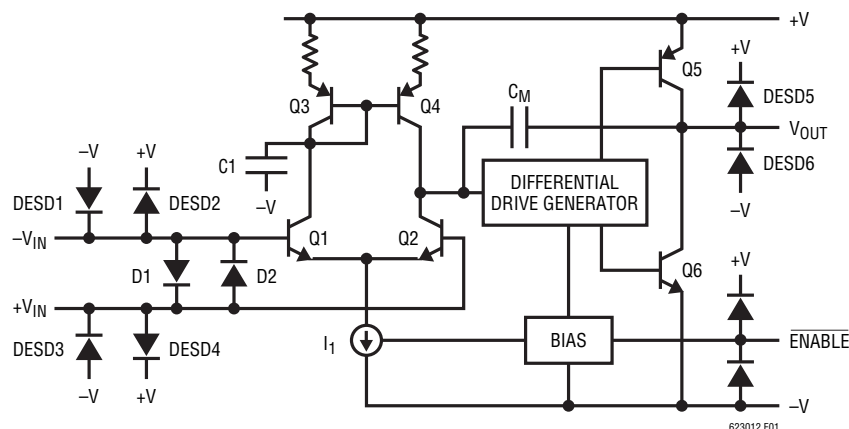


Figure 1. Simplified Schematic



## APPLICATIONS INFORMATION

With the amplifier connected in a gain of  $A_V \geq 2$ , the output can invert with very heavy overdrive. To avoid this inversion, limit the input overdrive to 0.5V beyond the power supply rails.

### ESD

The LT6230/LT6231/LT6232 have reverse-biased ESD protection diodes on all inputs and outputs as shown in Figure 1. If these pins are forced beyond either supply, unlimited current will flow through these diodes. If the current is transient and limited to one hundred milliamps or less, no damage to the device will occur.

### Noise

The noise voltage of the LT6230/LT6231/LT6232 is equivalent to that of a  $75\Omega$  resistor, and for the lowest possible noise it is desirable to keep the source and feedback resistance at or below this value, i.e.,  $R_S + R_G || R_{FB} \leq 75\Omega$ . With  $R_S + R_G || R_{FB} = 75\Omega$  the total noise of the amplifier is:

$$e_N = \sqrt{(1.1\text{nV})^2 + (1.1\text{nV})^2} = 1.55\text{nV}/\sqrt{\text{Hz}}$$

Below this resistance value, the amplifier dominates the noise, but in the region between  $75\Omega$  and about  $3\text{k}\Omega$ , the noise is dominated by the resistor thermal noise. As the total resistance is further increased beyond  $3\text{k}\Omega$ , the amplifier noise current multiplied by the total resistance eventually dominates the noise.

The product of  $e_N \cdot \sqrt{I_{\text{SUPPLY}}}$  is an interesting way to gauge low noise amplifiers. Most low noise amplifiers with low  $e_N$  have high  $I_{\text{SUPPLY}}$  current. In applications that require low noise voltage with the lowest possible supply current, this product can prove to be enlightening. The LT6230/LT6231/LT6232 have an  $e_N \cdot \sqrt{I_{\text{SUPPLY}}}$  product of only 1.9 per amplifier, yet it is common to see amplifiers with similar noise specifications to have  $e_N \cdot \sqrt{I_{\text{SUPPLY}}}$  as high as 13.5.

For a complete discussion of amplifier noise, see the LT1028 data sheet.


### ENABLE Pin

The LT6230 includes an  $\overline{\text{ENABLE}}$  pin that shuts down the amplifier to  $10\mu\text{A}$  maximum supply current. The  $\overline{\text{ENABLE}}$  pin must be driven low to operate the amplifier with normal supply current. The  $\overline{\text{ENABLE}}$  pin must be driven high to within 0.35V of  $V^+$  to shut down the supply current. This can be accomplished with simple gate logic; however care must be taken if the logic and the LT6230 operate from different supplies. If this is the case, then open-drain logic can be used with a pull-up resistor to ensure that the amplifier remains off. See the Typical Performance Characteristics.

The output leakage current when disabled is very low; however, current can flow into the input protection diodes D1 and D2 if the output voltage exceeds the input voltage by a diode drop.

## TYPICAL APPLICATIONS

### Single Supply, Low Noise, Low Power, Bandpass Filter with Gain = 10

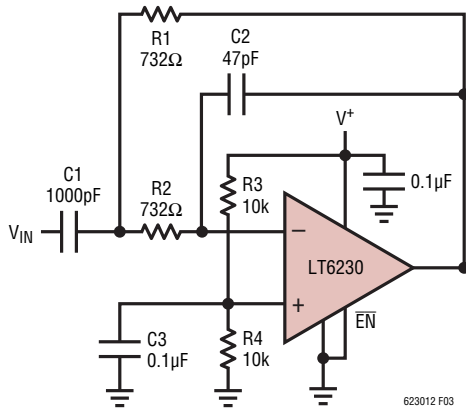

$$f_0 = \frac{1}{2\pi RC} = 1\text{MHz}$$

$$C = \sqrt{C_1 C_2}, R = R_1 = R_2$$

$$f_0 = \left(\frac{732\Omega}{R}\right)\text{MHz, MAXIMUM } f_0 = 1\text{MHz}$$


$$f_{-3\text{dB}} = \frac{f_0}{2.5}$$

$$A_V = 20\text{dB at } f_0$$


$$\overline{\text{EN}} = 4\mu\text{VRMS INPUT REFERRED}$$

$$I_S = 3.7\text{mA FOR } V^+ = 5\text{V}$$

Frequency Response Plot of  
Bandpass Filter

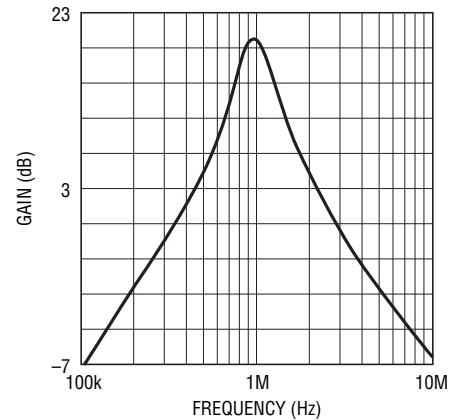

### Low Noise, Low Power, Single Supply, Instrumentation Amplifier with Gain = 100

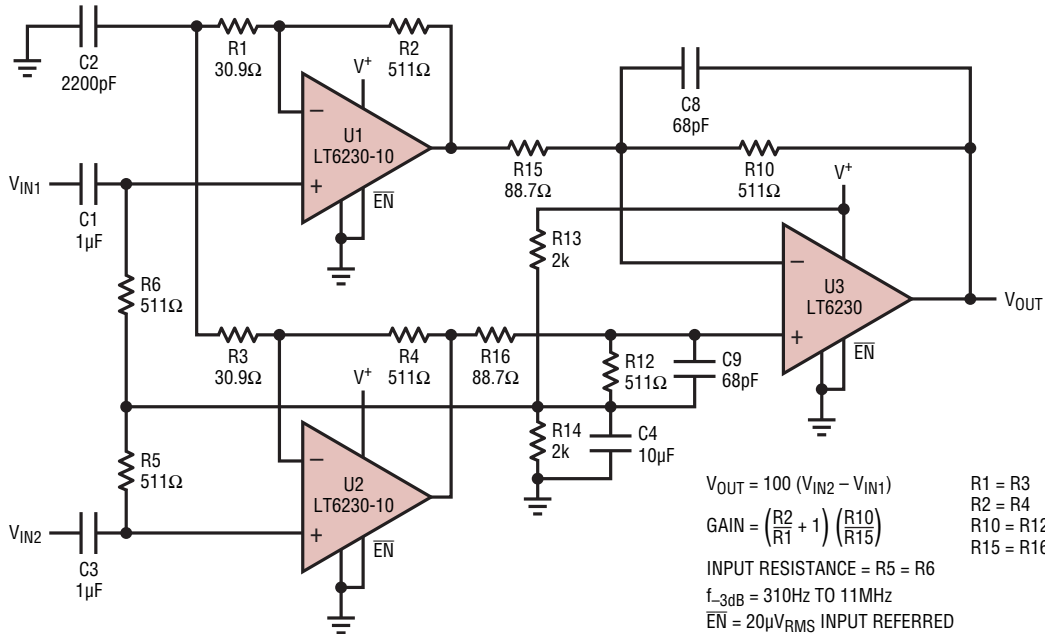

$$V_{OUT} = 100 (V_{IN2} - V_{IN1})$$

$$\text{GAIN} = \left(\frac{R_2}{R_1} + 1\right) \left(\frac{R_{10}}{R_{15}}\right)$$

$$\text{INPUT RESISTANCE} = R_5 = R_6$$

$$f_{-3\text{dB}} = 310\text{Hz TO } 11\text{MHz}$$

$$\overline{\text{EN}} = 20\mu\text{VRMS INPUT REFERRED}$$

$$I_S = 10.5\text{mA FOR } V_S = 5\text{V, } 0\text{V}$$

$$R_1 = R_3$$

$$R_2 = R_4$$


$$R_{10} = R_{12}$$

$$R_{15} = R_{16}$$




623012 F05

## PACKAGE DESCRIPTION

**S6 Package**  
**6-Lead Plastic TSOT-23**  
(Reference LTC DWG # 05-08-1636)

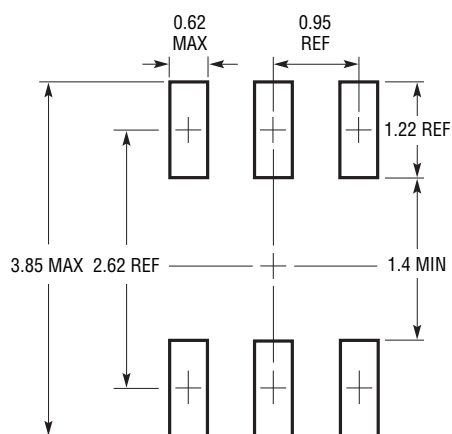

RECOMMENDED SOLDER PAD LAYOUT  
PER IPC CALCULATOR

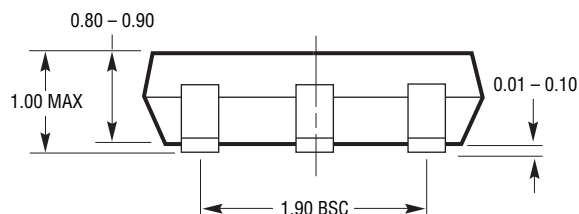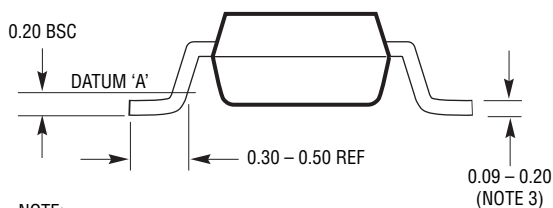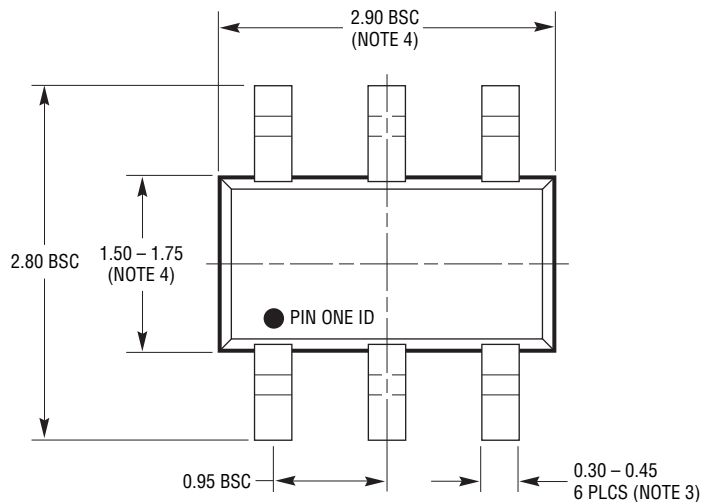

**NOTE:**


1. DIMENSIONS ARE IN MILLIMETERS
2. DRAWING NOT TO SCALE
3. DIMENSIONS ARE INCLUSIVE OF PLATING
4. DIMENSIONS ARE EXCLUSIVE OF MOLD FLASH AND METAL BURR
5. MOLD FLASH SHALL NOT EXCEED 0.254mm
6. JEDEC PACKAGE REFERENCE IS MO-193

S6 TSOT-23 0302 REV B




## PACKAGE DESCRIPTION

### S8 Package 8-Lead Plastic Small Outline (Narrow .150 Inch) (Reference LTC DWG # 05-08-1610)

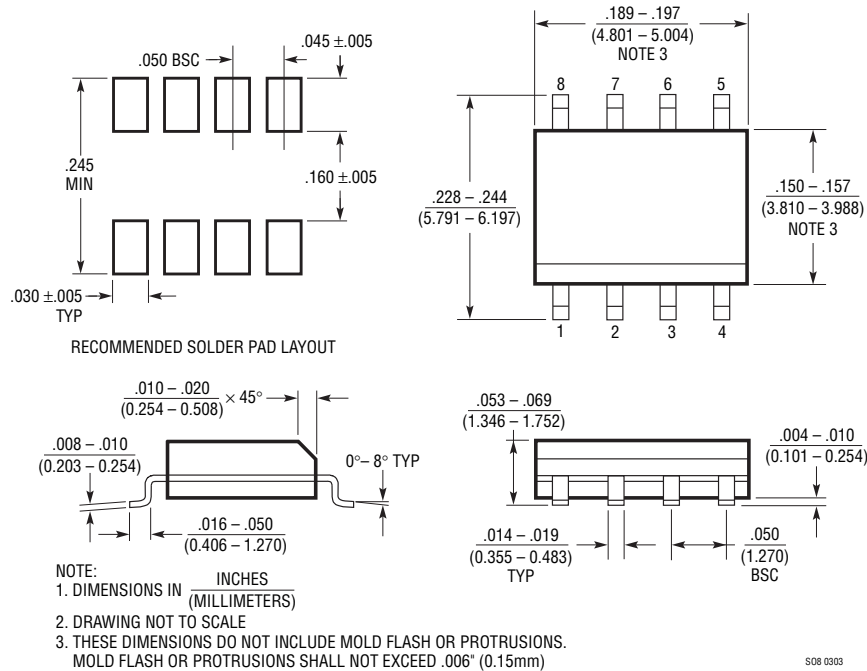

### GN Package 16-Lead Plastic SSOP (Narrow .150 Inch) (Reference LTC DWG # 05-08-1641)

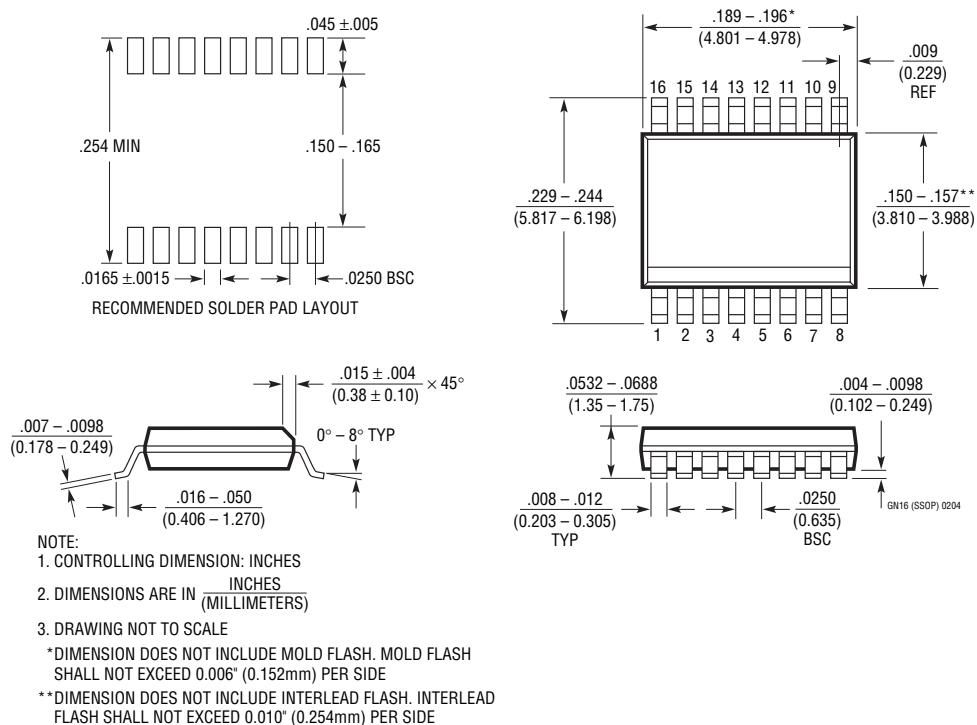

## REVISION HISTORY

(Revision history begins at Rev C)

| REV | DATE | DESCRIPTION                                            | PAGE NUMBER |
|-----|------|--------------------------------------------------------|-------------|
| C   | 1/11 | Updated ENABLE Pin section in Applications Information | 18          |

# LT6230/LT6230-10

# LT6231/LT6232


## TYPICAL APPLICATIONS

The LT6230 is applied as a transimpedance amplifier with an I-to-V conversion gain of  $1.5\text{k}\Omega$  set by R1. The LT6230 is ideally suited to this application because of its low input offset voltage and current, and its low noise. This is because the  $1.5\text{k}\Omega$  resistor has an inherent thermal noise of  $5\text{nV}/\sqrt{\text{Hz}}$  or  $3.4\text{pA}/\sqrt{\text{Hz}}$  at room temperature, while the LT6230 contributes only  $1.1\text{nV}$  and  $2.4\text{pA}/\sqrt{\text{Hz}}$ . So, with respect to both voltage and current noises, the LT6230 is actually quieter than the gain resistor.

The circuit uses an avalanche photodiode with the cathode biased to approximately 200V. When light is incident on


the photodiode, it induces a current  $I_{PD}$  which flows into the amplifier circuit. The amplifier output falls negative to maintain balance at its inputs. The transfer function is therefore  $V_{OUT} = -I_{PD} \cdot 1.5\text{k}$ . C1 ensures stability and good settling characteristics. Output offset was measured at  $280\mu\text{V}$ , so low in part because R2 serves to cancel the DC effects of bias current. Output noise was measured at  $1.1\text{mV}_{P-P}$  on a  $100\text{MHz}$  measurement bandwidth, with C2 shunting R2's thermal noise. As shown in the scope photo, the rise time is  $17\text{ns}$ , indicating a signal bandwidth of  $20\text{MHz}$ .

Low Power Avalanche Photodiode Transimpedance Amplifier  
 $I_S = 3.3\text{mA}$

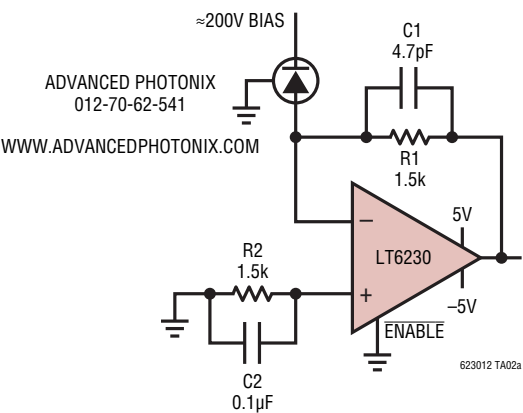

OUTPUT OFFSET =  $500\mu\text{V}$  TYPICAL  
BANDWIDTH =  $20\text{MHz}$   
OUTPUT NOISE =  $1.1\text{mV}_{P-P}$  ( $100\text{MHz}$  MEASUREMENT BW)

Photodiode Amplifier Time Domain Response

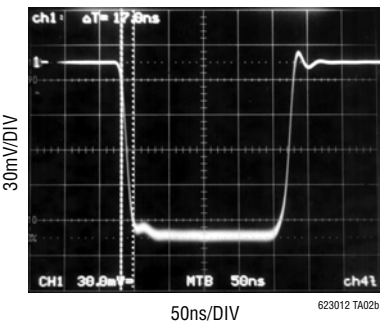

## RELATED PARTS

| PART NUMBER          | DESCRIPTION                                          | COMMENTS                                                                                      |
|----------------------|------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| LT1028               | Single, Ultralow Noise 50MHz Op Amp                  | $0.85\text{nV}/\sqrt{\text{Hz}}$                                                              |
| LT1677               | Single, Low Noise Rail-to-Rail Amplifier             | 3V Operation, $2.5\text{mA}$ , $4.5\text{nV}/\sqrt{\text{Hz}}$ , $60\mu\text{V}$ Max $V_{OS}$ |
| LT1806/LT1807        | Single/Dual, Low Noise 325MHz Rail-to-Rail Amplifier | $2.5\text{V}$ Operation, $550\mu\text{V}$ Max $V_{OS}$ , $3.5\text{nV}/\sqrt{\text{Hz}}$      |
| LT6200/LT6201        | Single/Dual, Low Noise 165MHz                        | $0.95\text{nV}/\sqrt{\text{Hz}}$ , Rail-to-Rail Input and Output                              |
| LT6202/LT6203/LT6204 | Single/Dual/Quad, Low Noise, Rail-to-Rail Amplifier  | $1.9\text{nV}/\sqrt{\text{Hz}}$ , $3\text{mA}$ Max, $100\text{MHz}$ Gain Bandwidth            |