



★ PIN CONNECTIONS



Pin No.	Pin Name
1	OUT1
2	GND
3	OUT2
4	V _{cont2}
5	IN
6	V _{cont1}

ABSOLUTE MAXIMUM RATINGS (T_A = +25°C, unless otherwise specified)

Parameter	Symbol	Ratings	Unit
Control Voltage 1, 2	V _{cont1, 2}	-6.0 to +6.0 ^{Note}	V
Input Power	P _{in}	+36	dBm
Total Power Dissipation	P _{tot}	0.15	W
Operating Ambient Temperature	T _A	-45 to +85	°C
Storage Temperature	T _{stg}	-55 to +150	°C

Note | V_{cont1}-V_{cont2} | ≤ 6.0 V

RECOMMENDED OPERATING RENGE (T_A = +25°C)

Parameter	Symbol	MIN.	TYP.	MAX.	Unit
Control Voltage (High)	V _{cont(H)}	+2.7	+2.8	+3.0	V
Control Voltage (Low)	V _{cont(L)}	-0.2	0	+0.2	V

ELECTRICAL CHARACTERISTICS

($T_A = +25^\circ\text{C}$, $V_{\text{cont1}} = 2.8\text{ V}$, $V_{\text{cont2}} = 0\text{ V}$ or $V_{\text{cont1}} = 0\text{ V}$, $V_{\text{cont2}} = 2.8\text{ V}$, $Z_o = 50\ \Omega$, Off chip DC blocking capacitors value; 56 pF, unless otherwise specified)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Insertion Loss	L_{INS}	$f = 0.5$ to 1.0 GHz	–	0.25	0.45	dB
		$f = 2.0\text{ GHz}$	–	0.30	0.50	dB
		$f = 2.5\text{ GHz}$	–	0.40	–	dB
Isolation	ISL	$f = 0.5$ to 2.0 GHz	24	28	–	dB
		$f = 2.5\text{ GHz}$	–	25	–	dB
Input Return Loss	RL_{in}	$f = 0.5$ to 2.5 GHz	15	20	–	dB
Output Return Loss	RL_{out}	$f = 0.5$ to 2.5 GHz	15	20	–	dB
Input Power at 0.1 dB Compression Point ^{Note}	$P_{\text{in}(0.1\text{ dB})}$	$f = 1.0\text{ GHz}$, $V_{\text{cont}} = 2.8\text{ V/0 V}$	32.5	34	–	dBm
2nd Harmonics	$2f_0$	$f = 1.0\text{ GHz}$, $V_{\text{cont}} = 2.8\text{ V/0 V}$, $P_{\text{in}} = 30.5\text{ dBm}$	65	75	–	dBc
3rd Harmonics	$3f_0$	$f = 1.0\text{ GHz}$, $V_{\text{cont}} = 2.8\text{ V/0 V}$, $P_{\text{in}} = 30.5\text{ dBm}$	65	75	–	dBc
Switching Speed	t_{sw}		–	150	–	ns
Control Current	I_{cont}	$V_{\text{cont}} = 2.8\text{ V/0 V}$, RF Non	–	1	50	μA


Note $P_{\text{in}(0.1\text{ dB})}$ are measured the input power level when the insertion loss increase more 0.1 than that of linear range. All other characteristics are measured in linear range.

Caution When the μ PG2009TB is used it is necessary to use DC blocking capacitors for No.1 (OUT1), No.3 (OUT2) and No.5 (IN). The value of DC blocking capacitors should be chosen to accommodate the frequency of operation, bandwidth, switching speed and the condition with actual board of your system.


The range of recommended DC blocking capacitor value is less than 100 pF.

EVALUATION CIRCUIT

$V_{cont1} = 2.8\text{ V}$, $V_{cont2} = 0\text{ V}$ or $V_{cont2} = 0\text{ V}$, $V_{cont1} = 2.8\text{ V}$, off chip DC blocking capacitors value $C1 = 56\text{ pF}$, $C2 = 1\text{ 000 pF}$ (Bypass), using the standard evaluation board.

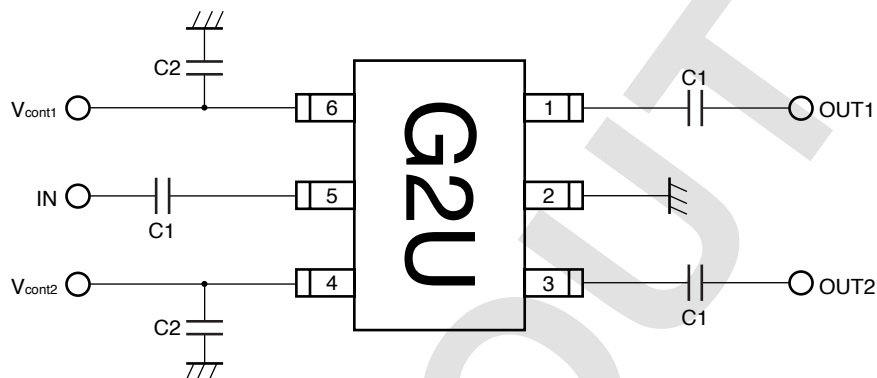

EVALUATION BOARD

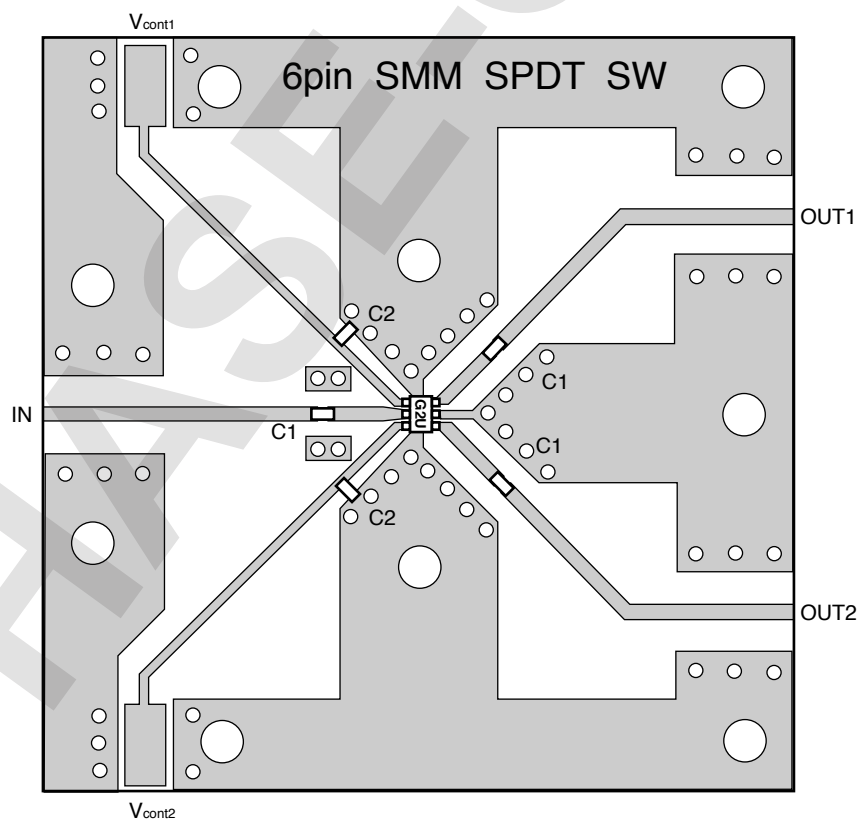


TRUTH TABLE


V_{cont1}	V_{cont2}	IN-OUT1	IN-OUT2
Low	High	OFF	ON
High	Low	ON	OFF

TYPICAL CHARACTERISTICS ($T_A = +25^\circ\text{C}$, $V_{\text{cont1/2}} = 2.8 \text{ V/0 V}$, $P_{\text{in}} = 0 \text{ dBm}$, OUT2 side is 50Ω termination, unless otherwise specified)


INPUT RETURN LOSS vs. FREQUENCY

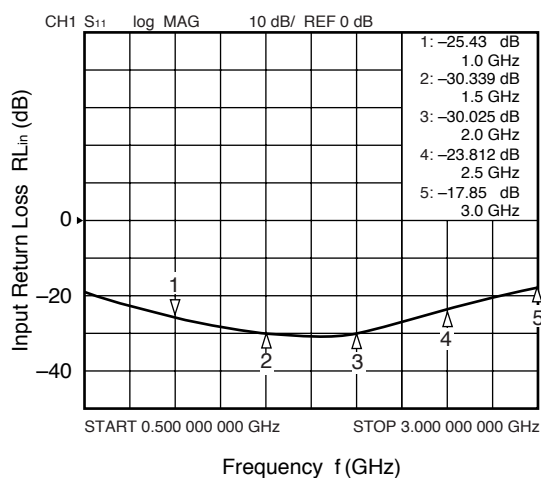


ISOLATION vs. FREQUENCY

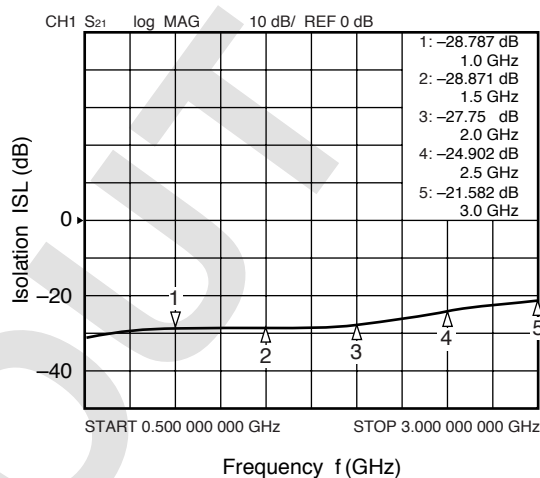

INSERTION LOSS vs. FREQUENCY

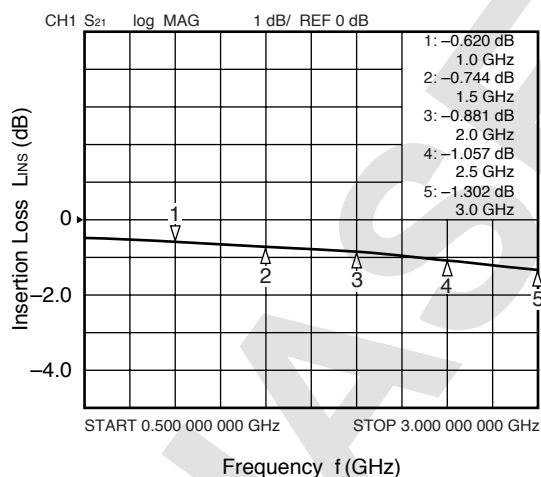

OUTPUT RETURN LOSS vs. FREQUENCY

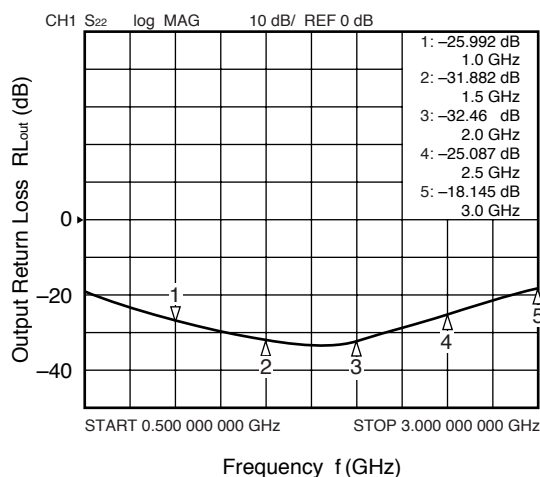


Caution These characteristics values include the losses of the evaluation board.

Remark The graphs indicate nominal characteristics.


TYPICAL CHARACTERISTICS

(f = 2 GHz, OUT2 side is 50 Ω termination, unless otherwise specified)


RELATION BETWEEN CONTROL VOLTAGE OF INSERTION LOSS

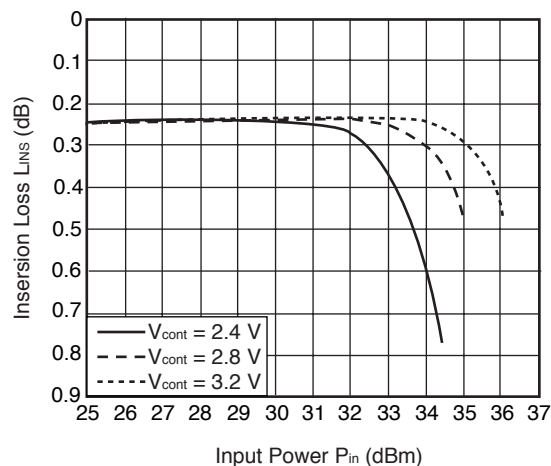

RELATION BETWEEN CONTROL VOLTAGE OF 2nd HARMONICS

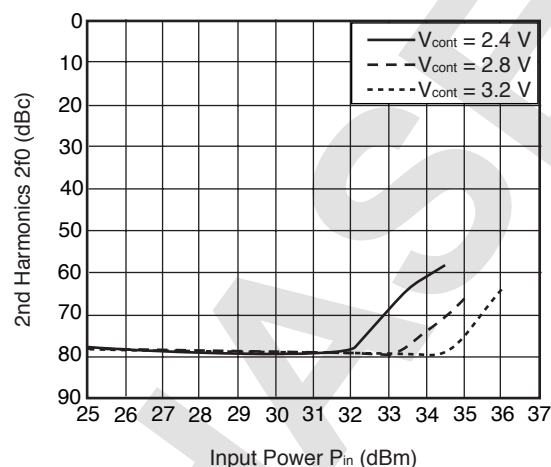


RELATION BETWEEN CONTROL VOLTAGE OF 3rd HARMONICS

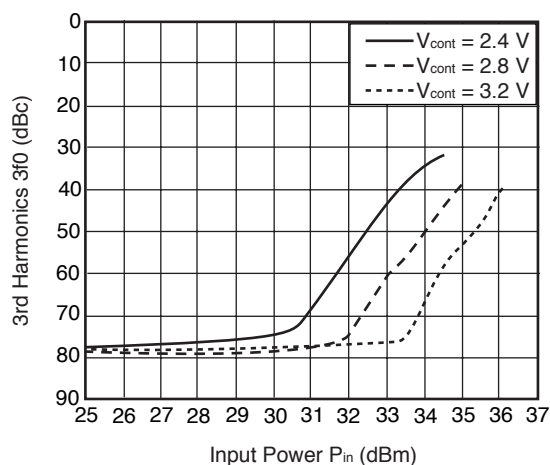

Remark The graphs indicate nominal characteristics.

PACKAGE DIMENSIONS

6-PIN SUPER MINIMOLD (UNIT: mm)

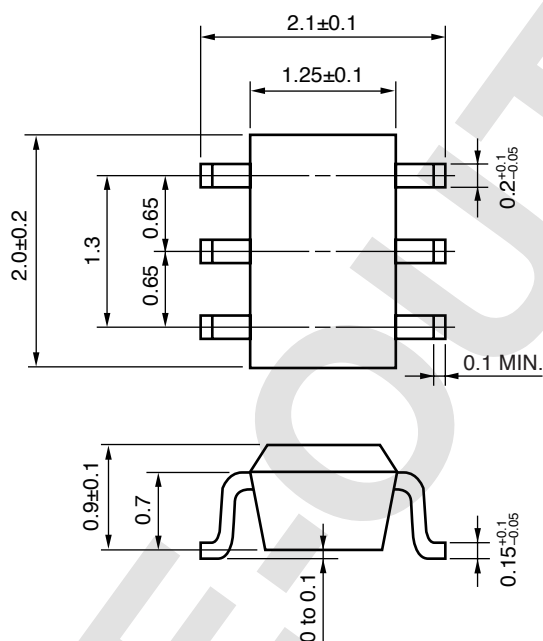

RECOMMENDED SOLDERING CONDITIONS

This product should be soldered and mounted under the following recommended conditions. For soldering methods and conditions other than those recommended below, contact your nearby sales office.

Soldering Method	Soldering Conditions	Condition Symbol
Infrared Reflow	Peak temperature (package surface temperature) : 260°C or below Time at peak temperature : 10 seconds or less Time at temperature of 220°C or higher : 60 seconds or less Preheating time at 120 to 180°C : 120±30 seconds Maximum number of reflow processes : 3 times Maximum chlorine content of rosin flux (% mass) : 0.2%(Wt.) or below	IR260
VPS	Peak temperature (package surface temperature) : 215°C or below Time at temperature of 200°C or higher : 25 to 40 seconds Preheating time at 120 to 150°C : 30 to 60 seconds Maximum number of reflow processes : 3 times Maximum chlorine content of rosin flux (% mass) : 0.2%(Wt.) or below	VP215
Wave Soldering	Peak temperature (molten solder temperature) : 260°C or below Time at peak temperature : 10 seconds or less Preheating temperature (package surface temperature) : 120°C or below Maximum number of flow processes : 1 time Maximum chlorine content of rosin flux (% mass) : 0.2%(Wt.) or below	WS260
Partial Heating	Peak temperature (pin temperature) : 350°C or below Soldering time (per side of device) : 3 seconds or less Maximum chlorine content of rosin flux (% mass) : 0.2%(Wt.) or below	HS350

Caution Do not use different soldering methods together (except for partial heating).

SAFETY INFORMATION ON THIS PRODUCT

Caution	GaAs Products	The product contains gallium arsenide, GaAs. GaAs vapor and powder are hazardous to human health if inhaled or ingested. • Do not destroy or burn the product. • Do not cut or cleave off any part of the product. • Do not crush or chemically dissolve the product. • Do not put the product in the mouth. Follow related laws and ordinances for disposal. The product should be excluded from general industrial waste or household garbage.
----------------	---------------	---

PHASE-OUT

NOTICE

1. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. California Eastern Laboratories and Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
2. California Eastern Laboratories has used reasonable care in preparing the information included in this document, but California Eastern Laboratories does not warrant that such information is error free. California Eastern Laboratories and Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
3. California Eastern Laboratories and Renesas Electronics do not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of California Eastern Laboratories or Renesas Electronics or others.
4. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part. California Eastern Laboratories and Renesas Electronics assume no responsibility for any losses incurred by you or third parties arising from such alteration, modification, copy or otherwise misappropriation of Renesas Electronics product.
5. Renesas Electronics products are classified according to the following two quality grades: "Standard" and "High Quality". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below. "Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots etc. "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; and safety equipment etc. Renesas Electronics products are neither intended nor authorized for use in products or systems that may pose a direct threat to human life or bodily injury (artificial life support devices or systems, surgical implantations etc.), or may cause serious property damages (nuclear reactor control systems, military equipment etc.). You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application for which it is not intended. California Eastern Laboratories and Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for which the product is not intended by California Eastern Laboratories or Renesas Electronics.
6. You should use the Renesas Electronics products described in this document within the range specified by California Eastern Laboratories, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. California Eastern Laboratories shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
7. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or systems manufactured by you.
8. Please contact a California Eastern Laboratories sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. California Eastern Laboratories and Renesas Electronics assume no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
9. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations. You should not use Renesas Electronics products or technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. When exporting the Renesas Electronics products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations.
10. It is the responsibility of the buyer or distributor of California Eastern Laboratories, who distributes, disposes of, or otherwise places the Renesas Electronics product with a third party, to notify such third party in advance of the contents and conditions set forth in this document, California Eastern Laboratories and Renesas Electronics assume no responsibility for any losses incurred by you or third parties as a result of unauthorized use of Renesas Electronics products.
11. This document may not be reproduced or duplicated in any form, in whole or in part, without prior written consent of California Eastern Laboratories.
12. Please contact a California Eastern Laboratories sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

NOTE 1: "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

NOTE 2: "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

NOTE 3: Products and product information are subject to change without notice.

CEL Headquarters • 4590 Patrick Henry Drive, Santa Clara, CA 95054 • Phone (408) 919-2500 • www.cel.com

For a complete list of sales offices, representatives and distributors,
Please visit our website: www.cel.com/contactus