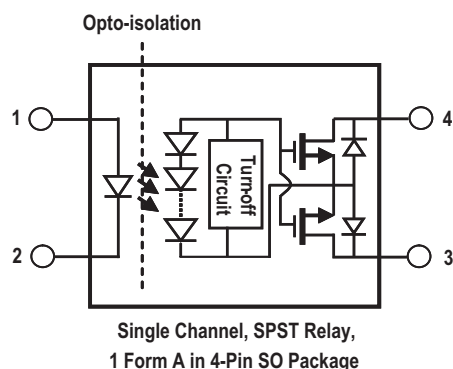


Functional Diagram



Truth Table

LED	Output
Off	Open
On	Close

Ordering Information

ASSR-32xx is UL Recognized with 3750 Vrms for 1 minute per UL1577 and is approved under CSA Component Acceptance Notice #5.

Part Number	Option	Package	Surface Mount	Gull Wing	Tape & Reel	Quantity
	RoHS Compliant					
ASSR-3210	-003E	SO-4	X			100 units per tube
	-503E		X		X	1500 units per reel
ASSR-3211	-001E	300-mil DIP-6				50 units per tube
	-301E		X	X		50 units per tube
	-501E		X	X	X	1000 units per reel
ASSR-3220	-002E	300-mil DIP-8				50 units per tube
	-302E		X	X		50 units per tube
	-502E		X	X	X	1000 units per reel

To order, choose a part number from the part number column and combine with the desired option from the option column to form an order entry.

Example 1:

ASSR-3211-501E to order product of 300-mil DIP-6 Gull Wing Surface Mount package in Tape and Reel packaging and RoHS Compliant.


Example 2:

ASSR-3220-002E to order product of 300-mil DIP-8 package in tube packaging and RoHS Compliant.


Option data sheets are available. Contact your Broadcom sales representative or authorized distributor for information.

Schematic

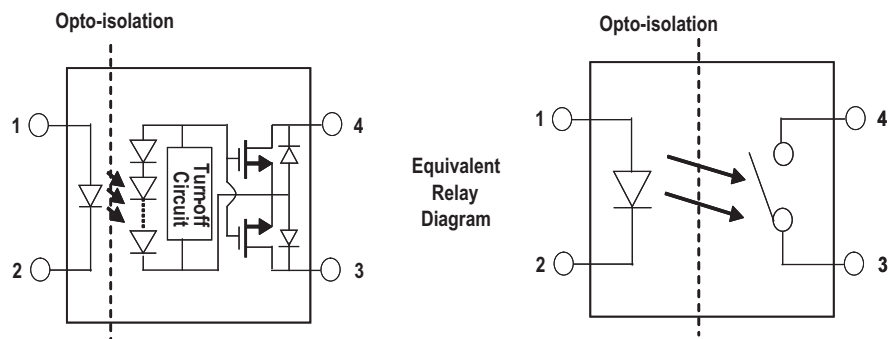
ASSR-3210




ASSR-3211 Connection A

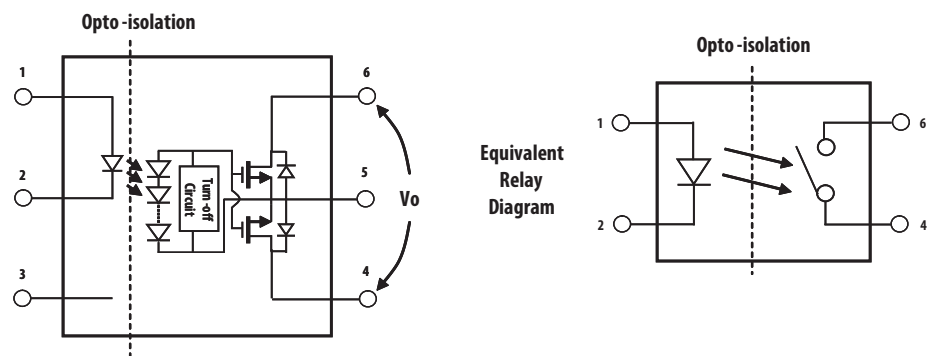

ASSR-3211 Connection B

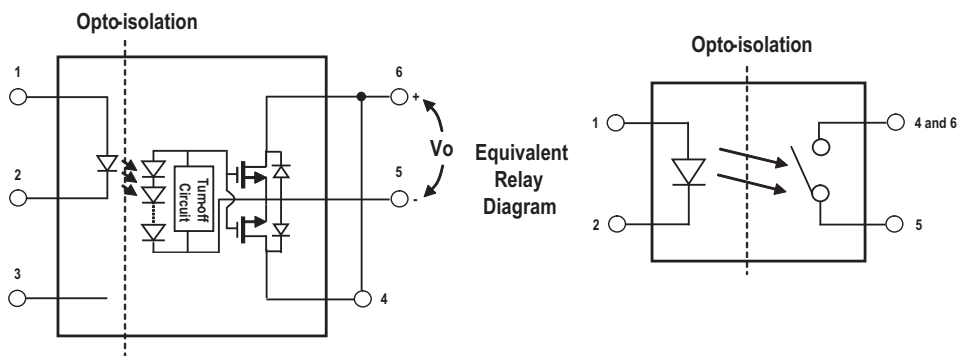


ASSR-3220

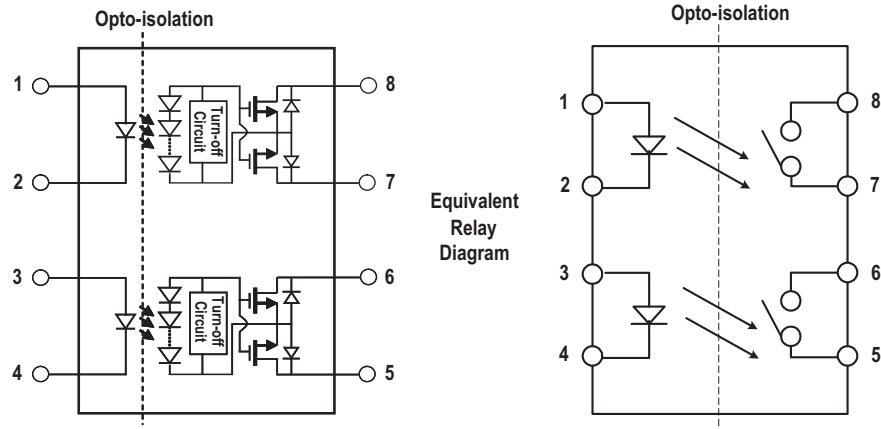


Package Outline Drawings

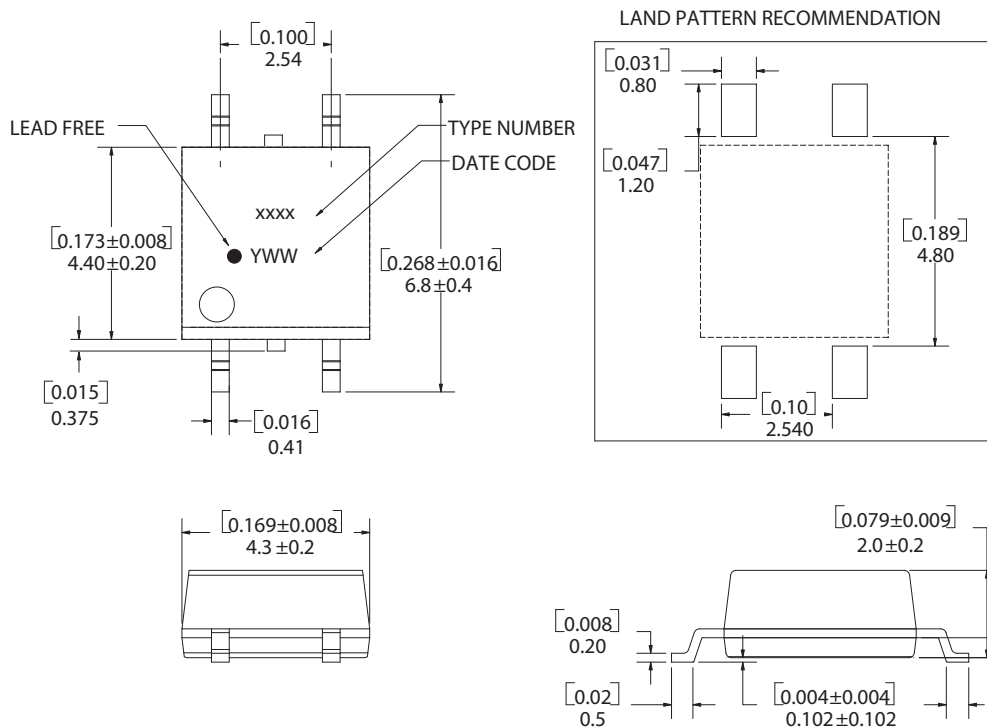ASSR-3210 4-Pin Small Outline Package




DIMENSIONS IN MILLIMETERS AND [INCHES]
OPTION NUMBER 500 AND UL RECOGNITION NOT MARKED

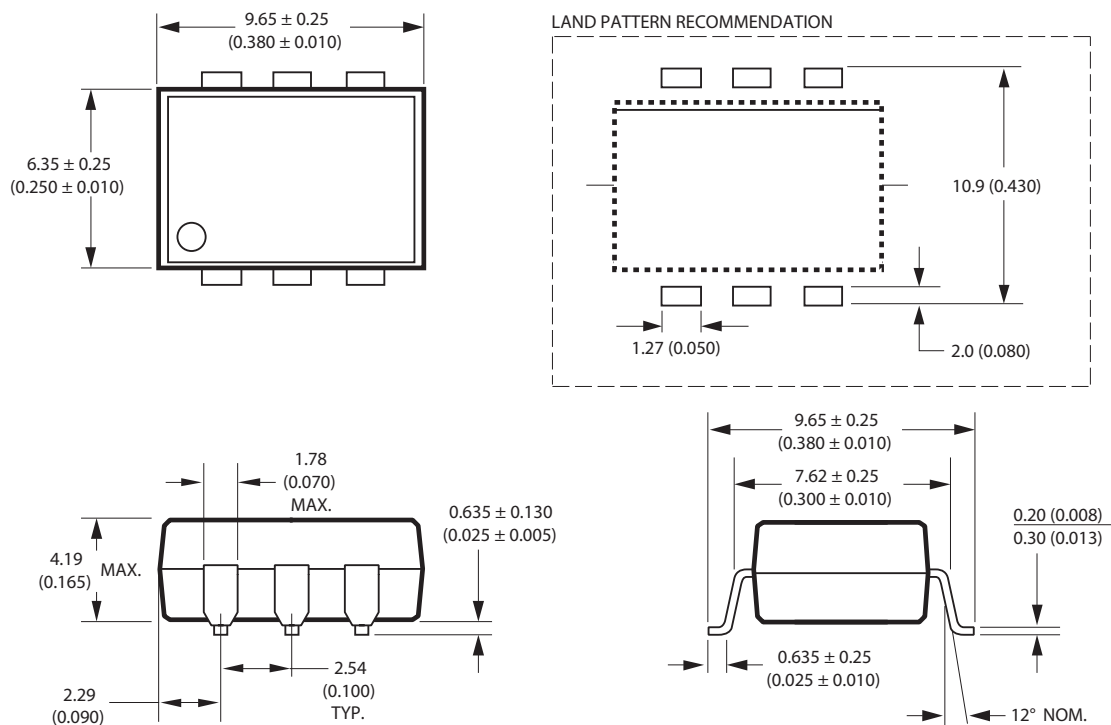ASSR-3211 6-Pin DIP Package





NOTE: FLOATING LEAD PROTRUSION IS 0.25 mm (10 mils) MAX.

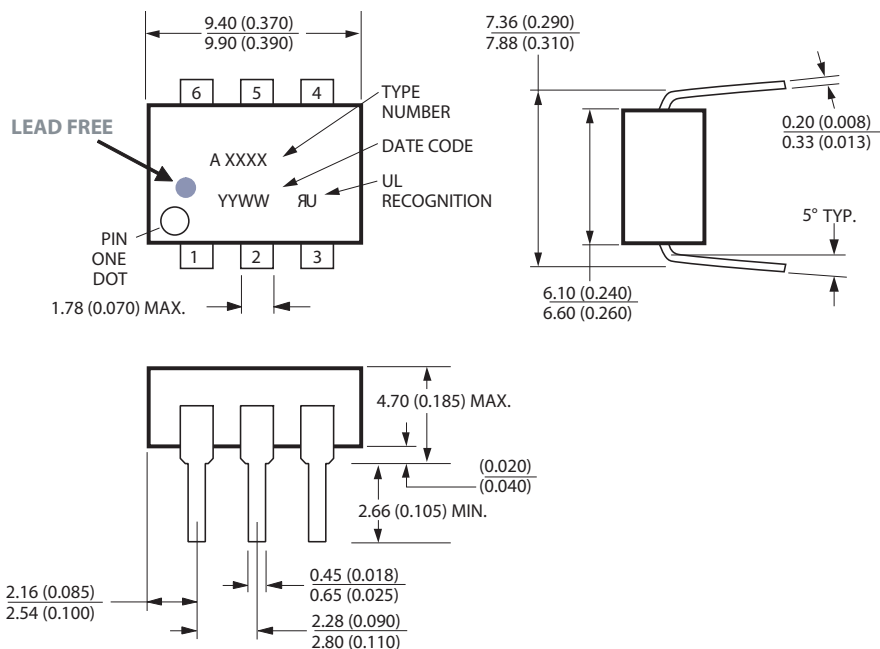ASSR-3211 6-Pin DIP Package with Gull Wing Surface Mount Option 300




DIMENSIONS IN MILLIMETERS AND (INCHES).

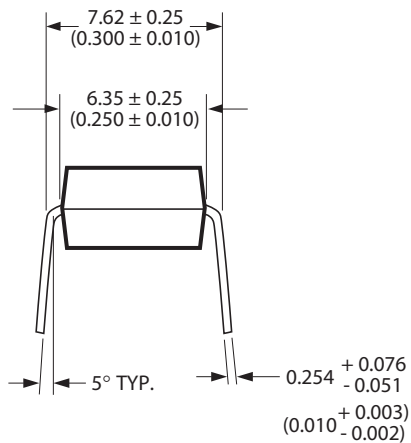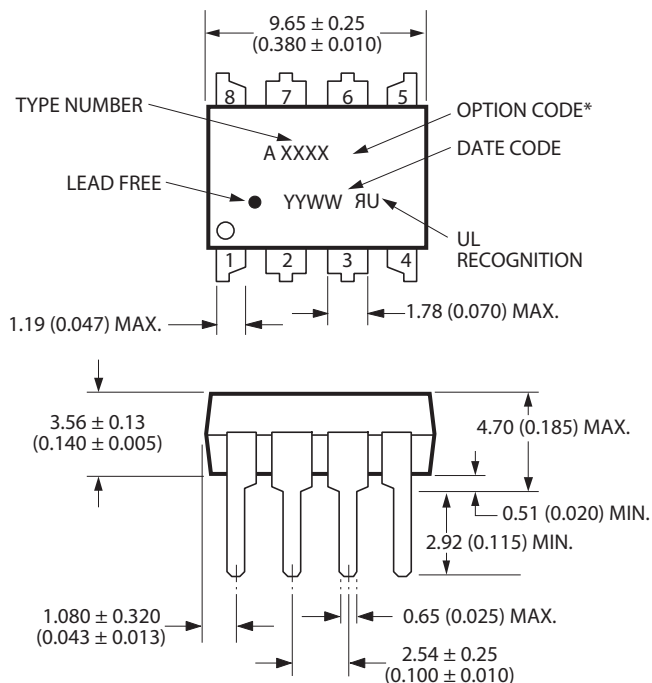ASSR-3220 8-Pin DIP Package



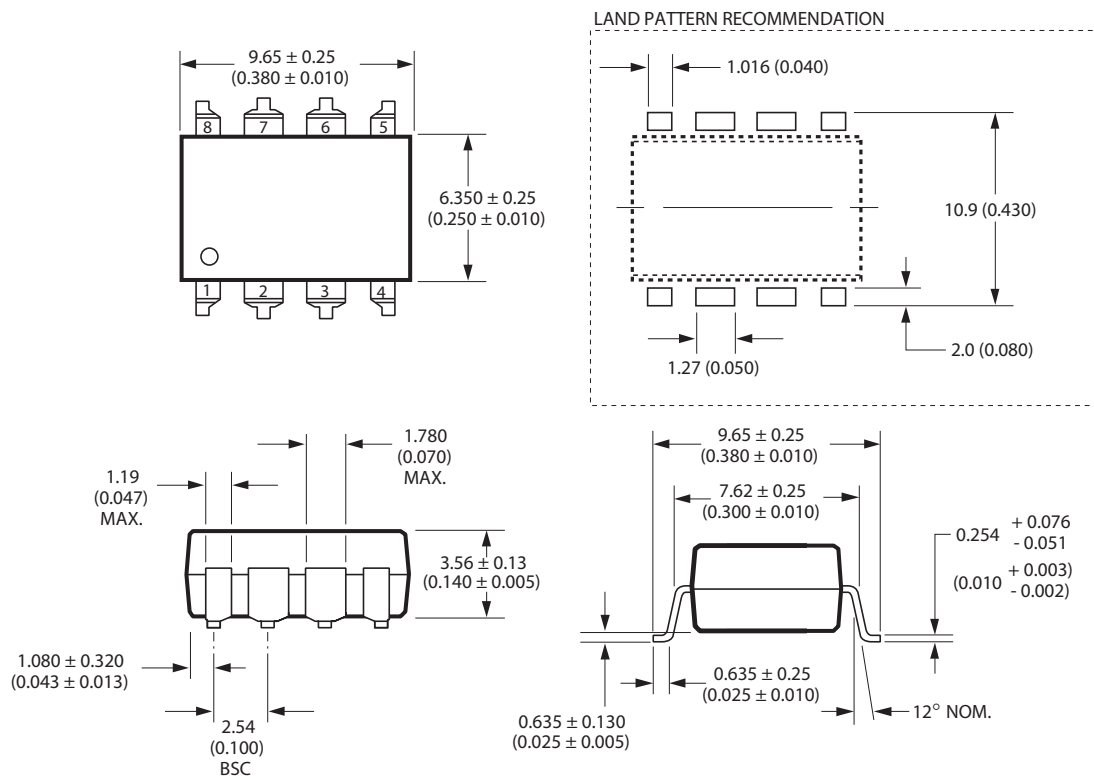DIMENSIONS IN MILLIMETERS AND (INCHES).
OPTION NUMBERS 300 AND 500 NOT MARKED.

ASSR-3220 8-Pin DIP Package with Gull Wing Surface Mount Option 300

DIMENSIONS IN MILLIMETERS (INCHES).

LEAD COPLANARITY = 0.10 mm (0.004 INCHES).

NOTE: FLOATING LEAD PROTRUSION IS 0.25 mm (10 mils) MAX.

Absolute Maximum Ratings

Parameter		Symbol	Min.	Max.	Unit	Note
Storage Temperature		T_S	-55	125	°C	
Operating Temperature		T_A	-40	85	°C	
Junction Temperature		T_J	—	125	°C	
Lead Soldering Cycle	Temperature		—	260	°C	
	Time		—	10	s	
Input Current	Average	I_F	—	25	mA	
	Surge		—	50		
	Transient		—	1000		
Reversed Input Voltage		V_R	—	5	V	
Input Power Dissipation	ASSR-3220	P_{IN}	—	80	mW	
	ASSR-3211, ASSR-3210	P_{IN}	—	40	mW	
Output Power Dissipation	ASSR-3220	P_O	—	800	mW	
	ASSR-3211, ASSR-3210	P_O	—	400	mW	
Average Output Current ($T_A = 25^\circ\text{C}$, $T_C \leq 100^\circ\text{C}$)		I_O	—	0.2	A	a
	ASSR-3211 Connection B	I_O	—	0.4	A	
Output Voltage ($T_A = 25^\circ\text{C}$)		V_O	-250	250	V	b
	ASSR-3211 Connection B	V_O	0	250	V	b
Solder Reflow Temperature Profile		See Lead Free IR Profile .				

a. For derating, refer to [Figure 1](#) and [Figure 2](#).

b. The voltage across the output terminals of the relay should not exceed this rated withstand voltage. Overvoltage protection circuits should be added in some applications to protect against overvoltage transients.

Recommended Operating Conditions

Parameter	Symbol	Min.	Max.	Unit	Note
Input Current (ON)	$I_{F(ON)}$	3	20	mA	a
Input Voltage (OFF)	$V_{F(OFF)}$	0	0.8	V	
Operating Temperature	T_A	-40	+85	°C	

a. Threshold to switch device is $I_F \geq 0.5$ mA; however, for qualified device performance over temperature range, it is recommended to operate at $I_F = 5$ mA. See [Applications Information](#).

Package Characteristics

Unless otherwise specified, $T_A = 25^\circ\text{C}$.

Parameter	Sym.	Min.	Typ.	Max.	Unit	Conditions	Note
Input-Output Momentary Withstand Voltage	V_{ISO}	3750	—	—	V _{rms}	$RH \leq 50\%$, $t = 1 \text{ min.}$	a, b
Input-Output Resistance	$R_{\text{I-O}}$	—	10^{12}	—	Ω	$V_{\text{I-O}} = 500 \text{ Vdc}$	
Input-Output Capacitance							a
ASSR-3210	$C_{\text{I-O}}$	—	0.4	—	pF	$f = 1 \text{ MHz}$; $V_{\text{I-O}} = 0 \text{ Vdc}$	
ASSR-3211	$C_{\text{I-O}}$	—	0.5	—	pF	$f = 1 \text{ MHz}$; $V_{\text{I-O}} = 0 \text{ Vdc}$	
ASSR-3220	$C_{\text{I-O}}$	—	0.8	—	pF	$f = 1 \text{ MHz}$; $V_{\text{I-O}} = 0 \text{ Vdc}$	

a. Device is considered a two-terminal device:

ASSR-3210 — pin 1, 2 shorted and pin 3, 4 shorted.

ASSR-3211 — pin 1, 2, 3 shorted and pin 4, 5, 6 shorted.

ASSR-3220 — pin 1, 2, 3, 4 shorted and pin 5, 6, 7, 8 shorted.

b. The Input-Output Momentary Withstand Voltage is a dielectric voltage rating that should not be interpreted as an input-output continuous voltage rating. For the continuous voltage rating, refer to the IEC/EN/DIN EN 60747-5-2 Insulation Characteristics Table (if applicable), your equipment level safety specification, or Broadcom Application Note 1074, *Optocoupler Input-Output Endurance Voltage*.

Electrical Specifications (DC)

Over recommended operating $T_A = -40^\circ\text{C}$ to 85°C , $I_F = 5 \text{ mA}$ to 10 mA , unless otherwise specified.

Parameter	Sym.	Min.	Typ.	Max.	Unit	Conditions	Figure	Note
Output Withstand Voltage	$ V_{\text{O(OFF)}} $	250	280	—	V	$V_F = 0.8\text{V}$, $I_O = 250 \mu\text{A}$, $T_A = 25^\circ\text{C}$		
		230	—	—	V	$V_F = 0.8\text{V}$, $I_O = 250 \mu\text{A}$	3	
Output Leakage Current	$I_{\text{O(OFF)}}$	—	0.3	100	nA	$V_F = 0.8\text{V}$, $V_O = 250\text{V}$, $T_A = 25^\circ\text{C}$		
		—	—	1	μA	$V_F = 0.8\text{V}$, $V_O = 250\text{V}$	4	
Output Offset Voltage	$ V_{\text{(OS)}} $	—	1	—	μV	$I_F = 5 \text{ mA}$, $I_O = 0 \text{ mA}$		
Input Reverse Breakdown Voltage	V_R	5	—	—	V	$I_R = 10 \mu\text{A}$		
Input Forward Voltage	V_F	1.1	1.3	1.65	V	$I_F = 5 \text{ mA}$	5, 6	
Output On-Resistance	$R_{\text{(ON)}}$	—	8	10	Ω	$I_F = 5 \text{ mA}$, $I_O = 200 \text{ mA}$, Pulse $\leq 30 \text{ ms}$, $T_A = 25^\circ\text{C}$	7, 8	a
ASSR-3211 Connection B	$R_{\text{(ON)}}$	—	2.0	2.5	Ω	$I_F = 5 \text{ mA}$, $I_O = 400 \text{ mA}$, Pulse $\leq 30 \text{ ms}$, $T_A = 25^\circ\text{C}$		a

a. During the pulsed $R_{\text{(ON)}}$ measurement (I_O duration $\leq 30 \text{ ms}$), ambient (T_A) and case temperature (T_C) are equal.

Switching Specifications (AC)

Over recommended operating $T_A = -40^{\circ}\text{C}$ to 85°C , $I_F = 5\text{ mA}$ to 10 mA , unless otherwise specified.

Parameter	Sym.	Min.	Typ.	Max.	Unit	Conditions	Figure	Note
Turn On Time	T_{ON}	—	0.25	1.0	ms	$I_F = 5\text{ mA}$, $I_O = 200\text{ mA}$, $T_A = 25^{\circ}\text{C}$	9, 13	
		—	—	2.0	ms	$I_F = 5\text{ mA}$, $I_O = 200\text{ mA}$	10	
Turn Off Time	T_{OFF}	—	0.02	0.2	ms	$I_F = 5\text{ mA}$, $I_O = 200\text{ mA}$, $T_A = 25^{\circ}\text{C}$	11, 13	
		—	—	0.5	ms	$I_F = 5\text{ mA}$, $I_O = 200\text{ mA}$	12	
Output Transient Rejection	dV_O/dt	1	7	—	kV/ μs	$\Delta V_O = 250\text{V}$, $T_A = 25^{\circ}\text{C}$	14	
Input-Output Transient Rejection	dV_{I-O}/dt	1	≥ 10	—	kV/ μs	$\Delta V_{I-O} = 1000\text{V}$, $T_A = 25^{\circ}\text{C}$	15	

Applications Information

On-Resistance and Derating Curves

The Output On-Resistance, $R_{(ON)}$, specified in this data sheet, is the resistance measured across the output contact when a pulsed current signal ($I_O = 0.2\text{A}$) is applied to the output pins. The use of a pulsed signal ($\leq 30\text{ ms}$) implies that each junction temperature is equal to the ambient and case temperatures. The steady-state resistance, R_{ss} , on the other hand, is the value of the resistance measured across the output contact when a DC current signal is applied to the output pins for a duration sufficient to reach thermal equilibrium. R_{ss} includes the effects of the temperature rise in the device.

Derating curves are shown in [Figure 1](#) and [Figure 2](#), specifying the maximum output current allowable for a given ambient temperature. The maximum allowable output current and power dissipation are related by the expression $R_{ss} = P_o(\text{max}) / (I_o(\text{max}))^2$ from which R_{ss} can be calculated. Staying within the safe area ensures that the steady-state MOSFET junction temperature remains less than 125°C .

Turn On Time and Turn Off Time Variation

The ASSR-32xx Series exhibits a very fast turn on and turn off time. Both the turn on and turn off time can be adjusted by choosing proper forward current as depicted in [Figure 9](#) and [Figure 11](#). The changes of the turn on and turn off time with ambient temperature are also shown in [Figure 10](#) and [Figure 12](#).

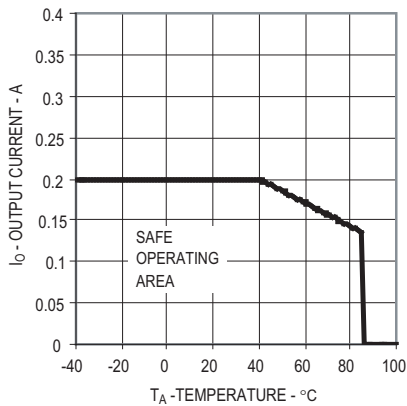
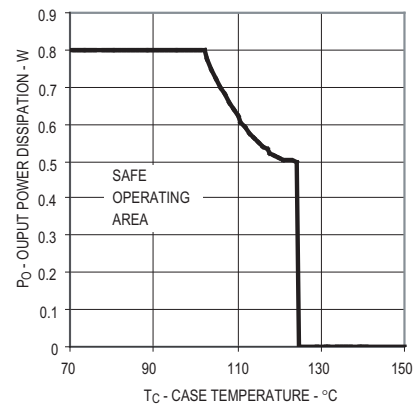
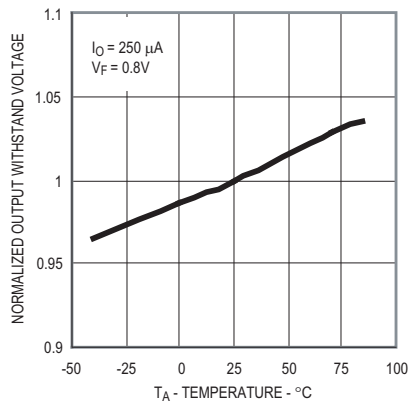
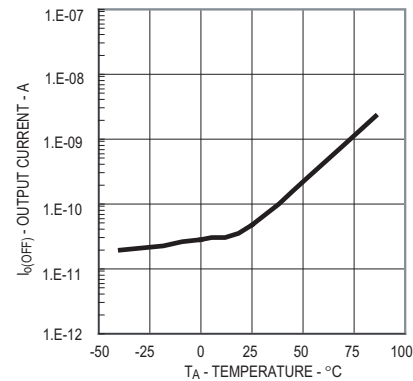
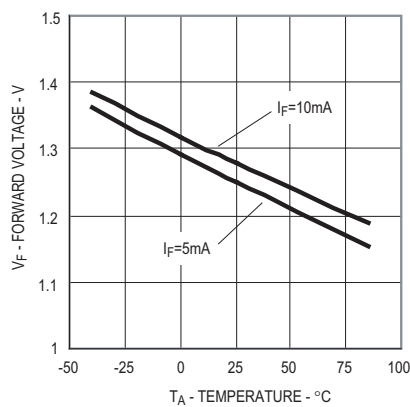
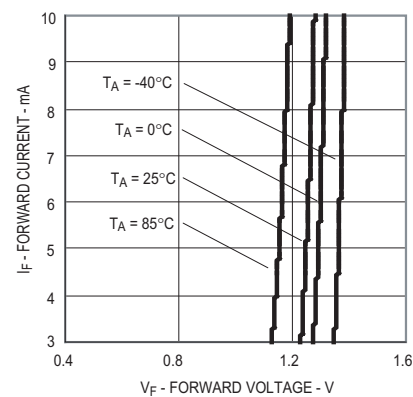
Figure 1: Maximum Average Output Current Rating vs. Ambient Temperature**Figure 2: Output Power Derating vs. Case Temperature****Figure 3: Normalized Typical Output Withstand Voltage vs. Temperature****Figure 4: Typical Output Leakage Current vs. Temperature****Figure 5: Typical Forward Voltage vs. Temperature****Figure 6: Typical Forward Current vs. Forward Voltage**

Figure 7: Typical On Resistance vs. Temperature

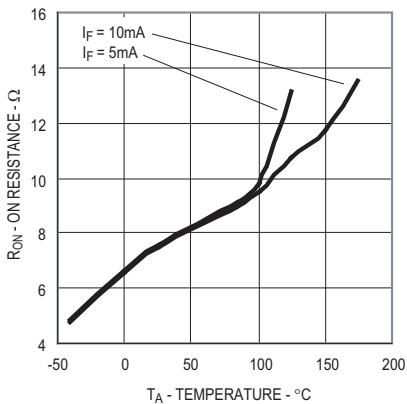


Figure 8: Typical Output Current vs. Output Voltage

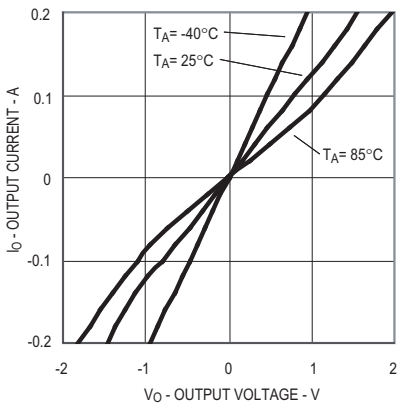


Figure 9: Typical Turn On Time vs. Input Current

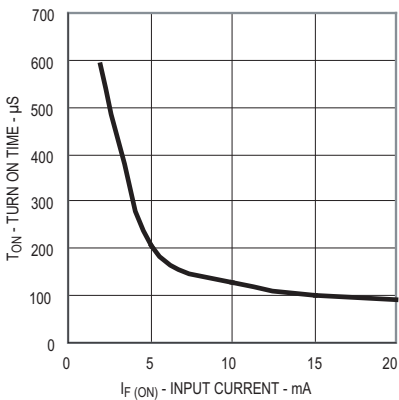


Figure 10: Typical Turn On Time vs. Temperature

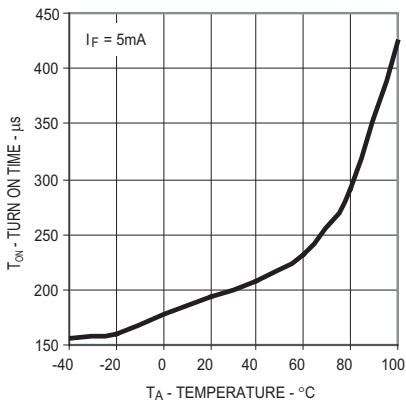


Figure 11: Typical Turn Off Time vs. Input Current

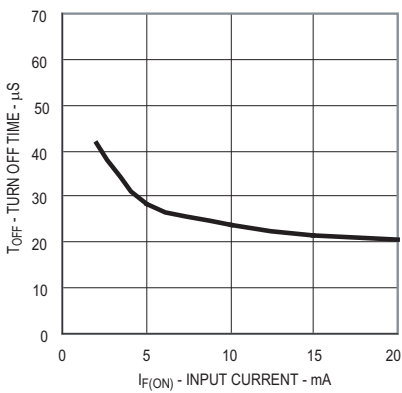


Figure 12: Typical Turn Off Time vs. Temperature

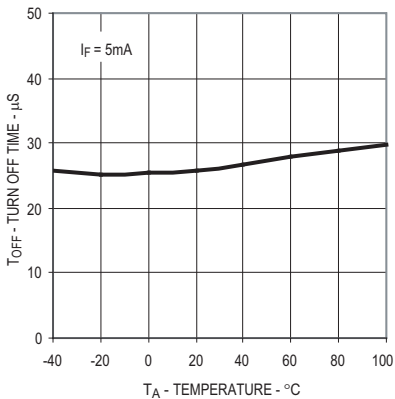



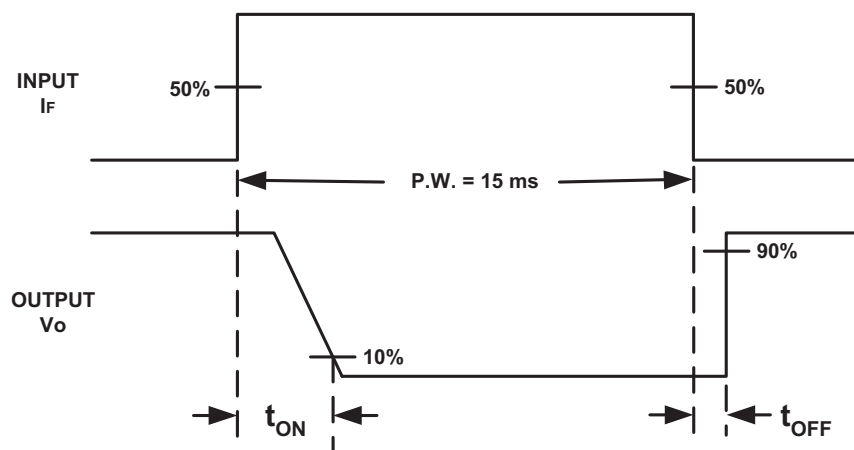
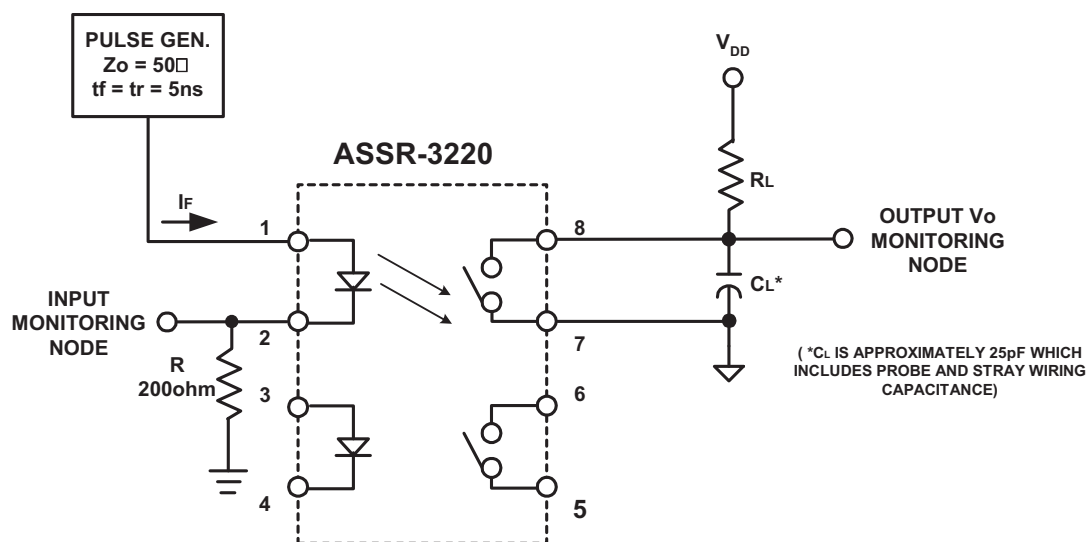
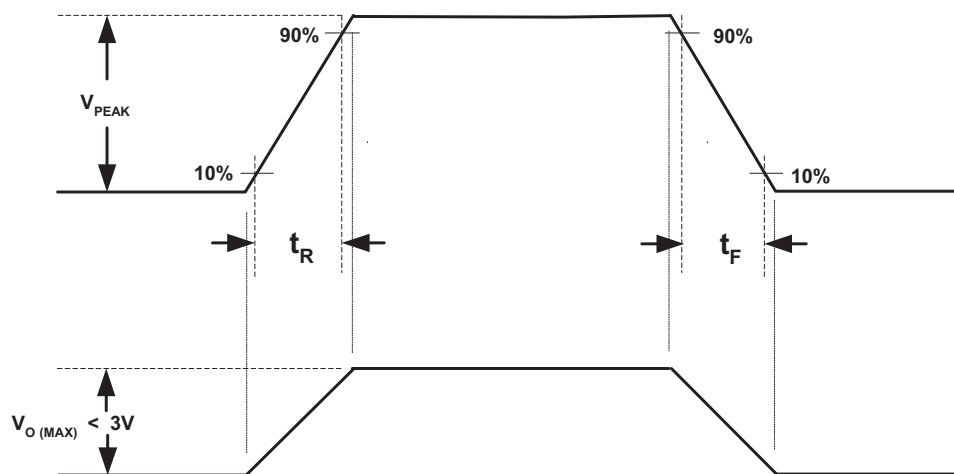
Figure 13: Switching Test Circuit for t_{ON} , t_{OFF} 

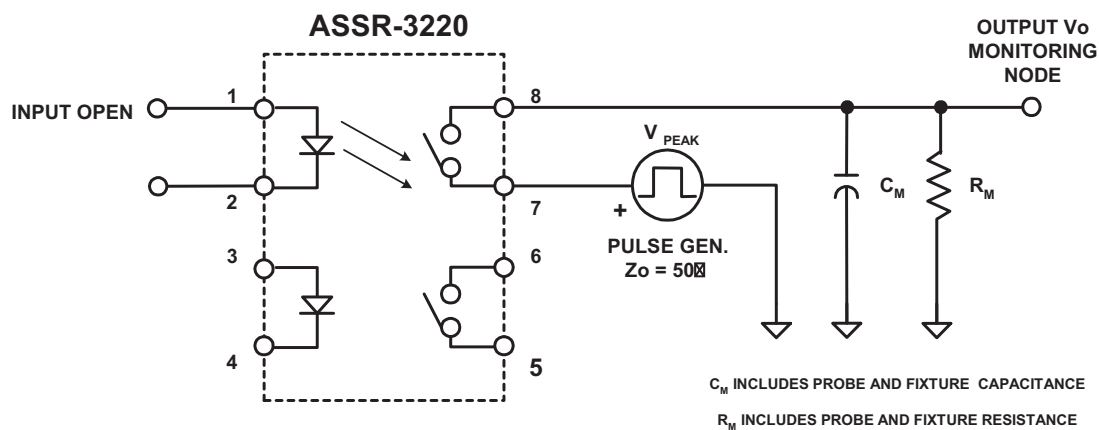
Figure 14: Output Transient Rejection Test Circuit



$$\frac{dV_o}{dt} = \frac{(0.8)V_{PEAK}}{t_R} \text{ OR } \frac{(0.8)V_{PEAK}}{t_F}$$

OVER SHOOT ON V_{PEAK} IS TO BE 10%

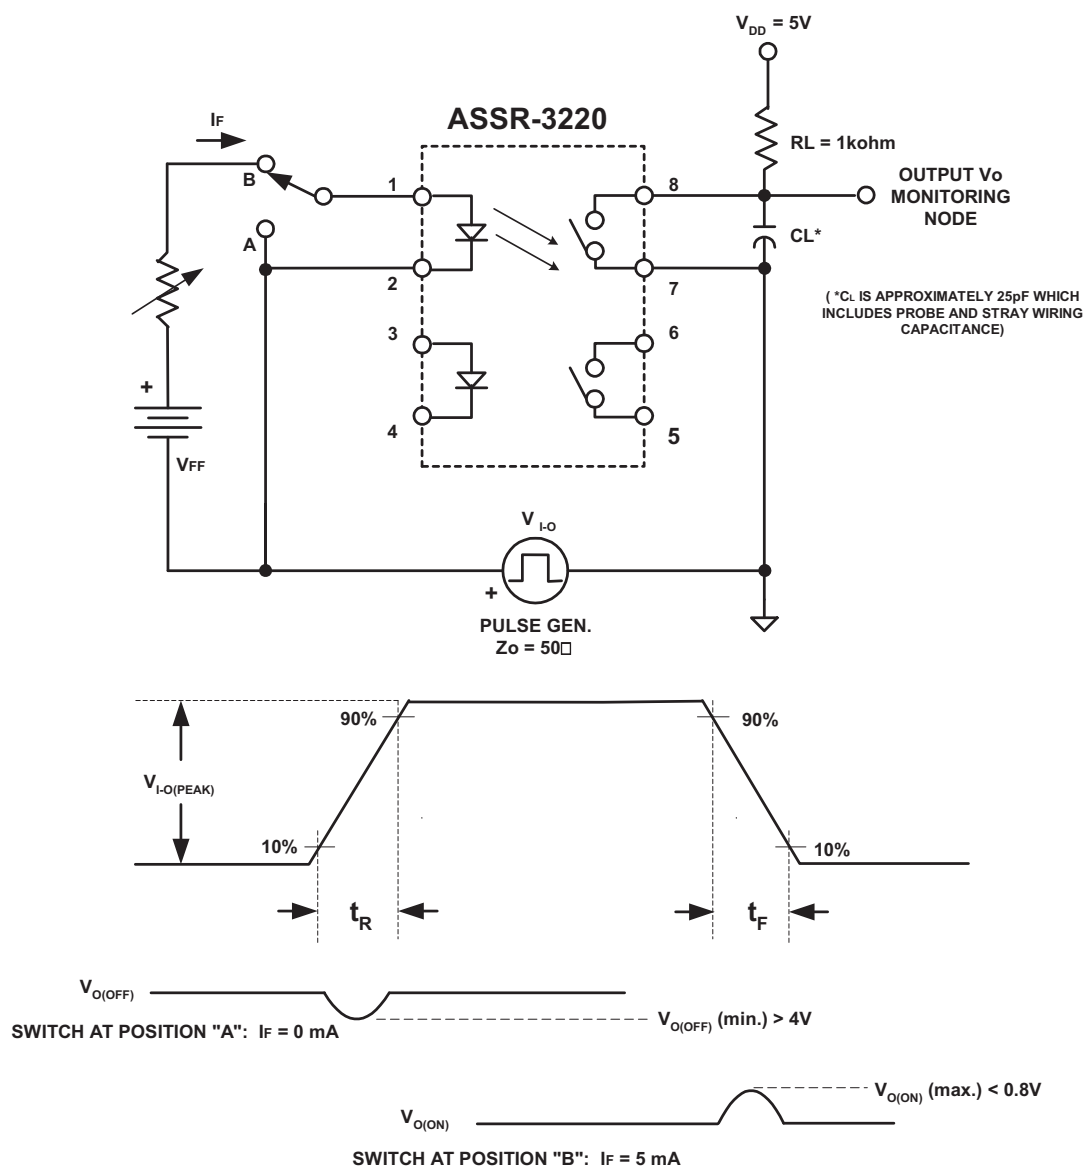Figure 15: Input-Output Transient Rejection Test Circuit



Broadcom, the pulse logo, Connecting everything, Avago Technologies, Avago, and the A logo are among the trademarks of Broadcom and/or its affiliates in the United States, certain other countries and/or the EU.

Copyright © 2012–2017 by Broadcom. All Rights Reserved.

The term “Broadcom” refers to Broadcom Limited and/or its subsidiaries. For more information, please visit www.broadcom.com.

Broadcom reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design. Information furnished by Broadcom is believed to be accurate and reliable. However, Broadcom does not assume any liability arising out of the application or use of this information, nor the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.

