


Table 1: Addressing

Parameter	128 Meg x 16	64 Meg x 32
Configuration	8 Meg x 16 x 16 banks	4 Meg x 32 x 16 banks
Refresh count	16K/32ms	16K/32ms
Refresh period	1.9µs	1.9µs
Row addressing	A[12:0]	A[12:0]
Bank addressing	BA[3:0]	BA[3:0]
Column addressing	A[6:0]	A[5:0]
Auto precharge	A8	A8
Page size	2KB	2KB

Figure 1: Part Numbering

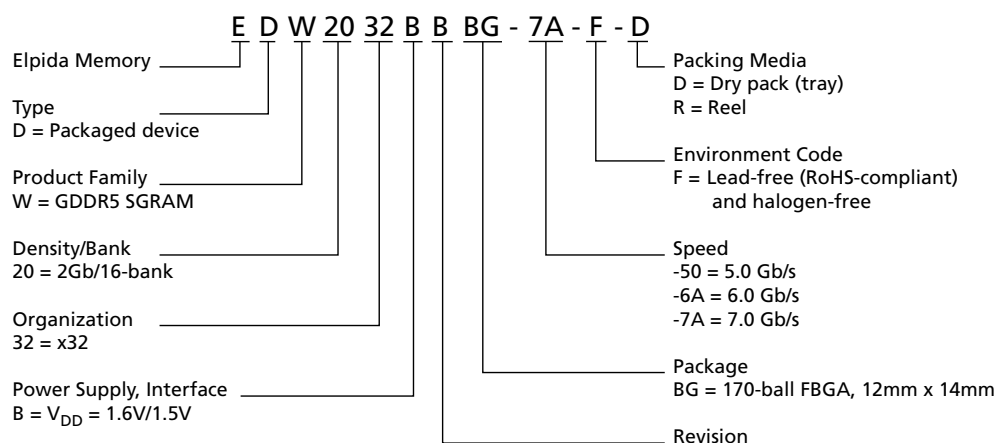

FBGA Part Marking Decoder

Due to space limitations, FBGA-packaged components have an abbreviated part marking that is different from the part number. For a quick conversion of an FBGA code, see the FBGA Part Marking Decoder on Micron's web site: <http://www.micron.com>.

Ball Assignments and Descriptions

Figure 2: 170-Ball FBGA – MF = 0 (Top View)

	1	2	3	4	5	6	7	8	9	10	11	12	13	14
A	V _{SSQ}	DQ1	V _{SSQ}	DQ0	NC					V _{REFD}	DQ8	V _{SSQ}	DQ9	V _{SSQ}
B	V _{DDQ}	DQ3	V _{DDQ}	DQ2	V _{SS}					V _{SS}	DQ10	V _{DDQ}	DQ11	V _{DDQ}
C	V _{SSQ}	EDC0	V _{SSQ}	V _{SSQ}	V _{DD}					V _{DD}	V _{SSQ}	V _{SSQ}	EDC1	V _{SSQ}
D	V _{DDQ}	DBI0_n	V _{DDQ}	WCK01_t	WCK01_c					V _{SS}	V _{DD}	V _{DDQ}	DBI1_n	V _{DDQ}
E	V _{SSQ}	DQ5	V _{SSQ}	DQ4	V _{DDQ}					V _{DDQ}	DQ12	V _{SSQ}	DQ13	V _{SSQ}
F	V _{DDQ}	DQ7	V _{DDQ}	DQ6	V _{SSQ}					V _{SSQ}	DQ14	V _{DDQ}	DQ15	V _{DDQ}
G	V _{DD}	V _{DDQ}	RAS_n	V _{DD}	V _{SS}					V _{SS}	V _{DD}	CS_n	V _{DDQ}	V _{DD}
H	V _{SS}	V _{SSQ}	V _{DDQ}	A10, A0	A9, A1					BA3, A3	BA0, A2	V _{DDQ}	V _{SSQ}	V _{SS}
J	MF	RESET_n	CKE_n	AB1_n	A12, RFU					SEN	CK_c	CK_t	ZQ	V _{REFC}
K	V _{SS}	V _{SSQ}	V _{DDQ}	A8, A7	A11, A6					BA1, A5	BA2, A4	V _{DDQ}	V _{SSQ}	V _{SS}
L	V _{DD}	V _{DDQ}	CAS_n	V _{DD}	V _{SS}					V _{SS}	V _{DD}	WE_n	V _{DDQ}	V _{DD}
M	V _{DDQ}	DQ31	V _{DDQ}	DQ30	V _{SSQ}					V _{SSQ}	DQ22	V _{DDQ}	DQ23	V _{DDQ}
N	V _{SSQ}	DQ29	V _{SSQ}	DQ28	V _{DDQ}					V _{DDQ}	DQ20	V _{SSQ}	DQ21	V _{SSQ}
P	V _{DDQ}	DBI3_n	V _{DDQ}	WCK23_t	WCK23_c					V _{SS}	V _{DD}	V _{DDQ}	DBI2_n	V _{DDQ}
R	V _{SSQ}	EDC3	V _{SSQ}	V _{SSQ}	V _{DD}					V _{DD}	V _{SSQ}	V _{SSQ}	EDC2	V _{SSQ}
T	V _{DDQ}	DQ27	V _{DDQ}	DQ26	V _{SS}					V _{SS}	DQ18	V _{DDQ}	DQ19	V _{DDQ}
U	V _{SSQ}	DQ25	V _{SSQ}	DQ24	NC					V _{REFD}	DQ16	V _{SSQ}	DQ17	V _{SSQ}

(Top view)

Data
 Addresses
 GDDR5
 Supply
 Ground

Note: 1. Balls shown with a heavy, solid outline are off in x16 mode.

Figure 3: 170-Ball FBGA – MF = 1 (Top View)

	1	2	3	4	5	6	7	8	9	10	11	12	13	14
A	V _{SSQ}	DQ25	V _{SSQ}	DQ24	NC					V _{REFD}	DQ16	V _{SSQ}	DQ17	V _{SSQ}
B	V _{DDQ}	DQ27	V _{DDQ}	DQ26	V _{SS}					V _{SS}	DQ18	V _{DDQ}	DQ19	V _{DDQ}
C	V _{SSQ}	EDC3	V _{SSQ}	V _{SSQ}	V _{DD}					V _{DD}	V _{SSQ}	V _{SSQ}	EDC2	V _{SSQ}
D	V _{DDQ}	DBI3_n	V _{DDQ}	WCK23_t	WCK23_c					V _{SS}	V _{DD}	V _{DDQ}	DBI2_n	V _{DDQ}
E	V _{SSQ}	DQ29	V _{SSQ}	DQ28	V _{DDQ}					V _{DDQ}	DQ20	V _{SSQ}	DQ21	V _{SSQ}
F	V _{DDQ}	DQ31	V _{DDQ}	DQ30	V _{SSQ}					V _{SSQ}	DQ22	V _{DDQ}	DQ23	V _{DDQ}
G	V _{DD}	V _{DDQ}	CAS_n	V _{DD}	V _{SS}					V _{SS}	V _{DD}	WE_n	V _{DDQ}	V _{DD}
H	V _{SS}	V _{SSQ}	V _{DDQ}	A8, A7	A11, A6					BA1, A5	BA2, A4	V _{DDQ}	V _{SSQ}	V _{SS}
J	MF	RESET_n	CKE_n	ABI_n	A12, RFU					SEN	CK_c	CK_t	ZQ	V _{REFC}
K	V _{SS}	V _{SSQ}	V _{DDQ}	A10, A0	A9, A1					BA3, A3	BA0, A2	V _{DDQ}	V _{SSQ}	V _{SS}
L	V _{DD}	V _{DDQ}	RAS_n	V _{DD}	V _{SS}					V _{SS}	V _{DD}	CS_n	V _{DDQ}	V _{DD}
M	V _{DDQ}	DQ7	V _{DDQ}	DQ6	V _{SSQ}					V _{SSQ}	DQ14	V _{DDQ}	DQ15	V _{DDQ}
N	V _{SSQ}	DQ5	V _{SSQ}	DQ4	V _{DDQ}					V _{DDQ}	DQ12	V _{SSQ}	DQ13	V _{SSQ}
P	V _{DDQ}	DBI0_n	V _{DDQ}	WCK01_t	WCK01_c					V _{SS}	V _{DD}	V _{DDQ}	DBI1_n	V _{DDQ}
R	V _{SSQ}	EDC0	V _{SSQ}	V _{SSQ}	V _{DD}					V _{DD}	V _{SSQ}	V _{SSQ}	EDC1	V _{SSQ}
T	V _{DDQ}	DQ3	V _{DDQ}	DQ2	V _{SS}					V _{SS}	DQ10	V _{DDQ}	DQ11	V _{DDQ}
U	V _{SSQ}	DQ1	V _{SSQ}	DQ0	NC					V _{REFD}	DQ8	V _{SSQ}	DQ9	V _{SSQ}

(Top view)

Data
 Addresses
 GDDR5
 Supply
 Ground

Note: 1. Balls shown with a heavy, solid outline are off in x16 mode.

Table 2: 170-Ball FBGA Ball Descriptions


Symbol	Type	Description
A[12:0]	Input	Address inputs: Provide the row address for ACTIVE commands. A[5:0] (A6) provide the column address and A8 defines the auto precharge bit for READ/WRITE commands, to select one location out of the memory array in the respective bank. A8 sampled during a PRECHARGE command determines whether the PRECHARGE applies to one bank (A8 LOW, bank selected by BA[3:0]) or all banks (A8 HIGH). The address inputs also provide the op-code during a MODE REGISTER SET command and the data bits during LDFF commands. A[12:8] are sampled with the rising edge of CK_t and A[7:0] are sampled with the rising edge of CK_c.
ABI_n	Input	Address bus inversion: Reduces the power requirements on address pins by limiting the number of address lines driving LOW to 5. ABI_n is enabled by the corresponding ABI mode register bit.
BA[3:0]	Input	Bank address inputs: Define the bank to which an ACTIVE, READ, WRITE, or PRECHARGE command is being applied. BA[3:0] define which mode register is loaded during the MODE REGISTER SET command. BA[3:0] are sampled with the rising edge of CK_t.
CK_t, CK_c	Input	Clock: CK_t and CK_c are differential clock inputs. Command inputs are latched on the rising edge of CK_t. Address inputs are latched on the rising edge of CK_t and the rising edge of CK_c. All latencies are referenced to CK_t. CK_t and CK_c are externally terminated.
WCK01_t, WCK01_c/ WCK23_t, WCK23_c	Input	Data Clocks: WCK_t and WCK_c are differential clocks used for write data capture and read data output. WCK01_t and WCK01_c are associated with DQ[15:0], DBI0_n, DBI1_n, EDC0, and EDC1. WCK23_t and WCK23_c are associated with DQ[31:16], DBI2_n, DBI3_n, EDC2, and EDC3. WCK clocks operate at nominally twice the CK clock frequency.
CKE_n	Input	Clock enable: CKE_n enables (registered LOW) and disables (registered HIGH) internal circuitry and clocks on the SGRAM. The specific circuitry that is enabled/disabled is dependent upon the device configuration and operating mode. Taking CKE_n HIGH provides PRECHARGE POWER-DOWN and SELF REFRESH operations (all banks idle), or active power-down (row active in any bank). CKE_n is synchronous for power-down entry and exit and for self refresh entry. CKE_n must be maintained LOW throughout read and write accesses. Input buffers (excluding CKE_n) are disabled during SELF REFRESH operation. The value of CKE_n latched at power-up with RESET_n going HIGH determines the termination value of the address and command inputs.
CS_n	Input	Chip select: CS_n enables (registered LOW) and disables (registered HIGH) the command decoder. All commands are masked when CS_n is registered HIGH, but internal command execution continues. CS_n is considered part of the command code.
MF	Input	Mirror function: V _{DDQ} CMOS input. Must be tied to V _{DDQ} or V _{SS} .
RAS_n, CAS_n, WE_n	Input	Command inputs: RAS_n, CAS_n, and WE_n (along with CS_n) define the command being entered.
RESET_n	Input	Reset: RESET_n is an active LOW CMOS input referenced to V _{SS} . A full chip reset may be performed at any time by pulling RESET_n LOW. With RESET_n LOW all ODTs are disabled.
SEN	Input	Scan enable: V _{DDQ} CMOS input. Must be tied to V _{SS} when not in use.

Table 2: 170-Ball FBGA Ball Descriptions (Continued)

Symbol	Type	Description
DQ[31:0]	I/O	Data input/output: Bidirectional 32-bit data bus.
DBI[3:0]_n	I/O	Data bus inversion: Reduces the DC power consumption and supply noise induced jitter on data pins. DBI0_n is associated with DQ[7:0], DBI1_n with DQ[15:8], DBI2_n with DQ[23:16], and DBI3_n with DQ[31:24].
EDC[3:0]	Output	Error detection code: The calculated CRC data is transmitted on these pins. In addition, these pins drive a hold pattern when idle and can be used as an RDQS function. EDC0 is associated with DQ[7:0], EDC1 with DQ[15:8], EDC2 with DQ[23:16], and EDC3 with DQ[31:24].
V _{DD}	Supply	Power supply: 1.6V/1.5V $\pm 3\%$ and 1.35V $\pm 3\%$.
V _{DDQ}	Supply	DQ power supply: 1.6V/1.5V $\pm 3\%$ and 1.35V $\pm 3\%$. Isolated on the device for improved noise immunity.
V _{REFC}	Supply	Reference voltage for control and address: V _{REFC} must be maintained at all times (including self refresh) for proper device operation.
V _{REFD}	Supply	Reference voltage for data: V _{REFD} must be maintained at all times (including self refresh) for proper device operation.
V _{SS}	Supply	Ground.
V _{SSQ}	Supply	DQ ground: Isolated on the device for improved noise immunity.
ZQ	Reference	External reference ball for output drive calibration: This ball is tied to an external 120 Ω resistor (ZQ), which is tied to V _{SSQ} .
NC	–	No connect: These balls should be left unconnected (the ball has no connection to the SGRAM or to other balls).

Figure 4: 170-Ball FBGA (BG)

Figure 4: 170-Ball FBGA (BG)

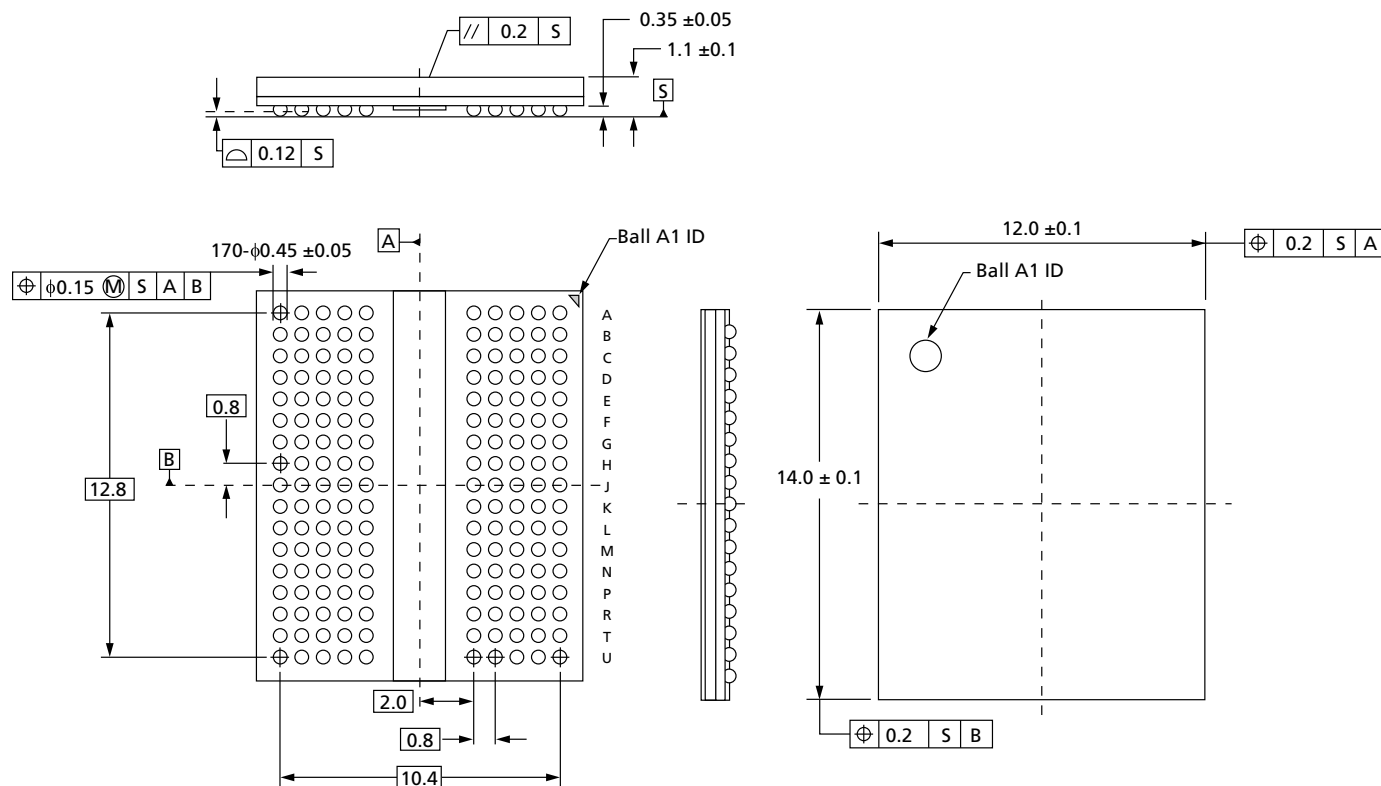

- Notes: 1. All dimensions are in millimeters.
2. Solder ball material: SAC305 (96.5% Sn, 3% Ag, 0.5% Cu).

8000 S. Federal Way, P.O. Box 6, Boise, ID 83707-0006, Tel: 208-368-3900
www.micron.com/productsupport Customer Comment Line: 800-932-4992
Micron and the Micron logo are trademarks of Micron Technology, Inc.
All other trademarks are the property of their respective owners.

This data sheet contains minimum and maximum limits specified over the power supply and temperature range set forth herein. Although considered final, these specifications are subject to change, as further product development and data characterization sometimes occur.