

Electrical Characteristics @ T_A = 25°C unless otherwise specified

Characteristic (DDA143TK & DDA114TK only)	Symbol	Min	Typ	Max	Unit	Test Condition
Collector-Base Breakdown Voltage	BV _{CBO}	-50	—	—	V	I _C = -50μA
Collector-Emitter Breakdown Voltage	BV _{CEO}	-50	—	—	V	I _C = -1mA
Emitter-Base Breakdown Voltage	BV _{EBO}	-5	—	—	V	I _E = -50μA
Collector Cutoff Current	I _{CBO}	—	—	-0.5	μA	V _{CB} = -50V
Emitter Cutoff Current	I _{EBO}	—	—	-0.5	μA	V _{EB} = -4V
Collector-Emitter Saturation Voltage	V _{CE(sat)}	—	—	-0.3	V	I _C /I _B = -2.5mA / - 0.25mA DDA143TK I _C /I _B = -1mA / - 0.1mA DDA114TK
DC Current Transfer Ratio	h _{FE}	100	250	600	—	I _C = -1mA, V _{CE} = -5V
Input Resistor (R _I) Tolerance	ΔR _I	-30	—	+30	%	—
Gain-Bandwidth Product*	f _T	—	250	—	MHz	V _{CE} = -10V, I _E = 5mA, f = 100MHz

Characteristic		Symbol	Min	Typ	Max	Unit	Test Condition
Input Voltage	DDA124EK DDA144EK DDA114YK DDA123JK DDA114EK	V _{I(off)}	-0.5 -0.5 -0.3 -0.5 -0.5	-1.1 -1.1 — — -1.1	—	V	V _{CC} = -5V, I _O = -100μA
	DDA124EK DDA144EK DDA114YK DDA123JK DDA114EK	V _{I(on)}	—	-1.9 -1.9 — — -1.9	-3.0 -3.0 -1.4 -1.1 -3.0		V _O = -0.3, I _O = -5mA V _O = -0.3, I _O = -2mA V _O = -0.3, I _O = -1mA V _O = -0.3, I _O = -5mA V _O = -0.3, I _O = -10mA
Output Voltage	DDA124EK DDA144EK DDA114YK DDA123JK DDA114EK	V _{O(on)}	—	-0.1	-0.3	V	I _O /I _I = -10mA / - 0.5mA I _O /I _I = -10mA / - 0.5mA I _O /I _I = -5mA / - 0.25mA I _O /I _I = -5mA / - 0.25mA I _O /I _I = -10mA / - 0.5mA
Input Current	DDA124EK DDA144EK DDA114YK DDA123JK DDA114EK	I _I	—	—	-0.36 -0.18 -0.88 -3.6 -0.88	mA	V _I = -5V
Output Current		I _{O(off)}	—	—	-0.5	μA	V _{CC} = 50V, V _I = 0V
DC Current Gain	DDA124EK DDA144EK DDA114YK DDA123JK DDA114EK	G _I	56 68 68 80 30	—	—	—	V _O = -5V, I _O = -5mA V _O = -5V, I _O = -5mA V _O = -5V, I _O = -10mA V _O = -5V, I _O = -10mA V _O = -5V, I _O = -5mA
Input Resistor (R _I) Tolerance		ΔR _I	-30	—	+30	%	—
Resistance Ratio Tolerance		R ₂ /R ₁	-20	—	+20	%	—
Gain-Bandwidth Product*		f _T	—	250	—	MHz	V _{CE} = -10V, I _E = -5mA, f = 100MHz


* Transistor - For Reference Only

Ordering Information (Note 4)

Device	Packaging	Shipping
DDA124EK-7	SOT-26	3000/Tape & Reel
DDA144EK-7	SOT-26	3000/Tape & Reel
DDA114YK-7	SOT-26	3000/Tape & Reel
DDA123JK-7	SOT-26	3000/Tape & Reel
DDA114EK-7	SOT-26	3000/Tape & Reel
DDA143TK-7	SOT-26	3000/Tape & Reel
DDA114TK-7	SOT-26	3000/Tape & Reel

- Notes: 4. For Packaging Details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.
5. For Lead Free/RoHS Compliant version part numbers, please add "-F" suffix to the part numbers above. Example: DDA114TK-7-F.

Marking Information



PXX = Product Type Marking Code
 See Sheet 1 Diagrams
 YM = Date Code Marking
 Y = Year ex: T = 2006
 M = Month ex: 9 = September

Date Code Key

Year	2006	2007	2008	2009	2010	2011	2012
Code	T	U	V	W	X	Y	Z

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

TYPICAL CURVES - DDA123JK

ONE SECTION

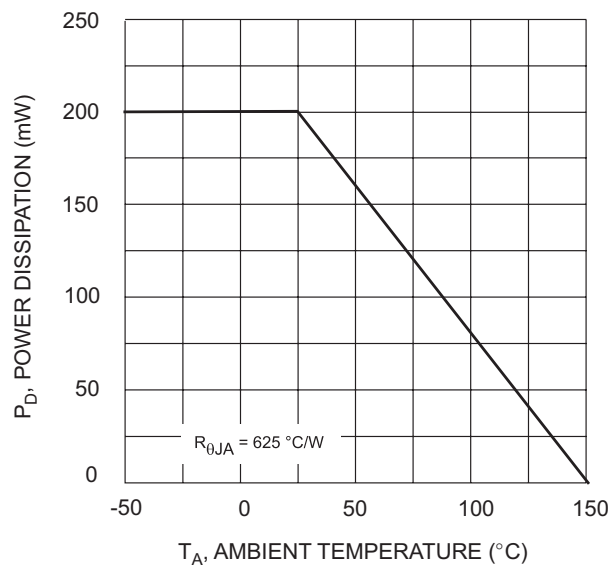


Fig. 1 Derating Curve

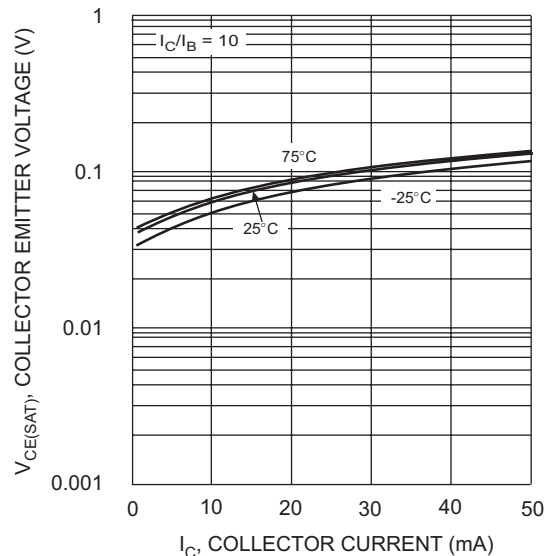


Fig. 2 $V_{CE(SAT)}$ vs. I_C

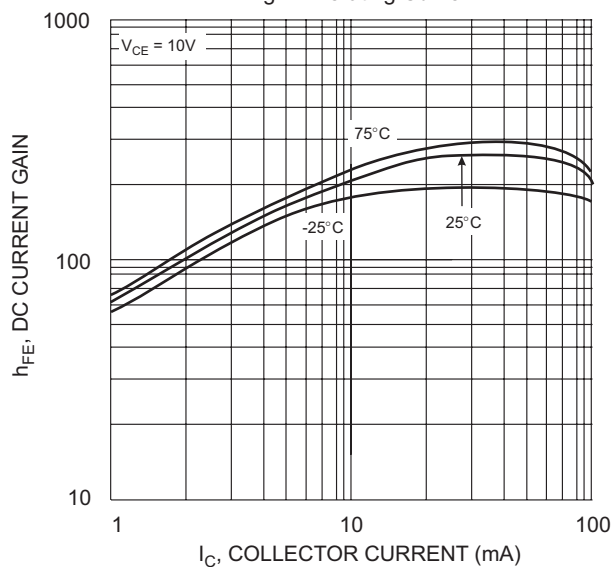


Fig. 3 DC Current Gain

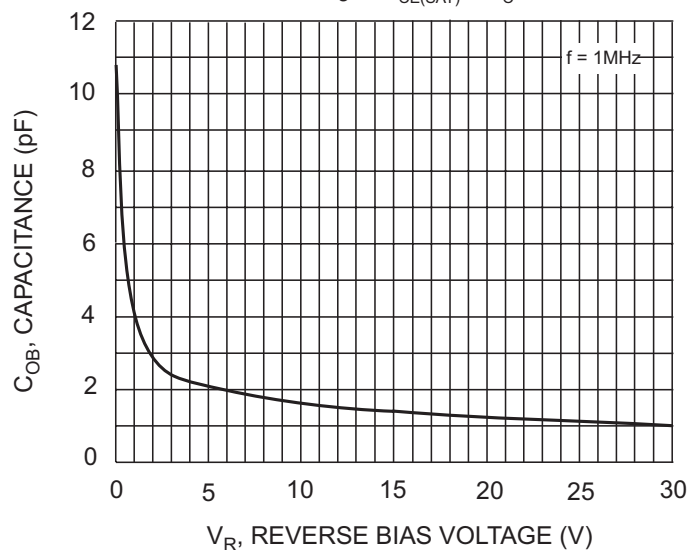


Fig. 4 Output Capacitance

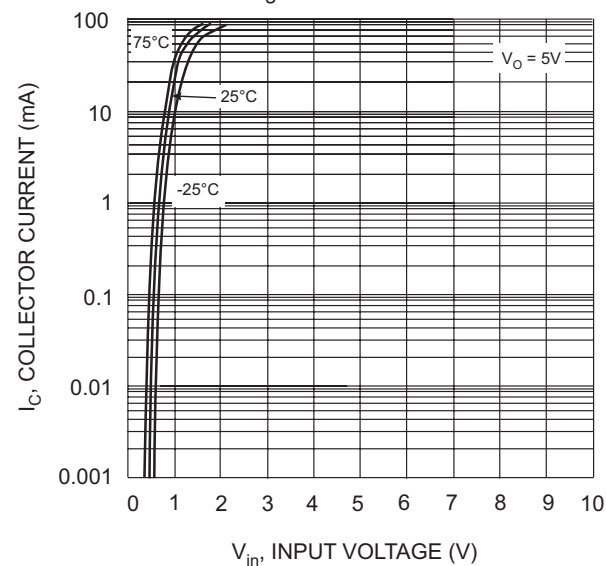


Fig. 5 Collector Current Vs. Input Voltage

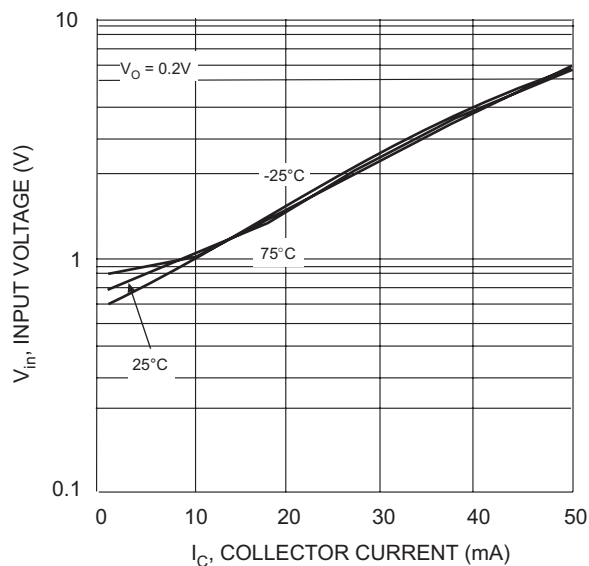


Fig. 6 Input Voltage vs. Collector Current

TYPICAL CURVES - DDA114TK

ONE SECTION

NEW PRODUCT

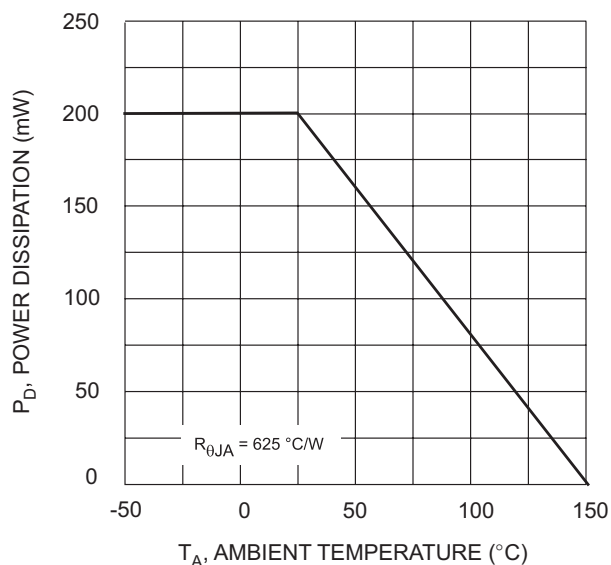


Fig. 1 Derating Curve

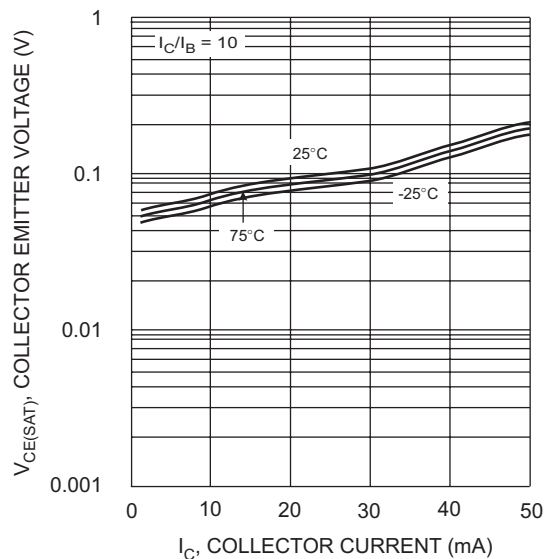


Fig. 2 $V_{CE(SAT)}$ vs. I_C

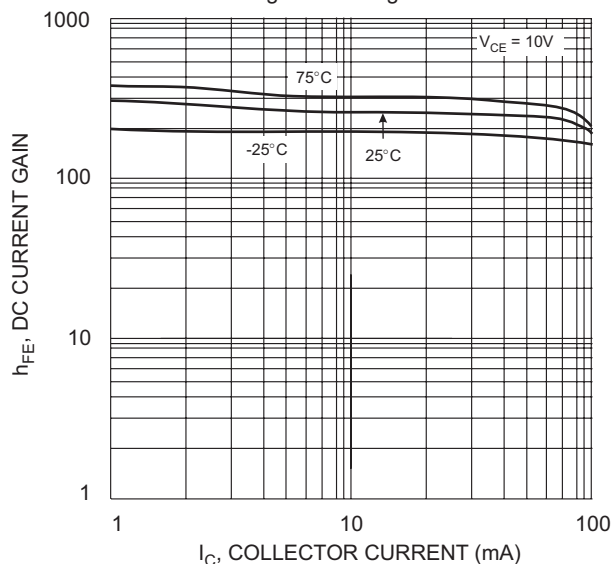


Fig. 3 DC Current Gain

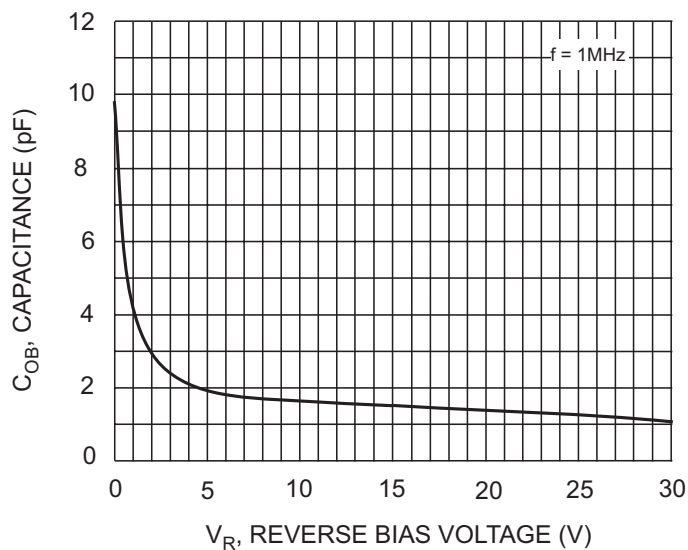


Fig. 4 Output Capacitance

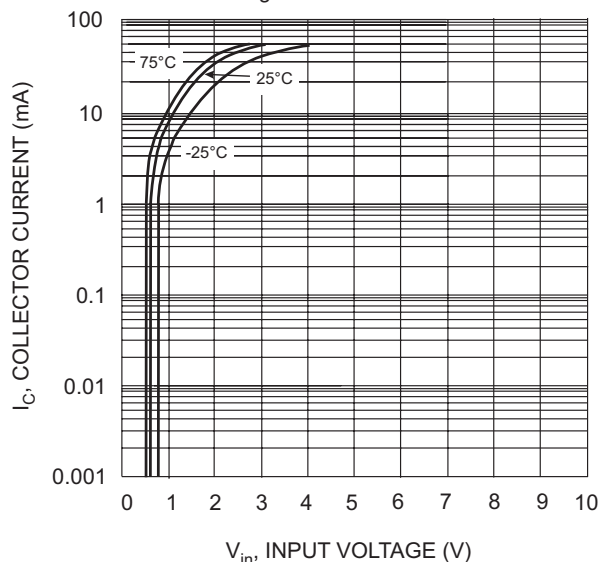


Fig. 5 Collector Current Vs. Input Voltage

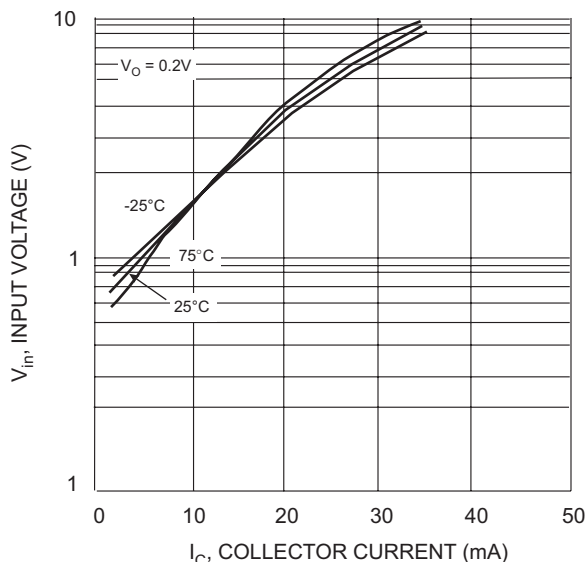


Fig. 6 Input Voltage vs. Collector Current

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.