


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

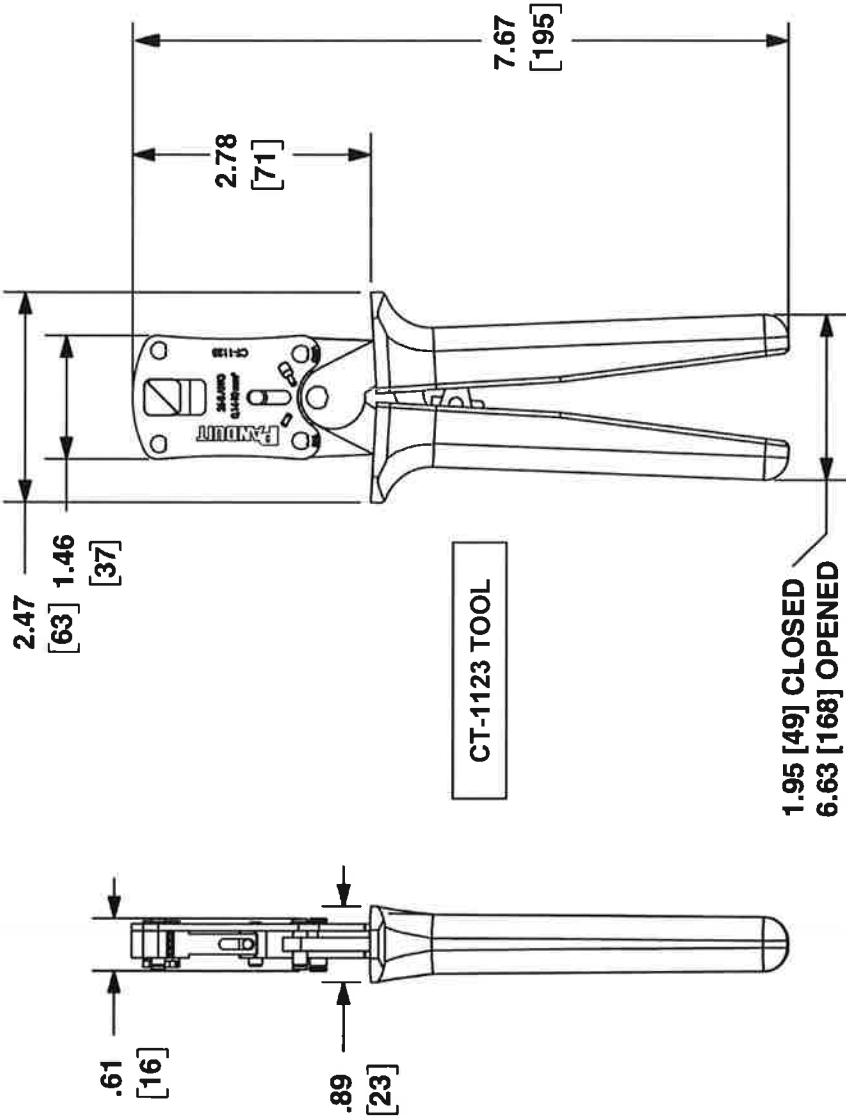

NOTES, UNLESS OTHERWISE SPECIFIED:

Panduit Tool Number CT-1123 is used to install single and dual wire Panduit insulated and non-insulated loose piece ferrules.

Crimps the following types:

- FTD type: 2 x 22 [4.0mm] to 2 x 12 [4.0mm] AWG insulated ferrules
- FSD and FSF type: #26 [1.4mm] – #8 [10.0mm] AWG insulated ferrules
- F type: #22 [4.0mm] – #16 [1.5mm] AWG; and #12 [4.0mm] – #8 [10.0mm] AWG non-insulated ferrules

TOOL FEATURES INCLUDE:

1. Self-adjusting crimp die for insulated and non-insulated ferrules. Ferrule size dependent on wire gage. Refer to ferrule packaging for proper ferrule and wire combinations.
2. Controlled cycle mechanism prevents tool from opening before crimp cycle is complete.
3. Manual release lever, push forward in the event that controlled cycle mechanism must be released.
4. Resilient grips to prevent operator fatigue.

NOTE: The grips are NOT intended to insulate against electrical shock.

TOOL WEIGHT: 10.6 oz. (300 gr.)

DIMENSIONS SHOWN IN PARENTHESES ARE MILLIMETERS.

F:\work\p\users\ENGR DOCS\CUSTOMER DRAWINGS\TP25123B01_02 CT-1123 CD.doc

CT-1123									
CUSTOMER DRAWING									
ITEM REVISION NAME:									
TP25123B01_02									
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:									
MATERIAL:									
SEE NOTES									
DRAWING NUMBER:									
TP25123B01									
THIRD ANGLE PROJECTION									
DATE: 3-29-06									
SCALE: NONE									
SHT 1 OF 1									
SIZE: B									

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02	6-26-14	BLR	AB	AB	UPD TOOL HEAD GRAPHIC	4754
01	4-02-13	BLR	BJPU	AB	UPD TEMPLATE, BRANDING	4609
00	3-29-06	BLR	SRRE	RFL	RELEASED	4195