


SMD Power Inductor

0518CDMCC/DS



Electrical Characteristics

Part No.	Stamp	Inductance [Within](μ H) ※1	D.C.R (m Ω) at 25℃ Max.(typ.)	Saturation Current (A)※2 Max.(Typ.)	Temperature rise current (A)※3 (Typ.)
0518CDMCCDS-R33MC	R33	$0.33 \pm 20\%$	6.5(5.5)	16.0(19.0)	14.5
0518CDMCCDS-R47MC	R47	$0.47 \pm 20\%$	9.0(7.7)	12.8(15.0)	10.5
0518CDMCCDS-R56MC	R56	$0.56 \pm 20\%$	10.0(8.0)	12.5(14.7)	10.0
0518CDMCCDS-1R0MC	1R0	$1.0 \pm 20\%$	17(15)	11.1(13.1)	7.5
0518CDMCCDS-1R5MC	1R5	$1.5 \pm 20\%$	26(21)	9.0(10.6)	6.6
0518CDMCCDS-2R2MC	2R2	$2.2 \pm 20\%$	35(30)	6.0(7.1)	5.2
0518CDMCCDS-3R3MC	3R3	$3.3 \pm 20\%$	58(52)	5.4(6.3)	4.2
0518CDMCCDS-4R7MC	4R7	$4.7 \pm 20\%$	85(78)	4.4(5.1)	3.2
0518CDMCCDS-5R6MC	5R6	$5.6 \pm 20\%$	95(86)	4.1(4.8)	2.8
0518CDMCCDS-6R8MC	6R8	$6.8 \pm 20\%$	120(107)	3.6(4.3)	2.4
0518CDMCCDS-100MC	100	$10 \pm 20\%$	155(140)	3.0(3.5)	2.3
0518CDMCCDS-150MC	150	$15 \pm 20\%$	260(240)	1.7(2.0)	1.8

※1 Measuring frequency Inductance at 100kHz ,1.0V

※2 Saturation current: The value of DC current when the inductance is over 70% of its initial value. (at 25℃)

※3 Temperature rise current: The actual value of DC current when temperature of coil rise is













$\Delta T=40^{\circ}\text{C}$ ($T_a=25^{\circ}\text{C}$). Board conditions: FR4, Copper=70 μ m,four-layer PWB, t=1.6mm.

SMD Power Inductor 0518CDMCC/DS



Saturation Current & Temperature Rise Graph

— L (20°C) — ΔT

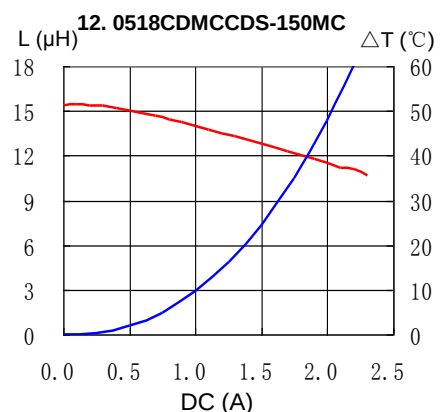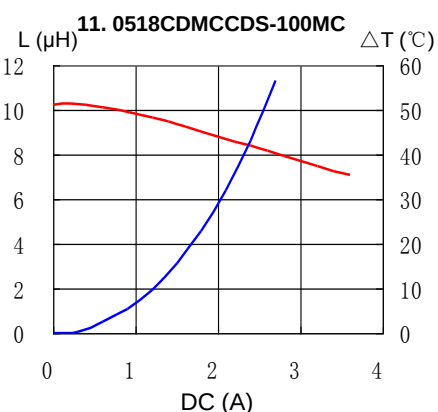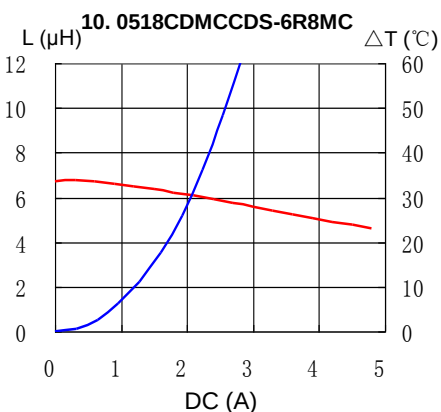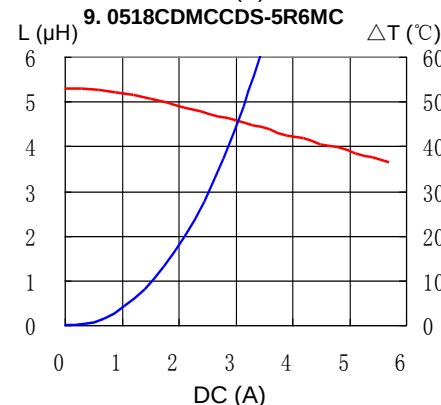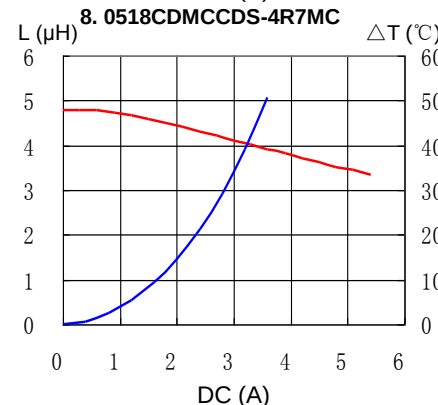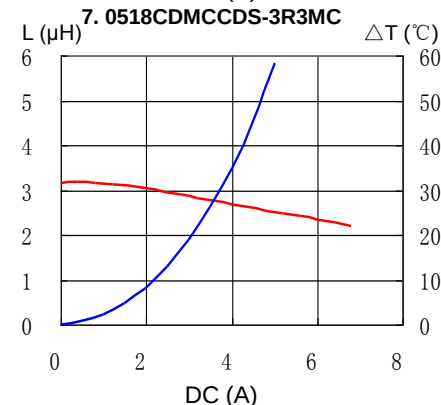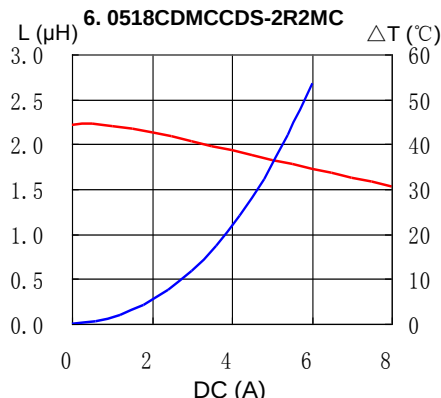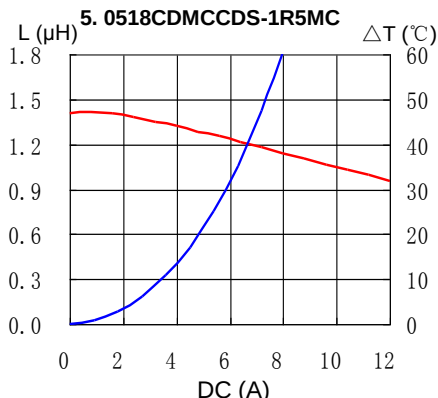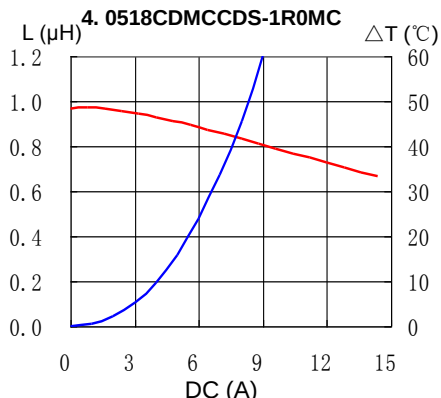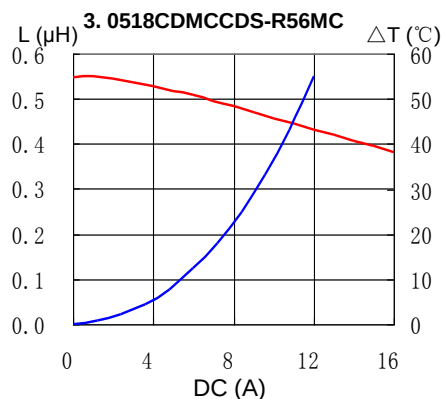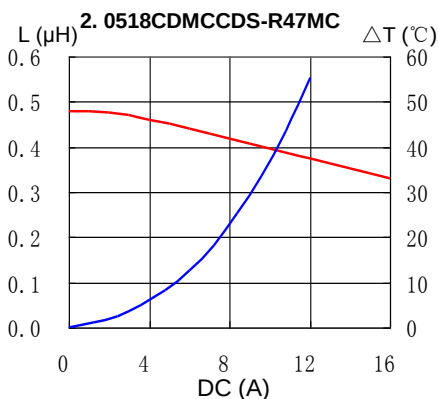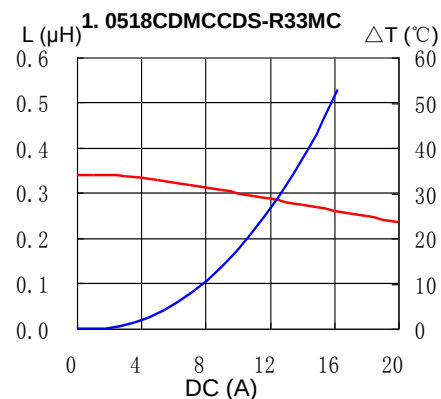


SMD Power Inductor 0518CDMCC/DS




Solder Reflow Condition

Heat Endurance

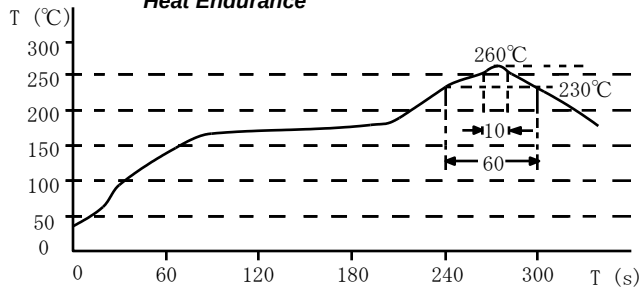

Temperature Chart

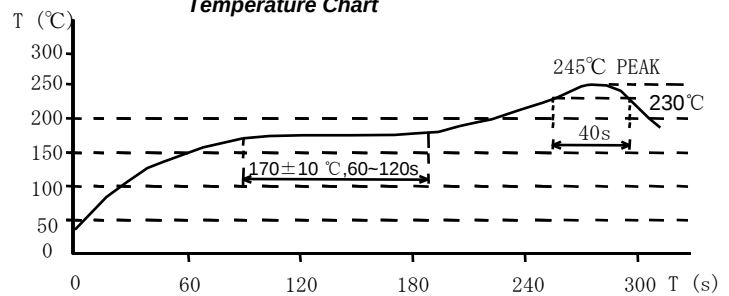

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com

Chicago

Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com