

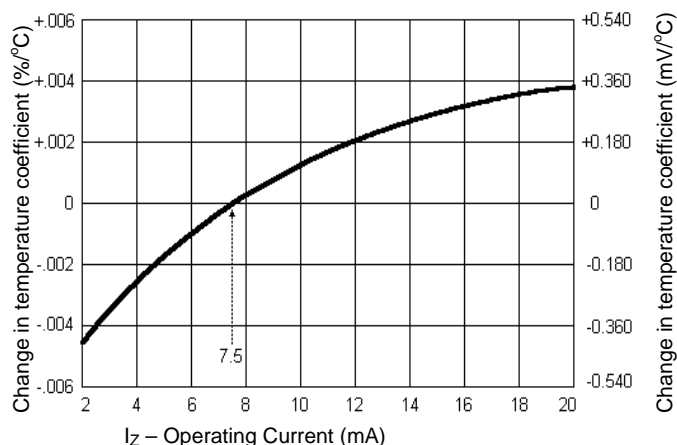
***ELECTRICAL CHARACTERISTICS @ 25°C, unless otherwise specified**

JEDEC TYPE NUMBERS (Notes 1 & 5)	ZENER VOLTAGE V_Z @ I_{ZT} (Notes 1, 4 & 5)	ZENER TEST CURRENT I_{ZT}	MAXIMUM ZENER IMPEDANCE (Note 2) Z_{ZT} @ I_{ZT}	MAXIMUM REVERSE CURRENT I_R @ 6 V	VOLTAGE TEMPERATURE STABILITY (Notes 3 & 4) ΔV_{ZT} MAXIMUM	TEMPERATURE RANGE	EFFECTIVE TEMPERATURE COEFFICIENT α_{VZ}
	VOLTS	mA	OHMS	μA	mV	°C	%/°C
1N935	8.55-9.45	7.5	20	10	67	0 to +75	0.01
1N935A	8.55-9.45	7.5	20	10	139	-55 to +100	0.01
1N935B	8.55-9.45	7.5	20	10	184	-55 to +150	0.01
1N936	8.55-9.45	7.5	20	10	33	0 to +75	0.005
1N936A	8.55-9.45	7.5	20	10	69	-55 to +100	0.005
1N936B	8.55-9.45	7.5	20	10	92	-55 to +150	0.005
1N937	8.55-9.45	7.5	20	10	13	0 to +75	0.002
1N937A	8.55-9.45	7.5	20	10	27	-55 to +100	0.002
1N937B	8.55-9.45	7.5	20	10	37	-55 to +150	0.002
1N938	8.55-9.45	7.5	20	10	6	0 to +75	0.001
1N938A	8.55-9.45	7.5	20	10	13	-55 to +100	0.001
1N938B	8.55-9.45	7.5	20	10	18	-55 to +150	0.001
1N939	8.55-9.45	7.5	20	10	3	0 to +75	0.0005
1N939A	8.55-9.45	7.5	20	10	7	-55 to +100	0.0005
1N939B	8.55-9.45	7.5	20	10	9	-55 to +150	0.0005
1N940	8.55-9.45	7.5	20	10	1.3	0 to +75	0.0002
1N940A	8.55-9.45	7.5	20	10	2.7	-55 to +100	0.0002
1N940B	8.55-9.45	7.5	20	10	3.7	-55 to +150	0.0002

*JEDEC Registered Data.

NOTES:

- When ordering devices with tighter tolerances than specified, use a nominal voltage of 9.2V and add a hyphenated suffix to the part number for desired tolerance at the end of the part number, e.g. 1N938B-2%, 1N939B-1%, 1N939B-1-1%, etc.
- Measured by superimposing 0.75 mA ac rms on 7.5 mA dc @ 25°C.
- The maximum allowable change observed over the entire temperature range i.e., the diode voltage will not exceed the specified mV change at any discrete temperature between the established limits.
- Voltage measurements to be performed 15 seconds after application of dc current.
- The 1N935B, 937B, 938B, 939B, 940B also have military qualification to MIL-PRF-19500/156 up to the JANTXV level by adding JAN, JANTX, or JANTXV prefixes to part numbers as well as "-1" suffix, e.g. JANTX1N938B-1, etc.
- Designate Radiation Hardened devices with "RH" prefix instead of "IN", i.e. RH938A instead of 1N938A.

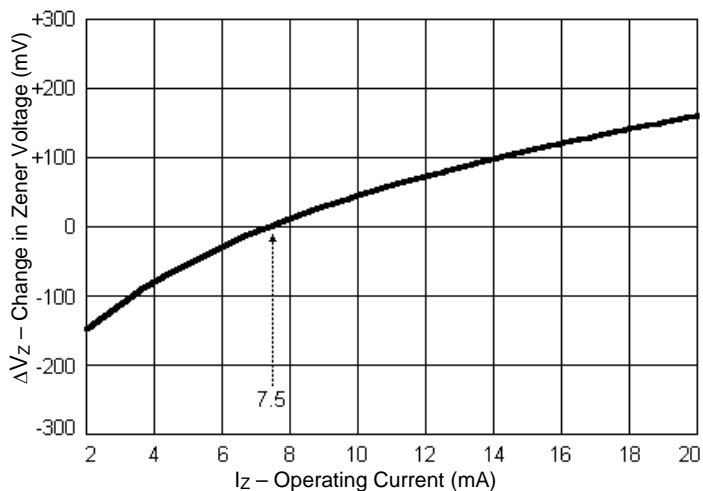
GRAPHS

FIGURE 1

**TYPICAL CHANGE OF TEMPERATURE COEFFICIENT
WITH CHANGE IN OPERATING CURRENT.**

The curve shown in Figure 1 is typical of the diode series and greatly simplifies the estimation of the Temperature Coefficient (TC) when the diode is operated at currents other than 7.5mA.

EXAMPLE: A diode in this series is operated at a current of 7.5mA and has specified Temperature Coefficient (TC) limits of +/- 0.005%/°C. To obtain the typical Temperature Coefficient limits for this same diode operated at a current of 6.0mA, the new TC limits (%/°C) can be estimated using the graph in FIGURE 1.

At a test current of 6.0mA the change in Temperature Coefficient (TC) is approximately -0.0009%/°C. The algebraic sum of +/- 0.005%/°C and -0.0009%/°C gives the new estimated limits of +0.0041%/°C and -0.0059%/°C.

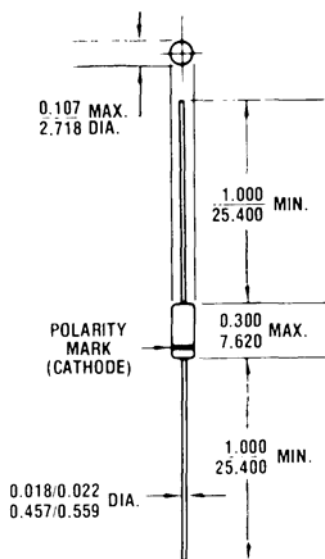


This curve in Figure 2 illustrates the change of diode voltage arising from the effect of impedance. It is in effect an exploded view of the zener operating region of the I-V characteristic.

In conjunction with Figure 1, this curve can be used to estimate total voltage regulation under conditions of both varying temperature and current.

FIGURE 2
TYPICAL CHANGE OF ZENER VOLTAGE
WITH CHANGE IN OPERATING CURRENT.

DIMENSIONS



All dimensions in INCH
mm