





Package Outline Dimensions








Recommend Sodering Pad





Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No:SZDSE-151-

http://www.everlight.com

Prepared date:7-Apr-2009

Rev 1 Page: 2 of 9



Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit		
Reverse Voltage	V_R	5	V		
Forward Current	I_{F}	25	mA		
Peak Forward Current (Duty 1/10 @1KHz)	I_{FP}	60	mA		
Power Dissipation	Pd	60	mW		
Electrostatic Discharge(HBM)	ESD	2000	V		
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$		
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}$		
Soldering Temperature	Tsol	Reflow Soldering : 260 °C for 10 sec. Hand Soldering : 350 °C for 3 sec.			

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition	
Luminous Intensity	Iv	36	57		mcd	I _F =20mA	
Viewing Angle	2 \theta 1/2		130		deg		
Peak Wavelength	λр		591		nm		
Dominant Wavelength	λd		589		nm		
Spectrum Radiation Bandwidth	Δλ		15		nm		
Forward Voltage	$V_{\rm F}$	1.7	2.0	2.4	V		
Reverse Current	I_R			10	μ A	$V_R=5V$	

Everlight Electronics Co., Ltd.

Device No:SZDSE-151-


http://www.everlight.com


Prepared date:7-Apr-2009


Rev 1 Page: 3 of 9





Typical Electro-Optical Characteristics Curves














Everlight Electronics Co., Ltd.

Device No:SZDSE-151-

http://www.everlight.com

Prepared date:7-Apr-2009

Rev 1 Page: 4 of 9




Label explanation


CAT: Luminous Intensity Rank

HUE: Chromaticity Coordinates

REF: Forward Voltage Rank



Reel Dimensions

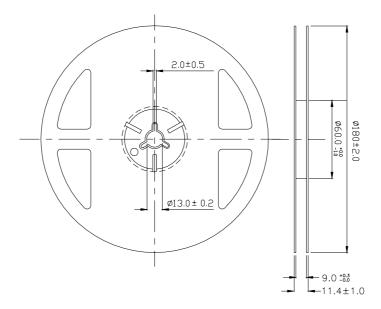

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No:SZDSE-151-


http://www.everlight.com

Prepared date:7-Apr-2009

Rev 1 Page: 5 of 9




Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

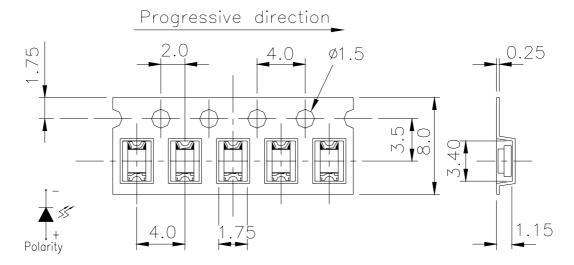

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

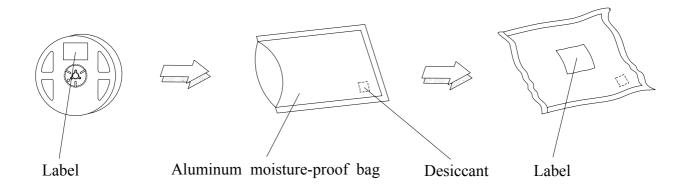



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition Test Hours/Cyc		Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H:+100°C 15min ∫ 5 min L:-40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°€	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. Device No:SZDSE-151-

http://www.everlight.com

Prepared date:7-Apr-2009

Rev 1 Page: 7 of 9

EVERLIGHT ELECTRONICS CO.,LTD.

15-21UYC/S530-A3/TR8


Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
 - 2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.
 - 2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
 - 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

 Baking treatment: 60±5°C for 24 hours..
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

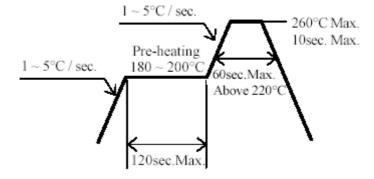

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd.

Device No:SZDSE-151-

http://www.everlight.com

Prepared date:7-Apr-2009

Rev 1 Page: 8 of 9




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

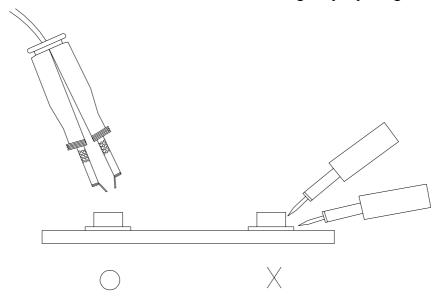

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. Device No:SZDSE-151-

http://www.everlight.com

Prepared date:7-Apr-2009

Rev 1 Page: 9 of 9