



Microsemi

SCOTTSDALE DIVISION

1N3821 thru 1N3830A, e3

1 Watt Metal Case Zener Diodes


*ELECTRICAL CHARACTERISTICS @ 25°C

JEDEC TYPE NUMBER	NOMINAL ZENER VOLTAGE V_z @ I_{zT} (Note 1)	ZENER TEST CURRENT I_{zT}	MAXIMUM ZENER IMPEDANCE (Note 2)		MAXIMUM ZENER CURRENT I_{zM} (Note 3)	MAXIMUM REVERSE LEAKAGE CURRENT I_R @ V_R		TYPICAL TEMP. COEFF. OF ZENER VOLTAGE α_{Vz}
			Z_{zT} @ I_{zT}	Z_{zK} @ $I_{zK} = 1\text{mA}$		μA	Volts	
			Volts	mA	OHMS	OHMS	mA	Volts
1N3821	3.3	76	10	400	276	100	1	-.066
1N3821A	3.3	76	10	400	276	100	1	-.066
1N3822	3.6	69	10	400	252	100	1	-.058
1N3822A	3.6	69	10	400	252	100	1	-.058
1N3823	3.9	64	9	400	238	50	1	-.046
1N3823A	3.9	64	9	400	238	50	1	-.046
1N3824	4.3	58	9	400	213	10	1	-.033
1N3824A	4.3	58	9	400	213	10	1	-.033
1N3825	4.7	53	8	500	194	10	1	-.015
1N3825A	4.7	53	8	500	194	10	1	-.015
1N3826	5.1	49	7	550	178	10	1	+/- .010
1N3826A	5.1	49	7	550	178	10	1	+/- .010
1N3827	5.6	45	5	600	162	10	2	.030
1N3827A	5.6	45	5	600	162	10	2	.030
1N3828	6.2	41	2	700	146	10	3	.049
1N3828A	6.2	41	2	700	146	10	3	.049
1N3829	6.8	37	1.5	500	133	10	3	.053
1N3829A	6.8	37	1.5	500	133	10	3	.053
1N3830	7.5	34	1.5	250	121	10	3	.057
1N3830A	7.5	34	1.5	250	121	10	3	.057

*JEDEC Registered Data.

- NOTES:**
- The JEDEC type numbers shown with suffix A have a standard tolerance of +/-5% on the nominal zener voltage. V_z measured with device in thermal equilibrium in 25°C still air and mounted in test clips, 3/4" from unit body. If tighter tolerance on V_z is required, consult factory.
 - The zener impedance is derived when a 60 cycle ac current having an rms value equal to 10% of the dc zener current (I_{zT} or I_{zK}) is superimposed on I_{zT} or I_{zK} . Zener impedance is measured at 2 points to ensure a sharp knee on the breakdown curve and to eliminate unstable units. See MicroNote 202 for variation in dynamic impedance with different zener currents.
 - Allowance has been made for the increase in V_z due to Z_z and for the increase in junction temperature as the unit approaches thermal equilibrium at the power dissipation of 1 watt.

GRAPHS

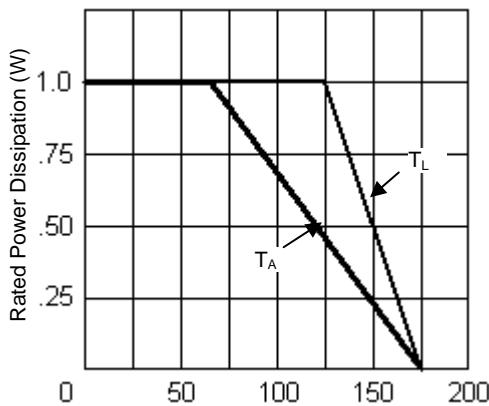

T_L – Lead Temperature (°C) 3/8" from body
or T_A on FR4 PC Board

FIGURE 1
Power Derating

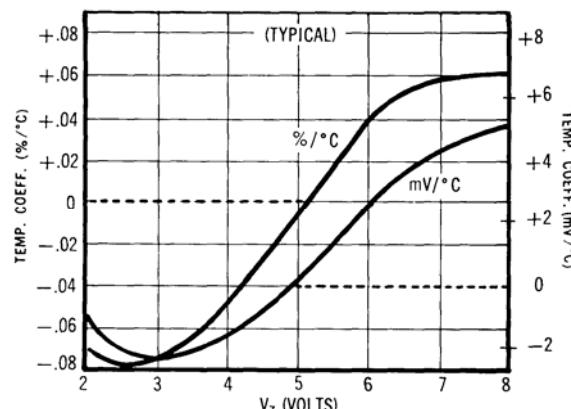


FIGURE 2
Temperature Coeff. vs. Zener Voltage



Microsemi

SCOTTSDALE DIVISION

1N3821 thru 1N3830A, e3

1 Watt Metal Case Zener Diodes


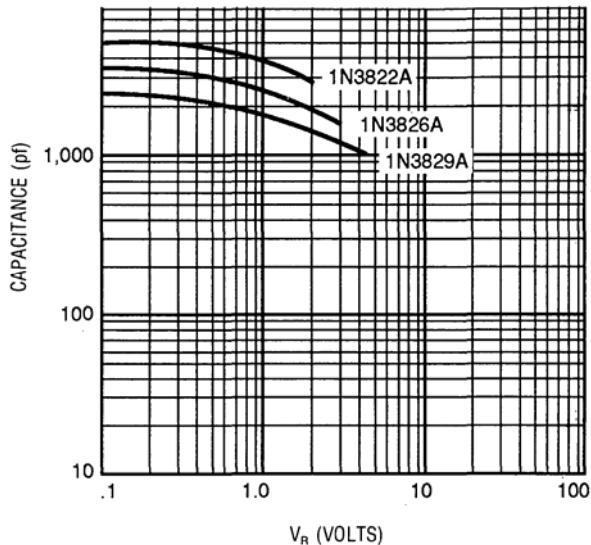


FIGURE 4
Typical Capacitance vs. Reverse Voltage
for 1-Watt Zeners

PACKAGE DIMENSIONS

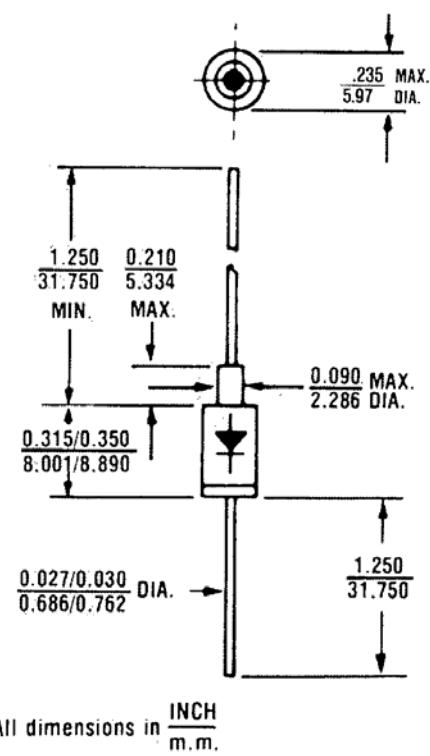

DO-13