


Fast Diode				Ratings				
Symbol	Definition	Conditions		min.	typ.	max.	Unit	
V _{RSM}	max. non-repetitive reverse blocking voltage	T _{VJ} = 25°C				600	V	
V _{RRM}	max. repetitive reverse blocking voltage	T _{VJ} = 25°C				600	V	
I _R	reverse current, drain current	V _R = 600 V	T _{VJ} = 25°C			250	μA	
		V _R = 600 V	T _{VJ} = 150°C			1	mA	
V _F	forward voltage drop	I _F = 30 A	T _{VJ} = 25°C			1.61	V	
		I _F = 60 A				1.94	V	
		I _F = 30 A	T _{VJ} = 150°C			1.26	V	
		I _F = 60 A				1.56	V	
I _{FAV}	average forward current	T _C = 135°C rectangular d = 0.5	T _{VJ} = 175°C			30	A	
V _{F0}	threshold voltage	} for power loss calculation only		T _{VJ} = 175°C		0.91	V	
r _F	slope resistance					9.4	mΩ	
R _{thJC}	thermal resistance junction to case					0.9	K/W	
R _{thCH}	thermal resistance case to heatsink				0.50		K/W	
P _{tot}	total power dissipation	T _C = 25°C				165	W	
I _{FSM}	max. forward surge current	t = 10 ms; (50 Hz), sine; V _R = 0 V		T _{VJ} = 45°C		250	A	
C _J	junction capacitance	V _R = 400 V f = 1 MHz		T _{VJ} = 25°C	26		pF	
I _{RM}	max. reverse recovery current	} I _F = 30 A; V _R = 300 V -di _F /dt = 200 A/μs		T _{VJ} = 25 °C	6		A	
				T _{VJ} = 100 °C	10		A	
t _{rr}	reverse recovery time			T _{VJ} = 25 °C	35		ns	
				T _{VJ} = 100 °C	100		ns	

Package TO-220			Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal			35	A
T_{VJ}	virtual junction temperature		-55		175	°C
T_{op}	operation temperature		-55		150	°C
T_{stg}	storage temperature		-55		150	°C
Weight				2		g
M_D	mounting torque		0.4		0.6	Nm
F_C	mounting force with clip		20		60	N

Product Marking

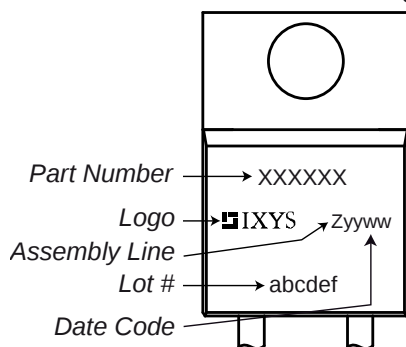


Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	DSEP29-06A	DSEP29-06A	Tube	50	474819

Similar Part	Package	Voltage class
DSEP29-06AS	TO-263AB (D2Pak) (2)	600
DSEP30-06A	TO-247AD (2)	600
DSEP30-06B	TO-247AD (2)	600
DSEP30-06BR	ISOPLUS247 (2)	600
DHG30I600PA	TO-220AC (2)	600
DHG30I600HA	TO-247AD (2)	600
DHG30IM600PC	TO-263AB (D2Pak) (2)	600

Equivalent Circuits for Simulation

* on die level

 $T_{VJ} = 175\text{ °C}$  $V_{0\text{ max}}$ threshold voltage

Fast Diode

0.91


V

 $R_{0\text{ max}}$ slope resistance *


6.1

mΩ

Outlines TO-220

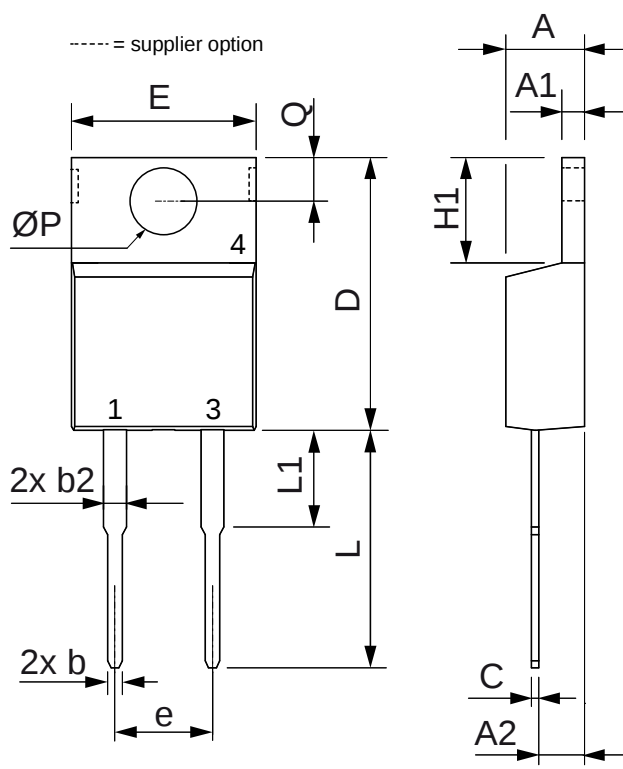

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.32	4.82	0.170	0.190
A1	1.14	1.39	0.045	0.055
A2	2.29	2.79	0.090	0.110
b	0.64	1.01	0.025	0.040
b2	1.15	1.65	0.045	0.065
C	0.35	0.56	0.014	0.022
D	14.73	16.00	0.580	0.630
E	9.91	10.66	0.390	0.420
e	5.08	BSC	0.200	BSC
H1	5.85	6.85	0.230	0.270
L	12.70	13.97	0.500	0.550
L1	2.79	5.84	0.110	0.230
ØP	3.54	4.08	0.139	0.161
Q	2.54	3.18	0.100	0.125



Fast Diode

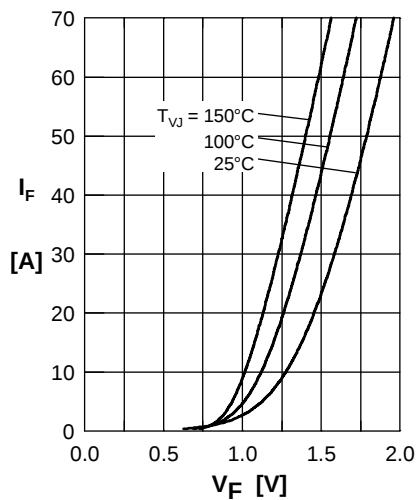


Fig. 1 Forward current I_F versus V_F

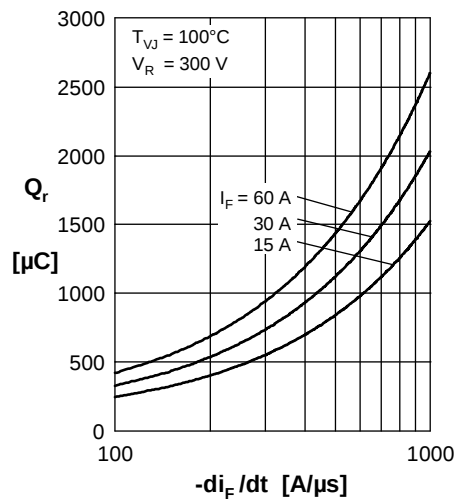


Fig. 2 Typ. reverse recov. charge Q_r versus $-di_F/dt$

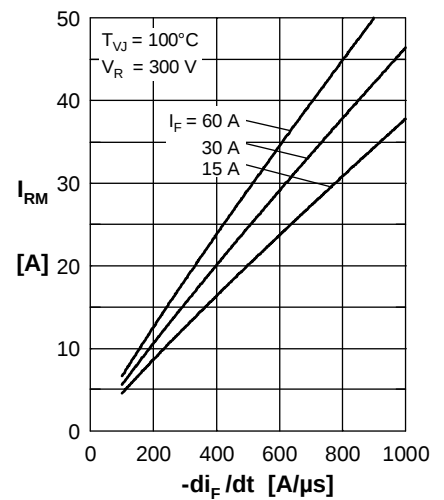


Fig. 3 Typ. peak reverse current I_{RM} versus $-di_F/dt$

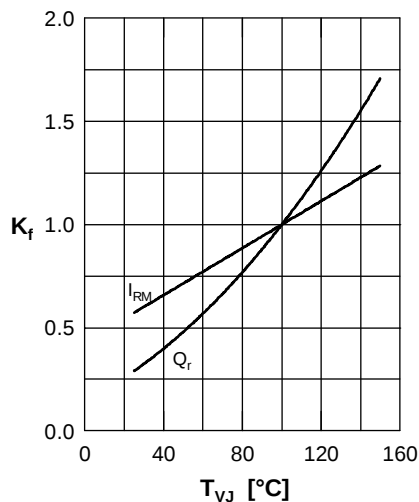


Fig. 4 Dynamic parameters Q_r , I_{RM} versus T_{VJ}

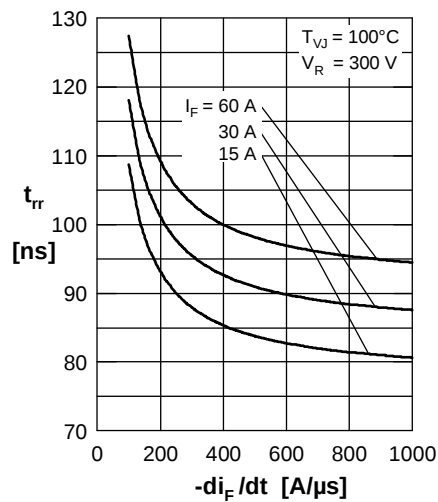


Fig. 5 Typ. recovery time t_{rr} versus $-di_F/dt$

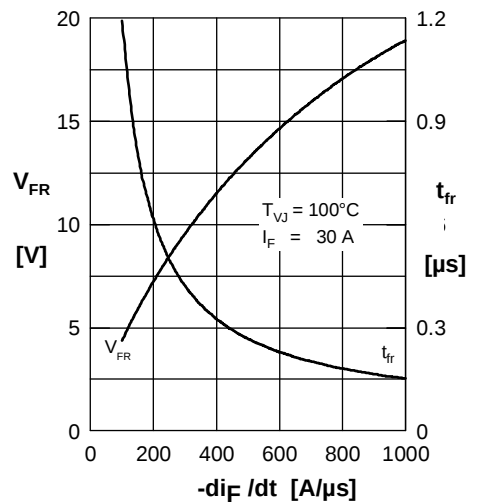


Fig. 6 Typ. peak forward voltage V_{FR} and t_{fr} versus di_F/dt

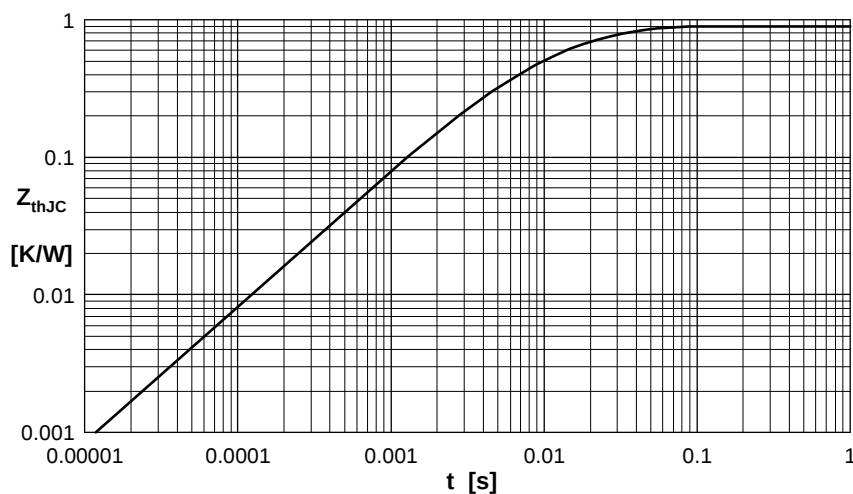


Fig. 7 Transient thermal impedance junction to case

Constants for Z_{thJC} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.030	0.001
2	0.080	0.030
3	0.300	0.006
4	0.490	0.060