





Package Outline Dimensions








For reflow soldering (propose)





Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No:DSE-111-082

http://www.everlight.com

Rev 1

Page: 2 of 9

Prepared date: 13-Feb-2006



Absolute Maximum Ratings (Ta=25℃)

Parameter	Symbol	Rating	Unit	
Reverse Voltage	V_R	5	V	
Forward Current	\mathbf{I}_{F}	30	mA	
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$	
Storage Temperature	Tstg	-40~ +90	$^{\circ}\mathbb{C}$	
Electrostatic Discharge (HBM)	ESD	2000	V	
Power Dissipation	Pd	100	mW	
Peak Forward Current (Duty 1/10 @1KHz)	IFP	60	mA	
Soldering Temperature	Tsol	Reflow Soldering: 260 °C for 10 sec. Hand Soldering: 350 °C for 3 sec.		

Electro-Optical Characteristics (Ta=25°C)


Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition	
Luminous Intensity	Iv	11	18		mcd	IF=20mA	
Viewing Angle	2 \theta 1/2		60		deg	I _F =20mA	
Peak Wavelength	λp		570		nm	I _F =20mA	
Dominant Wavelength	λd		571		nm	I _F =20mA	
Spectrum Radiation Bandwidth	Δλ		30		nm	I _F =20mA	
Forward Voltage	VF	1.7	2.0	2.4	V	I _F =20mA	
Reverse Current	Ir			10	μΑ	V _R =5V	

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Page: 3 of 9

Device No:DSE-111-082 Prepared date: 13-Feb-2006 Prepared by: Ashley Kuo



Typical Electro-Optical Characteristics Curves

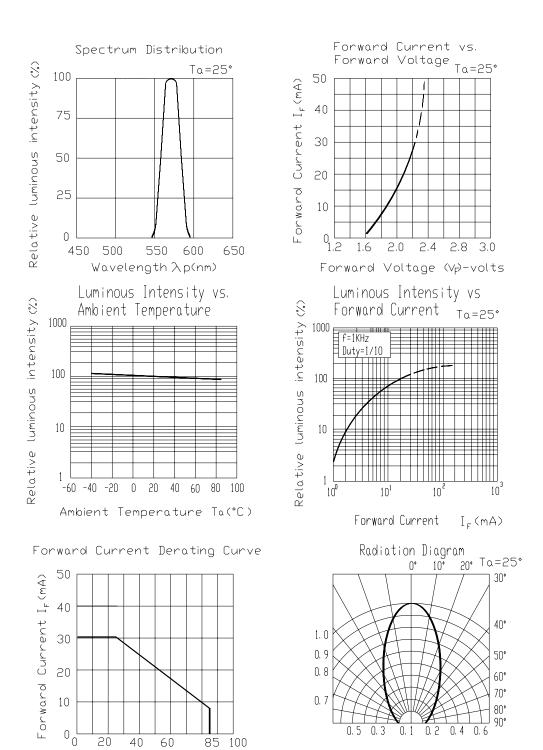

Everlight Electronics Co., Ltd.
Device No:DSE-111-082

Ambient Temperature

http://www.everlight.com

 $T_{\alpha}(^{\circ}C)$

Rev 1

Page: 4 of 9

Prepared date: 13-Feb-2006 Prepared by: Ashley Kuo




Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



Reel Dimensions

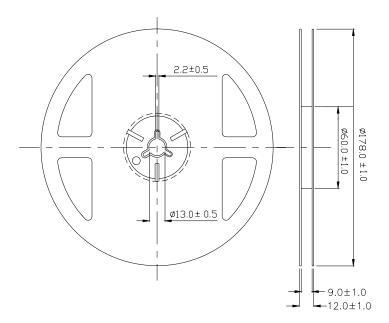

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

 $Everlight\ Electronics\ Co.,\ Ltd.$

http://www.everlight.com

Rev 1


Page: 5 of 9

Device No:DSE-111-082

Prepared date: 13-Feb-2006




Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

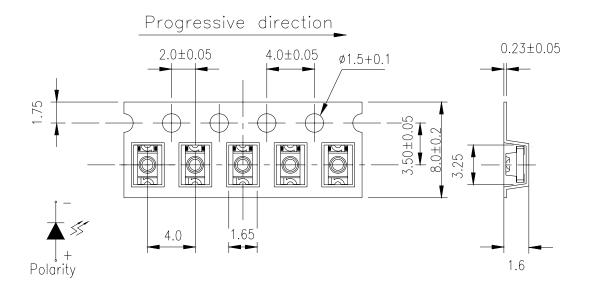

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

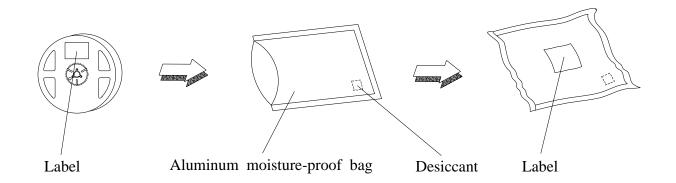

Everlight Electronics Co., Ltd.

Device No:DSE-111-082

http://www.everlight.com

Prepared date: 13-Feb-2006

Rev 1

Page: 6 of 9



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min \int 5 min $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°€	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. Device No:DSE-111-082

http://www.everlight.com

Rev 1

Page: 7 of 9


Prepared date: 13-Feb-2006 Prepared by: Ashley Kuo

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30° C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30 deg C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment : $60\pm5^{\circ}$ C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

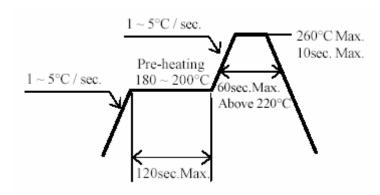

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev 1 Device No:DSE-111-082 Prepared date: 13-Feb-2006 Prepared by: Ashley Kuo

Downloaded from Arrow.com.




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

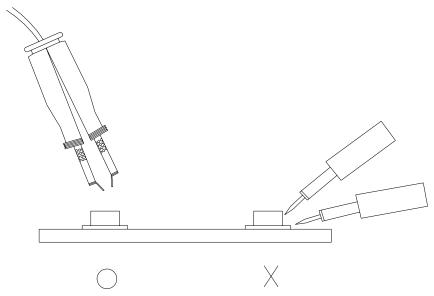

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. Device No:DSE-111-082

http://www.everlight.com

Rev 1

Page: 9 of 9

Prepared date: 13-Feb-2006