


Fast Diode				Ratings				
Symbol	Definition	Conditions		min.	typ.	max.	Unit	
V _{RSM}	max. non-repetitive reverse blocking voltage	T _{VJ} = 25°C				1200	V	
V _{RRM}	max. repetitive reverse blocking voltage	T _{VJ} = 25°C				1200	V	
I _R	reverse current, drain current	V _R = 1200 V	T _{VJ} = 25°C			100	μA	
		V _R = 1200 V	T _{VJ} = 150°C			0.5	mA	
V _F	forward voltage drop	I _F = 15 A	T _{VJ} = 25°C			2.62	V	
		I _F = 30 A				3.19	V	
		I _F = 15 A	T _{VJ} = 150°C			1.87	V	
		I _F = 30 A				2.56	V	
I _{FAV}	average forward current	T _C = 135°C rectangular d = 0.5	T _{VJ} = 175°C			12	A	
V _{F0}	threshold voltage	} for power loss calculation only		T _{VJ} = 175°C		1.03	V	
r _F	slope resistance					46	mΩ	
R _{thJC}	thermal resistance junction to case					1.6	K/W	
R _{thCH}	thermal resistance case to heatsink				0.50		K/W	
P _{tot}	total power dissipation	T _C = 25°C				95	W	
I _{FSM}	max. forward surge current	t = 10 ms; (50 Hz), sine; V _R = 0 V		T _{VJ} = 45°C		90	A	
C _J	junction capacitance	V _R = 600 V f = 1 MHz		T _{VJ} = 25°C	5		pF	
I _{RM}	max. reverse recovery current	} I _F = 15 A; V _R = 600 V -di _F /dt = 200 A/μs		T _{VJ} = 25 °C	6		A	
				T _{VJ} = 100 °C	9		A	
t _{rr}	reverse recovery time			T _{VJ} = 25 °C	40		ns	
				T _{VJ} = 100 °C	140		ns	

Package TO-220			Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal			35	A
T_{VJ}	virtual junction temperature		-55		175	°C
T_{op}	operation temperature		-55		150	°C
T_{stg}	storage temperature		-55		150	°C
Weight				2		g
M_D	mounting torque		0.4		0.6	Nm
F_C	mounting force with clip		20		60	N

Product Marking

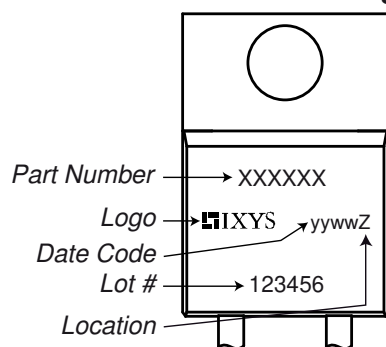


Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	DSEP12-12A	DSEP12-12A	Tube	50	470465


Similar Part	Package	Voltage class
DSEP12-12B	TO-220AC (2)	1200
DSEP15-12CR	ISOPLUS247 (2)	1200

Equivalent Circuits for Simulation


* on die level

$T_{VJ} = 175^{\circ}\text{C}$

		Fast Diode	
$V_{0\max}$	threshold voltage	1.03	V
$R_{0\max}$	slope resistance *	43	mΩ

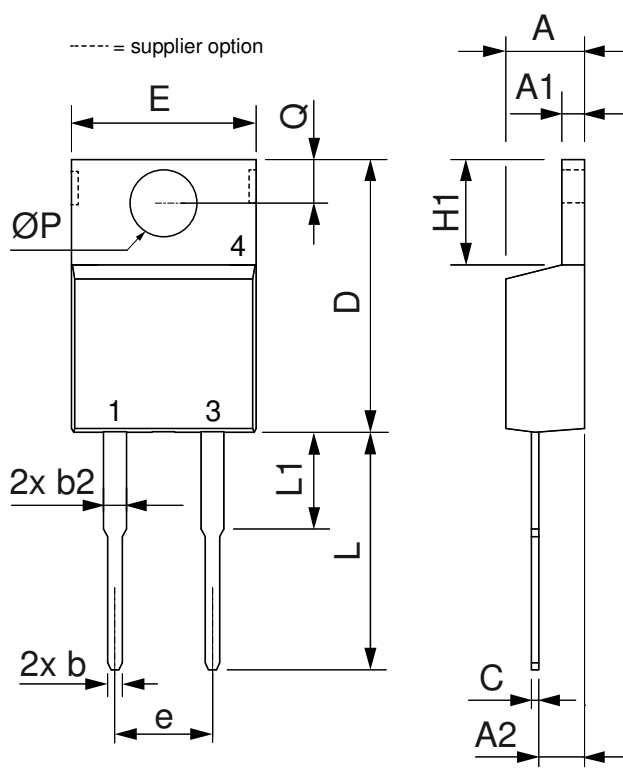Outlines TO-220


Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.32	4.82	0.170	0.190
A1	1.14	1.39	0.045	0.055
A2	2.29	2.79	0.090	0.110
b	0.64	1.01	0.025	0.040
b2	1.15	1.65	0.045	0.065
C	0.35	0.56	0.014	0.022
D	14.73	16.00	0.580	0.630
E	9.91	10.66	0.390	0.420
e	5.08	BSC	0.200	BSC
H1	5.85	6.85	0.230	0.270
L	12.70	13.97	0.500	0.550
L1	2.79	5.84	0.110	0.230
ØP	3.54	4.08	0.139	0.161
Q	2.54	3.18	0.100	0.125



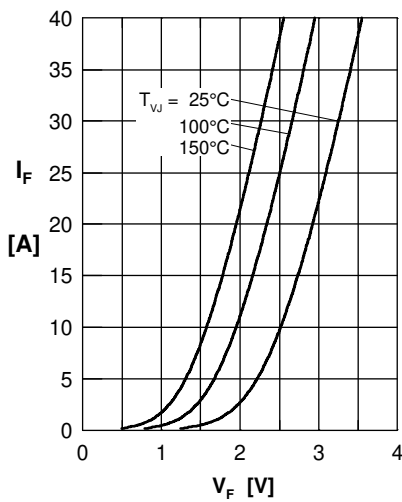
Fast Diode


Fig. 1 Forward current
 I_F versus V_F

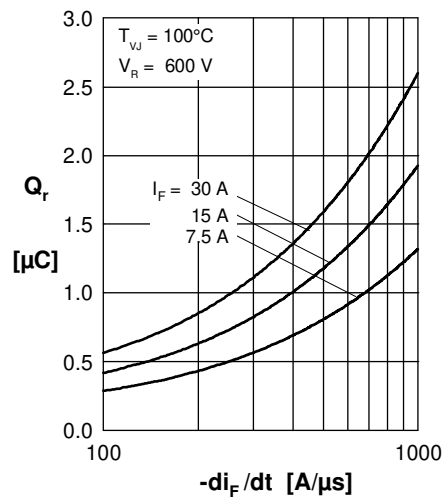


Fig. 2 Typ. reverse recov. charge
 Q_r versus $-di_F/dt$

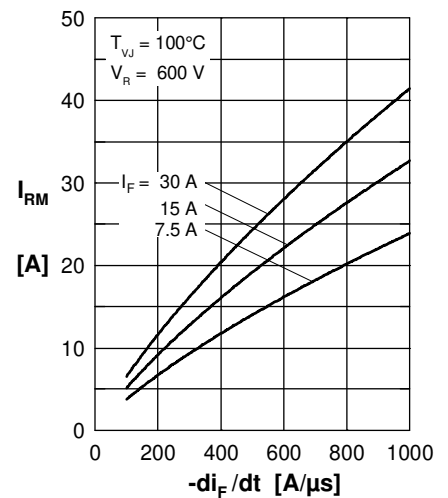


Fig. 3 Typ. peak reverse current
 I_{RM} versus $-di_F/dt$

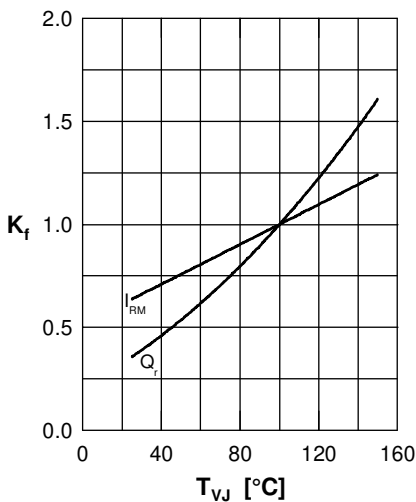


Fig. 4 Dynamic parameters
 Q_r , I_{RM} versus T_{VJ}

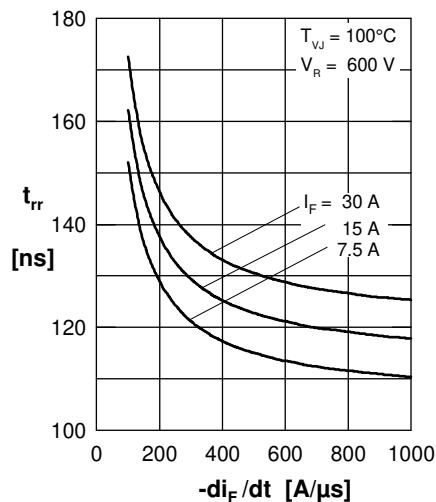


Fig. 5 Typ. recovery time
 t_{rr} versus $-di_F/dt$

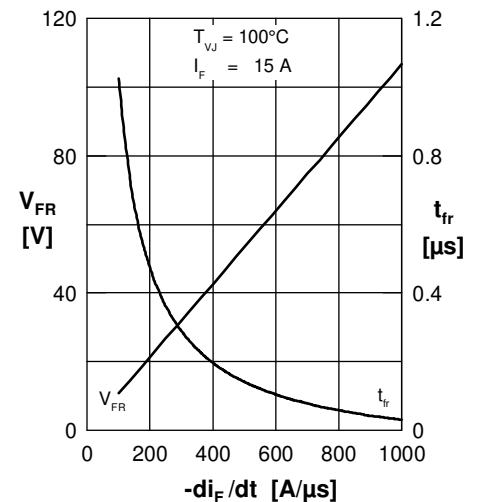


Fig. 6 Typ. peak forward voltage
 V_{FR} and t_{fr} versus di_F/dt

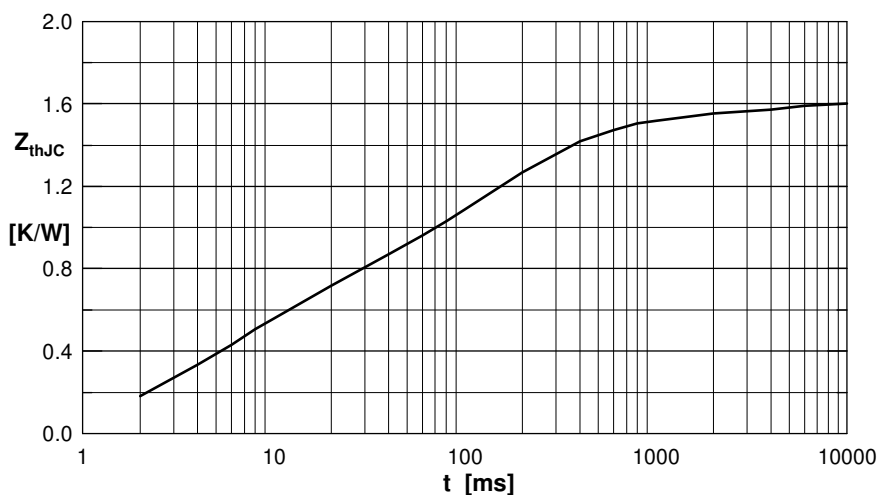


Fig. 7 Transient thermal impedance junction to case

Constants for Z_{thJC} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.160	0.0010
2	0.100	0.0150
3	0.500	0.0040
4	0.840	0.1200