
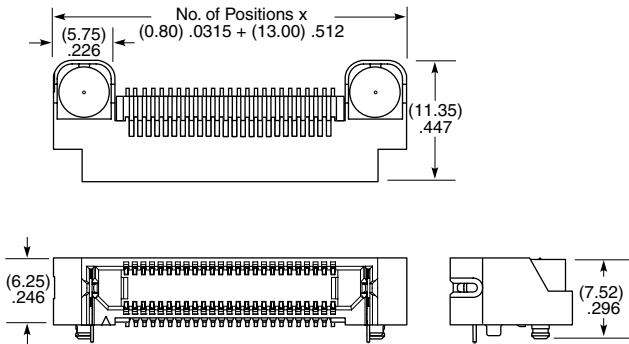


(0.80 mm) .0315" PITCH • RIGHT-ANGLE & EDGE MOUNT HIGH-SPEED SOCKETS

ERF8	POSITIONS PER ROW	01	PLATING OPTION	D	RA	OPTIONS	"X"R
Right-Angle Socket	-010, -013, -020, -025, -030, -040, -049, -050, -060, -070, -075		-L = 10 μ" (0.25 μm) Gold on contact area, Matte Tin on tail			-L = Latching (N/A with -EGP Option) -EGP = Extended Guide Post (N/A with -L Option)	-TR = Tape & Reel -FR = Full Reel Tape & Reel (must order maximum quantity per reel; contact Samtec for quantity breaks)

ERF8-RA
Board Mates: ERM8
Cable Mates: ERCD, ERDP


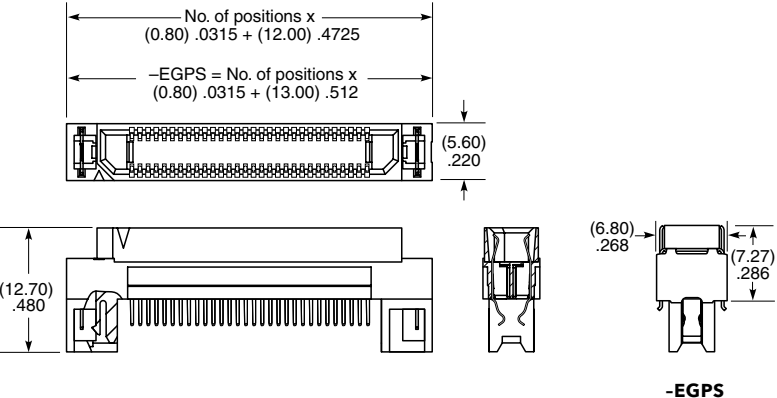



Technical drawing dimensions for ERF8-RA:
 Top view: No. of Positions x (0.80) .0315 + (13.00) .512
 (5.75) .226
 (11.35) .447
 Side view: (6.25) .246
 End view: (7.52) .296

View complete specifications at: samtec.com?ERF8-RA

ERF8	POSITIONS PER ROW	01	PLATING OPTION	D	EM2	OPTIONS	"X"R
Edge Mount Socket	-010, -013, -020, -025, -030, -040, -049, -050, -060, -070, -075		-L = 10 μ" (0.25 μm) Gold on contact area, Matte Tin on tail		= (1.60 mm) .062" Thick PCB	-EGPS = Extended Guide Post Shield (-010, -020, -025, -030 Pos. only)	-TR = Tape & Reel -FR = Full Reel Tape & Reel (must order maximum quantity per reel; contact Samtec for quantity breaks)

ERF8-EM
Board Mates: ERM8

Technical drawing dimensions for ERF8-EM:
 Top view: No. of positions x (0.80) .0315 + (12.00) .4725
 -EGPS = No. of positions x (0.80) .0315 + (13.00) .512
 (5.60) .220
 Side view: (12.70) .480
 End view: (6.80) .268, (7.27) .286

View complete specifications at: samtec.com?ERF8-EM

Note:
Some lengths, styles and options are non-standard, non-returnable.