

# LT6236/LT6237/LT6238


## ABSOLUTE MAXIMUM RATINGS

(Note 1)

Total Supply Voltage ( $V^+$  to  $V^-$ ) ..... 12.6V  
 Input Current (Note 2) .....  $\pm 40\text{mA}$   
 Output Short-Circuit Duration (Note 3) ..... Indefinite  
 Operating Temperature Range (Note 4) ..  $-40^\circ\text{C}$  to  $125^\circ\text{C}$

Specified Temperature Range (Note 5).....  $-40^\circ\text{C}$  to  $125^\circ\text{C}$   
 Maximum Junction Temperature .....  $150^\circ\text{C}$   
 Storage Temperature Range .....  $-65^\circ\text{C}$  to  $150^\circ\text{C}$

## PIN CONFIGURATION

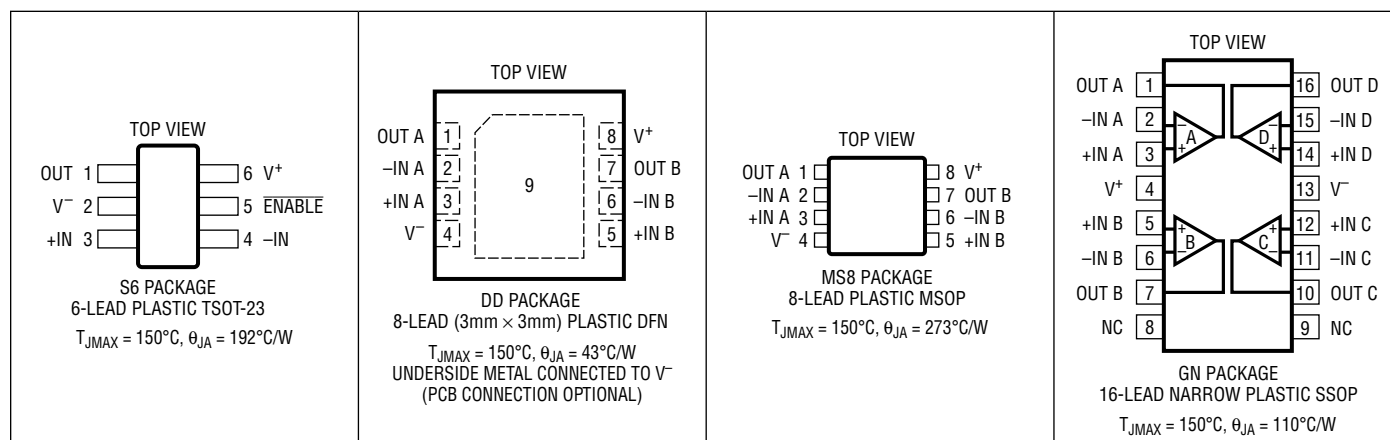

## ORDER INFORMATION

| LEAD FREE FINISH | TAPE AND REEL    | PART MARKING* | PACKAGE DESCRIPTION                   | SPECIFIED TEMPERATURE RANGE                |
|------------------|------------------|---------------|---------------------------------------|--------------------------------------------|
| LT6236CS6#TRMPBF | LT6236CS6#TRPBF  | LTGHM         | 6-Lead Plastic TSOT-23                | $0^\circ\text{C}$ to $70^\circ\text{C}$    |
| LT6236IS6#TRMPBF | LT6236IS6#TRPBF  | LTGHM         | 6-Lead Plastic TSOT-23                | $-40^\circ\text{C}$ to $85^\circ\text{C}$  |
| LT6236HS6#TRMPBF | LT6236HS6#TRPBF  | LTGHM         | 6-Lead Plastic TSOT-23                | $-40^\circ\text{C}$ to $125^\circ\text{C}$ |
| LT6237CDD#PBF    | LT6237CDD#TRPBF  | LGHN          | 8-Lead (3mm $\times$ 3mm) Plastic DFN | $0^\circ\text{C}$ to $70^\circ\text{C}$    |
| LT6237IDD#PBF    | LT6237IDD#TRPBF  | LGHN          | 8-Lead (3mm $\times$ 3mm) Plastic DFN | $-40^\circ\text{C}$ to $85^\circ\text{C}$  |
| LT6237HDD#PBF    | LT6237HDD#TRPBF  | LGHN          | 8-Lead (3mm $\times$ 3mm) Plastic DFN | $-40^\circ\text{C}$ to $125^\circ\text{C}$ |
| LT6237CMS8#PBF   | LT6237CMS8#TRPBF | LTGHP         | 8-Lead Plastic MSOP                   | $0^\circ\text{C}$ to $70^\circ\text{C}$    |
| LT6237IMS8#PBF   | LT6237IMS8#TRPBF | LTGHP         | 8-Lead Plastic MSOP                   | $-40^\circ\text{C}$ to $85^\circ\text{C}$  |
| LT6237HMS8#PBF   | LT6237HMS8#TRPBF | LTGHP         | 8-Lead Plastic MSOP                   | $-40^\circ\text{C}$ to $125^\circ\text{C}$ |
| LT6238CGN#PBF    | LT6238CGN#TRPBF  | 6238          | 16-Lead Narrow Plastic SSOP           | $0^\circ\text{C}$ to $70^\circ\text{C}$    |
| LT6238IGN#PBF    | LT6238IGN#TRPBF  | 6238          | 16-Lead Narrow Plastic SSOP           | $-40^\circ\text{C}$ to $85^\circ\text{C}$  |
| LT6238HGN#PBF    | LT6238HGN#TRPBF  | 6238          | 16-Lead Narrow Plastic SSOP           | $-40^\circ\text{C}$ to $125^\circ\text{C}$ |

TRM = 500 pieces. \*Temperature grades are identified by a label on the shipping container.

Consult LTC Marketing for parts specified with wider operating temperature ranges.

Consult LTC Marketing for information on lead based finish parts.

For more information on lead free part marking, go to: <http://www.linear.com/leadfree/>

For more information on tape and reel specifications, go to: <http://www.linear.com/tapeandree/>

623637fb

# ELECTRICAL CHARACTERISTICS

$T_A = 25^\circ\text{C}$ ,  $V_S = 5\text{V}$ ,  $0\text{V}$ ;  $V_S = 3.3\text{V}$ ,  $0\text{V}$ ;  $V_{CM} = V_{OUT} = \text{half supply}$ ,  
 $\text{ENABLE} = 0\text{V}$ , unless otherwise noted.

| SYMBOL              | PARAMETER                                                                                      | CONDITIONS                                                                                   | MIN      | TYP      | MAX  | UNIT                   |
|---------------------|------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|----------|----------|------|------------------------|
| $V_{OS}$            | Input Offset Voltage                                                                           | LT6236                                                                                       |          | 100      | 500  | $\mu\text{V}$          |
|                     |                                                                                                | LT6237MS8, LT6238GN                                                                          |          | 50       | 350  | $\mu\text{V}$          |
|                     |                                                                                                | LT6237DD8                                                                                    |          | 75       | 450  | $\mu\text{V}$          |
|                     | Input Offset Voltage Match (Channel-to-Channel) (Note 6)                                       |                                                                                              |          | 100      | 600  | $\mu\text{V}$          |
| $I_B$               | Input Bias Current                                                                             |                                                                                              |          | 5        | 10   | $\mu\text{A}$          |
|                     | $I_B$ Match (Channel-to-Channel) (Note 6)                                                      |                                                                                              |          | 0.1      | 0.9  | $\mu\text{A}$          |
| $I_{OS}$            | Input Offset Current                                                                           |                                                                                              |          | 0.1      | 0.6  | $\mu\text{A}$          |
|                     | Input Noise Voltage                                                                            | 0.1Hz to 10Hz                                                                                |          | 180      |      | nV <sub>P-P</sub>      |
| $e_n$               | Input Noise Voltage Density                                                                    | $f = 10\text{kHz}$ , $V_S = 5\text{V}$                                                       |          | 1.1      | 1.7  | nV/ $\sqrt{\text{Hz}}$ |
| $i_n$               | Input Noise Current Density, Balanced Source<br>Input Noise Current Density, Unbalanced Source | $f = 10\text{kHz}$ , $V_S = 5\text{V}$ , $R_S = 10\text{k}$                                  |          | 1        |      | pA/ $\sqrt{\text{Hz}}$ |
|                     |                                                                                                | $f = 10\text{kHz}$ , $V_S = 5\text{V}$ , $R_S = 10\text{k}$                                  |          | 2.4      |      | pA/ $\sqrt{\text{Hz}}$ |
| $R_{IN}$            | Input Resistance                                                                               | Common Mode                                                                                  |          | 6.5      |      | M $\Omega$             |
|                     |                                                                                                | Differential Mode                                                                            |          | 7.5      |      | k $\Omega$             |
| $C_{IN}$            | Input Capacitance                                                                              | Common Mode                                                                                  |          | 2.9      |      | pF                     |
|                     |                                                                                                | Differential Mode                                                                            |          | 7.7      |      | pF                     |
| $A_{VOL}$           | Large-Signal Gain                                                                              | $V_S = 5\text{V}$ , $V_O = 0.5\text{V}$ to $4.5\text{V}$ , $R_L = 10\text{k}$ to $V_S/2$     | 105      | 200      |      | V/mV                   |
|                     |                                                                                                | $V_S = 5\text{V}$ , $V_O = 0.5\text{V}$ to $4.5\text{V}$ , $R_L = 1\text{k}$ to $V_S/2$      | 21       | 40       |      | V/mV                   |
|                     |                                                                                                | $V_S = 5\text{V}$ , $V_O = 1\text{V}$ to $4\text{V}$ , $R_L = 100\Omega$ to $V_S/2$          | 5.4      | 9        |      | V/mV                   |
|                     |                                                                                                | $V_S = 3.3\text{V}$ , $V_O = 0.65\text{V}$ to $2.65\text{V}$ , $R_L = 10\text{k}$ to $V_S/2$ | 90       | 175      |      | V/mV                   |
|                     |                                                                                                | $V_S = 3.3\text{V}$ , $V_O = 0.65\text{V}$ to $2.65\text{V}$ , $R_L = 1\text{k}$ to $V_S/2$  | 16.5     | 32       |      | V/mV                   |
| $V_{CM}$            | Input Voltage Range                                                                            | Guaranteed by CMRR, $V_S = 5\text{V}$ , $0\text{V}$                                          | 1.5      |          | 4    | V                      |
|                     |                                                                                                | Guaranteed by CMRR, $V_S = 3.3\text{V}$ , $0\text{V}$                                        | 1.15     |          | 2.65 | V                      |
| CMRR                | Common Mode Rejection Ratio                                                                    | $V_S = 5\text{V}$ , $V_{CM} = 1.5\text{V}$ to $4\text{V}$                                    | 90       | 115      |      | dB                     |
|                     |                                                                                                | $V_S = 3.3\text{V}$ , $V_{CM} = 1.15\text{V}$ to $2.65\text{V}$                              | 90       | 115      |      | dB                     |
| PSRR                | Power Supply Rejection Ratio                                                                   | $V_S = 3\text{V}$ to $10\text{V}$                                                            | 90       | 115      |      | dB                     |
|                     | Minimum Supply Voltage (Note 7)                                                                |                                                                                              | 3        |          |      | V                      |
| $V_{OL}$            | Output Voltage Swing Low (Note 8)                                                              | No Load                                                                                      |          | 4        | 40   | mV                     |
|                     |                                                                                                | $I_{SINK} = 5\text{mA}$                                                                      |          | 85       | 190  | mV                     |
|                     |                                                                                                | $V_S = 5\text{V}$ , $I_{SINK} = 20\text{mA}$                                                 |          | 240      | 460  | mV                     |
|                     |                                                                                                | $V_S = 3.3\text{V}$ , $I_{SINK} = 15\text{mA}$                                               |          | 185      | 350  | mV                     |
| $V_{OH}$            | Output Voltage Swing High (Note 8)                                                             | No Load                                                                                      |          | 5        | 50   | mV                     |
|                     |                                                                                                | $I_{SOURCE} = 5\text{mA}$                                                                    |          | 90       | 200  | mV                     |
|                     |                                                                                                | $V_S = 5\text{V}$ , $I_{SOURCE} = 20\text{mA}$                                               |          | 325      | 600  | mV                     |
|                     |                                                                                                | $V_S = 3.3\text{V}$ , $I_{SOURCE} = 15\text{mA}$                                             |          | 250      | 400  | mV                     |
| $I_{SC}$            | Short-Circuit Current                                                                          | $V_S = 5\text{V}$                                                                            | $\pm 30$ | $\pm 45$ |      | mA                     |
|                     |                                                                                                | $V_S = 3.3\text{V}$                                                                          | $\pm 25$ | $\pm 40$ |      | mA                     |
| $I_S$               | Supply Current per Amplifier                                                                   |                                                                                              |          | 3.15     | 3.5  | mA                     |
|                     | Disabled Supply Current per Amplifier                                                          | $\text{ENABLE} = V^+ - 0.35\text{V}$                                                         |          | 0.2      | 10   | $\mu\text{A}$          |
| $I_{\text{ENABLE}}$ | ENABLE Pin Current                                                                             | $\text{ENABLE} = 0.3\text{V}$                                                                |          | -25      | -75  | $\mu\text{A}$          |

# LT6236/LT6237/LT6238

## ELECTRICAL CHARACTERISTICS

$T_A = 25^\circ\text{C}$ ,  $V_S = 5\text{V}$ ,  $0\text{V}$ ;  $V_S = 3.3\text{V}$ ,  $0\text{V}$ ;  $V_{CM} = V_{OUT} = \text{half supply}$ ,  
**ENABLE = 0V**, unless otherwise noted.

| SYMBOL            | PARAMETER                     | CONDITIONS                                                                                | MIN                  | TYP | MAX | UNIT                   |
|-------------------|-------------------------------|-------------------------------------------------------------------------------------------|----------------------|-----|-----|------------------------|
| $V_L$             | ENABLE Pin Input Voltage Low  |                                                                                           |                      |     | 0.3 | V                      |
| $V_H$             | ENABLE Pin Input Voltage High |                                                                                           | $V^+ - 0.35\text{V}$ |     |     | V                      |
|                   | Output Leakage Current        | ENABLE = $V^+ - 0.35\text{V}$ , $V_O = 1.5\text{V}$ to $3.5\text{V}$                      |                      | 0.2 | 10  | $\mu\text{A}$          |
| $t_{ON}$          | Turn-On Time                  | ENABLE = $5\text{V}$ to $0\text{V}$ , $R_L = 1\text{k}$ , $V_S = 5\text{V}$               |                      | 800 |     | ns                     |
| $t_{OFF}$         | Turn-Off Time                 | ENABLE = $0\text{V}$ to $5\text{V}$ , $R_L = 1\text{k}$ , $V_S = 5\text{V}$               |                      | 41  |     | $\mu\text{s}$          |
| GBW               | Gain-Bandwidth Product        | Frequency = $1\text{MHz}$ , $V_S = 5\text{V}$                                             |                      | 200 |     | MHz                    |
| $f_{-3\text{dB}}$ | -3dB Bandwidth                | $V_S = 5\text{V}$ , $R_L = 100\Omega$                                                     |                      | 90  |     | MHz                    |
| SR                | Slew Rate                     | $V_S = 5\text{V}$ , $A_V = -1$ , $R_L = 1\text{k}$ , $V_O = 1.5\text{V}$ to $3.5\text{V}$ | 42                   | 60  |     | $\text{V}/\mu\text{s}$ |
| FPBW              | Full-Power Bandwidth          | $V_S = 5\text{V}$ , $V_{OUT} = 3\text{V}_{P-P}$ (Note 9)                                  | 4.4                  | 6.3 |     | MHz                    |
| $t_S$             | Settling Time                 | $0.1\%$ , $V_S = 5\text{V}$ , $V_{STEP} = 2\text{V}$ , $A_V = 1$                          |                      | 50  |     | ns                     |
|                   |                               | $0.01\%$                                                                                  |                      | 60  |     | ns                     |
|                   |                               | $0.0015\%$ (16-Bit)                                                                       |                      | 240 |     | ns                     |
|                   |                               | 4ppm (18-Bit)                                                                             |                      | 570 |     | ns                     |

The ● denotes the specifications which apply over the  $0^\circ\text{C} < T_A < 70^\circ\text{C}$  temperature range.  $V_S = 5\text{V}$ ,  $0\text{V}$ ;  $V_S = 3.3\text{V}$ ,  $0\text{V}$ ;  $V_{CM} = V_{OUT} = \text{half supply}$ , **ENABLE = 0V**, unless otherwise noted.

| SYMBOL       | PARAMETER                                                   | CONDITIONS                                                                                                                                                                                                                                                                 | MIN              | TYP                      | MAX                      | UNIT                                                                                                                         |
|--------------|-------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|--------------------------|--------------------------|------------------------------------------------------------------------------------------------------------------------------|
| $V_{OS}$     | Input Offset Voltage                                        | LT6236<br>LT6237MS8, LT6238GN<br>LT6237DD8                                                                                                                                                                                                                                 | ●<br>●<br>●      |                          | 600<br>450<br>550        | $\mu\text{V}$<br>$\mu\text{V}$<br>$\mu\text{V}$                                                                              |
|              | Input Offset Voltage Match<br>(Channel-to-Channel) (Note 6) |                                                                                                                                                                                                                                                                            | ●                |                          | 800                      | $\mu\text{V}$                                                                                                                |
| $V_{OS\ TC}$ | Input Offset Voltage Drift (Note 10)                        | LT6236<br>LT6237MS8<br>LT6237DD8<br>LT6238GN                                                                                                                                                                                                                               | ●<br>●<br>●<br>● | 0.5<br>0.3<br>0.4<br>0.5 | 2.0<br>1.4<br>2.2<br>2.2 | $\mu\text{V}/^\circ\text{C}$<br>$\mu\text{V}/^\circ\text{C}$<br>$\mu\text{V}/^\circ\text{C}$<br>$\mu\text{V}/^\circ\text{C}$ |
| $I_B$        | Input Bias Current                                          |                                                                                                                                                                                                                                                                            | ●                |                          | 11                       | $\mu\text{A}$                                                                                                                |
|              | $I_B$ Match (Channel-to-Channel) (Note 6)                   |                                                                                                                                                                                                                                                                            | ●                |                          | 1                        | $\mu\text{A}$                                                                                                                |
| $I_{OS}$     | Input Offset Current                                        |                                                                                                                                                                                                                                                                            | ●                |                          | 0.7                      | $\mu\text{A}$                                                                                                                |
| $A_{VOL}$    | Large-Signal Gain                                           | $V_S = 5\text{V}$ , $V_O = 0.5\text{V}$ to $4.5\text{V}$ , $R_L = 10\text{k}$ to $V_S/2$<br>$V_S = 5\text{V}$ , $V_O = 0.5\text{V}$ to $4.5\text{V}$ , $R_L = 1\text{k}$ to $V_S/2$<br>$V_S = 5\text{V}$ , $V_O = 1\text{V}$ to $4\text{V}$ , $R_L = 100\Omega$ to $V_S/2$ | ●<br>●<br>●      | 78<br>17<br>4.1          |                          | $\text{V}/\text{mV}$<br>$\text{V}/\text{mV}$<br>$\text{V}/\text{mV}$                                                         |
|              |                                                             | $V_S = 3.3\text{V}$ , $V_O = 0.65\text{V}$ to $2.65\text{V}$ , $R_L = 10\text{k}$ to $V_S/2$<br>$V_S = 3.3\text{V}$ , $V_O = 0.65\text{V}$ to $2.65\text{V}$ , $R_L = 1\text{k}$ to $V_S/2$                                                                                | ●<br>●           | 66<br>13                 |                          | $\text{V}/\text{mV}$<br>$\text{V}/\text{mV}$                                                                                 |
| $V_{CM}$     | Input Voltage Range                                         | Guaranteed by CMRR<br>$V_S = 5\text{V}$ , $0\text{V}$<br>$V_S = 3.3\text{V}$ , $0\text{V}$                                                                                                                                                                                 | ●<br>●           | 1.5<br>1.15              | 4<br>2.65                | V<br>V                                                                                                                       |
| CMRR         | Common Mode Rejection Ratio                                 | $V_S = 5\text{V}$ , $V_{CM} = 1.5\text{V}$ to $4\text{V}$<br>$V_S = 3.3\text{V}$ , $V_{CM} = 1.15\text{V}$ to $2.65\text{V}$                                                                                                                                               | ●<br>●           | 90<br>85                 |                          | dB<br>dB                                                                                                                     |
| PSRR         | Power Supply Rejection Ratio                                | $V_S = 3\text{V}$ to $10\text{V}$                                                                                                                                                                                                                                          | ●                | 85                       |                          | dB                                                                                                                           |
|              | Minimum Supply Voltage (Note 7)                             |                                                                                                                                                                                                                                                                            | ●                | 3                        |                          | V                                                                                                                            |
| $V_{OL}$     | Output Voltage Swing Low (Note 8)                           | No Load<br>$I_{SINK} = 5\text{mA}$<br>$V_S = 5\text{V}$ , $I_{SINK} = 20\text{mA}$<br>$V_S = 3.3\text{V}$ , $I_{SINK} = 15\text{mA}$                                                                                                                                       | ●<br>●<br>●<br>● |                          | 50<br>200<br>500<br>380  | mV<br>mV<br>mV<br>mV                                                                                                         |

# ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the  $0^{\circ}\text{C} < T_A < 70^{\circ}\text{C}$  temperature range.  $V_S = 5\text{V}$ ,  $0\text{V}$ ;  $V_S = 3.3\text{V}$ ,  $0\text{V}$ ;  $V_{CM} = V_{OUT} = \text{half supply}$ ,  $\text{ENABLE} = 0\text{V}$ , unless otherwise noted.

| SYMBOL              | PARAMETER                             | CONDITIONS                                                                                | MIN | TYP                  | MAX | UNIT             |
|---------------------|---------------------------------------|-------------------------------------------------------------------------------------------|-----|----------------------|-----|------------------|
| $V_{OH}$            | Output Voltage Swing High (Note 8)    | No Load                                                                                   | ●   |                      | 60  | mV               |
|                     |                                       | $I_{SOURCE} = 5\text{mA}$                                                                 | ●   |                      | 215 | mV               |
|                     |                                       | $V_S = 5\text{V}$ , $I_{SOURCE} = 20\text{mA}$                                            | ●   |                      | 650 | mV               |
|                     |                                       | $V_S = 3.3\text{V}$ , $I_{SOURCE} = 15\text{mA}$                                          | ●   |                      | 430 | mV               |
| $I_{SC}$            | Short-Circuit Current                 | $V_S = 5\text{V}$                                                                         | ●   | $\pm 25$             |     | mA               |
|                     |                                       | $V_S = 3.3\text{V}$                                                                       | ●   | $\pm 20$             |     | mA               |
| $I_S$               | Supply Current per Amplifier          |                                                                                           | ●   |                      | 4.2 | mA               |
|                     | Disabled Supply Current per Amplifier | $\text{ENABLE} = V^+ - 0.25\text{V}$                                                      | ●   | 1                    |     | $\mu\text{A}$    |
| $I_{\text{ENABLE}}$ | ENABLE Pin Current                    | $\text{ENABLE} = 0.3\text{V}$                                                             | ●   |                      | -85 | $\mu\text{A}$    |
| $V_L$               | ENABLE Pin Input Voltage Low          |                                                                                           | ●   |                      | 0.3 | V                |
| $V_H$               | ENABLE Pin Input Voltage High         |                                                                                           | ●   | $V^+ - 0.25\text{V}$ |     | V                |
| SR                  | Slew Rate                             | $V_S = 5\text{V}$ , $A_V = -1$ , $R_L = 1\text{k}$ , $V_O = 1.5\text{V}$ to $3.5\text{V}$ | ●   | 35                   |     | V/ $\mu\text{s}$ |
| FPBW                | Full-Power Bandwidth (Note 9)         | $V_S = 5\text{V}$ , $V_{OUT} = 3V_{P-P}$                                                  | ●   | 3.7                  |     | MHz              |

The ● denotes the specifications which apply over the  $-40^{\circ}\text{C} < T_A < 85^{\circ}\text{C}$  temperature range.  $V_S = 5\text{V}$ ,  $0\text{V}$ ;  $V_S = 3.3\text{V}$ ,  $0\text{V}$ ;  $V_{CM} = V_{OUT} = \text{half supply}$ ,  $\text{ENABLE} = 0\text{V}$ , unless otherwise noted. (Note 5)

| SYMBOL             | PARAMETER                                                | CONDITIONS                                                                                   | MIN | TYP  | MAX  | UNITS                          |
|--------------------|----------------------------------------------------------|----------------------------------------------------------------------------------------------|-----|------|------|--------------------------------|
| $V_{OS}$           | Input Offset Voltage                                     | LT6236                                                                                       | ●   |      | 700  | $\mu\text{V}$                  |
|                    |                                                          | LT6237MS8, LT6238GN                                                                          | ●   |      | 550  | $\mu\text{V}$                  |
|                    |                                                          | LT6237DD8                                                                                    | ●   |      | 650  | $\mu\text{V}$                  |
|                    | Input Offset Voltage Match (Channel-to-Channel) (Note 6) |                                                                                              | ●   |      | 1000 | $\mu\text{V}$                  |
| $V_{OS\text{ TC}}$ | Input Offset Voltage Drift (Note 10)                     | LT6236                                                                                       | ●   | 0.5  | 2.0  | $\mu\text{V}/^{\circ}\text{C}$ |
|                    |                                                          | LT6237MS8                                                                                    | ●   | 0.3  | 1.4  | $\mu\text{V}/^{\circ}\text{C}$ |
|                    |                                                          | LT6237DD8                                                                                    | ●   | 0.4  | 2.2  | $\mu\text{V}/^{\circ}\text{C}$ |
|                    |                                                          | LT6238GN                                                                                     | ●   | 0.5  | 2.2  | $\mu\text{V}/^{\circ}\text{C}$ |
| $I_B$              | Input Bias Current                                       |                                                                                              | ●   |      | 12   | $\mu\text{A}$                  |
|                    | $I_B$ Match (Channel-to-Channel) (Note 6)                |                                                                                              | ●   |      | 1.1  | $\mu\text{A}$                  |
| $I_{OS}$           | Input Offset Current                                     |                                                                                              | ●   |      | 0.8  | $\mu\text{A}$                  |
| $A_{VOL}$          | Large-Signal Gain                                        | $V_S = 5\text{V}$ , $V_O = 0.5\text{V}$ to $4.5\text{V}$ , $R_L = 10\text{k}$ to $V_S/2$     | ●   | 72   |      | V/mV                           |
|                    |                                                          | $V_S = 5\text{V}$ , $V_O = 0.5\text{V}$ to $4.5\text{V}$ , $R_L = 1\text{k}$ to $V_S/2$      | ●   | 16   |      | V/mV                           |
|                    |                                                          | $V_S = 5\text{V}$ , $V_O = 1\text{V}$ to $4\text{V}$ , $R_L = 100\Omega$ to $V_S/2$          | ●   | 3.6  |      | V/mV                           |
|                    |                                                          | $V_S = 3.3\text{V}$ , $V_O = 0.65\text{V}$ to $2.65\text{V}$ , $R_L = 10\text{k}$ to $V_S/2$ | ●   | 60   |      | V/mV                           |
| $V_{CM}$           | Input Voltage Range                                      | $V_S = 3.3\text{V}$ , $V_O = 0.65\text{V}$ to $2.65\text{V}$ , $R_L = 1\text{k}$ to $V_S/2$  | ●   | 12   |      | V/mV                           |
|                    |                                                          | Guaranteed by CMRR                                                                           |     |      |      |                                |
|                    |                                                          | $V_S = 5\text{V}$ , $0\text{V}$                                                              | ●   | 1.5  | 4    | V                              |
|                    |                                                          | $V_S = 3.3\text{V}$ , $0\text{V}$                                                            | ●   | 1.15 | 2.65 | V                              |
| CMRR               | Common Mode Rejection Ratio                              | $V_S = 5\text{V}$ , $V_{CM} = 1.5\text{V}$ to $4\text{V}$                                    | ●   | 90   |      | dB                             |
|                    |                                                          | $V_S = 3.3\text{V}$ , $V_{CM} = 1.15\text{V}$ to $2.65\text{V}$                              | ●   | 85   |      | dB                             |
| PSRR               | Power Supply Rejection Ratio                             | $V_S = 3\text{V}$ to $10\text{V}$                                                            | ●   | 85   |      | dB                             |
|                    | Minimum Supply Voltage (Note 7)                          |                                                                                              | ●   | 3    |      | V                              |
| $V_{OL}$           | Output Voltage Swing Low (Note 8)                        | No Load                                                                                      | ●   |      | 60   | mV                             |
|                    |                                                          | $I_{SINK} = 5\text{mA}$                                                                      | ●   |      | 210  | mV                             |
|                    |                                                          | $V_S = 5\text{V}$ , $I_{SINK} = 15\text{mA}$                                                 | ●   |      | 510  | mV                             |
|                    |                                                          | $V_S = 3.3\text{V}$ , $I_{SINK} = 15\text{mA}$                                               | ●   |      | 390  | mV                             |

# LT6236/LT6237/LT6238

**ELECTRICAL CHARACTERISTICS** The ● denotes the specifications which apply over the  $-40^{\circ}\text{C} < T_A < 85^{\circ}\text{C}$  temperature range.  $V_S = 5\text{V}$ ,  $0\text{V}$ ;  $V_S = 3.3\text{V}$ ,  $0\text{V}$ ;  $V_{CM} = V_{OUT} = \text{half supply}$ ,  $\text{ENABLE} = 0\text{V}$ , unless otherwise noted. (Note 5)

|              |                                                                       |                                                                                                                                            |                  |                         |                      |
|--------------|-----------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|------------------|-------------------------|----------------------|
| $V_{OH}$     | Output Voltage Swing High (Note 6)                                    | No Load<br>$I_{SOURCE} = 5\text{mA}$<br>$V_S = 5\text{V}$ , $I_{SOURCE} = 20\text{mA}$<br>$V_S = 3.3\text{V}$ , $I_{SOURCE} = 15\text{mA}$ | ●<br>●<br>●<br>● | 70<br>220<br>675<br>440 | mV<br>mV<br>mV<br>mV |
| $I_{SC}$     | Short-Circuit Current                                                 | $V_S = 5\text{V}$<br>$V_S = 3.3\text{V}$                                                                                                   | ●<br>●           | $\pm 15$<br>$\pm 15$    | mA<br>mA             |
| $I_S$        | Supply Current per Amplifier<br>Disabled Supply Current per Amplifier | $\text{ENABLE} = V^+ - 0.2\text{V}$                                                                                                        | ●<br>●           | 4.4<br>1                | mA<br>$\mu\text{A}$  |
| $I_{ENABLE}$ | ENABLE Pin Current                                                    | $\text{ENABLE} = 0.3\text{V}$                                                                                                              | ●                | -100                    | $\mu\text{A}$        |
| $V_L$        | ENABLE Pin Input Voltage Low                                          |                                                                                                                                            | ●                | 0.3                     | V                    |
| $V_H$        | ENABLE Pin Input Voltage High                                         |                                                                                                                                            | ●                | $V^+ - 0.2\text{V}$     | V                    |
| SR           | Slew Rate                                                             | $V_S = 5\text{V}$ , $A_V = -1$ , $R_L = 1\text{k}$ , $V_O = 1.5\text{V}$ to $3.5\text{V}$                                                  | ●                | 31                      | V/ $\mu\text{s}$     |
| FPBW         | Full-Power Bandwidth (Note 9)                                         | $V_S = 5\text{V}$ , $V_{OUT} = 3V_{P-P}$                                                                                                   | ●                | 3.3                     | MHz                  |

The ● denotes the specifications which apply over the  $-40^{\circ}\text{C} < T_A < 125^{\circ}\text{C}$  temperature range.  $V_S = 5\text{V}$ ,  $0\text{V}$ ;  $V_S = 3.3\text{V}$ ,  $0\text{V}$ ;  $V_{CM} = V_{OUT} = \text{half supply}$ ,  $\text{ENABLE} = 0\text{V}$ , unless otherwise noted. (Note 5)

| SYMBOL       | PARAMETER                                                   | CONDITIONS                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                       | MIN                       | TYP                      | MAX                      | UNITS                                                                                                                                |
|--------------|-------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|---------------------------|--------------------------|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| $V_{OS}$     | Input Offset Voltage                                        | LT6236<br>LT6237MS8, LT6238GN<br>LT6237DD8                                                                                                                                                                                                                                                                                                                                                                                                                                | ●<br>●<br>●           |                           |                          | 750<br>650<br>700        | $\mu\text{V}$<br>$\mu\text{V}$<br>$\mu\text{V}$                                                                                      |
|              | Input Offset Voltage Match<br>(Channel-to-Channel) (Note 6) |                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | ●                     |                           |                          | 1000                     | $\mu\text{V}$                                                                                                                        |
| $V_{OS\ TC}$ | Input Offset Voltage Drift (Note 10)                        | LT6236<br>LT6237MS8<br>LT6237DD8<br>LT6238GN                                                                                                                                                                                                                                                                                                                                                                                                                              | ●<br>●<br>●<br>●      |                           | 0.5<br>0.3<br>0.4<br>0.5 | 2.0<br>1.4<br>2.2<br>2.2 | $\mu\text{V}/^{\circ}\text{C}$<br>$\mu\text{V}/^{\circ}\text{C}$<br>$\mu\text{V}/^{\circ}\text{C}$<br>$\mu\text{V}/^{\circ}\text{C}$ |
| $I_B$        | Input Bias Current                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | ●                     |                           |                          | 12                       | $\mu\text{A}$                                                                                                                        |
|              | $I_B$ Match (Channel-to-Channel) (Note 6)                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | ●                     |                           |                          | 1.1                      | $\mu\text{A}$                                                                                                                        |
| $I_{OS}$     | Input Offset Current                                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | ●                     |                           |                          | 1.2                      | $\mu\text{A}$                                                                                                                        |
| $A_{VOL}$    | Large-Signal Gain                                           | $V_S = 5\text{V}$ , $V_O = 0.5\text{V}$ to $4.5\text{V}$ , $R_L = 10\text{k}$ to $V_S/2$<br>$V_S = 5\text{V}$ , $V_O = 0.5\text{V}$ to $4.5\text{V}$ , $R_L = 1\text{k}$ to $V_S/2$<br>$V_S = 5\text{V}$ , $V_O = 1\text{V}$ to $4\text{V}$ , $R_L = 100\Omega$ to $V_S/2$<br>$V_S = 3.3\text{V}$ , $V_O = 0.65\text{V}$ to $2.65\text{V}$ , $R_L = 10\text{k}$ to $V_S/2$<br>$V_S = 3.3\text{V}$ , $V_O = 0.65\text{V}$ to $2.65\text{V}$ , $R_L = 1\text{k}$ to $V_S/2$ | ●<br>●<br>●<br>●<br>● | 62<br>14<br>3<br>52<br>11 |                          |                          | V/mV<br>V/mV<br>V/mV<br>V/mV<br>V/mV                                                                                                 |
| $V_{CM}$     | Input Voltage Range                                         | Guaranteed by CMRR<br>$V_S = 5\text{V}$ , $0\text{V}$<br>$V_S = 3.3\text{V}$ , $0\text{V}$                                                                                                                                                                                                                                                                                                                                                                                | ●<br>●                | 1.5<br>1.15               |                          | 4<br>2.65                | V<br>V                                                                                                                               |
| CMRR         | Common Mode Rejection Ratio                                 | $V_S = 5\text{V}$ , $V_{CM} = 1.5\text{V}$ to $4\text{V}$<br>$V_S = 3.3\text{V}$ , $V_{CM} = 1.15\text{V}$ to $2.65\text{V}$                                                                                                                                                                                                                                                                                                                                              | ●<br>●                | 90<br>85                  |                          |                          | dB<br>dB                                                                                                                             |
| PSRR         | Power Supply Rejection Ratio                                | $V_S = 3\text{V}$ to $10\text{V}$                                                                                                                                                                                                                                                                                                                                                                                                                                         | ●                     | 85                        |                          |                          | dB                                                                                                                                   |
|              | Minimum Supply Voltage (Note 7)                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | ●                     | 3                         |                          |                          | V                                                                                                                                    |
| $V_{OL}$     | Output Voltage Swing Low (Note 8)                           | No Load<br>$I_{SINK} = 5\text{mA}$<br>$V_S = 5\text{V}$ , $I_{SINK} = 15\text{mA}$<br>$V_S = 3.3\text{V}$ , $I_{SINK} = 15\text{mA}$                                                                                                                                                                                                                                                                                                                                      | ●<br>●<br>●<br>●      |                           |                          | 60<br>225<br>550<br>425  | mV<br>mV<br>mV<br>mV                                                                                                                 |
| $V_{OH}$     | Output Voltage Swing High (Note 8)                          | No Load<br>$I_{SOURCE} = 5\text{mA}$<br>$V_S = 5\text{V}$ , $I_{SOURCE} = 20\text{mA}$<br>$V_S = 3.3\text{V}$ , $I_{SOURCE} = 15\text{mA}$                                                                                                                                                                                                                                                                                                                                | ●<br>●<br>●<br>●      |                           |                          | 80<br>240<br>700<br>470  | mV<br>mV<br>mV<br>mV                                                                                                                 |

623637fb

# ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the  $-40^{\circ}\text{C} < T_A < 125^{\circ}\text{C}$  temperature range.  $V_S = 5\text{V}$ ,  $0\text{V}$ ;  $V_S = 3.3\text{V}$ ,  $0\text{V}$ ;  $V_{CM} = V_{OUT} = \text{half supply}$ ,  $\overline{\text{ENABLE}} = 0\text{V}$ , unless otherwise noted. (Note 5)

|                                |                                                                       |                                                                                           |        |                      |                     |
|--------------------------------|-----------------------------------------------------------------------|-------------------------------------------------------------------------------------------|--------|----------------------|---------------------|
| $I_{SC}$                       | Short-Circuit Current                                                 | $V_S = 5\text{V}$<br>$V_S = 3.3\text{V}$                                                  | ●<br>● | $\pm 15$<br>$\pm 15$ | mA<br>mA            |
| $I_S$                          | Supply Current per Amplifier<br>Disabled Supply Current per Amplifier | $\overline{\text{ENABLE}} = V^+ - 0.15\text{V}$                                           | ●<br>● | 5<br>2               | mA<br>$\mu\text{A}$ |
| $I_{\overline{\text{ENABLE}}}$ | $\overline{\text{ENABLE}}$ Pin Current                                | $\overline{\text{ENABLE}} = 0.3\text{V}$                                                  | ●      | -100                 | $\mu\text{A}$       |
| $V_L$                          | $\overline{\text{ENABLE}}$ Pin Input Voltage Low                      |                                                                                           | ●      | 0.3                  | V                   |
| $V_H$                          | $\overline{\text{ENABLE}}$ Pin Input Voltage High                     |                                                                                           | ●      | $V^+ - 0.15\text{V}$ | V                   |
| SR                             | Slew Rate                                                             | $V_S = 5\text{V}$ , $A_V = -1$ , $R_L = 1\text{k}$ , $V_O = 1.5\text{V}$ to $3.5\text{V}$ | ●      | 31                   | V/ $\mu\text{s}$    |
| FPBW                           | Full-Power Bandwidth (Note 9)                                         | $V_S = 5\text{V}$ , $V_{OUT} = 3V_{P-P}$                                                  | ●      | 3.3                  | MHz                 |

$T_A = 25^{\circ}\text{C}$ ,  $V_S = \pm 5\text{V}$ ,  $V_{CM} = V_{OUT} = 0\text{V}$ ,  $\overline{\text{ENABLE}} = 0\text{V}$ , unless otherwise noted.

| SYMBOL                         | PARAMETER                                                                                      | CONDITIONS                                                                                                                               | MIN              | TYP             | MAX               | UNITS                                            |
|--------------------------------|------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|------------------|-----------------|-------------------|--------------------------------------------------|
| $V_{OS}$                       | Input Offset Voltage                                                                           | LT6236<br>LT6237MS8, LT6238GN<br>LT6237DD8                                                                                               |                  | 100<br>50<br>75 | 500<br>350<br>450 | $\mu\text{V}$<br>$\mu\text{V}$<br>$\mu\text{V}$  |
|                                | Input Offset Voltage Match<br>(Channel-to-Channel) (Note 6)                                    |                                                                                                                                          |                  | 100             | 600               | $\mu\text{V}$                                    |
| $I_B$                          | Input Bias Current                                                                             |                                                                                                                                          |                  | 5               | 10                | $\mu\text{A}$                                    |
|                                | $I_B$ Match (Channel-to-Channel) (Note 6)                                                      |                                                                                                                                          |                  | 0.1             | 0.9               | $\mu\text{A}$                                    |
| $I_{OS}$                       | Input Offset Current                                                                           |                                                                                                                                          |                  | 0.1             | 0.6               | $\mu\text{A}$                                    |
|                                | Input Noise Voltage                                                                            | 0.1Hz to 10Hz                                                                                                                            |                  | 180             |                   | nV $_{P-P}$                                      |
| $e_n$                          | Input Noise Voltage Density                                                                    | $f = 10\text{kHz}$                                                                                                                       |                  | 1.1             | 1.7               | nV/ $\sqrt{\text{Hz}}$                           |
| $i_n$                          | Input Noise Current Density, Balanced Source<br>Input Noise Current Density, Unbalanced source | $f = 10\text{kHz}$ , $R_S = 10\text{k}$<br>$f = 10\text{kHz}$ , $R_S = 10\text{k}$                                                       |                  | 1<br>2.4        |                   | pA/ $\sqrt{\text{Hz}}$<br>pA/ $\sqrt{\text{Hz}}$ |
| $R_{IN}$                       | Input Resistance                                                                               | Common Mode<br>Differential Mode                                                                                                         |                  | 6.5<br>7.5      |                   | M $\Omega$<br>k $\Omega$                         |
| $C_{IN}$                       | Input Capacitance                                                                              | Common Mode<br>Differential Mode                                                                                                         |                  | 2.4<br>6.5      |                   | pF<br>pF                                         |
| $A_{VOL}$                      | Large-Signal Gain                                                                              | $V_O = \pm 4.5\text{V}$ , $R_L = 10\text{k}$<br>$V_O = \pm 4.5\text{V}$ , $R_L = 1\text{k}$<br>$V_O = \pm 2\text{V}$ , $R_L = 100\Omega$ | 140<br>35<br>8.5 | 260<br>65<br>16 |                   | V/mV<br>V/mV<br>V/mV                             |
| $V_{CM}$                       | Input Voltage Range                                                                            | Guaranteed by CMRR                                                                                                                       | -3               |                 | 4                 | V                                                |
| CMRR                           | Common Mode Rejection Ratio                                                                    | $V_{CM} = -3\text{V}$ to $4\text{V}$                                                                                                     | 95               | 120             |                   | dB                                               |
| PSRR                           | Power Supply Rejection Ratio                                                                   | $V_S = \pm 1.5\text{V}$ to $\pm 5\text{V}$                                                                                               | 90               | 115             |                   | dB                                               |
| $V_{OL}$                       | Output Voltage Swing Low (Note 8)                                                              | No Load<br>$I_{SINK} = 5\text{mA}$<br>$I_{SINK} = 20\text{mA}$                                                                           |                  | 4<br>85<br>240  | 40<br>190<br>460  | mV<br>mV<br>mV                                   |
| $V_{OH}$                       | Output Voltage Swing High (Note 8)                                                             | No Load<br>$I_{SOURCE} = 5\text{mA}$<br>$I_{SOURCE} = 20\text{mA}$                                                                       |                  | 5<br>90<br>325  | 50<br>200<br>600  | mV<br>mV<br>mV                                   |
| $I_{SC}$                       | Short-Circuit Current                                                                          |                                                                                                                                          | $\pm 30$         |                 |                   | mA                                               |
| $I_S$                          | Supply Current per Amplifier<br>Disabled Supply Current per Amplifier                          | $\overline{\text{ENABLE}} = 4.65\text{V}$                                                                                                |                  | 3.3<br>0.2      | 3.9               | mA<br>$\mu\text{A}$                              |
| $I_{\overline{\text{ENABLE}}}$ | $\overline{\text{ENABLE}}$ Pin Current                                                         | $\overline{\text{ENABLE}} = 0.3\text{V}$                                                                                                 |                  | -35             | -85               | $\mu\text{A}$                                    |
| $V_L$                          | $\overline{\text{ENABLE}}$ Pin Input Voltage Low                                               |                                                                                                                                          |                  |                 | 0.3               | V                                                |
| $V_H$                          | $\overline{\text{ENABLE}}$ Pin Input Voltage High                                              |                                                                                                                                          | 4.65             |                 |                   | V                                                |

# LT6236/LT6237/LT6238

## ELECTRICAL CHARACTERISTICS $T_A = 25^\circ\text{C}$ , $V_S = \pm 5\text{V}$ , $V_{CM} = V_{OUT} = 0\text{V}$ , $\overline{\text{ENABLE}} = 0\text{V}$ , unless otherwise noted.

| SYMBOL    | PARAMETER              | CONDITIONS                                                                | MIN | TYP  | MAX | UNITS                  |
|-----------|------------------------|---------------------------------------------------------------------------|-----|------|-----|------------------------|
|           | Output Leakage Current | $\overline{\text{ENABLE}} = V_+ - 0.35\text{V}$ , $V_O = \pm 1\text{V}$   |     | 0.2  | 10  | $\mu\text{A}$          |
| $t_{ON}$  | Turn-On Time           | $\overline{\text{ENABLE}} = 5\text{V}$ to $0\text{V}$ , $R_L = 1\text{k}$ |     | 800  |     | ns                     |
| $t_{OFF}$ | Turn-Off Time          | $\overline{\text{ENABLE}} = 0\text{V}$ to $5\text{V}$ , $R_L = 1\text{k}$ |     | 62   |     | $\mu\text{s}$          |
| GBW       | Gain-Bandwidth Product | Frequency = $1\text{MHz}$                                                 | 150 | 215  |     | $\text{MHz}$           |
| SR        | Slew Rate              | $A_V = -1$ , $R_L = 1\text{k}$ , $V_O = -2\text{V}$ to $2\text{V}$        | 50  | 70   |     | $\text{V}/\mu\text{s}$ |
| FPBW      | Full-Power Bandwidth   | $V_{OUT} = 3V_{P-P}$ (Note 9)                                             | 5.3 | 7.4  |     | $\text{MHz}$           |
| $t_S$     | Settling Time          | 0.1%, $V_{STEP} = 4\text{V}$ , $A_V = 1$ ,                                |     | 60   |     | ns                     |
|           |                        | 0.01%                                                                     |     | 80   |     | ns                     |
|           |                        | 0.0015% (16-Bit)                                                          |     | 470  |     | ns                     |
|           |                        | 4ppm (18-Bit)                                                             |     | 1200 |     | ns                     |

The ● denotes the specifications which apply over the  $0^\circ\text{C} < T_A < 70^\circ\text{C}$  temperature range.  $V_S = \pm 5\text{V}$ ,  $V_{CM} = V_{OUT} = 0\text{V}$ ,  $\overline{\text{ENABLE}} = 0\text{V}$ , unless otherwise noted.

| SYMBOL                         | PARAMETER                                                             | CONDITIONS                                                         | MIN | TYP      | MAX | UNITS                        |
|--------------------------------|-----------------------------------------------------------------------|--------------------------------------------------------------------|-----|----------|-----|------------------------------|
| $V_{OS}$                       | Input Offset Voltage                                                  | LT6236                                                             | ●   |          | 600 | $\mu\text{V}$                |
|                                |                                                                       | LT6237MS8, LT6238GN                                                | ●   |          | 450 | $\mu\text{V}$                |
|                                |                                                                       | LT6237DD8                                                          | ●   |          | 550 | $\mu\text{V}$                |
|                                | Input Offset Voltage Match (Channel-to-Channel) (Note 6)              |                                                                    | ●   |          | 800 | $\mu\text{V}$                |
| $V_{OS\ TC}$                   | Input Offset Voltage Drift (Note 10)                                  | LT6236                                                             | ●   | 0.7      | 2.2 | $\mu\text{V}/^\circ\text{C}$ |
|                                |                                                                       | LT6237MS8                                                          | ●   | 0.5      | 1.8 | $\mu\text{V}/^\circ\text{C}$ |
|                                |                                                                       | LT6237DD8                                                          | ●   | 0.4      | 2.2 | $\mu\text{V}/^\circ\text{C}$ |
|                                |                                                                       | LT6238GN                                                           | ●   | 0.5      | 2.2 | $\mu\text{V}/^\circ\text{C}$ |
| $I_B$                          | Input Bias Current                                                    |                                                                    | ●   |          | 11  | $\mu\text{A}$                |
|                                | $I_B$ Match (Channel-to-Channel) (Note 6)                             |                                                                    | ●   |          | 1   | $\mu\text{A}$                |
| $I_{OS}$                       | Input Offset Current                                                  |                                                                    | ●   |          | 0.7 | $\mu\text{A}$                |
| $A_{VOL}$                      | Large-Signal Gain                                                     | $V_O = \pm 4.5\text{V}$ , $R_L = 10\text{k}$                       | ●   | 100      |     | $\text{V}/\text{mV}$         |
|                                |                                                                       | $V_O = \pm 4.5\text{V}$ , $R_L = 1\text{k}$                        | ●   | 27       |     | $\text{V}/\text{mV}$         |
|                                |                                                                       | $V_O = \pm 2\text{V}$ , $R_L = 100\Omega$                          | ●   | 6        |     | $\text{V}/\text{mV}$         |
| $V_{CM}$                       | Input Voltage Range                                                   | Guaranteed by CMRR                                                 | ●   | -3       | 4   | V                            |
| CMRR                           | Common Mode Rejection Ratio                                           | $V_{CM} = -3\text{V}$ to $4\text{V}$                               | ●   | 95       |     | dB                           |
| PSRR                           | Power Supply Rejection Ratio                                          | $V_S = \pm 1.5\text{V}$ to $\pm 5\text{V}$                         | ●   | 85       |     | dB                           |
| $V_{OL}$                       | Output Voltage Swing Low (Note 8)                                     | No Load                                                            | ●   |          | 50  | mV                           |
|                                |                                                                       | $I_{SINK} = 5\text{mA}$                                            | ●   |          | 200 | mV                           |
|                                |                                                                       | $I_{SINK} = 20\text{mA}$                                           | ●   |          | 500 | mV                           |
| $V_{OH}$                       | Output Voltage Swing High (Note 8)                                    | No Load                                                            | ●   |          | 60  | mV                           |
|                                |                                                                       | $I_{SOURCE} = 5\text{mA}$                                          | ●   |          | 215 | mV                           |
|                                |                                                                       | $I_{SOURCE} = 20\text{mA}$                                         | ●   |          | 650 | mV                           |
| $I_{SC}$                       | Short-Circuit Current                                                 |                                                                    | ●   | $\pm 25$ |     | mA                           |
| $I_S$                          | Supply Current per Amplifier<br>Disabled Supply Current per Amplifier |                                                                    | ●   |          | 4.6 | mA                           |
|                                |                                                                       | $\overline{\text{ENABLE}} = 4.75\text{V}$                          | ●   | 1        |     | $\mu\text{A}$                |
| $I_{\overline{\text{ENABLE}}}$ | $\overline{\text{ENABLE}}$ Pin Current                                | $\overline{\text{ENABLE}} = 0.3\text{V}$                           | ●   |          | -95 | $\mu\text{A}$                |
| $V_L$                          | $\overline{\text{ENABLE}}$ Pin Input Voltage Low                      |                                                                    | ●   |          | 0.3 | V                            |
| $V_H$                          | $\overline{\text{ENABLE}}$ Pin Input Voltage High                     |                                                                    | ●   | 4.75     |     | V                            |
| SR                             | Slew Rate                                                             | $A_V = -1$ , $R_L = 1\text{k}$ , $V_O = -2\text{V}$ to $2\text{V}$ | ●   | 44       |     | $\text{V}/\mu\text{s}$       |
| FPBW                           | Full-Power Bandwidth                                                  | $V_{OUT} = 3V_{P-P}$ (Note 9)                                      | ●   | 4.66     |     | $\text{MHz}$                 |

623637fb

**ELECTRICAL CHARACTERISTICS** The ● denotes the specifications which apply over the  $-40^{\circ}\text{C} < T_A < 85^{\circ}\text{C}$  temperature range.  $V_S = \pm 5\text{V}$ ,  $V_{CM} = V_{OUT} = 0\text{V}$ ,  $\overline{\text{ENABLE}} = 0\text{V}$ , unless otherwise noted. (Note 5)

| SYMBOL              | PARAMETER                                                | CONDITIONS                                                         | MIN | TYP      | MAX  | UNITS                          |
|---------------------|----------------------------------------------------------|--------------------------------------------------------------------|-----|----------|------|--------------------------------|
| $V_{OS}$            | Input Offset Voltage                                     | LT6236                                                             | ●   |          | 700  | $\mu\text{V}$                  |
|                     |                                                          | LT6237MS8, LT6238GN                                                | ●   |          | 550  | $\mu\text{V}$                  |
|                     |                                                          | LT6237DD8                                                          | ●   |          | 650  | $\mu\text{V}$                  |
|                     | Input Offset Voltage Match (Channel-to-Channel) (Note 6) |                                                                    | ●   |          | 1000 | $\mu\text{V}$                  |
| $V_{OS\ TC}$        | Input Offset Voltage Drift (Note 10)                     | LT6236                                                             | ●   | 0.7      | 2.2  | $\mu\text{V}/^{\circ}\text{C}$ |
|                     |                                                          | LT6237MS8                                                          | ●   | 0.5      | 1.8  | $\mu\text{V}/^{\circ}\text{C}$ |
|                     |                                                          | LT6237DD8                                                          | ●   | 0.4      | 2.2  | $\mu\text{V}/^{\circ}\text{C}$ |
|                     |                                                          | LT6238GN                                                           | ●   | 0.5      | 2.2  | $\mu\text{V}/^{\circ}\text{C}$ |
| $I_B$               | Input Bias Current                                       |                                                                    | ●   |          | 12   | $\mu\text{A}$                  |
|                     | $I_B$ Match (Channel-to-Channel) (Note 6)                |                                                                    | ●   |          | 1.1  | $\mu\text{A}$                  |
| $I_{OS}$            | Input Offset Current                                     |                                                                    | ●   |          | 0.8  | $\mu\text{A}$                  |
| $A_{VOL}$           | Large-Signal Gain                                        | $V_O = \pm 4.5\text{V}$ , $R_L = 10\text{k}$                       | ●   | 93       |      | $\text{V}/\text{mV}$           |
|                     |                                                          | $V_O = \pm 4.5\text{V}$ , $R_L = 1\text{k}$                        | ●   | 25       |      | $\text{V}/\text{mV}$           |
|                     |                                                          | $V_O = \pm 1.5\text{V}$ , $R_L = 100\Omega$                        | ●   | 4.8      |      | $\text{V}/\text{mV}$           |
| $V_{CM}$            | Input Voltage Range                                      | Guaranteed by CMRR                                                 | ●   | -3       | 4    | V                              |
| CMRR                | Common Mode Rejection Ratio                              | $V_{CM} = -3\text{V}$ to $4\text{V}$                               | ●   | 95       |      | dB                             |
| PSRR                | Power Supply Rejection Ratio                             | $V_S = \pm 1.5\text{V}$ to $\pm 5\text{V}$                         | ●   | 85       |      | dB                             |
| $V_{OL}$            | Output Voltage Swing Low (Note 8)                        | No Load                                                            | ●   |          | 60   | mV                             |
|                     |                                                          | $I_{SINK} = 5\text{mA}$                                            | ●   |          | 210  | mV                             |
|                     |                                                          | $I_{SINK} = 15\text{mA}$                                           | ●   |          | 510  | mV                             |
| $V_{OH}$            | Output Voltage Swing High (Note 8)                       | No Load                                                            | ●   |          | 70   | mV                             |
|                     |                                                          | $I_{SOURCE} = 5\text{mA}$                                          | ●   |          | 220  | mV                             |
|                     |                                                          | $I_{SOURCE} = 20\text{mA}$                                         | ●   |          | 675  | mV                             |
| $I_{SC}$            | Short-Circuit Current                                    |                                                                    | ●   | $\pm 15$ |      | mA                             |
| $I_S$               | Supply Current per Amplifier                             |                                                                    | ●   |          | 4.85 | mA                             |
|                     | Disabled Supply Current per Amplifier                    | $\overline{\text{ENABLE}} = 4.8\text{V}$                           | ●   | 1        |      | $\mu\text{A}$                  |
| $I_{\text{ENABLE}}$ | ENABLE Pin Current                                       | $\overline{\text{ENABLE}} = 0.3\text{V}$                           | ●   |          | -110 | $\mu\text{A}$                  |
| $V_L$               | ENABLE Pin Input Voltage Low                             |                                                                    | ●   |          | 0.3  | V                              |
| $V_H$               | ENABLE Pin Input Voltage High                            |                                                                    | ●   | 4.8      |      | V                              |
| SR                  | Slew Rate                                                | $A_V = -1$ , $R_L = 1\text{k}$ , $V_O = -2\text{V}$ to $2\text{V}$ | ●   | 37       |      | $\text{V}/\mu\text{s}$         |
| FPBW                | Full-Power Bandwidth                                     | $V_{OUT} = 3\text{V}_{P-P}$ (Note 9)                               | ●   | 3.9      |      | MHz                            |

# LT6236/LT6237/LT6238

## ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the  $-40^{\circ}\text{C} < T_A < 125^{\circ}\text{C}$  temperature range.  $V_S = \pm 5\text{V}$ ,  $V_{\text{CM}} = V_{\text{OUT}} = 0\text{V}$ ,  $\overline{\text{ENABLE}} = 0\text{V}$ , unless otherwise noted. (Note 5)

| SYMBOL                   | PARAMETER                                                | CONDITIONS                                                         | MIN | TYP      | MAX  | UNITS                          |
|--------------------------|----------------------------------------------------------|--------------------------------------------------------------------|-----|----------|------|--------------------------------|
| $V_{\text{OS}}$          | Input Offset Voltage                                     | LT6236                                                             | ●   |          | 750  | $\mu\text{V}$                  |
|                          |                                                          | LT6237MS8, LT6238GN                                                | ●   |          | 650  | $\mu\text{V}$                  |
|                          |                                                          | LT6237DD8                                                          | ●   |          | 700  | $\mu\text{V}$                  |
|                          | Input Offset Voltage Match (Channel-to-Channel) (Note 6) |                                                                    | ●   |          | 1000 | $\mu\text{V}$                  |
| $V_{\text{OS}}\text{TC}$ | Input Offset Voltage Drift (Note 10)                     | LT6236                                                             | ●   | 0.7      | 2.2  | $\mu\text{V}/^{\circ}\text{C}$ |
|                          |                                                          | LT6237MS8                                                          | ●   | 0.5      | 1.8  | $\mu\text{V}/^{\circ}\text{C}$ |
|                          |                                                          | LT6237DD8                                                          | ●   | 0.4      | 2.2  | $\mu\text{V}/^{\circ}\text{C}$ |
|                          |                                                          | LT6238GN                                                           | ●   | 0.5      | 2.2  | $\mu\text{V}/^{\circ}\text{C}$ |
| $I_B$                    | Input Bias Current                                       |                                                                    | ●   |          | 12   | $\mu\text{A}$                  |
|                          | $I_B$ Match (Channel-to-Channel) (Note 6)                |                                                                    | ●   |          | 1.1  | $\mu\text{A}$                  |
| $I_{\text{OS}}$          | Input Offset Current                                     |                                                                    | ●   |          | 1.2  | $\mu\text{A}$                  |
| $A_{\text{VOL}}$         | Large-Signal Gain                                        | $V_O = \pm 4.5\text{V}$ , $R_L = 10\text{k}$                       | ●   | 76       |      | $\text{V}/\text{mV}$           |
|                          |                                                          | $V_O = \pm 4.5\text{V}$ , $R_L = 1\text{k}$                        | ●   | 21       |      | $\text{V}/\text{mV}$           |
|                          |                                                          | $V_O = \pm 1.5\text{V}$ , $R_L = 100\Omega$                        | ●   | 4.1      |      | $\text{V}/\text{mV}$           |
| $V_{\text{CM}}$          | Input Voltage Range                                      | Guaranteed by CMRR                                                 | ●   | -3       | 4    | V                              |
| CMRR                     | Common Mode Rejection Ratio                              | $V_{\text{CM}} = -3\text{V}$ to $4\text{V}$                        | ●   | 95       |      | dB                             |
| PSRR                     | Power Supply Rejection Ratio                             | $V_S = \pm 1.5\text{V}$ to $\pm 5\text{V}$                         | ●   | 85       |      | dB                             |
| $V_{\text{OL}}$          | Output Voltage Swing Low (Note 8)                        | No Load                                                            | ●   |          | 70   | mV                             |
|                          |                                                          | $I_{\text{SINK}} = 5\text{mA}$                                     | ●   |          | 230  | mV                             |
|                          |                                                          | $I_{\text{SINK}} = 15\text{mA}$                                    | ●   |          | 550  | mV                             |
| $V_{\text{OH}}$          | Output Voltage Swing High (Note 8)                       | No Load                                                            | ●   |          | 78   | mV                             |
|                          |                                                          | $I_{\text{SOURCE}} = 5\text{mA}$                                   | ●   |          | 240  | mV                             |
|                          |                                                          | $I_{\text{SOURCE}} = 20\text{mA}$                                  | ●   |          | 710  | mV                             |
| $I_{\text{SC}}$          | Short-Circuit Current                                    |                                                                    | ●   | $\pm 15$ |      | mA                             |
| $I_S$                    | Supply Current per Amplifier                             |                                                                    | ●   |          | 5.5  | mA                             |
|                          | Disabled Supply Current per Amplifier                    | $\overline{\text{ENABLE}} = 4.85\text{V}$                          | ●   | 10       |      | $\mu\text{A}$                  |
| $I_{\text{ENABLE}}$      | ENABLE Pin Current                                       | $\overline{\text{ENABLE}} = 0.3\text{V}$                           | ●   |          | -110 | $\mu\text{A}$                  |
| $V_L$                    | ENABLE Pin Input Voltage Low                             |                                                                    | ●   |          | 0.3  | V                              |
| $V_H$                    | ENABLE Pin Input Voltage High                            |                                                                    | ●   | 4.85     |      | V                              |
| SR                       | Slew Rate                                                | $A_V = -1$ , $R_L = 1\text{k}$ , $V_O = -2\text{V}$ to $2\text{V}$ | ●   | 37       |      | $\text{V}/\mu\text{s}$         |
| FPBW                     | Full-Power Bandwidth                                     | $V_{\text{OUT}} = 3V_{\text{P-P}}$ (Note 9)                        | ●   | 3.9      |      | MHz                            |

**Note 1:** Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

**Note 2:** Inputs are protected by back-to-back diodes. If the differential input voltage exceeds  $0.7\text{V}$ , the input current must be limited to less than  $40\text{mA}$ .

**Note 3:** A heat sink may be required to keep the junction temperature below the absolute maximum rating when the output is shorted indefinitely.

**Note 4:** The LT6236C/LT6236I/LT6236H, the LT6237C/LT6237I/LT6237H and the LT6238C/LT6238I/LT6238H are guaranteed functional over the temperature range of  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ .

**Note 5:** The LT6236C/LT6237C/LT6238C are guaranteed to meet specified performance from  $0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$ . The LT6236I/LT6237I/LT6238I are guaranteed to meet specified performance from  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ .

The LT6236H/LT6237H/LT6238H are guaranteed to meet specified performance from  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ . The LT6236C/LT6237C/LT6238C are designed, characterized and expected to meet specified performance from  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ , but are not tested or QA sampled at these temperatures.

**Note 6:** Matching parameters are the difference between the two amplifiers A and D and between B and C of the LT6238 and between the two amplifiers of the LT6237.

**Note 7:** Minimum supply voltage is guaranteed by power supply rejection ratio test.

**Note 8:** Output voltage swings are measured between the output and power supply rails.


**Note 9:** Full-power bandwidth is calculated from the slew rate:

$$\text{FPBW} = \text{SR}/2\pi V_P$$


**Note 10:** This parameter is not 100% tested.

# TYPICAL PERFORMANCE CHARACTERISTICS


**V<sub>OS</sub> Distribution**

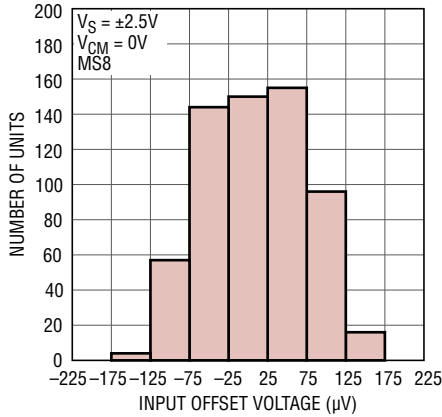


**Supply Current vs Supply Voltage (Per Amplifier)**

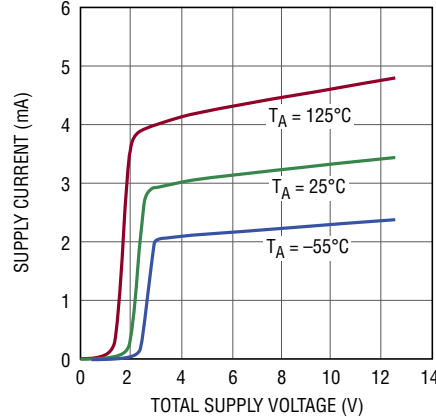


**Offset Voltage vs Input Common Mode Voltage**

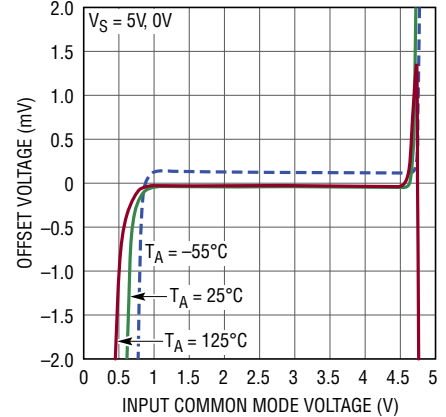


**Input Bias Current vs Common Mode Voltage**

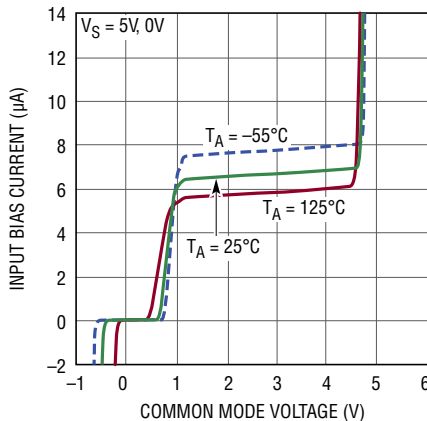


**Input Bias Current vs Temperature**

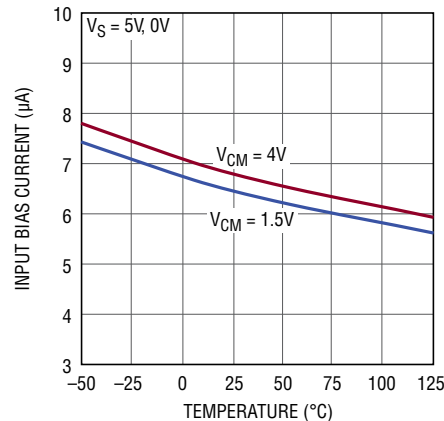


**Output Saturation Voltage vs Load Current (Output Low)**

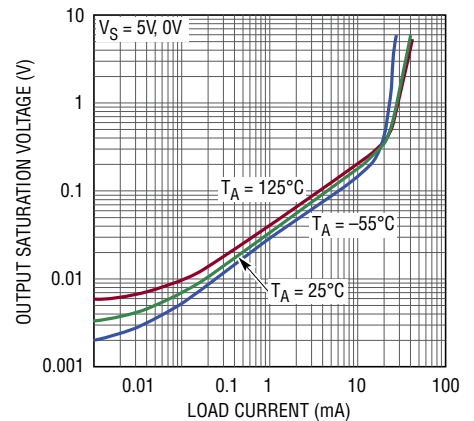


**Output Saturation Voltage vs Load Current (Output High)**

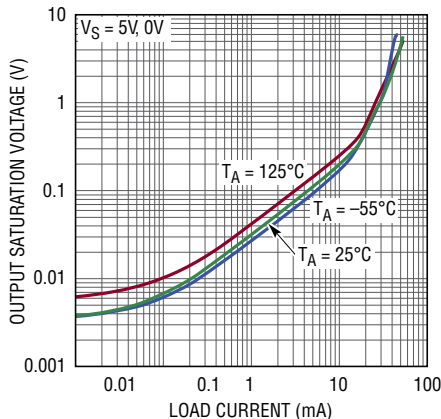

**Minimum Supply Voltage**

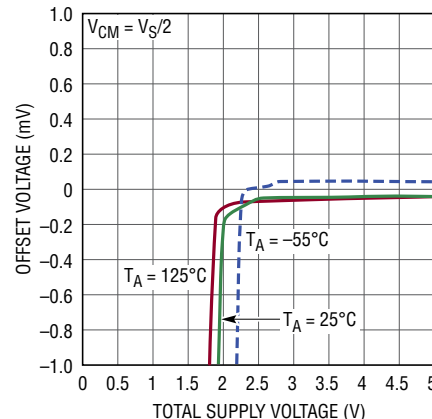


**Output Short-Circuit Current vs Power Supply Voltage**

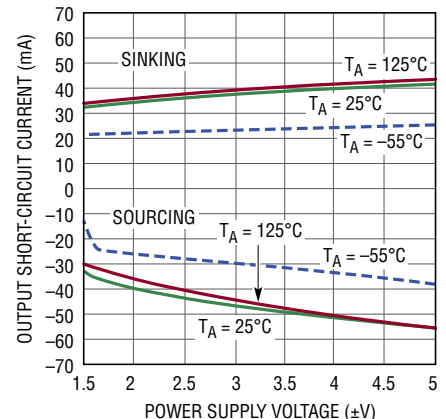


# TYPICAL PERFORMANCE CHARACTERISTICS

Open-Loop Gain

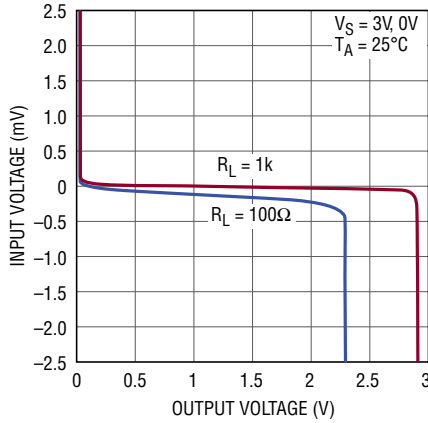


62367 G10

Open-Loop Gain

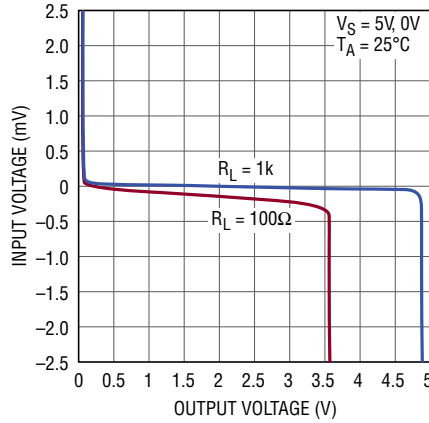


62367 G11

Open-Loop Gain

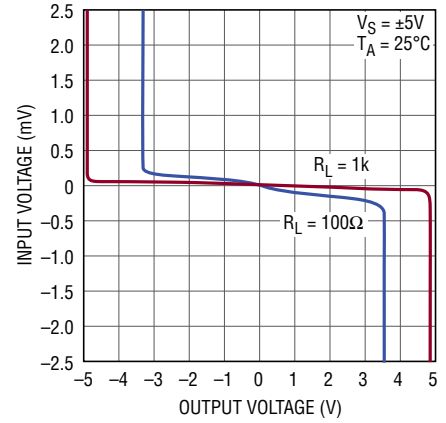


62367 G12


Offset Voltage vs Output Current

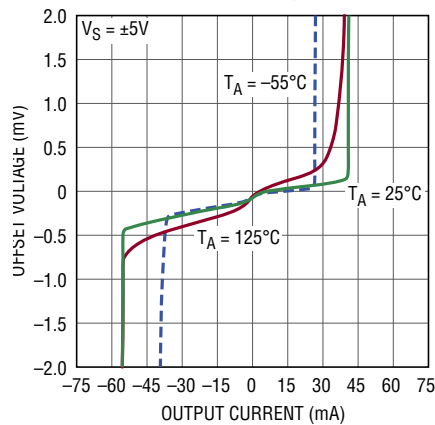

Warm-Up Drift vs Time

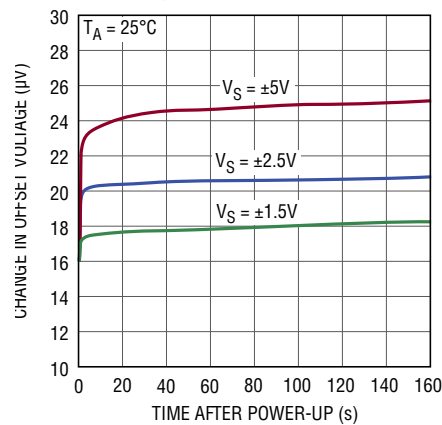


Total Noise vs Total Source Resistance

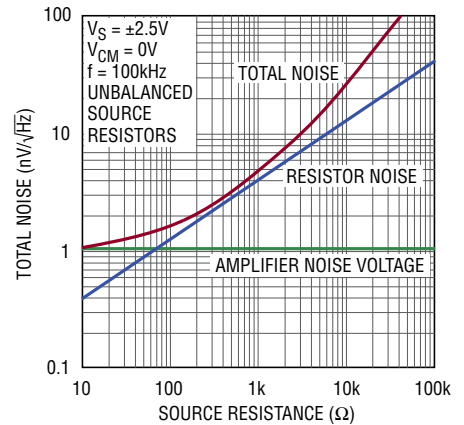


62367 G15

Balanced Current Noise vs Frequency

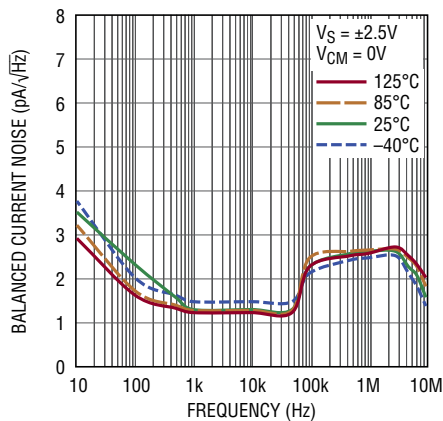


62367 G56

Unbalanced Current Noise vs Frequency

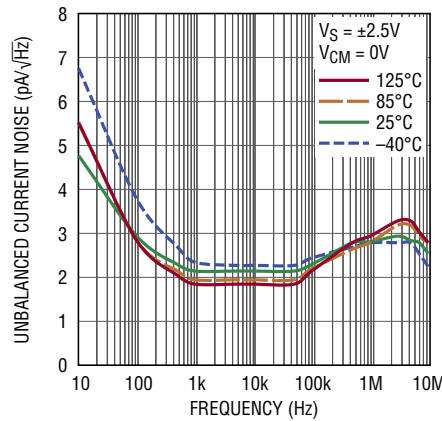

62367 G57

Noise Voltage vs Frequency

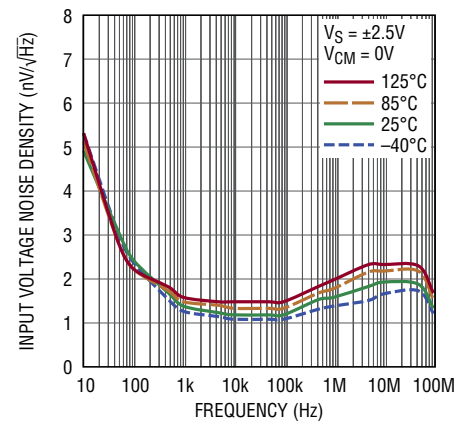


62367 G58

623637fb


# TYPICAL PERFORMANCE CHARACTERISTICS

0.1Hz to 10Hz Input Voltage Noise

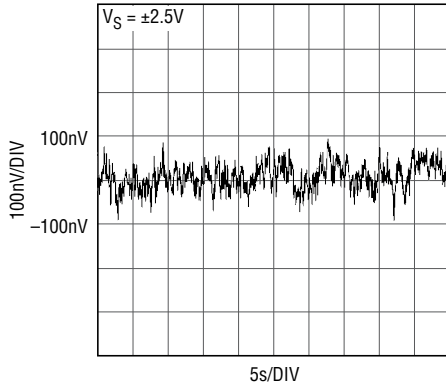


62367 G17

Gain Bandwidth and Phase Margin vs Temperature

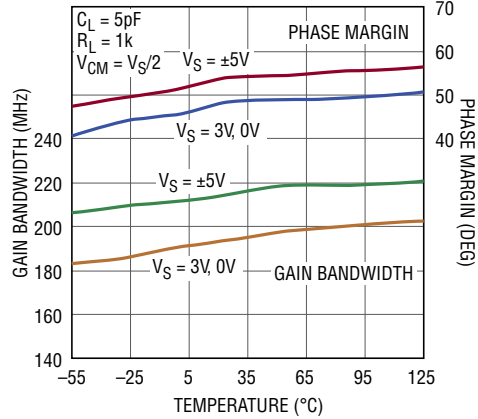


62367 G18

Open-Loop Gain vs Frequency

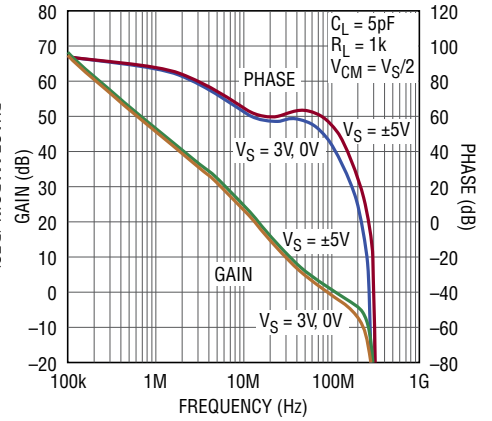


62367 G19

Gain Bandwidth and Phase Margin vs Supply Voltage

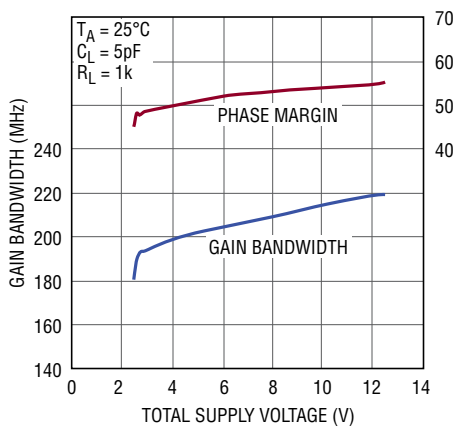


62367 G20

Slew Rate vs Temperature

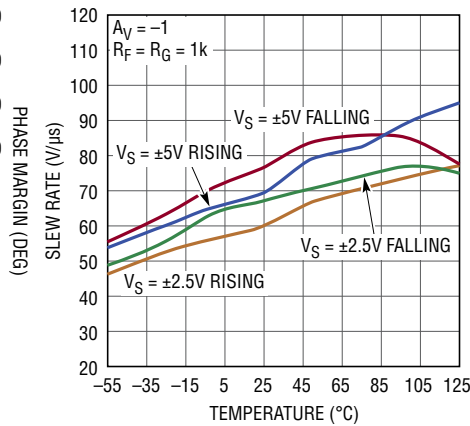


62367 G21

Output Impedance vs Frequency

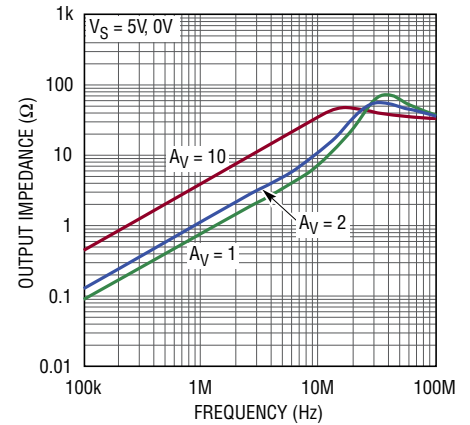


62367 G22

Common Mode Rejection Ratio vs Frequency

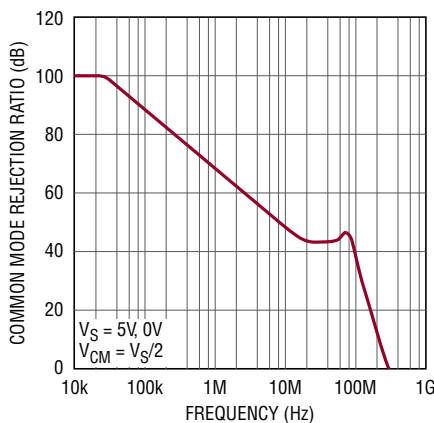


62367 G23

Channel Separation vs Frequency

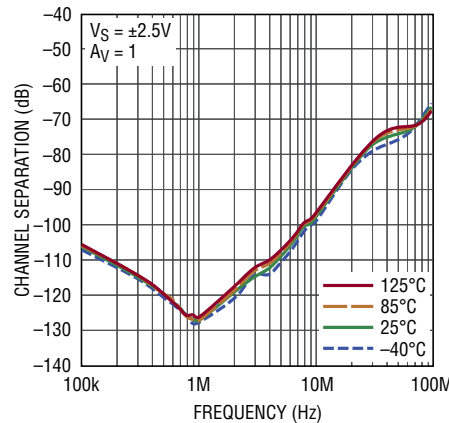

62367 G24

Power Supply Rejection Ratio vs Frequency

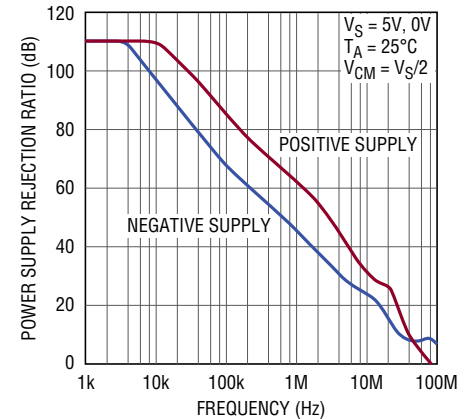


62367 G25

623637fb


## TYPICAL PERFORMANCE CHARACTERISTICS

**Series Output Resistance and Overshoot vs Capacitive Load**

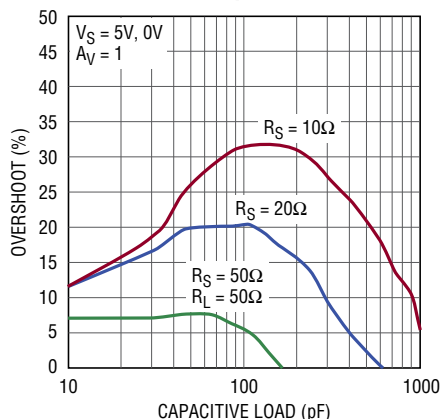


62367 G26

**Series Output Resistance and Overshoot vs Capacitive Load**

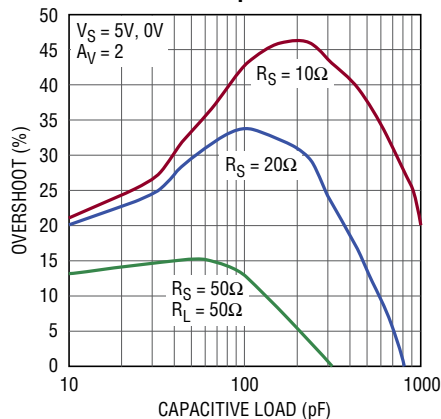


62367 G27

**18-Bit Settling Time to 2Vp-p Output Step**

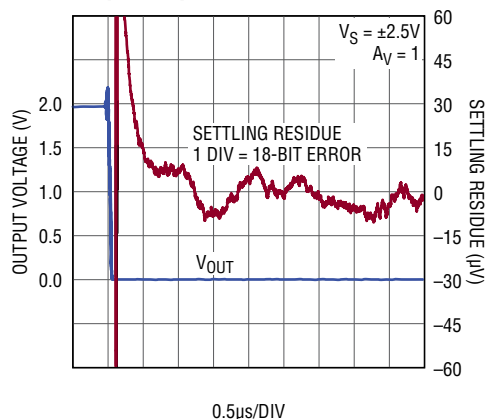


62367 G27a

**18-Bit Settling Time to 4Vp-p Output Step**

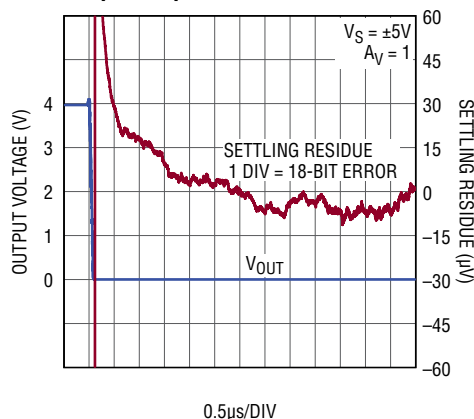


62367 G27b

**Settling Time vs Output Step (Noninverting)**

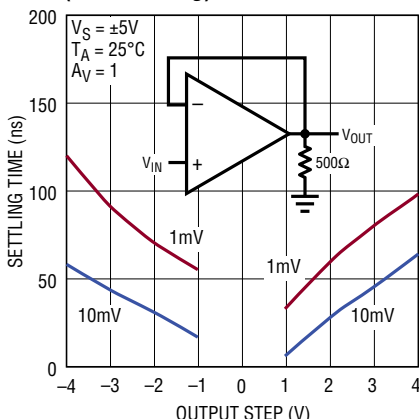


62367 G28

**Settling Time vs Output Step (Inverting)**

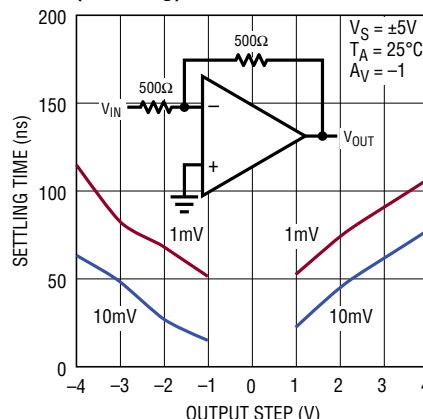


62367 G29

**Maximum Undistorted Output Signal vs Frequency**

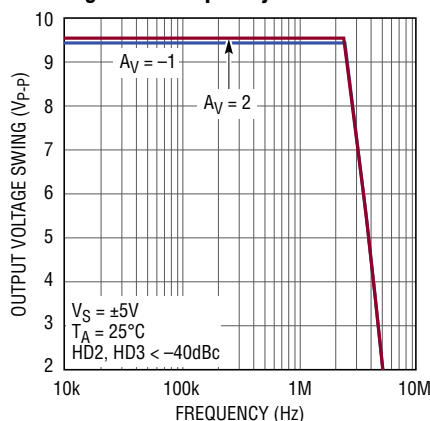


62367 G30

**Maximum Undistorted Output Signal vs Frequency**

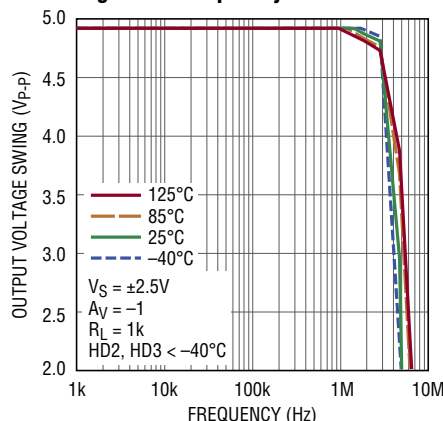

6237 G59

**Maximum Undistorted Output Signal vs Frequency**

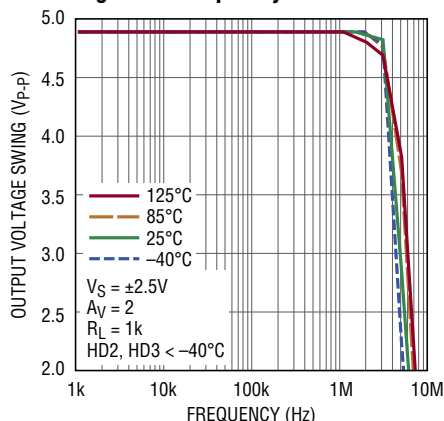


6237 G60


62367 G30

# TYPICAL PERFORMANCE CHARACTERISTICS


**Harmonic Distortion (HD2) vs Frequency**

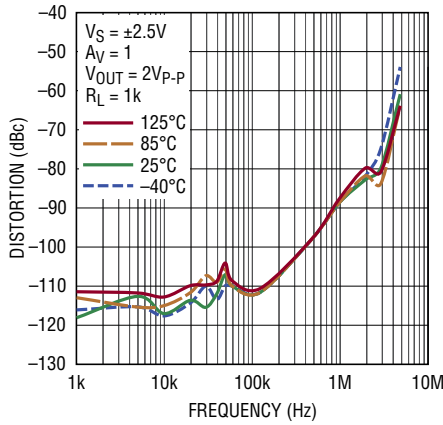


**Harmonic Distortion (HD3) vs Frequency**

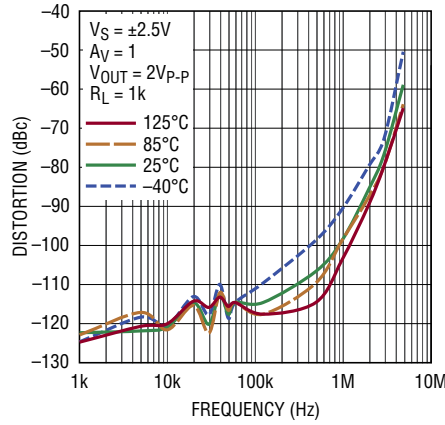


**Harmonic Distortion (HD2) vs Frequency**

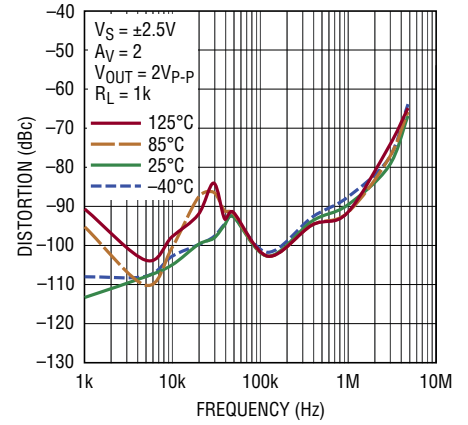


**Harmonic Distortion (HD3) vs Frequency**

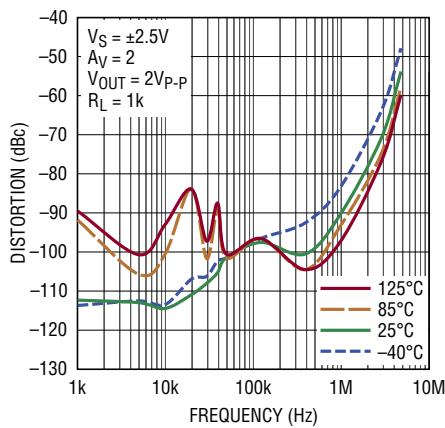


**Distortion vs Frequency**

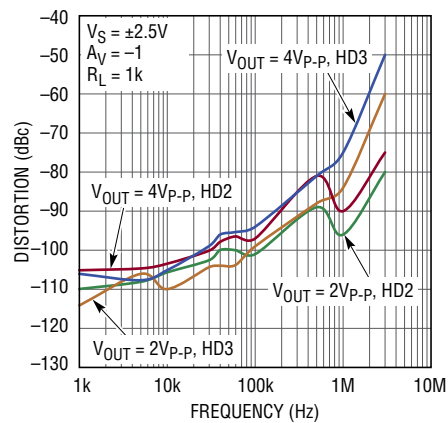

**Distortion vs Frequency**

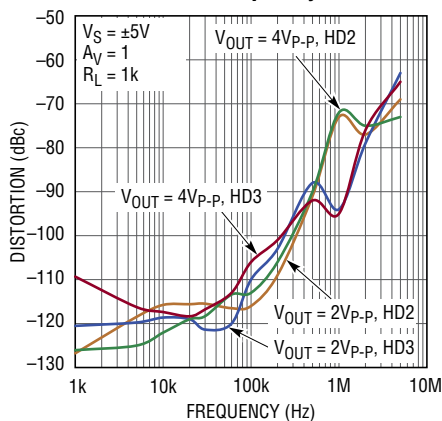


**Distortion vs Frequency**

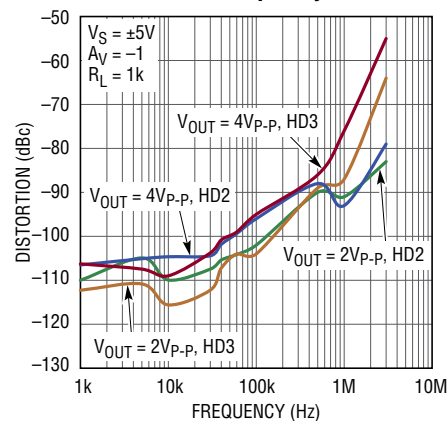


## TYPICAL PERFORMANCE CHARACTERISTICS


Large-Signal Response

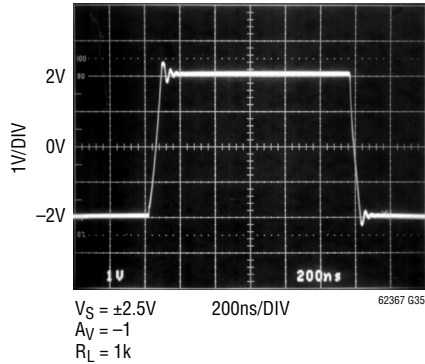


Small-Signal Response

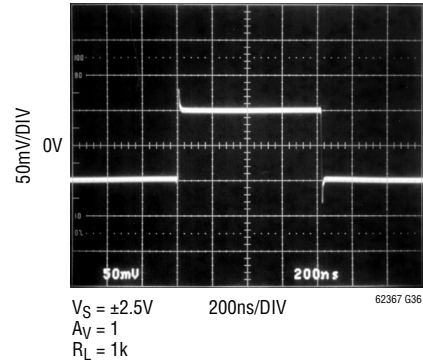

Large-Signal Response

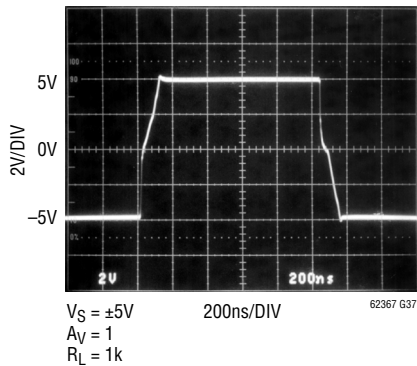


Output Overdrive Recovery

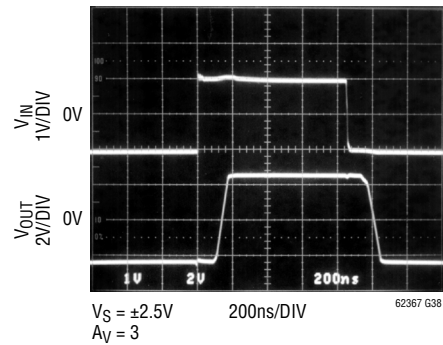


### (LT6236) ENABLE Characteristics


Supply Current vs ENABLE Pin Voltage

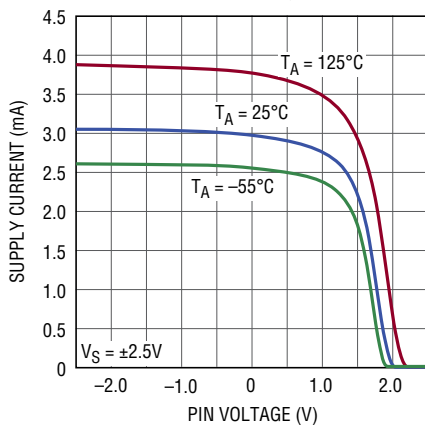

ENABLE Pin Current vs ENABLE Pin Voltage

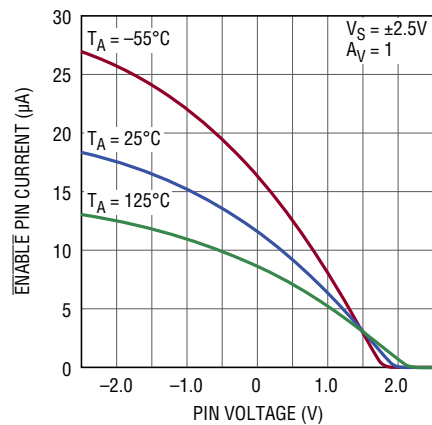

ENABLE Pin Response Time

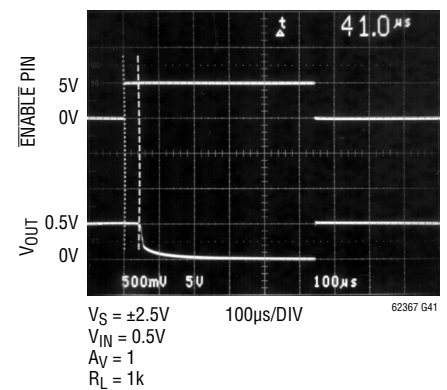

## APPLICATIONS INFORMATION

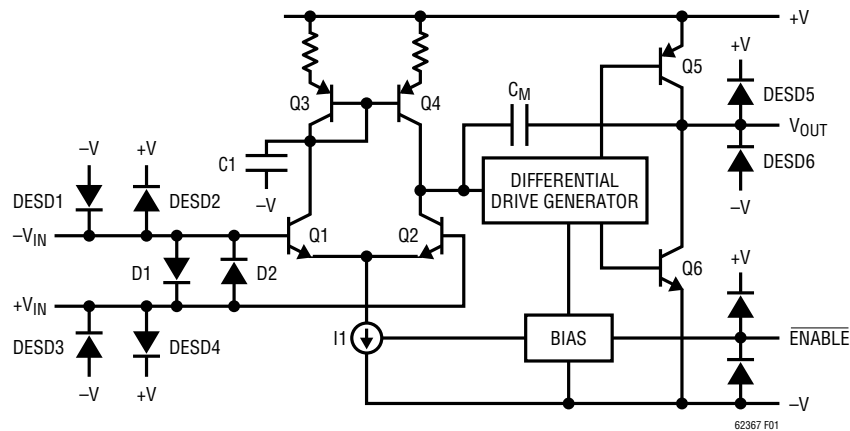


Figure 1. Simplified Schematic

## Functional Description

Figure 1 is a simplified schematic of the LT6236/LT6237/LT6238, which has a pair of low noise input transistors Q1 and Q2. A simple current mirror Q3/Q4 converts the differential signal to a single-ended output, and these transistors are degenerated to reduce their contribution to the overall noise. Capacitor C1 reduces the unity cross frequency and improves the frequency stability without degrading the gain bandwidth of the amplifier. Capacitor  $C_M$  sets the overall amplifier gain bandwidth. The differential drive generator supplies current to transistors Q5 and Q6 that provide rail-to-rail output swing.


## Input Protection

Back-to-back diodes, D1 and D2, limit the differential input voltage to  $\pm 0.7V$ . The inputs of the LT6236/LT6237/LT6238 do not have internal resistors in series with the input transistors. This technique is often used to protect the input devices from over voltage that causes excessive current to flow. The addition of these resistors would significantly degrade the voltage noise of these amplifiers.

For instance, a  $100\Omega$  resistor in series with each input would generate  $1.8nV/\sqrt{Hz}$  of noise, and the total amplifier noise voltage would rise from  $1.1nV/\sqrt{Hz}$  to  $2.1nV/\sqrt{Hz}$ . Once the input differential voltage exceeds  $\pm 0.7V$ , steady state current conducted through the protection diodes should be limited to  $\pm 40mA$ . This implies  $25\Omega$  of protection resistance is necessary per volt of overdrive beyond

$\pm 0.7V$ . These input diodes are rugged enough to handle transient currents due to amplifier slew rate overdrive and clipping without protection resistors. Figure 2 shows the output response to an input overdrive with the amplifier connected as a voltage follower. With the input signal low, current source I1 saturates and the differential drive generator drives Q6 into saturation so the output voltage swings all the way to  $V^-$ . The input can swing positive until transistor Q2 saturates into current mirror Q3/Q4. When saturation occurs, the output tries to phase invert, but diode D2 conducts current from the signal source to the output through the feedback connection. The output is clamped a diode drop below the input. In Figure 2, the input signal generator is limiting at about 20mA.

With the amplifier connected in a gain of  $A_V \geq 2$ , the output can invert with very heavy overdrive. To avoid this inversion, limit the input overdrive to 0.5V beyond the power supply rails.

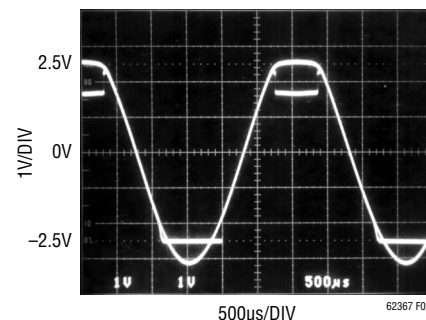Figure 2.  $V_S = \pm 2.5V$ ,  $A_V = 1$  with Large Overdrive

## APPLICATIONS INFORMATION

### ESD

The LT6236/LT6237/LT6238 have reverse-biased ESD protection diodes on all inputs and outputs as shown in Figure 1. If these pins are forced beyond either supply, unlimited current will flow through these diodes. If the current is transient and limited to 100mA or less, no damage to the device will occur.

### Noise

The noise voltage of the LT6236/LT6237/LT6238 is equivalent to that of a 75Ω resistor, and for the lowest possible noise it is desirable to keep the source and feedback resistance at or below this value, i.e.  $R_S + R_G || R_{FB} \leq 75\Omega$ . With  $R_S + R_G || R_{FB} = 75\Omega$  the total noise of the amplifier is:

$$e_N = \sqrt{(1.1nV)^2 + (1.1nV)^2} = 1.55nV/\sqrt{Hz}$$

Below this resistance value, the amplifier dominates the noise, but in the region between 75Ω and about 3k, the noise is dominated by the resistor thermal noise. As the total resistance is further increased beyond 3k, the amplifier noise current multiplied by the total resistance eventually dominates the noise.

The product of  $e_N \cdot \sqrt{I_{SUPPLY}}$  is an interesting way to gauge low noise amplifiers. Most low noise amplifiers have high  $I_{SUPPLY}$ . In applications that require low noise voltage with the lowest possible supply current, this product can be helpful.

The LT6236/LT6237/LT6238 have an  $e_N \cdot \sqrt{I_{SUPPLY}}$  of only 1.9 per amplifier, yet it is common to see amplifiers with similar noise specifications to have  $e_N \cdot \sqrt{I_{SUPPLY}}$  as high as 13.5. For a complete discussion of amplifier noise, see the LT1028 data sheet.

### ENABLE Pin

The LT6236 includes an  $\overline{ENABLE}$  pin that shuts down the amplifier to 10μA maximum supply current. For normal operation, the  $\overline{ENABLE}$  pin must be pulled to at least 2.7V below  $V^+$ . The  $\overline{ENABLE}$  pin must be driven high to within 0.35V of  $V^+$  to shut down the amplifier. This can be accomplished with simple gate logic; however care must be taken if the logic and the LT6236 operate from different supplies. If this is the case, open drain logic can

be used with a pull-up resistor to ensure that the amplifier remains off. When the  $\overline{ENABLE}$  pin is left floating, the amplifier is inactive. However, care should be taken to control the leakage current through the pin so the amplifier is not inadvertently turned on. See Typical Performance Characteristics.

The output leakage current when disabled is very low; however, current can flow into the input protection diodes, D1 and D2, if the output voltage exceeds the input voltage by a diode drop.

### Power Dissipation

The LT6237MS8 combines high speed with large output current in a small package. Due to the wide supply voltage range, it is possible to exceed the maximum junction temperature under certain conditions. Maximum junction temperature ( $T_J$ ) is calculated from the ambient temperature ( $T_A$ ) and power dissipation ( $P_D$ ) as follows:

$$T_J = T_A + (P_D \cdot \theta_{JA})$$

The power dissipation in the IC is the function of the supply voltage, output voltage and the load resistance. For a given supply voltage, the worst-case power dissipation  $P_{D(MAX)}$  occurs at the maximum quiescent supply current and at the output voltage which is half of either supply voltage (or the maximum swing if it is less than half the supply voltage).  $P_{D(MAX)}$  is given by:

$$P_{D(MAX)} = (V^+ - V^-)(I_{S(MAX)}) + (V^+/2)^2/R_L$$

Example: An LT6237HMS8 in the 8-Lead MSOP package has a thermal resistance of  $\theta_{JA} = 273^\circ\text{C/W}$ . Operating on  $\pm 5V$  supplies with one amplifier driving a 1k load, the worst-case power dissipation is given by:

$$P_{D(MAX)} = (10V)(11mA) + (2.5V)^2/1000\Omega = 116mW$$

In this example, the maximum ambient temperature that the part is allowed to operate is:

$$T_A = T_J - (P_{D(MAX)} \times 273^\circ\text{C/W})$$

$$T_A = 150^\circ\text{C} - (116mW)(273^\circ\text{C/W}) = 118.3^\circ\text{C}$$

To operate the device at a higher ambient temperature for the same conditions, switch to using two LT6236 in the 6-Lead TSOT-23, or a single LT6237 in the 8-Lead DFN package.

## APPLICATIONS INFORMATION

### Interfacing to ADCs

When driving an ADC, a single-pole, passive RC filter should be used between the outputs of the LT6236/LT6237/LT6238 and the inputs of the ADC. The sampling process of ADCs creates a charge transient from the switching of the ADC sampling capacitor. This momentarily “shorts” the output of the amplifier as charge is transferred between amplifier and sampling capacitor. The amplifier must recover and settle from this load transient before the acquisition period has ended for a valid representation of the input signal. The RC network between the outputs of the driver and the inputs of the ADC decouples the sampling transient of the ADC. The capacitance serves to provide the bulk of the charge during the sampling process, while the two resistors at the outputs of the LT6236/LT6237/LT6238 are used to dampen and attenuate any charge injected by the ADC. The RC filter provides the benefit of band limiting broadband output noise.

**Thanks to the very low wideband noise of the LT6236/LT6237/LT6238, a wideband filter can be used between the amplifier and the ADC without impacting SNR. This is especially important with ADCs or applications that require full settling in between each conversion.**


The selection of an appropriate filter depends on the specific ADC, however the following procedure is suggested for choosing filter component values. Begin by selecting an appropriate RC time constant for the input signal. Generally, longer time constants improve SNR at the expense of

settling time. Output transient settling to 18-bit accuracy will require over twelve RC time constants. To select the resistor value, the resistors in the decoupling network should be at least  $10\Omega$ . Keep in mind that these resistors also serve to decouple the LT6236/LT6237/LT6238 outputs from load capacitance. Too large of a resistor will leave insufficient settling time. Too small of a resistor will not properly dampen the load transient of the sampling process, and prolong the time required for settling. For lowest distortion, choose capacitors with low dielectric absorption such as a COG multilayer ceramic capacitor. In general, large capacitor values attenuate the fixed nonlinear charge kickback, however very large capacitor values will detrimentally load the driver at the desired input frequency and cause driver distortion. Smaller input swings allow for larger filter capacitor values due to decreased loading demands on the driver. This property may be limited by the particular input amplitude dependence of differential nonlinear kickback for the specific ADC used.

Series resistors should typically be placed at the inputs to the ADC in order to further improve distortion performance. These series resistors function with the ADC sampling capacitor to filter potential ground bounce or other high speed sampling disturbances. Additionally the resistors limit the rise time of residual filter glitches that manage to propagate to the driver outputs. Restricting possible glitch propagation rise time to within the small signal bandwidth of the driver enables less disturbed output settling.

## TYPICAL APPLICATIONS

### Single Supply, Low Noise, Low Power, Bandpass Filter with Gain = 10

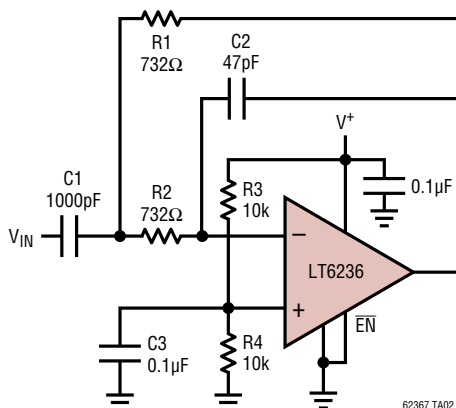

$$f_0 = \frac{1}{2\pi RC} = 1\text{MHz}$$

$$C = \sqrt{C_1 C_2}, R = R_1 = R_2$$

$$f_0 = \left(\frac{732\Omega}{R}\right)\text{MHz, MAXIMUM } f_0 = 1\text{MHz}$$


$$f_{-3\text{dB}} = \frac{f_0}{2.5}$$

$$A_V = 20\text{dB at } f_0$$


$$\text{EN} = 4\mu\text{VRMS INPUT REFERRED}$$

$$I_S = 3.7\text{mA FOR } V^+ = 5\text{V}$$


### Frequency Response Plot of Bandpass Filter

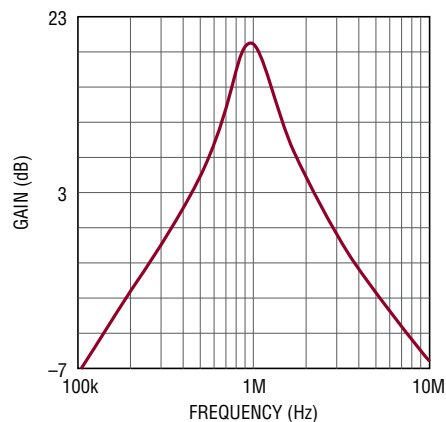

### Driving a Fully Differential ADC

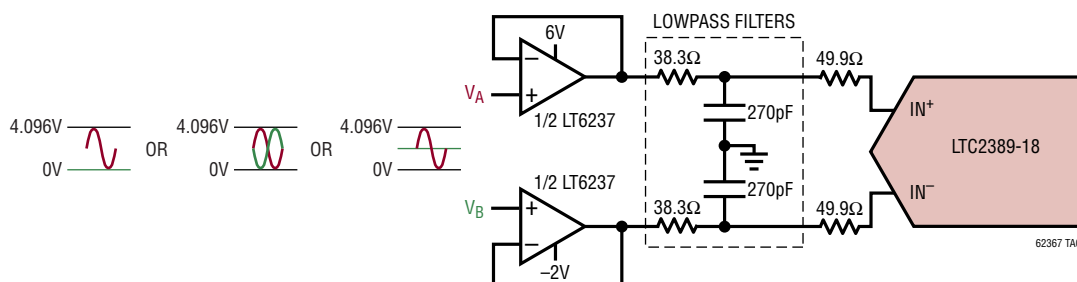


### Driving a Single-Ended ADC

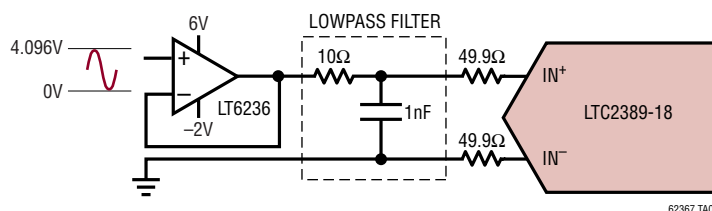

## PACKAGE DESCRIPTION

Please refer to <http://www.linear.com/designtools/packaging/> for the most recent package drawings.

### S6 Package 6-Lead Plastic TSOT-23 (Reference LTC DWG # 05-08-1636)

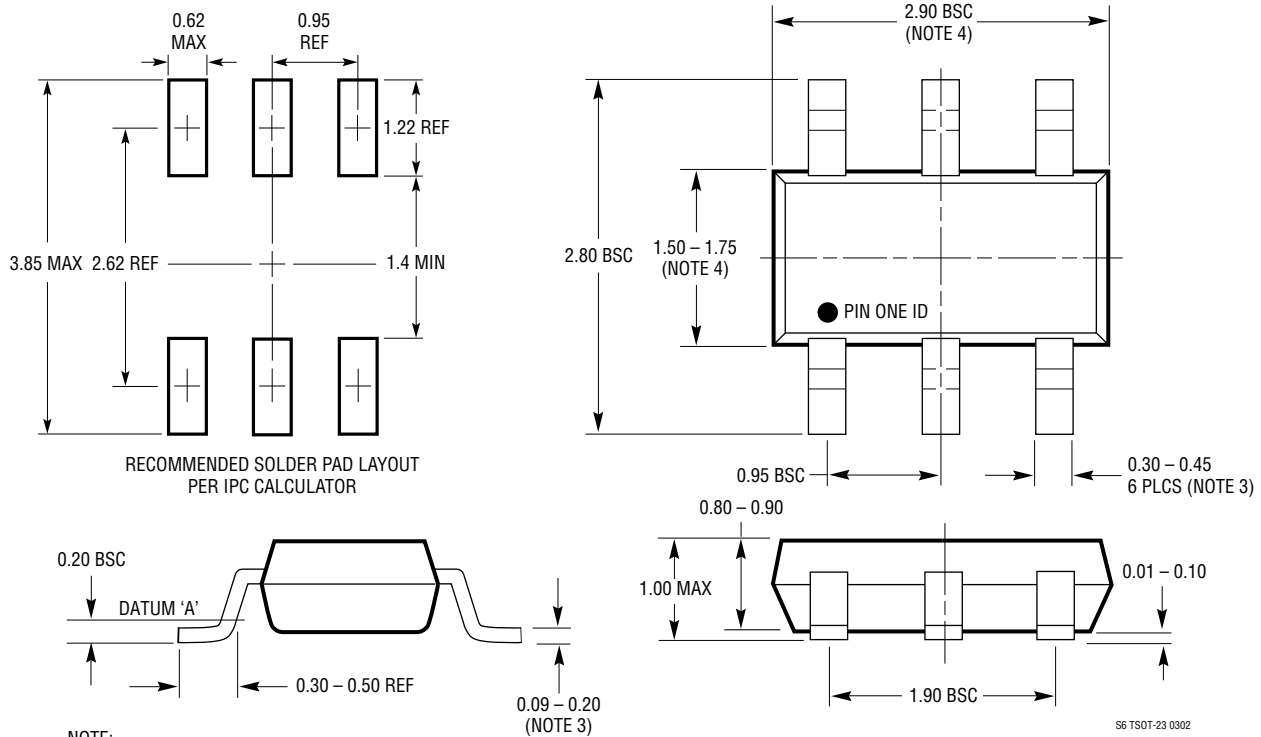




# PACKAGE DESCRIPTION

Please refer to <http://www.linear.com/designtools/packaging/> for the most recent package drawings.

## MS8 Package 8-Lead Plastic MSOP

(Reference LTC DWG # 05-08-1660 Rev G)

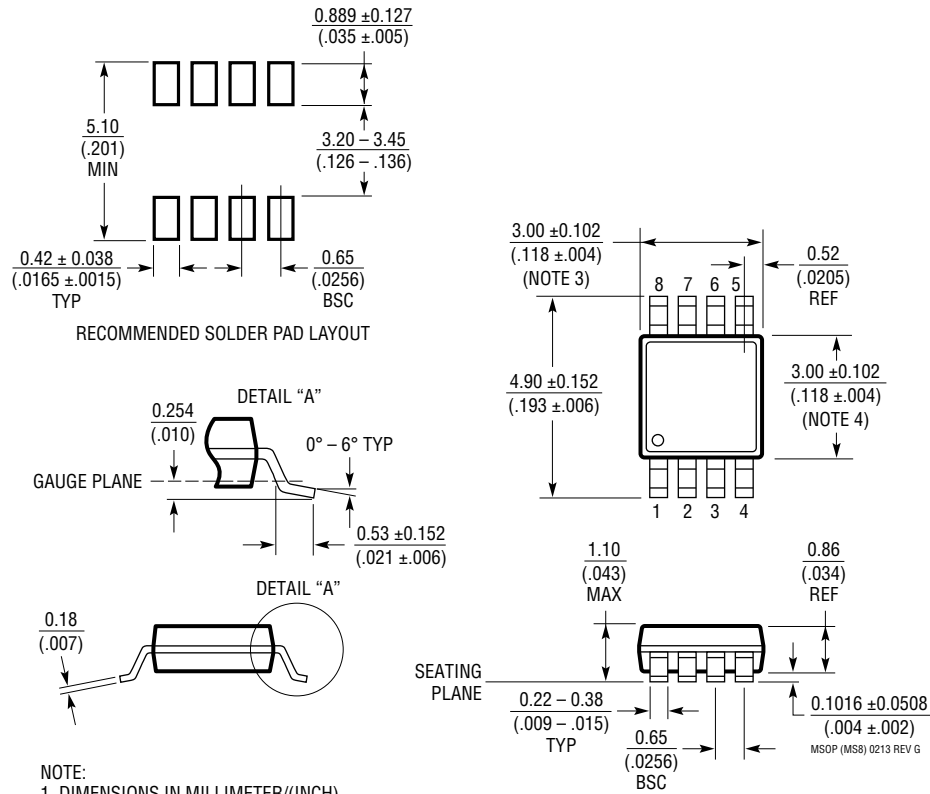


### NOTE:

1. DIMENSIONS IN MILLIMETER/(INCH)
2. DRAWING NOT TO SCALE
3. DIMENSION DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.  
MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED  $0.152\text{mm}$  ( $.006''$ ) PER SIDE
4. DIMENSION DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSIONS.  
INTERLEAD FLASH OR PROTRUSIONS SHALL NOT EXCEED  $0.152\text{mm}$  ( $.006''$ ) PER SIDE
5. LEAD COPLANARITY (BOTTOM OF LEADS AFTER FORMING) SHALL BE  $0.102\text{mm}$  ( $.004''$ ) MAX

## PACKAGE DESCRIPTION

Please refer to <http://www.linear.com/designtools/packaging/> for the most recent package drawings.

### GN Package 16-Lead Plastic SSOP (Narrow .150 Inch) (Reference LTC DWG # 05-08-1641 Rev B)

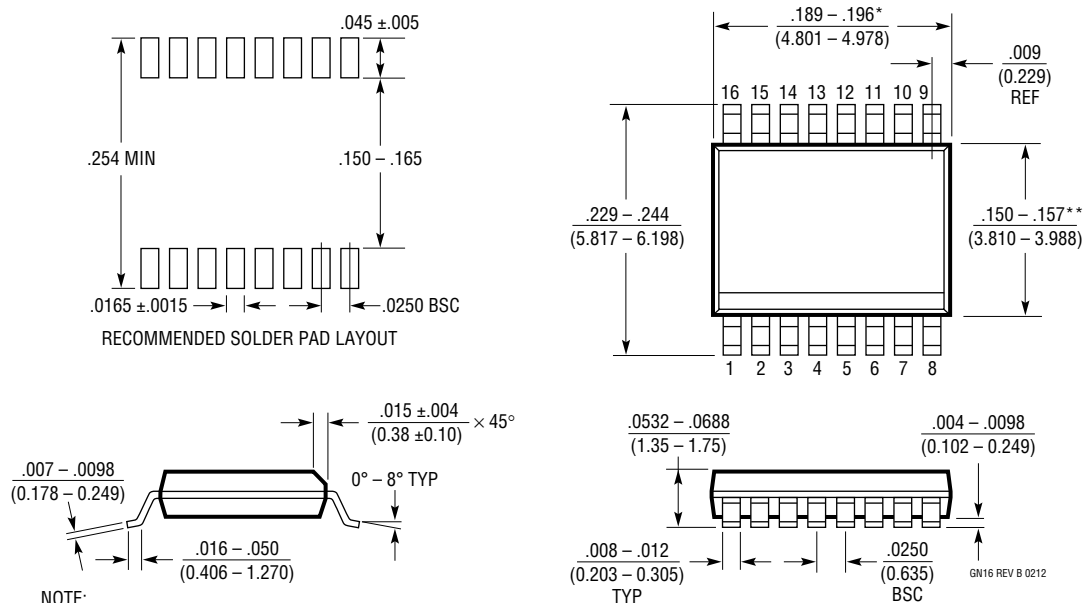

## REVISION HISTORY

| REV | DATE  | DESCRIPTION                                                                                                                                             | PAGE NUMBER                |
|-----|-------|---------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| A   | 09/13 | Added LT6238 quad                                                                                                                                       | All                        |
| B   | 09/14 | Corrected $I_{SINK}$ condition for $V_{OL}$ specification.<br>Corrected $V_O$ condition for $A_{VOL}$ specification.<br>Added LT6238 to ESD discussion. | 5, 6, 9, 10<br>9, 10<br>18 |


# LT6236/LT6237/LT6238

## TYPICAL APPLICATION


The LT6236 is configured as a transimpedance amplifier with an I-to-V conversion gain of  $1.5\text{k}\Omega$  set by R1. The LT6236 is ideally suited to this application because of its low input offset voltage and current, and its low noise. This is because the  $1.5\text{k}\Omega$  resistor has an inherent thermal noise of  $5\text{nV}/\sqrt{\text{Hz}}$  or  $3.4\text{pA}/\sqrt{\text{Hz}}$  at room temperature, while the LT6236 contributes only  $1.1\text{nV}/\sqrt{\text{Hz}}$  and  $2.4\text{pA}/\sqrt{\text{Hz}}$ . So, with respect to both voltage and current noises, the LT6236 is actually quieter than the gain resistor. The circuit uses an avalanche photodiode with the cathode biased to approximately 200V. When light is incident on the photodiode, it induces a current

$I_{PD}$  which flows into the amplifier circuit. The amplifier output falls negative to maintain balance at its inputs. The transfer function is therefore  $V_{OUT} = -I_{PD} \cdot 1.5\text{k}$ . C1 ensures stability and good settling characteristics. Output offset was measured at  $280\mu\text{V}$ , so low in part because R2 serves to cancel the DC effects of bias current. Output noise was measured at  $1.1\text{mV}_{P-P}$  on a 100MHz measurement bandwidth, with C2 shunting R2's thermal noise. As shown in the scope photo, the rise time is 17ns, indicating a signal bandwidth of 20MHz.

Low Power Avalanche Photodiode Transimpedance Amplifier  
 $I_S = 3.3\text{mA}$

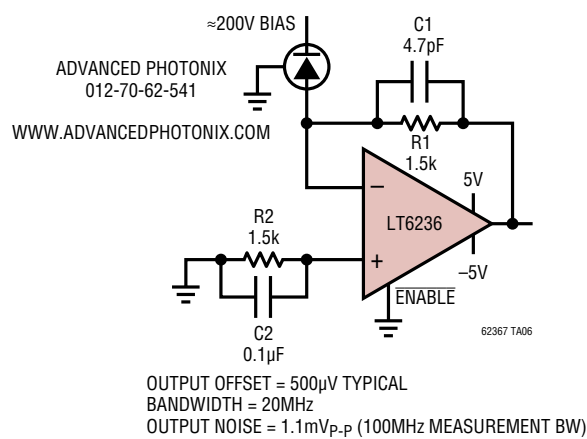

Photodiode Amplifier Time Domain Response

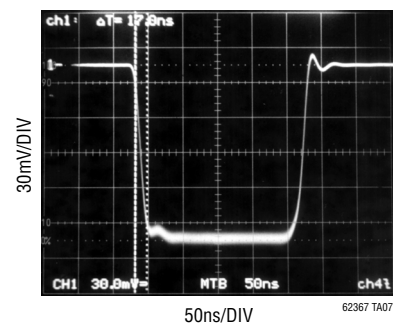

## RELATED PARTS

| PART NUMBER                                                                                                          | DESCRIPTION                                                           | COMMENTS                                                                                              |
|----------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
| <b>OPERATIONAL AMPLIFIERS</b>                                                                                        |                                                                       |                                                                                                       |
| <a href="#">LT6230/LT6231/LT6232</a>                                                                                 | Single, Dual, Quad Low Noise, Rail-to-Rail Output.                    | $1.1\text{nV}/\sqrt{\text{Hz}}$                                                                       |
| <a href="#">LT6350</a>                                                                                               | Low Noise, Single-Ended to Differential Converter/ADC Driver          | 4.8mA, $-97\text{dBc}$ Distortion at 100kHz, $4\text{V}_{P-P}$ Output                                 |
| <a href="#">LTC6246/LTC6247/LTC6248</a>                                                                              | Single/Dual/Quad 180MHz Rail-to-Rail Low Power Op Amps                | 1mA/Amplifier, $4.2\text{nV}/\sqrt{\text{Hz}}$                                                        |
| <a href="#">LTC6360</a>                                                                                              | 1GHz Very Low Noise Single-Ended SAR ADC Driver with True Zero Output | $\text{HD2} = -103\text{dBc}$ and $\text{HD3} = -109\text{dBc}$ for $4\text{V}_{P-P}$ Output at 40kHz |
| <b>ADCs</b>                                                                                                          |                                                                       |                                                                                                       |
| <a href="#">LTC2389-18</a>                                                                                           | Low Power 18-Bit SAR ADC                                              | 2.5Msps                                                                                               |
| <a href="#">LTC2389-16</a>                                                                                           | Low Power 16-Bit SAR ADC                                              | 2.5Msps                                                                                               |
| <a href="#">LTC2379-18</a><br><a href="#">LTC2378-18</a><br><a href="#">LTC2377-18</a><br><a href="#">LTC2376-18</a> | Low Power 18-Bit SAR ADC                                              | 1.6Msps<br>1Msps<br>500ksps<br>250ksps                                                                |

623637fb