


# PIC16(L)F72X


## 2.0 DEVICE PINOUTS

The pin diagrams for the PIC16(L)F72X family are shown in [Figure 2-1](#) through [Figure 2-6](#). The pins that are required for programming are listed in [Table 1-1](#) and shown in bold lettering in the pin diagrams.

**FIGURE 2-1: PDIP/SOIC/SSOP DIAGRAM FOR PIC16F722/722A/723/723A/726 AND PIC16LF722/722A/723/723A/726**

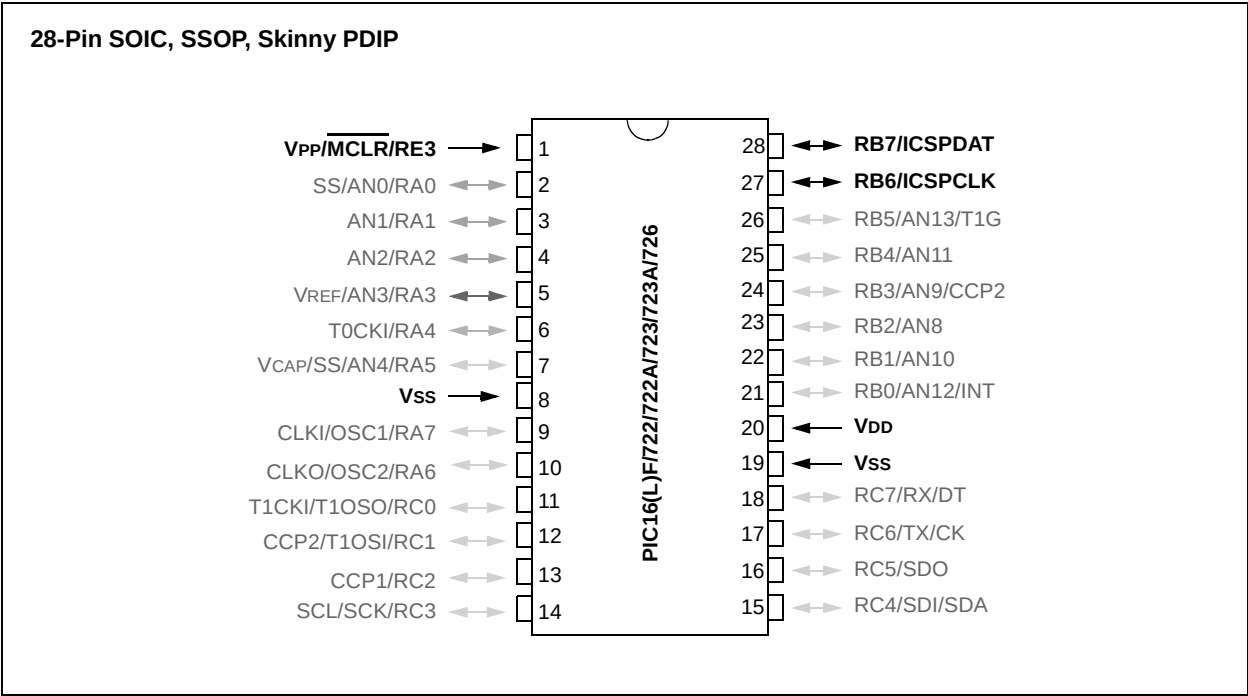

**FIGURE 2-2: QFN PACKAGE DIAGRAM FOR PIC16F722/722A/723/723A/726 AND PIC16LF722/722A/723/723A/726**

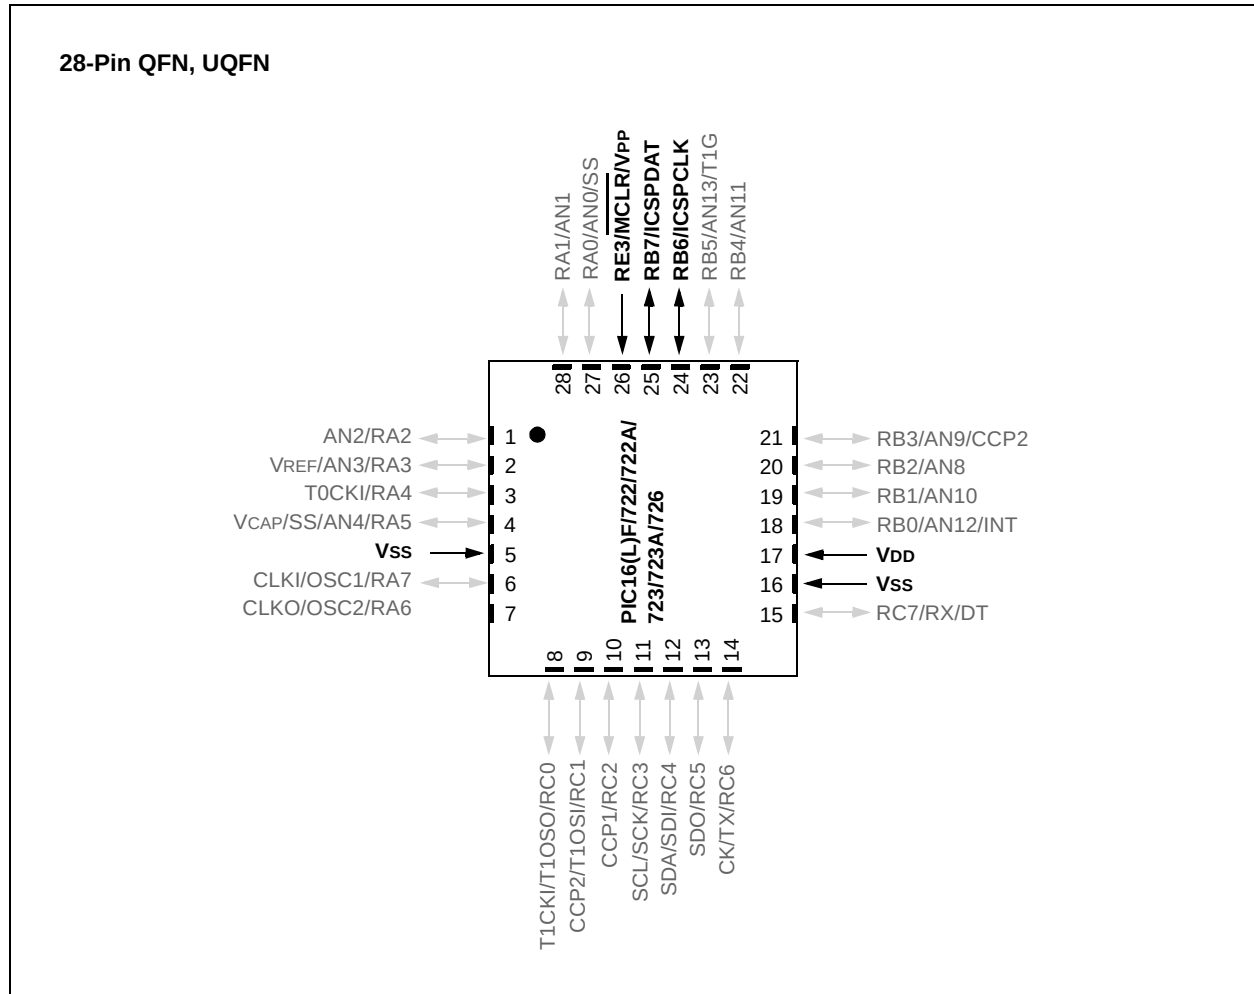

# PIC16(L)F72X

FIGURE 2-3: PDIP PACKAGE DIAGRAM FOR PIC16F724/727 AND PIC16LF724/727

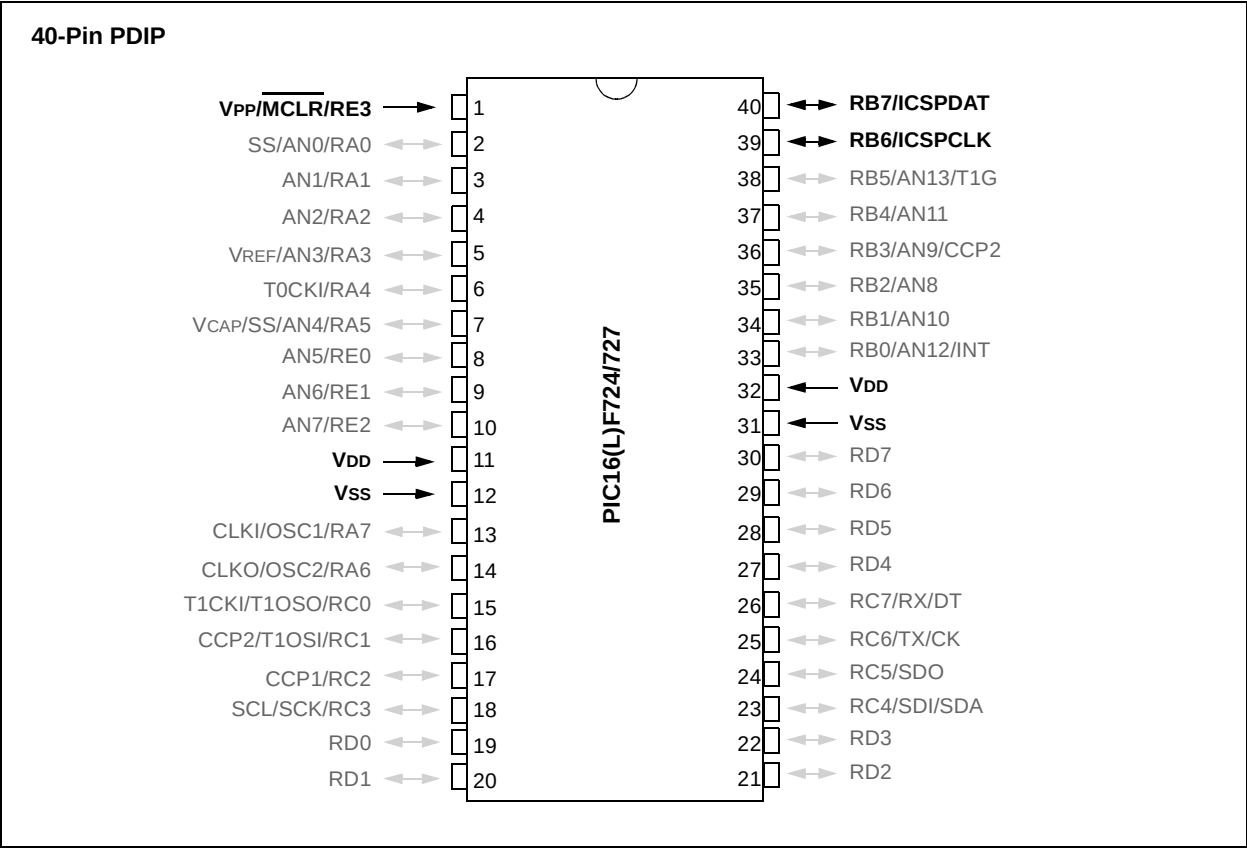


FIGURE 2-4: QFN PACKAGE DIAGRAM FOR PIC16F724/727 AND PIC16LF724/727



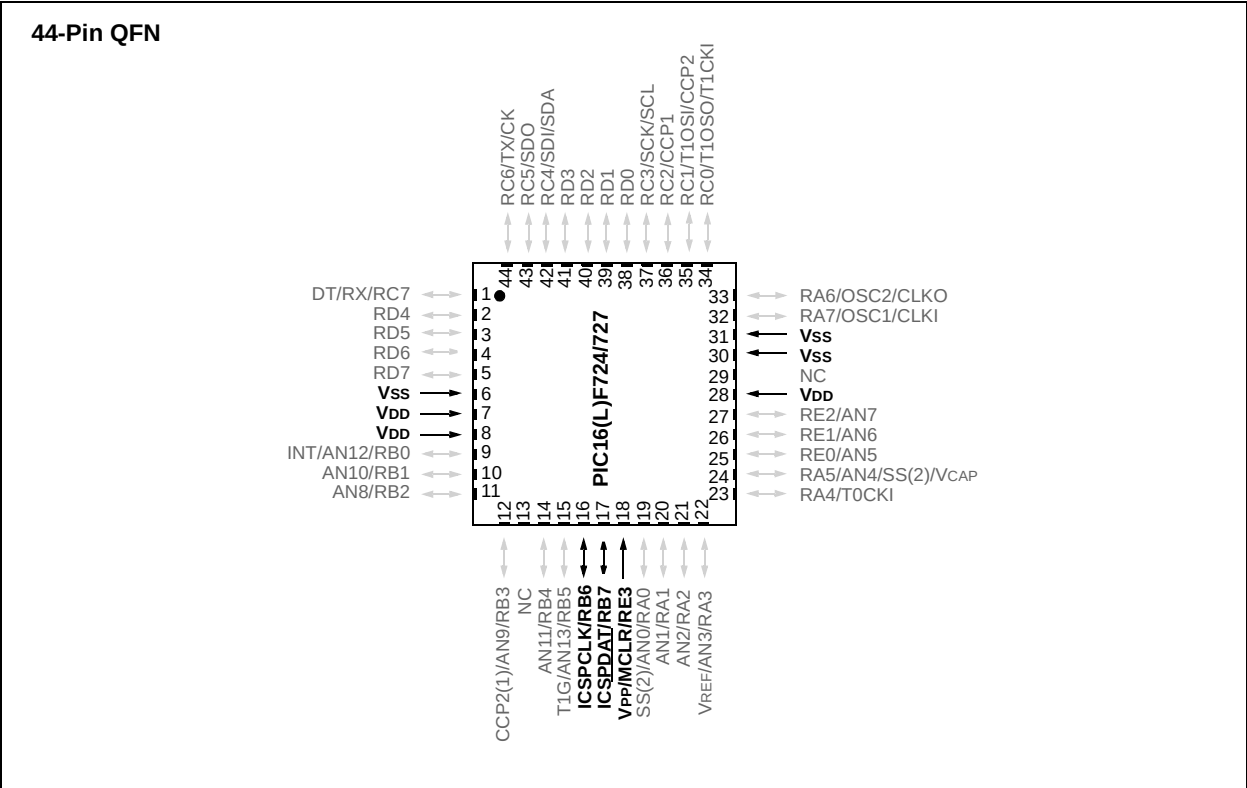


FIGURE 2-5: TQFP PACKAGE DIAGRAM FOR PIC16F724/727 AND PIC16LF724/727

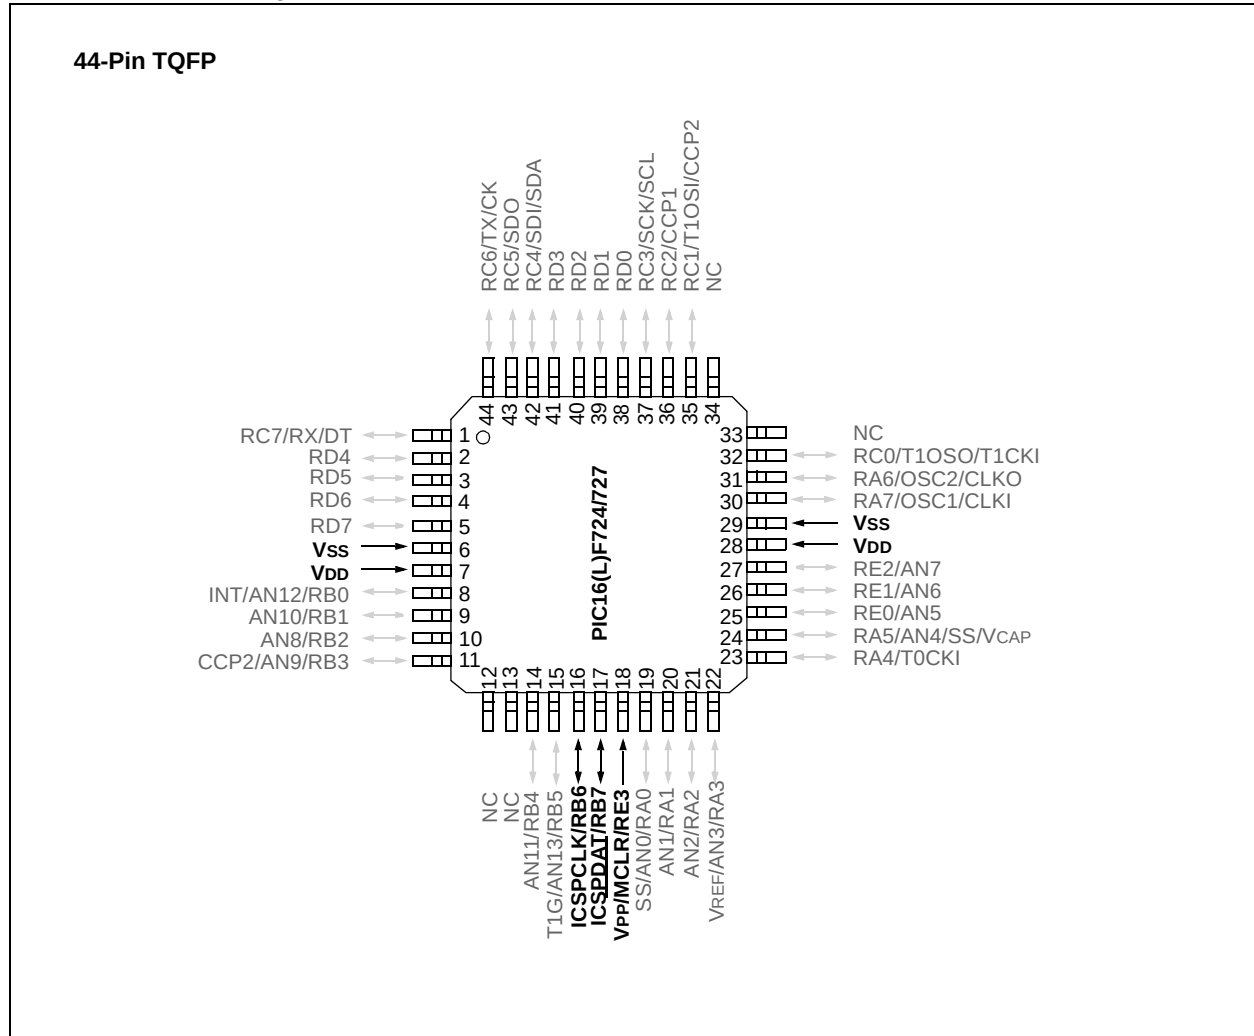

# PIC16(L)F72X


FIGURE 2-6: 40-PIN UQFN PACKAGE DIAGRAM FOR PIC16F724/727

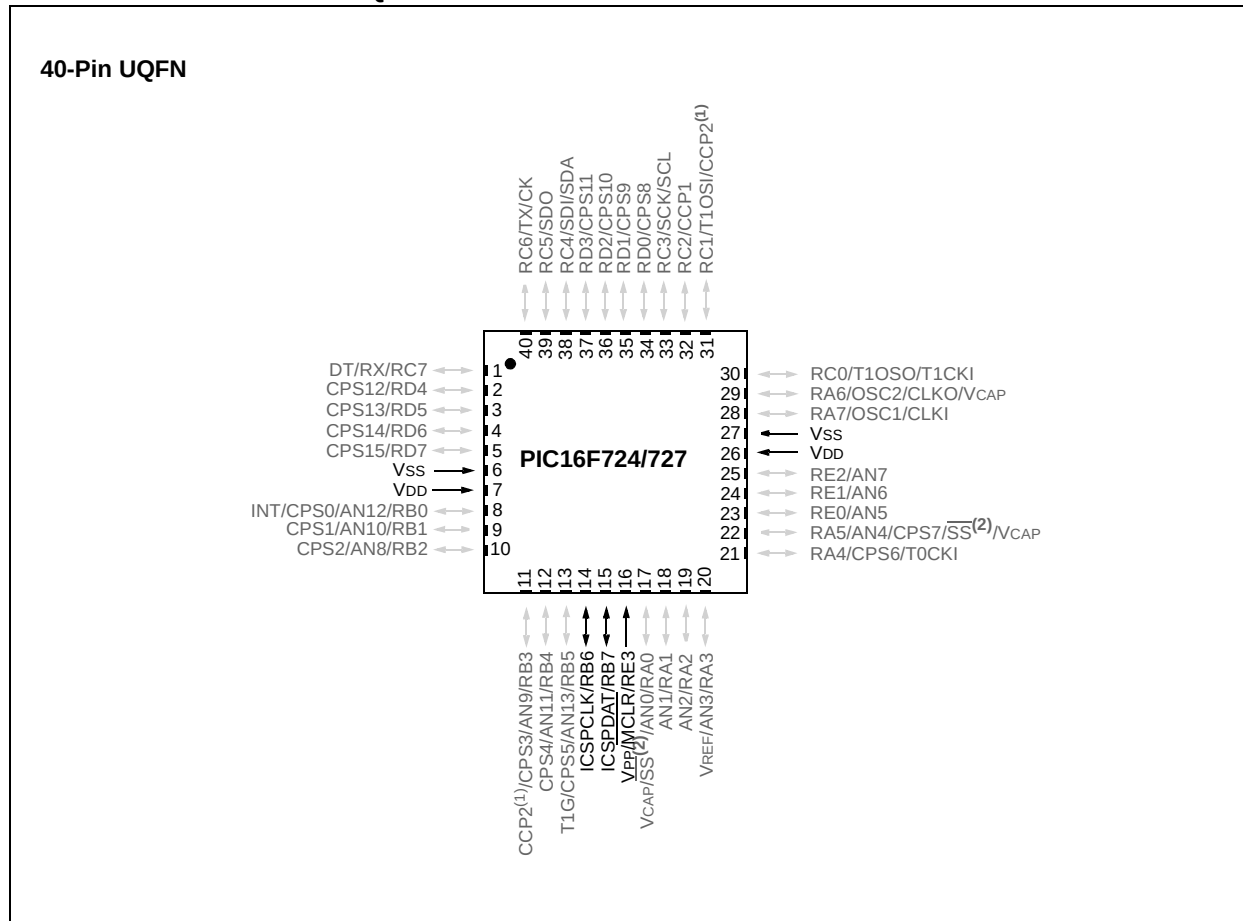

## 3.0 MEMORY MAP


The memory for the PIC16(L)F72X devices is broken into two sections: program memory and configuration memory. Only the size of the program memory changes between devices; the configuration memory remains the same.

**FIGURE 3-1: PIC16(L)F722/722A PROGRAM MEMORY MAPPING**

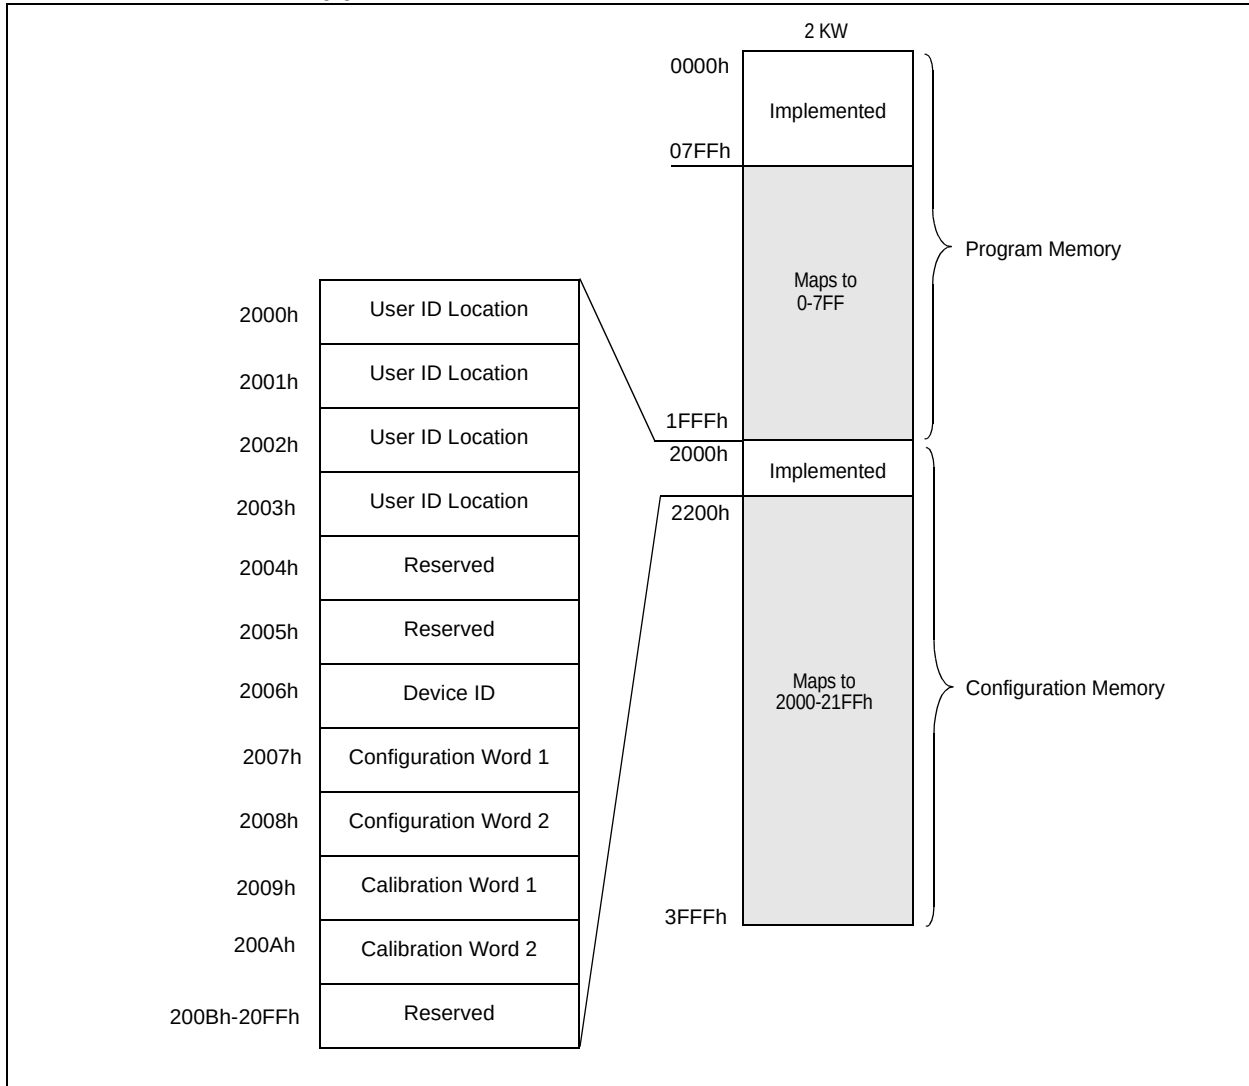


# PIC16(L)F72X

FIGURE 3-2: PIC16(L)F723/723A/724 PROGRAM MEMORY MAPPING

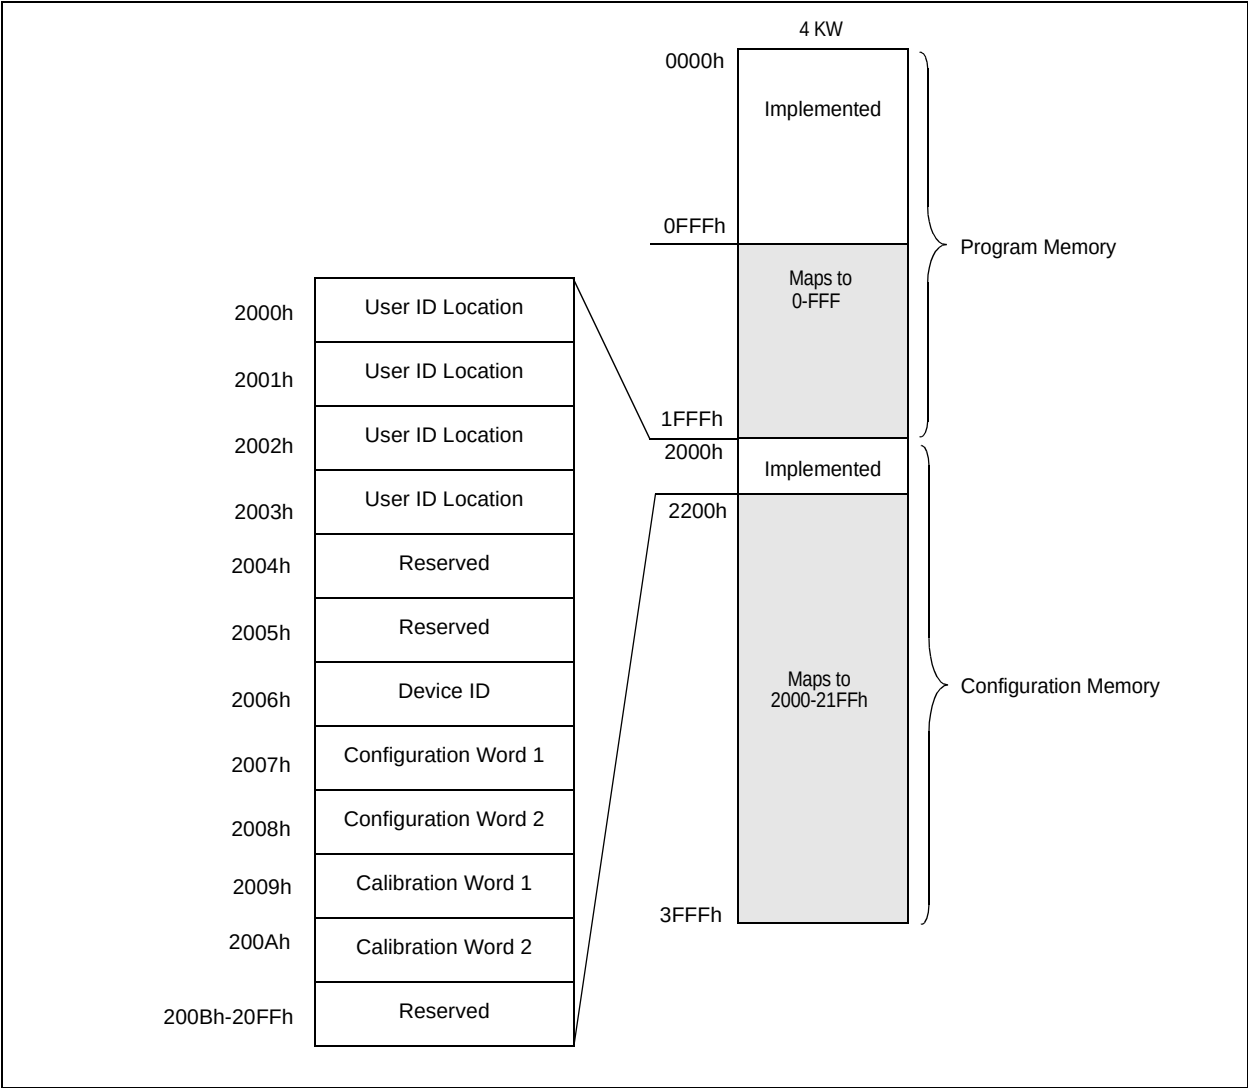

**FIGURE 3-3: PIC16(L)F726/727 PROGRAM MEMORY MAPPING**

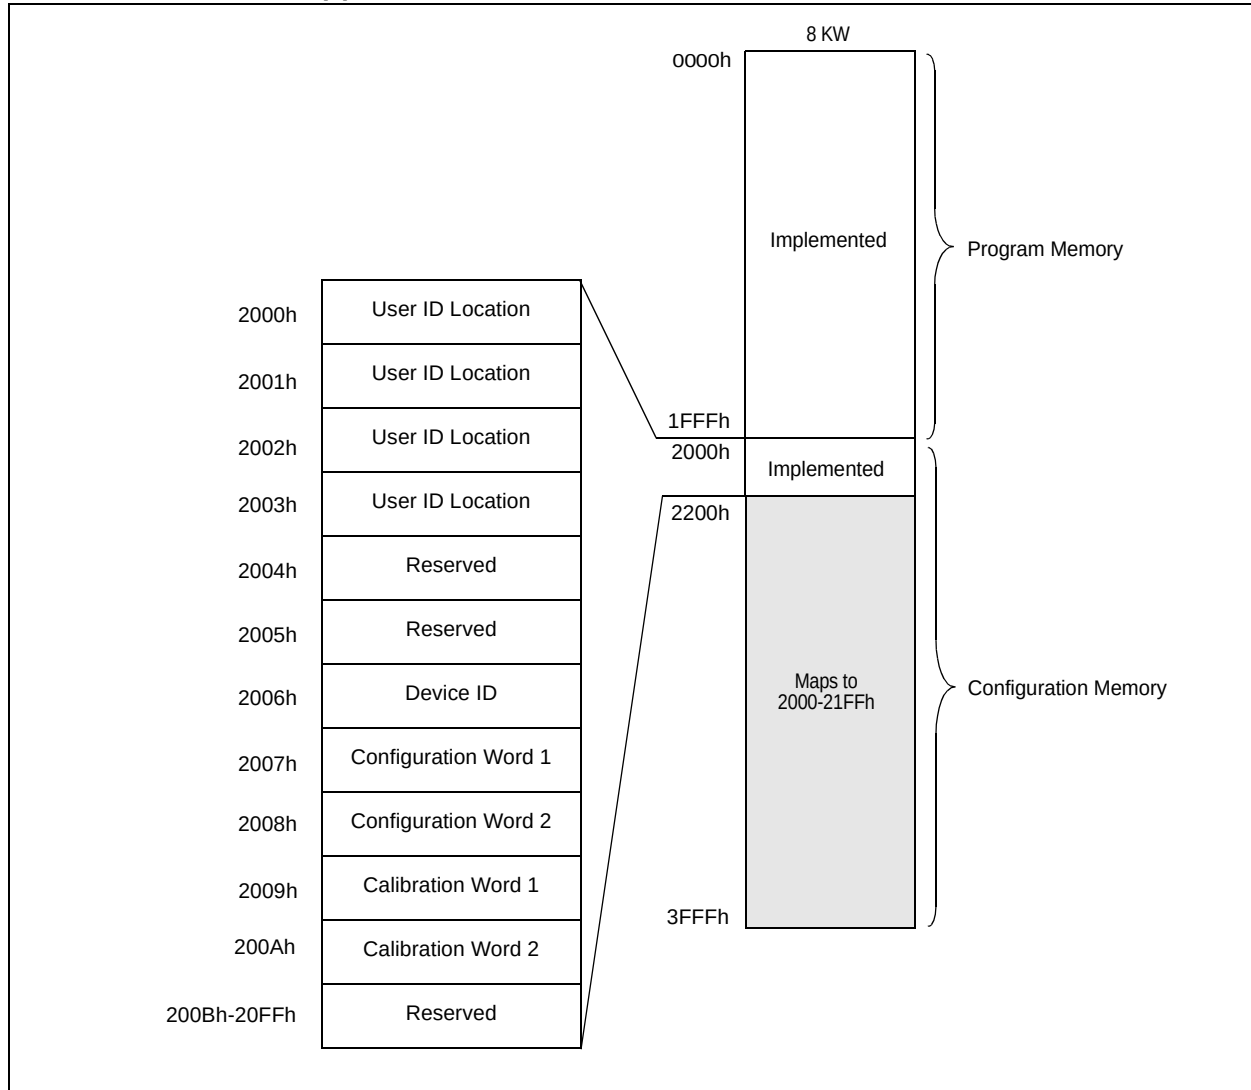

### 3.1 User ID Location

A user may store identification information (user ID) in four designated locations. The user ID locations are mapped to 2000h-2003h. Each location is 14 bits in length. Code protection has no effect on these memory locations. Each location may be read with code protection enabled or disabled.

**Note:** MPLAB® IDE only displays the 7 Least Significant bits (LSb) of each user ID location, the upper bits are not read. It is recommended that only the 7 LSbs be used if MPLAB IDE is the primary tool used to read these addresses.

### 3.2 Device ID

The device ID word for the PIC16F72X and the PIC16LF72X devices is located at 2006h. This location cannot be erased or modified.



# PIC16(L)F72X

**TABLE 3-1: DEVICE ID VALUES**

| DEVICE      | DEVICE ID VALUES |        |
|-------------|------------------|--------|
|             | DEV              | REV    |
| PIC16F722   | 01 1000 100      | X XXXX |
| PIC16F722A  | 01 1011 001      | X XXXX |
| PIC16F723   | 01 1000 011      | X XXXX |
| PIC16F723A  | 01 1011 000      | X XXXX |
| PIC16F724   | 01 1000 010      | X XXXX |
| PIC16F726   | 01 1000 001      | X XXXX |
| PIC16F727   | 01 1000 000      | X XXXX |
| PIC16LF722  | 01 1001 100      | X XXXX |
| PIC16LF722A | 01 1011 011      | X XXXX |
| PIC16LF723  | 01 1001 011      | X XXXX |
| PIC16LF723A | 01 1011 010      | X XXXX |
| PIC16LF724  | 01 1001 010      | X XXXX |
| PIC16LF726  | 01 1001 001      | X XXXX |
| PIC16LF727  | 01 1001 000      | X XXXX |

## 3.3 Configuration Words

The PIC16(L)F72X devices have two Configuration Words, Configuration Word 1 (2007h) and Configuration Word 2 (2008h). The individual bits within these Configuration Words are used to enable or disable device functions such as the Brown-out Reset, code protection and Power-up Timer.

## 3.4 Calibration Words

For the PIC16(L)F72X devices, the 16 MHz internal oscillator (INTOSC), and the Brown-out Reset (BOR), are factory calibrated and stored in Calibration Words 1 and 2 (2009h and 200Ah).

The Calibration Words do not participate in erase operations. The device can be erased without affecting the Calibration Words.

## REGISTER 3-1: CONFIGURATION WORD 1

| R/P-1                       | R/P-1 | U-1 <sup>(2)</sup> | R/P-1 | R/P-1  | R/P-1  | U-1 <sup>(2)</sup> |
|-----------------------------|-------|--------------------|-------|--------|--------|--------------------|
| <b>DEBUG</b> <sup>(1)</sup> | PLLEN | —                  | BORV  | BOREN1 | BOREN0 | —                  |
| bit 13                      |       |                    |       |        |        |                    |

| R/P-1     | R/P-1 | R/P-1 | R/P-1 | R/P-1 | R/P-1 | R/P-1 |
|-----------|-------|-------|-------|-------|-------|-------|
| <b>CP</b> | MCLRE | PWRTE | WDTE  | FOSC2 | FOSC1 | FOSC0 |
|           |       |       |       |       |       | bit 0 |

|                    |                             |                                    |
|--------------------|-----------------------------|------------------------------------|
| <b>Legend:</b>     | P = Programmable            | x = Bit is unknown                 |
| R = Readable bit   | W = Writable bit            | U = Unimplemented bit, read as '1' |
| -n = Default value | '1' = Bit is written to '1' | '0' = Bit is written to '0'        |

|         |                                                                                                                                                                                                                                                                                                                                                                       |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| bit 13  | <b>DEBUG:</b> Debugger mode bit <sup>(1)</sup><br>1 = Background debugger is disabled<br>0 = Background debugger is enabled                                                                                                                                                                                                                                           |
| bit 12  | <b>PLLEN:</b> INTOSC PLL Enable bit<br>1 = INTOSC frequency is 16 MHz<br>0 = INTOSC frequency is 500 kHz                                                                                                                                                                                                                                                              |
| bit 11  | <b>Unimplemented:</b> Read as '1'                                                                                                                                                                                                                                                                                                                                     |
| bit 10  | <b>BORV:</b> Brown-out Reset Voltage Selection bit<br>1 = Brown-out Reset Voltage (VBOR) set to 1.9V<br>0 = Brown-out Reset Voltage (VBOR) set to 2.5V                                                                                                                                                                                                                |
| bit 9-8 | <b>BOREN&lt;1:0&gt;:</b> Brown-out Reset Enable bits<br>0x = Brown-out Reset disabled<br>10 = Brown-out Reset enabled during operation and disabled in Sleep<br>11 = Brown-out Reset enabled                                                                                                                                                                          |
| bit 7   | <b>Unimplemented:</b> Read as '1'                                                                                                                                                                                                                                                                                                                                     |
| bit 6   | <b>CP:</b> Flash Program Memory Code Protection bit<br><b>For PIC16F/LF726/727:</b><br>0 = 0000h to 1FFFh code protection on<br>1 = Code protection off<br><b>For PIC16F/LF723/723A/724:</b><br>0 = 0000h to 0FFFh code protection on<br>1 = Code protection off<br><b>For PIC16F/LF722/722A:</b><br>0 = 0000h to 07FFh code protection on<br>1 = Code protection off |
| bit 5   | <b>MCLRE:</b> RE3/MCLR/VPP Pin Function Select bit<br>1 = RE3/MCLR/VPP pin function is MCLR; Weak pull-up enabled.<br>0 = RE3/MCLR/VPP pin function is digital input; MCLR internally disabled; Weak pull-up disabled.                                                                                                                                                |
| bit 4   | <b>PWRTE:</b> Power-up Timer Enable bit<br>1 = PWRT disabled<br>0 = PWRT enabled                                                                                                                                                                                                                                                                                      |
| bit 3   | <b>WDTE:</b> Watchdog Timer Enable bit<br>1 = WDT enabled<br>0 = WDT disabled                                                                                                                                                                                                                                                                                         |

**Note 1:** **DEBUG** bit is ignored when code-protect is enabled ( $\overline{\text{CP}} = 0$ ).

**2:** MPLAB<sup>®</sup> IDE masks unimplemented Configuration bits to '0'.

# PIC16(L)F72X

## REGISTER 3-1: CONFIGURATION WORD 1 (CONTINUED)

bit 2-0      **FOSC<2:0>**: Oscillator Selection bits

111 = RC with CLKOUT oscillator: CLKO function on RA6/OSC2/CLKO pin, RC on RA7/OSC1/CLKI

110 = RC NO CLKOUT oscillator: I/O function on RA6/OSC2/CLKO pin, RC on RA7/OSC1/CLKI

101 = INTOSC with CLKOUT oscillator: CLKO function on RA6/OSC2/CLKO pin, I/O function on RA7/OSC1/CLKI

100 = INTOSC NO CLKOUT oscillator: I/O function on RA6/OSC2/CLKO pin, I/O function on RA7/OSC1/CLKI

011 = EC oscillator: I/O function on RA6/OSC2/CLKO pin, CLKI on RA7/OSC1/CLKI

010 = HS oscillator: High-speed crystal/resonator on RA6/OSC2/CLKO pin and RA7/OSC1/CLKI

001 = XT oscillator: Crystal/resonator on RA6/OSC2/CLKO pin and RA7/OSC1/CLKI

000 = LP oscillator: Low-power crystal on RA6/OSC2/CLKO pin and RA7/OSC1/CLKI

**Note 1:**  $\overline{\text{DEBUG}}$  bit is ignored when code-protect is enabled ( $\overline{\text{CP}} = 0$ ).

**2:** MPLAB® IDE masks unimplemented Configuration bits to '0'.

## REGISTER 3-2: CONFIGURATION WORD 2

| U-1 <sup>(1)</sup> | U-1 <sup>(1)</sup> | U-1 <sup>(1)</sup> | U-1 <sup>(1)</sup> | U-1 <sup>(1)</sup> | U-1 <sup>(1)</sup> | U-1 <sup>(1)</sup> |
|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|--------------------|
| —                  | —                  | —                  | —                  | —                  | —                  | —                  |
| bit 13             |                    |                    |                    |                    |                    |                    |

| U-1 <sup>(1)</sup> | R/P-1   | R/P-1   | U-1 <sup>(1)</sup> | U-1 <sup>(1)</sup> | U-1 <sup>(1)</sup> | U-1 <sup>(1)</sup> |
|--------------------|---------|---------|--------------------|--------------------|--------------------|--------------------|
| —                  | VCAPEN1 | VCAPEN0 | —                  | —                  | —                  | —                  |
|                    |         |         |                    |                    |                    | bit 0              |

|                    |                             |                                    |
|--------------------|-----------------------------|------------------------------------|
| <b>Legend:</b>     | P = Programmable            | x = Bit is unknown                 |
| R = Readable bit   | W = Writable bit            | U = Unimplemented bit, read as '1' |
| -n = Default value | '1' = Bit is written to '1' | '0' = Bit is written to '0'        |

bit 13-6      **Unimplemented:** Read as '1'

bit 5-4      **VCAPEN<1:0>**: Voltage Regulator Capacitor Enable bits

For PIC16LF72X:

These bits are ignored. All VCAP pin functions are disabled.

For PIC16F72X:

00 = VCAP functionality is enabled on RA0

01 = VCAP functionality is enabled on RA5

10 = VCAP functionality is enabled on RA6

11 = All VCAP pin functions are disabled

bit 3-0      **Unimplemented:** Read as '1'

**Note 1:** MPLAB® IDE masks unimplemented Configuration bits to '0'.

## 4.0 PROGRAM/VERIFY MODE

In Program/Verify mode, the program memory and the configuration memory can be accessed and programmed in serial fashion. ICSPDAT and ICSPCLK are used for the data and the clock, respectively. All commands and data words are transmitted LSb first. Data changes on the rising edge of the ICSPCLK and latched on the falling edge. In Program/Verify mode both the ICSPDAT and ICSPCLK are Schmitt Trigger inputs. The sequence that enters the device into Program/Verify mode places all other logic into the Reset state. Upon entering Program/Verify mode, all I/O's are automatically configured as high-impedance inputs and the Program Counter (PC) is cleared.

### 4.1 Program/Verify Mode Entry and Exit

There are 2 different methods of entering Program/Verify mode:

- VPP – First entry mode
- VDD – First entry mode

#### 4.1.1 VPP – FIRST ENTRY MODE

To enter Program/Verify mode via the VPP-first method the following sequence must be followed:

1. Hold ICSPCLK and ICSPDAT low. All other pins should be unpowered.
2. Raise the voltage on  $\overline{\text{MCLR}}$  from 0V to  $V_{IH}$ .
3. Raise the voltage on VDD from 0V to the desired operating voltage.

The VPP-first entry prevents the device from executing code prior to entering Program/Verify mode (e.g., When the Configuration Word has MCLR disabled ( $\text{MCLRE} = 0$ ), the power-up time disabled ( $\text{PWRT} = 0$ ), and the internal oscillator is selected ( $\text{FOSC} = 10x$ ), VPP-first entry mode is strongly recommended for this reason. ICSPCLK or ICSPDAT is driven high by the user code. See the timing diagram in [Figure 8-4](#).

#### 4.1.2 VDD–FIRST ENTRY MODE

To enter Program/Verify mode via the VDD-first method the following sequence must be followed:

1. Hold ICSPCLK and ICSPDAT low.
2. Raise the voltage on VDD from 0V to the desired operating voltage.
3. Raise the voltage on  $\overline{\text{MCLR}}$  from below VDD to VPP.

The VDD-first method is useful when programming the device when VDD is already applied, for it is not necessary to disconnect VDD to enter Program/Verify mode. See the timing diagram in [Figure 8-5](#).

#### 4.1.3 PROGRAM/VERIFY MODE EXIT

To exit Program/Verify mode take  $\overline{\text{MCLR}}$  to VDD or lower.

## 4.2 Program/Verify Commands

The PIC16F72X and PIC16LF72X devices implement 10 programming commands, each six bits in length. The commands are summarized in [Table 4-1](#).

Commands that have data associated with them are specified to have a minimum delay of  $T_{DLY}$  between the command and the data. After this delay 16 clocks are required to either clock in or clock out the 14-bit data word. The first clock is for the Start bit and the last clock is for the Stop bit.

**TABLE 4-1: COMMAND MAPPING FOR PIC16F72X**

| Command                            | Mapping              |     | Data/Note        |
|------------------------------------|----------------------|-----|------------------|
|                                    | Binary (MSb ... LSb) | Hex |                  |
| Load Configuration                 | x 0 0 0 0 0          | 00h | 0, data (14), 0  |
| Load Data For Program Memory       | x 0 0 0 1 0          | 02h | 0, data (14), 0  |
| Read Data From Program Memory      | x 0 0 1 0 0          | 04h | 0, data (14), 0  |
| Increment Address                  | x 0 0 1 1 0          | 06h |                  |
| Reset Address                      | x 1 0 1 1 0          | 16h |                  |
| Begin Internally Timed Programming | x 0 1 0 0 0          | 08h |                  |
| Begin Externally Timed Programming | x 1 1 0 0 0          | 18h |                  |
| End Externally Timed Programming   | x 0 1 0 1 0          | 0Ah |                  |
| Bulk Erase Program Memory          | x 0 1 0 0 1          | 09h | Internally Timed |
| Row Erase Program Memory           | x 1 0 0 0 1          | 11h | Internally Timed |

# PIC16(L)F72X


## 4.2.1 LOAD CONFIGURATION

The Load Configuration command is used to access the configuration memory (user ID locations, Configuration Words, Calibration Words). The Load Configuration command sets the Program Counter (PC) to address 2000h and loads the data latches with one word of data.

After issuing the Load Configuration command, use the Increment Address command until the proper address to be programmed is reached. The address is then programmed by issuing either the Begin Internally Timed Programming or Begin Externally Timed Programming command.

After the configuration memory has been accessed by the Load Configuration command, the only way to get back to the program memory is to exit Program/Verify mode or issue the Reset Address command.


FIGURE 4-1: LOAD CONFIGURATION

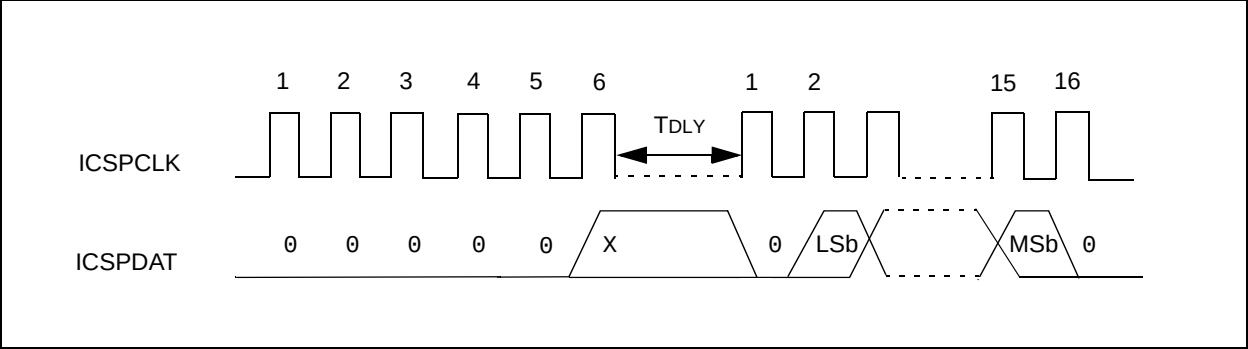

## 4.2.2 LOAD DATA FOR PROGRAM MEMORY

The Load Data for Program Memory command is used to load one 14-bit word into the data latches. The word is placed into program memory after the Begin Internally Timed Programming or Begin Externally Timed Programming command is issued.


FIGURE 4-2: LOAD DATA FOR PROGRAM MEMORY

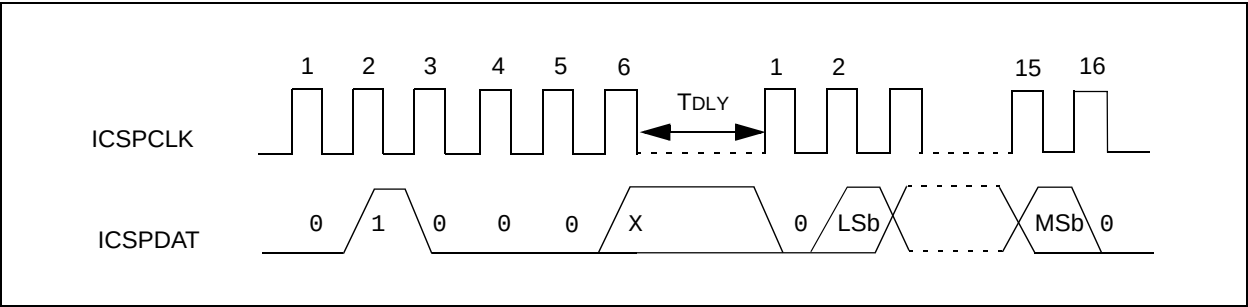

## 4.2.3 READ DATA FROM PROGRAM MEMORY

After receiving this command, the chip will transmit data bits out of the program memory (user or configuration) currently accessed, starting with the second rising edge of the clock input. The data pin will go into Output mode on the first falling clock edge, and it will revert to Input mode (high-impedance) after the 16th falling edge of the clock. If the program memory is code-protected (CP), the data will be read as zeros.


**FIGURE 4-3: READ DATA FROM PROGRAM MEMORY**

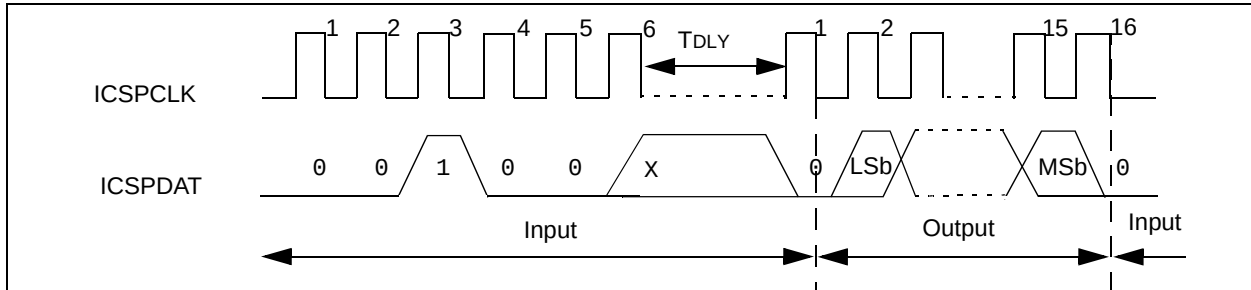

## 4.2.4 INCREMENT ADDRESS

The Program Counter (PC) is incremented when this command is received. It is not possible to decrement the PC. To reset this counter, the user must exit Program/Verify mode and re-enter it or use the Reset Address command.

**FIGURE 4-4: INCREMENT ADDRESS**

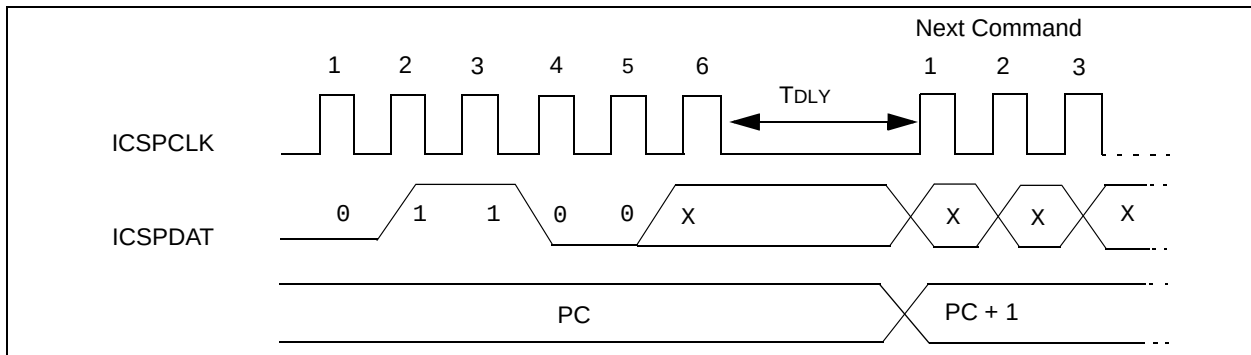


# PIC16(L)F72X

## 4.2.5 RESET ADDRESS

After receiving this command the Program Counter (PC) is set to 0000h. The PC will be reset independent of addressing the program memory or the configuration memory.

**FIGURE 4-5: RESET ADDRESS**

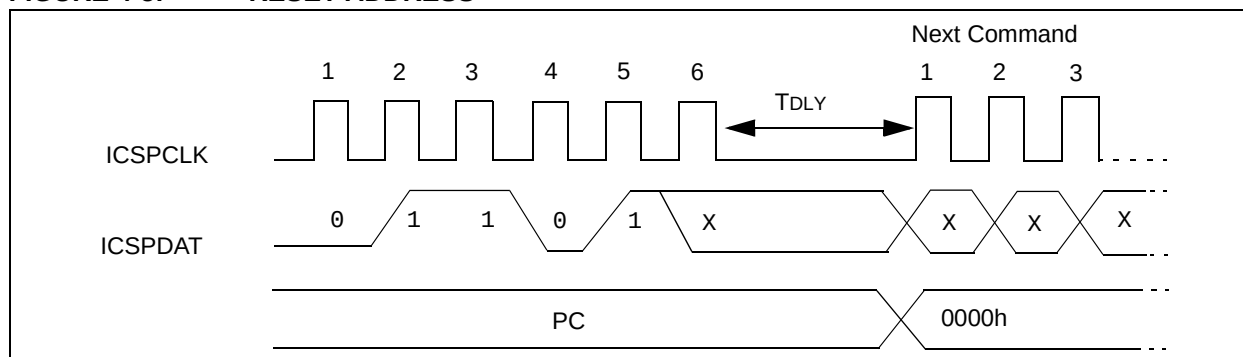


## 4.2.6 BEGIN INTERNALLY TIMED PROGRAMMING

A Load Configuration or Load Data for Program Memory command must be given before every Begin Programming command. Programming of the addressed memory will begin after this command is received. An internal timing mechanism executes the write. The user must allow for the program cycle time for the programming to complete. The address that is being programmed is not erased prior to being programmed.

The End Externally Timed Programming command is not needed when the Begin Internally Timed Programming is used to start the programming.

**FIGURE 4-6: BEGIN INTERNALLY TIMED PROGRAMMING**

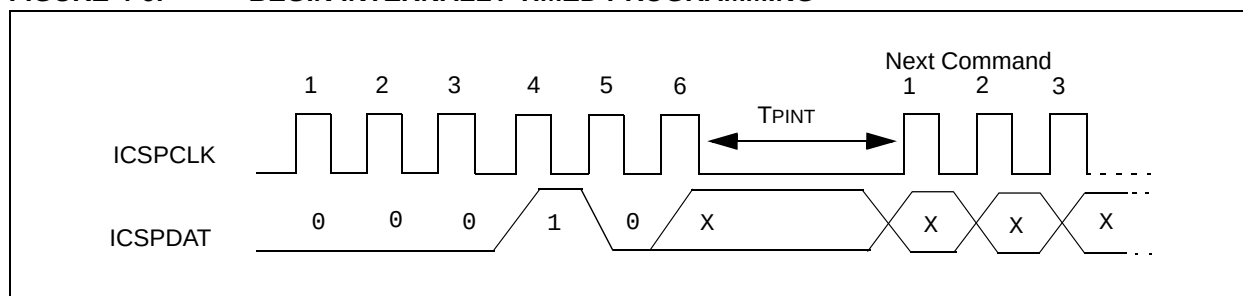


## 4.2.7 BEGIN EXTERNALLY TIMED PROGRAMMING

A Load Configuration, Load Data for Program Memory or Load Data for Data Memory command must be given before every Begin Programming command. Programming of the addressed memory will begin after this command is received. To complete the programming of the address, the End Externally Timed Programming command must be sent in the specified time window defined by  $T_{PEXT}$ .

The Begin Externally Timed Programming command cannot be used for programming the Configuration Words.

**FIGURE 4-7: BEGIN EXTERNALLY TIMED PROGRAMMING**

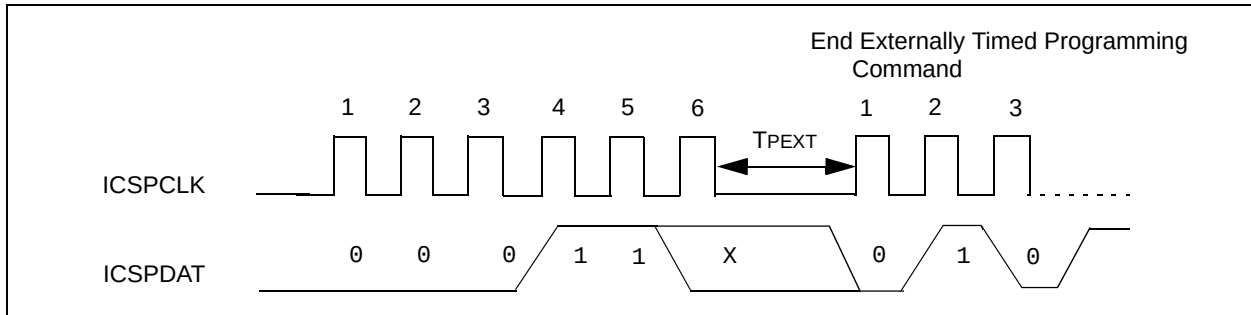


## 4.2.8 END EXTERNALLY TIMED PROGRAMMING

This command is required after a Begin Externally Timed Programming command is given. This command must be sent within the time window specified by  $T_{PEXT}$  after the Begin Externally Timed Programming command is sent.

After sending the End Externally Timed Programming command, an additional delay ( $T_{DIS}$ ) is required before sending the next command. This delay is longer than the delay ordinarily required between other commands.

**FIGURE 4-8: END EXTERNALLY TIMED PROGRAMMING**

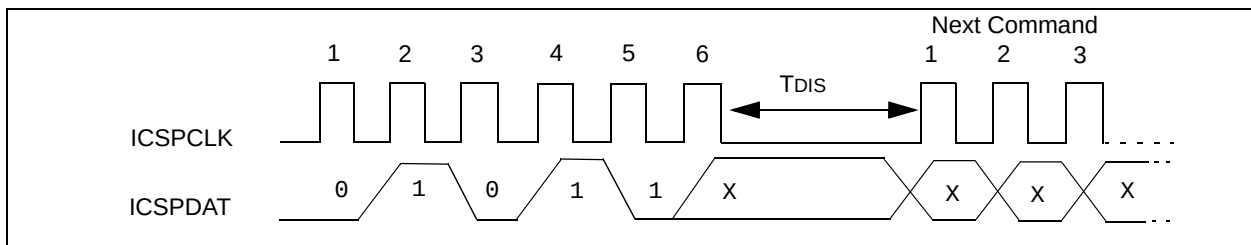



# PIC16(L)F72X

## 4.2.9 BULK ERASE PROGRAM MEMORY

The Bulk Erase Program Memory command performs two different functions, dependant on the current state of the Program Counter (PC).

PC 0000h-1FFFh:

Program Memory is erased  
Configuration words are erased

PC 2000h-2008h:


Program Memory is erased  
Configuration Words are erased  
User ID Locations are erased

After receiving the Bulk Erase Program Memory command, the erase will not complete until the time interval,  $T_{ERAB}$ , has expired.

**Note 1:** The code protection Configuration bit ( $\overline{CP}$ ) has no effect on the Bulk Erase Program Memory command.

**Note 2:** A Bulk Erase Program Memory command should not be issued when the PC is greater than 2008h.

**FIGURE 4-9: BULK ERASE PROGRAM MEMORY**

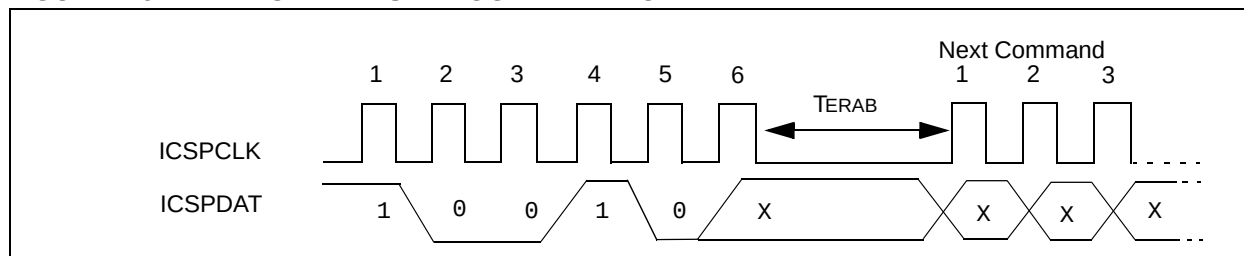


## 4.2.10 ROW ERASE PROGRAM MEMORY

A row of program memory consists of 32 consecutive 14-bit words. A row is addressed by the Program Counter PC<13:5>. The Row Erase Program Memory command can be used to erase an individual row. If the program memory is code-protected the Row Erase Program Memory command will be ignored. When the PC is 2000h-2008h the Row Erase Program Memory command will only erase the user ID locations, independent of the setting of the  $\overline{CP}$  Configuration bit.

After receiving the Row Erase Program Memory command, the erase will not complete until the time interval,  $T_{ERAR}$ , has expired.

**FIGURE 4-10: ROW ERASE PROGRAM MEMORY**

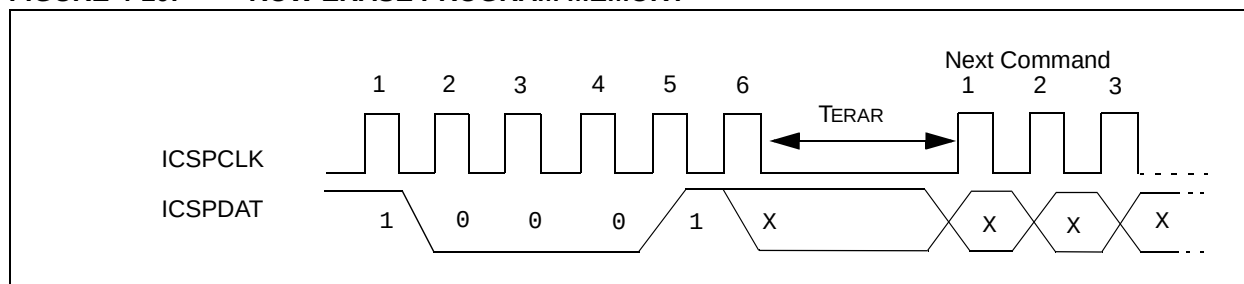


## 5.0 PROGRAMMING ALGORITHMS

The PIC16(L)F72X devices have the capability of storing eight 14-bit words in its data latches. The data latches are internal to the PIC16(L)F72X devices and are only used for programming. The data latches allow the user to program up to eight program words with a single Begin Externally Timed Programming or Begin Internally Timed Programming command. The Load Program Data or the Load Configuration Word command is used to load a single data latch. The data latch will hold the data until Begin Externally Timed Programming or Begin Internally Timed Programming command is given.

The data latches are aligned with the 3 LSB of the PC. The address of the PC, at the time the Begin Externally Timed Programming or Begin Internally Timed Programming command is given, will determine which location(s) in memory are written. Writes cannot cross a physical eight-word boundary. For example, attempting to write from PC 0002h-0009h will result in data being written to 0008h-000Fh.


If more than 8 data latches are written without a Begin Externally Timed Programming or Begin Internally Timed Programming command the data in the data latches will be overwritten. The following diagrams show the recommended flowcharts for programming.

**FIGURE 5-1: ONE-WORD PROGRAMMING FLOWCHART**

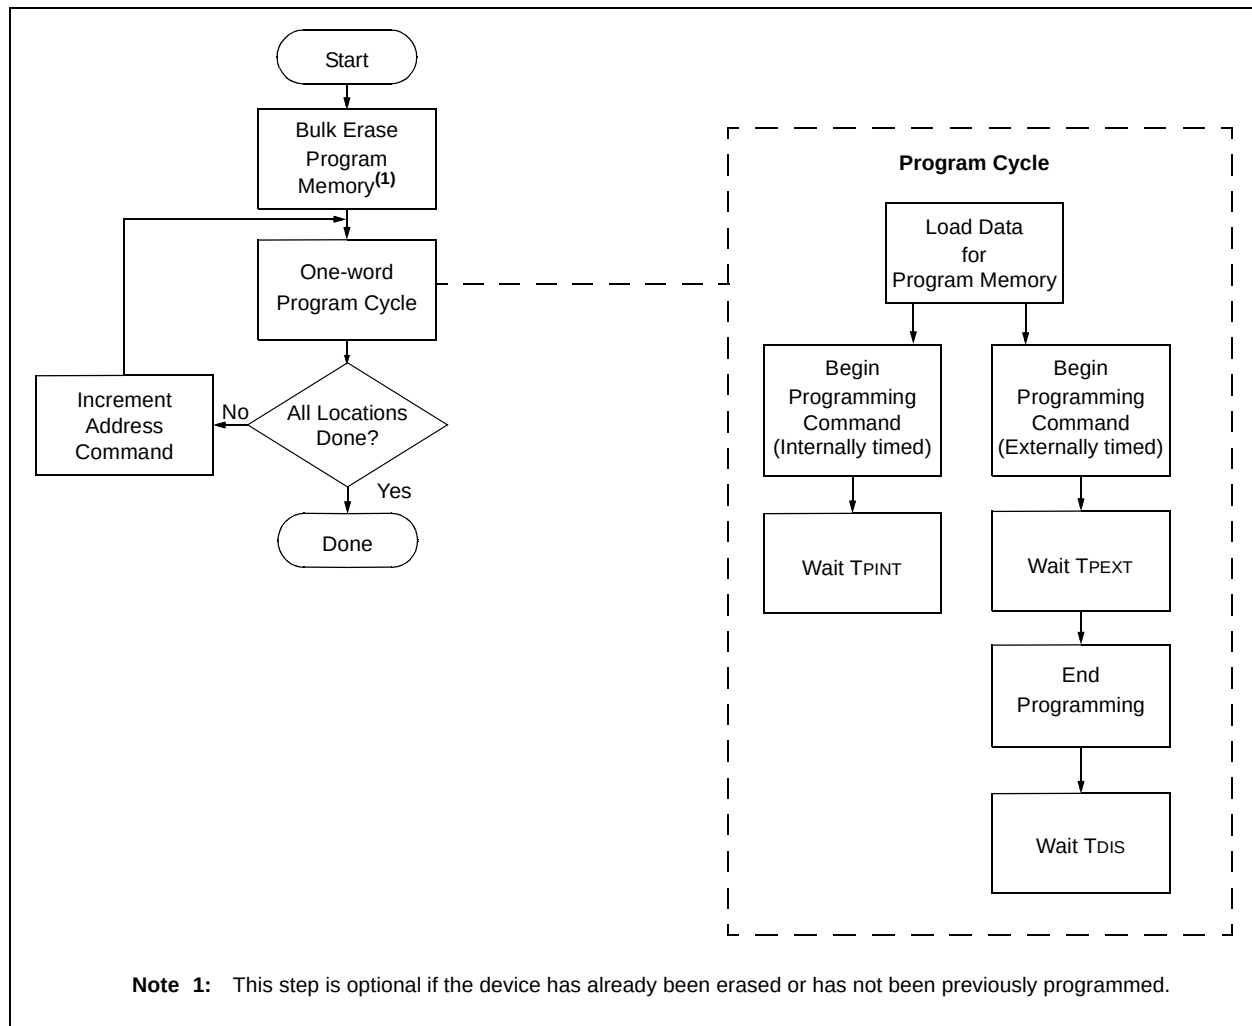

# PIC16(L)F72X

FIGURE 5-2: EIGHT-WORD PROGRAMMING FLOWCHART

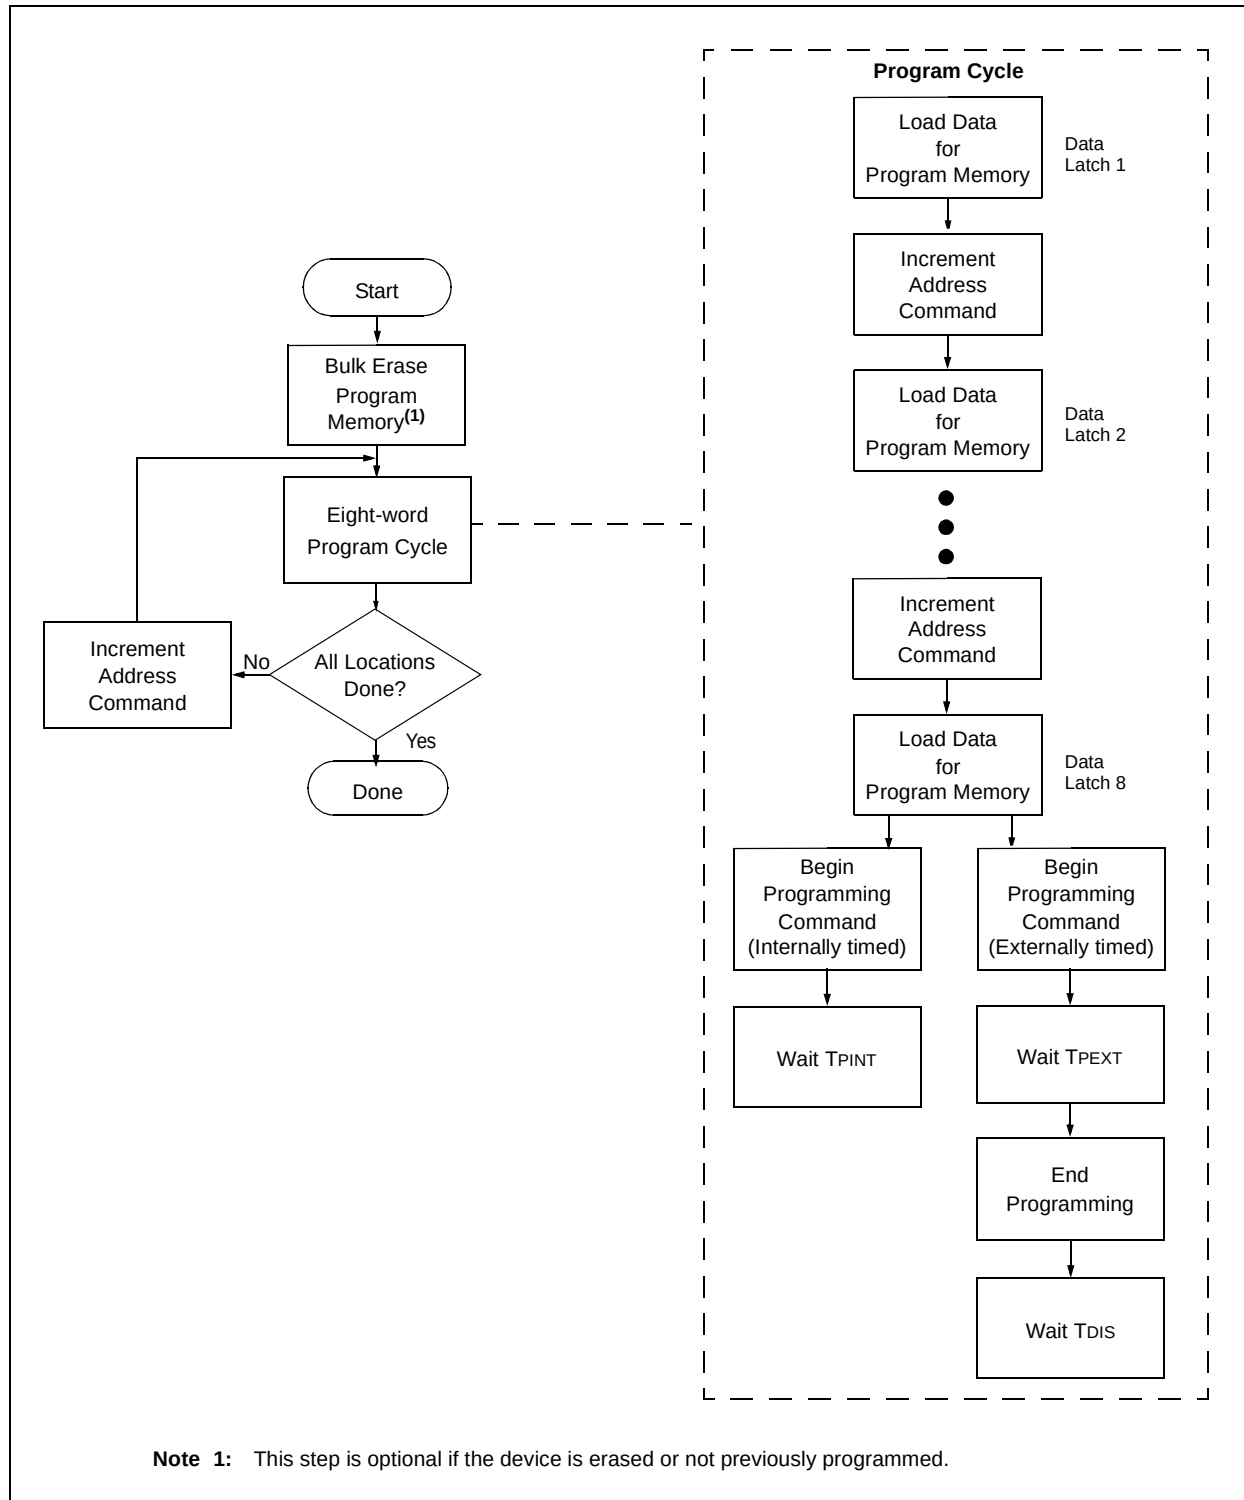

**FIGURE 5-3: PROGRAM FLOWCHART – PIC16F72X CONFIGURATION MEMORY**


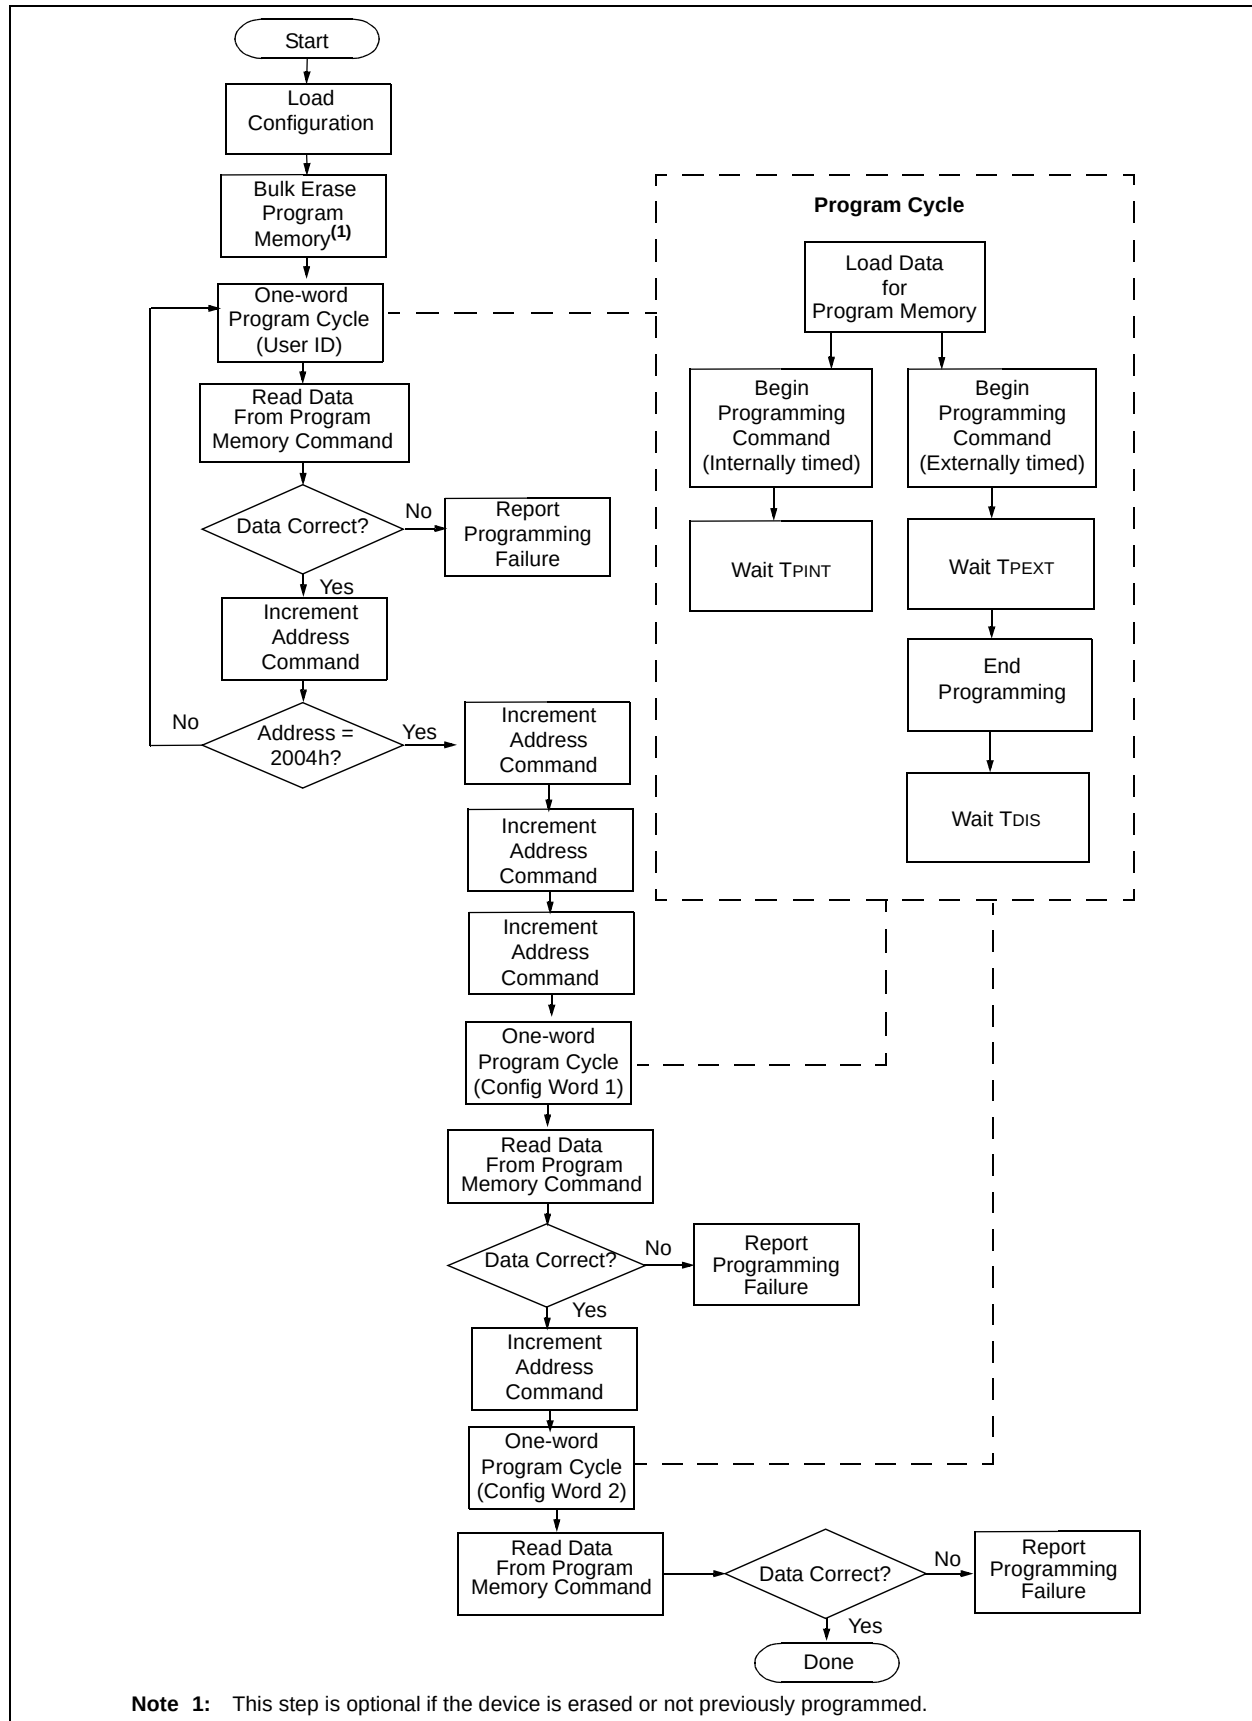


FIGURE 5-4: VERIFY FLOWCHART

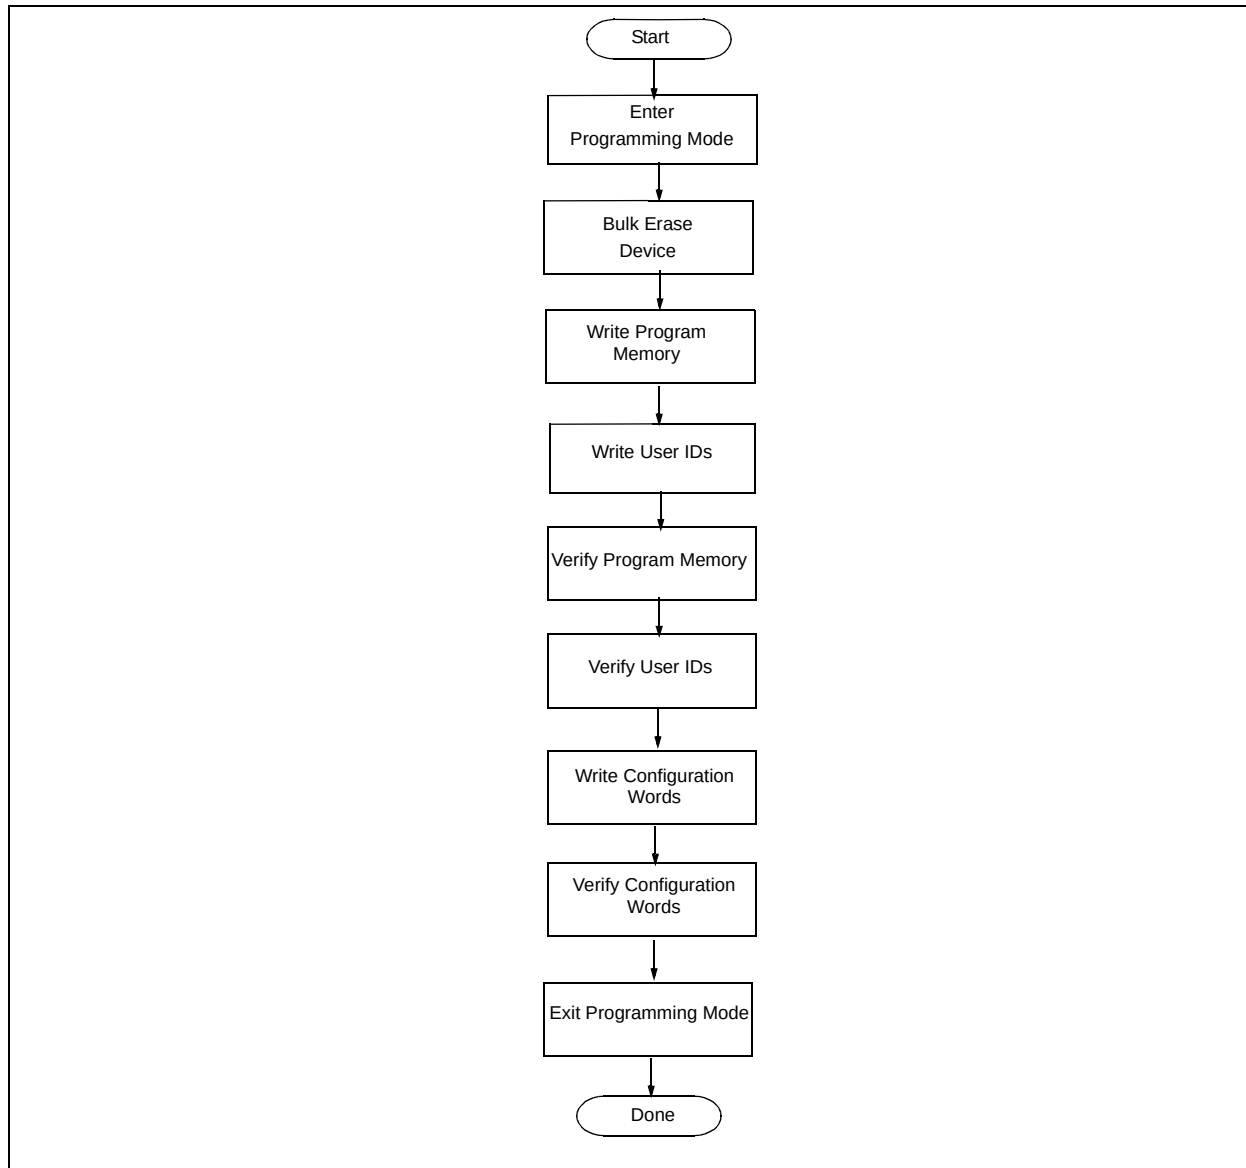

## 6.0 CODE PROTECTION

Code protection is controlled using the  $\overline{\text{CP}}$  bit in Configuration Word 1. When code protection is enabled, all program memory locations (0000h-1FFFh) read as all '0'. Further programming is disabled for the program memory (0000h-1FFFh).

The user ID locations and Configuration Words can be programmed and read out regardless of the code protection settings.

### 6.1 Enabling Code Protection

Code protection is enabled by programming the  $\overline{\text{CP}}$  bit in Configuration Word 1 to '0'.

### 6.2 Disabling Code Protection

The only way to disable code protection is to use the Bulk Erase Program Memory command.

# PIC16(L)F72X

## 7.0 HEX FILE USAGE

In the hex file there are two bytes per program word stored in the Intel® INH8M hex format. Data is stored LSB first, MSB second. Because there are two bytes per word, the addresses in the hex file are 2x the address in program memory. (Example: The Configuration Word 1 is stored at 2007h on the PIC16(L)F72X. In the hex file this will be at location 400Eh-400Fh).

### 7.1 Configuration Word

To allow portability of code, it is strongly recommended that the programmer is able to read the Configuration Words and user ID locations from the hex file. If the Configuration Words information was not present in the hex file, a simple warning message may be issued. Similarly, while saving a hex file, Configuration Words and user ID information should be included.

## 7.2 Device ID and Revision

If a device ID is present in the hex file at 400Ch-400Dh (2006h on the part), the programmer should verify the device ID/revision against the value read from the part. On a mismatch condition, the programmer should generate a warning message.

## 7.3 Checksum Computation

The checksum is calculated by two different methods, dependent on the setting of the CP Configuration bit.

### 7.3.1 CODE PROTECTION DISABLED

With the code protection disabled, the checksum is computed by reading the contents of the PIC16(L)F72X program memory locations and adding up the program memory data, starting at address 0000h, up to the maximum user addressable location (e.g., 1FFFh for the PIC16F726). Any Carry bit exceeding 16 bits are neglected. Additionally, the relevant bits of the Configuration Words are added to the checksum. All unused Configuration bits are masked to '0'.

### EXAMPLE 7-1: CHECKSUM COMPUTED WITH CODE PROTECTION DISABLED, PIC16F726, BLANK DEVICE

|           |                                     |                                                 |
|-----------|-------------------------------------|-------------------------------------------------|
| PIC16F726 | Sum of Memory addresses 0000h-1FFFh | E000h                                           |
|           | Configuration Word 1                | 2AC3h                                           |
|           | Configuration Word 1 mask           | 377Fh                                           |
|           | Configuration Word 2                | 3FEFh                                           |
|           | Configuration Word 2 mask           | 0030h                                           |
|           | Checksum                            | = E000h + (2AC3h and 377Fh) + (3FEFh and 0030h) |
|           |                                     | = E000h + 2243h + 0020h                         |
|           |                                     | = 0263h                                         |

## 7.3.2 CODE PROTECTION ENABLED

With the code protection enabled, the checksum is computed in the following manner. The Configuration Words are summed (all unused Configuration bits are masked to '0') with the Least Significant nibble of the user ID's.

### EXAMPLE 7-2: CHECKSUM COMPUTED WITH CODE PROTECTION ENABLED, PIC16F726, BLANK DEVICE

|           |                                                                                                                    |       |
|-----------|--------------------------------------------------------------------------------------------------------------------|-------|
| PIC16F726 | Configuration Word 1                                                                                               | 2A83h |
|           | Configuration Word 1 mask                                                                                          | 377Fh |
|           | Configuration Word 2                                                                                               | 3FEFh |
|           | Configuration Word 2 mask                                                                                          | 0030h |
|           | User ID (2000h)                                                                                                    | 0123h |
|           | User ID (2001h)                                                                                                    | 4567h |
|           | User ID (2002h)                                                                                                    | 89ABh |
|           | User ID (2003h)                                                                                                    | CDEFh |
|           | Sum of User IDs = (0003h and 000Fh) << 12 + (0007h and 000Fh) << 8 +<br>(000Bh and 000Fh) << 4 + (000Fh and 000Fh) |       |
|           | = 3000h + 0700h + 00B0h + 000Fh                                                                                    |       |
|           | = 37BFh                                                                                                            |       |
|           | Checksum = (2A83h and 377Fh) + (3FEFh and 0030h) + Sum of User IDs                                                 |       |
|           | = 2203h + 0020h + 37BFh                                                                                            |       |
|           | = 59E2h                                                                                                            |       |



# PIC16(L)F72X

## 8.0 ELECTRICAL SPECIFICATIONS

Refer to the device specific data sheet for absolute maximum ratings.

**TABLE 8-1: AC/DC CHARACTERISTICS TIMING REQUIREMENTS FOR PROGRAM/VERIFY MODE**

| AC/DC CHARACTERISTICS                  |                                                                                             | Standard Operating Conditions (unless otherwise stated)<br>Operating Temperature $+10^{\circ}\text{C} \leq T_A \leq +40^{\circ}\text{C}$ |       |                               |               |                                                                            |
|----------------------------------------|---------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|-------|-------------------------------|---------------|----------------------------------------------------------------------------|
| Sym.                                   | Characteristics                                                                             | Min.                                                                                                                                     | Type. | Max.                          | Units         | Conditions/Comments                                                        |
| <b>Supply Voltages and currents</b>    |                                                                                             |                                                                                                                                          |       |                               |               |                                                                            |
| VDD                                    | <b>VDD</b>                                                                                  |                                                                                                                                          |       |                               |               |                                                                            |
|                                        | PIC16F72X (excluding Bulk Erase)                                                            | 1.8                                                                                                                                      | —     | 5.5                           | V             |                                                                            |
|                                        | PIC16LF72X (excluding Bulk Erase)                                                           | 1.8                                                                                                                                      | —     | 3.6                           | V             |                                                                            |
|                                        | PIC16(L)F72X Bulk Erase                                                                     | 2.7                                                                                                                                      |       | —                             | V             |                                                                            |
| IDD                                    | Current on VDD, Idle                                                                        |                                                                                                                                          |       | 1.0                           | mA            |                                                                            |
| IDDA                                   | Current on VDD, program cycle or Bulk Erase in progress                                     |                                                                                                                                          |       | 5.0                           | mA            |                                                                            |
| VIHH                                   | <b>VPP</b>                                                                                  |                                                                                                                                          |       |                               |               |                                                                            |
|                                        | High voltage on MCLR/VPP for Program/Verify mode entry                                      | 8.0                                                                                                                                      | —     | 9.0                           | V             |                                                                            |
| TVHHR                                  | MCLR rise time (VDD to VIHH) for Program/Verify mode entry                                  | —                                                                                                                                        | —     | 1.0                           | $\mu\text{s}$ |                                                                            |
| IPP                                    | Current on MCLR/VPP                                                                         |                                                                                                                                          |       | 5.0                           | mA            |                                                                            |
| <b>I/O pins</b>                        |                                                                                             |                                                                                                                                          |       |                               |               |                                                                            |
| VIH                                    | (ICSPCLK, ICSPDAT) input high level                                                         | 0.8 VDD                                                                                                                                  | —     | —                             | V             |                                                                            |
| VIL                                    | (ICSPCLK, ICSPDAT) input low level                                                          | —                                                                                                                                        | —     | 0.2 VDD                       | V             |                                                                            |
| VOH                                    | ICSPDAT output high level                                                                   | VDD-0.7<br>VDD-0.7<br>VDD-0.7                                                                                                            |       | VDD                           | V             | IOH = 3.5 mA, VDD = 5V<br>IOH = 3 mA, VDD = 3.3V<br>IOH = 2 mA, VDD = 1.8V |
| VOL                                    | ICSPDAT output low level                                                                    | VSS                                                                                                                                      |       | VSS+0.6<br>VSS+0.6<br>VSS+0.6 | V             | IOH = 8 mA, VDD = 5V<br>IOH = 6 mA, VDD = 3.3V<br>IOH = 3 mA, VDD = 1.8V   |
| <b>Programming mode entry and exit</b> |                                                                                             |                                                                                                                                          |       |                               |               |                                                                            |
| TENTS                                  | Programing mode entry setup time: ICSPCLK, ICSPDAT setup time before VDD or MCLR $\uparrow$ | 100                                                                                                                                      | —     | —                             | ns            |                                                                            |
| TENTH                                  | Programing mode entry hold time: ICSPCLK, ICSPDAT hold time after VDD or MCLR $\uparrow$    | 250                                                                                                                                      |       |                               | $\mu\text{s}$ |                                                                            |
| <b>Serial Program/Verify</b>           |                                                                                             |                                                                                                                                          |       |                               |               |                                                                            |
| TCKL                                   | Clock Low Pulse Width                                                                       | 100                                                                                                                                      | —     | —                             | ns            |                                                                            |
| TCKH                                   | Clock High Pulse Width                                                                      | 100                                                                                                                                      | —     | —                             | ns            |                                                                            |
| TDS                                    | Data in setup time before clock $\downarrow$                                                | 100                                                                                                                                      | —     | —                             | ns            |                                                                            |
| TDH                                    | Data in hold time after clock $\downarrow$                                                  | 100                                                                                                                                      | —     | —                             | ns            |                                                                            |
| Tco                                    | Clock $\uparrow$ to data out valid (during a Read Data command)                             | 0                                                                                                                                        | —     | 80                            | ns            |                                                                            |
| TLZD                                   | Clock $\downarrow$ to data low-impedance (during a Read Data command)                       | 0                                                                                                                                        | —     | 80                            | ns            |                                                                            |
| THZD                                   | Clock $\downarrow$ to data high-impedance (during a Read Data command)                      | 0                                                                                                                                        | —     | 80                            | ns            |                                                                            |


**TABLE 8-1: AC/DC CHARACTERISTICS TIMING REQUIREMENTS FOR PROGRAM/VERIFY MODE (CONTINUED)**

| AC/DC CHARACTERISTICS |                                                                                                    | Standard Operating Conditions (unless otherwise stated)<br>Operating Temperature $+10^{\circ}\text{C} \leq T_A \leq +40^{\circ}\text{C}$ |       |          |               |                                                                          |
|-----------------------|----------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|-------|----------|---------------|--------------------------------------------------------------------------|
| Sym.                  | Characteristics                                                                                    | Min.                                                                                                                                     | Type. | Max.     | Units         | Conditions/Comments                                                      |
| T <sub>DLY</sub>      | Data input not driven to next clock input (delay required between command/data or command/command) | 1.0                                                                                                                                      | —     | —        | $\mu\text{s}$ |                                                                          |
| T <sub>ERAB</sub>     | Bulk Erase cycle time                                                                              | —                                                                                                                                        | —     | 5        | ms            |                                                                          |
| T <sub>ERAR</sub>     | Row Erase cycle time                                                                               | —                                                                                                                                        | —     | 2.5      | ms            |                                                                          |
| T <sub>PINT</sub>     | Internally timed programming operation time                                                        | —                                                                                                                                        | —     | 2.5<br>5 | ms<br>ms      | Program memory<br>Configuration fuses                                    |
| T <sub>PEXT</sub>     | Externally timed programming pulse                                                                 | 1.0                                                                                                                                      | —     | 2.1      | ms            | $10^{\circ}\text{C} \leq T_A \leq +40^{\circ}\text{C}$<br>Program memory |
| T <sub>DIS</sub>      | Time delay from program to compare (HV discharge time)                                             | 100                                                                                                                                      | —     | —        | $\mu\text{s}$ |                                                                          |
| T <sub>EXIT</sub>     | Time delay when exiting Program/Verify mode                                                        | 1                                                                                                                                        | —     | —        | $\mu\text{s}$ |                                                                          |


# PIC16(L)F72X

## 8.1 AC Timing Diagrams


**FIGURE 8-2: PROGRAMMING MODE ENTRY – V<sub>DD</sub> FIRST**

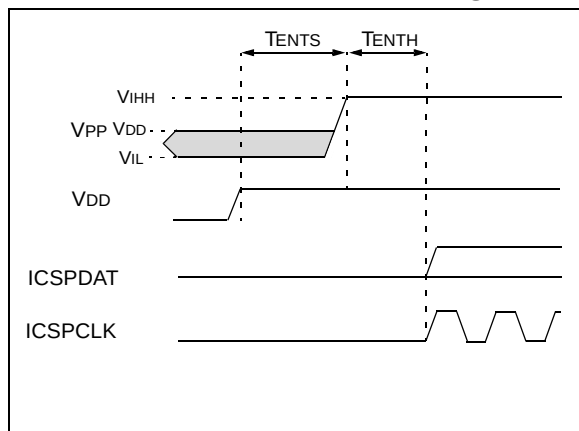


**FIGURE 8-3: PROGRAMMING MODE ENTRY – V<sub>PP</sub> FIRST**

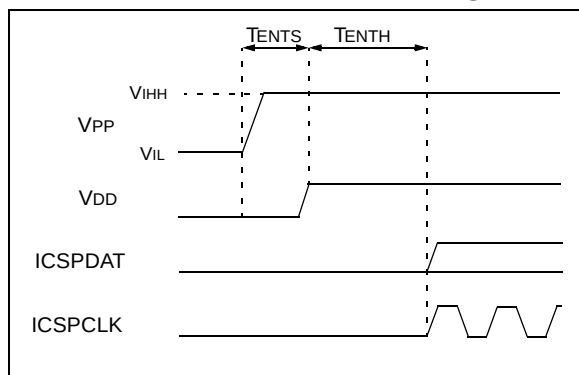


**FIGURE 8-4: PROGRAMMING MODE EXIT – V<sub>PP</sub> LAST**

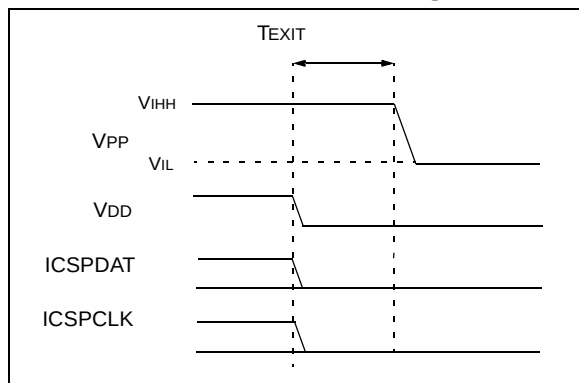


**FIGURE 8-5: PROGRAMMING MODE EXIT – V<sub>DD</sub> LAST**

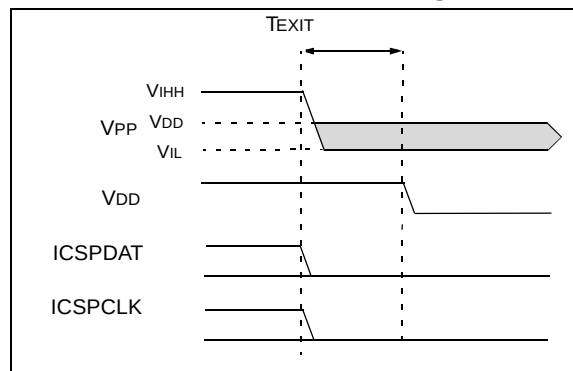

**FIGURE 8-6: CLOCK AND DATA TIMING**

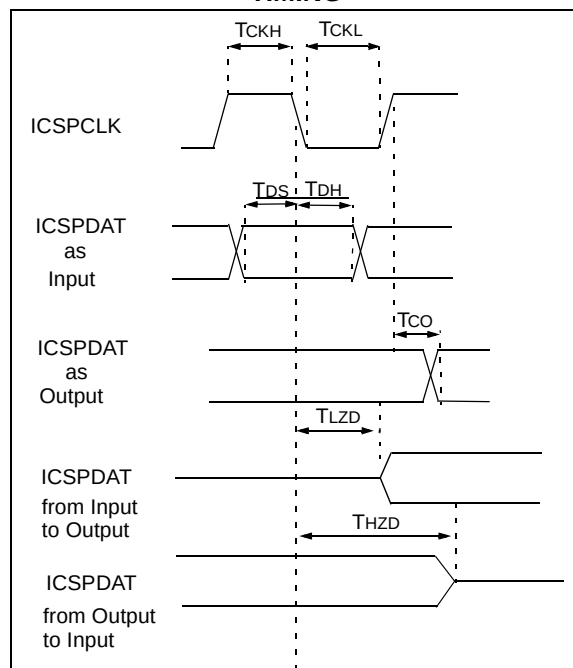

**FIGURE 8-7: COMMAND-PAYLOAD TIMING**

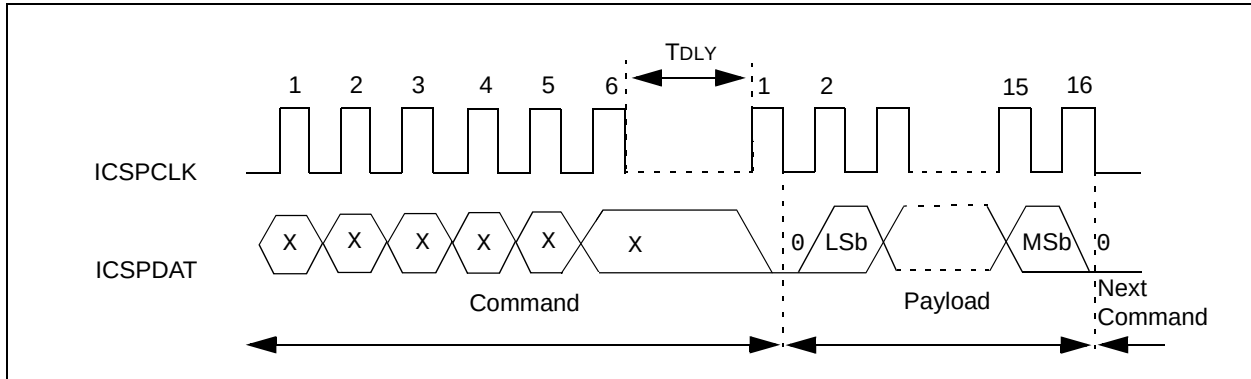

# PIC16(L)F72X

---

## APPENDIX A: REVISION HISTORY

### Revision A (11/2007)

Original release of this document.

### Revision B (02/2009)

Updated minimum V<sub>DD</sub> for Bulk Erase in Table 8-1.  
Various minor edits.

Clarified time of transition from input to output in Figure 4-3.

Corrected Reserved area range in Figures 3-1, 3-2, and 3-3.

Corrected low-voltage range for Programming modes shown in Figures 8-3 and 8-5.

### Revision C (02/2010)

Added PIC16F722A, PIC16F723A, PIC16LF722A and PIC16LF723A devices to the Programming Specification; Other minor edits.

### Revision D (03/2011)

Updated spec. to new format; Updated Figure 2-2 to add UQFN; Added Figure 2-6; Added Note 2 to Register 3-1, and Note 1 to Register 3-2; Revised Examples 7-1 and 7-2.

---

**Note the following details of the code protection feature on Microchip devices:**

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

---

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights.

#### **Trademarks**

The Microchip name and logo, the Microchip logo, dsPIC, KEELOQ, KEELOQ logo, MPLAB, PIC, PICmicro, PICSTART, PIC<sup>32</sup> logo, rfPIC and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

FilterLab, Hampshire, HI-TECH C, Linear Active Thermistor, MXDEV, MXLAB, SEEVAL and The Embedded Control Solutions Company are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Analog-for-the-Digital Age, Application Maestro, CodeGuard, dsPICDEM, dsPICDEM.net, dsPICworks, dsSPEAK, ECAN, ECONOMONITOR, FanSense, HI-TIDE, In-Circuit Serial Programming, ICSP, Mindi, MiWi, MPASM, MPLAB Certified logo, MPLIB, MPLINK, mTouch, Omniscent Code Generation, PICC, PICC-18, PICDEM, PICDEM.net, PICkit, PICTail, REAL ICE, rLAB, Select Mode, Total Endurance, TSHARC, UniWinDriver, WiperLock and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

All other trademarks mentioned herein are property of their respective companies.

© 2011, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

 Printed on recycled paper.

ISBN: 978-1-61341-083-7

*Microchip received ISO/TS-16949:2002 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.*

**QUALITY MANAGEMENT SYSTEM  
CERTIFIED BY DNV  
== ISO/TS 16949:2002 ==**

## Worldwide Sales and Service

### AMERICAS

**Corporate Office**  
2355 West Chandler Blvd.  
Chandler, AZ 85224-6199  
Tel: 480-792-7200  
Fax: 480-792-7277  
Technical Support:  
<http://www.microchip.com/support>  
Web Address:  
[www.microchip.com](http://www.microchip.com)

**Atlanta**  
Duluth, GA  
Tel: 678-957-9614  
Fax: 678-957-1455

**Boston**  
Westborough, MA  
Tel: 774-760-0087  
Fax: 774-760-0088

**Chicago**  
Itasca, IL  
Tel: 630-285-0071  
Fax: 630-285-0075

**Cleveland**  
Independence, OH  
Tel: 216-447-0464  
Fax: 216-447-0643

**Dallas**  
Addison, TX  
Tel: 972-818-7423  
Fax: 972-818-2924

**Detroit**  
Farmington Hills, MI  
Tel: 248-538-2250  
Fax: 248-538-2260

**Indianapolis**  
Noblesville, IN  
Tel: 317-773-8323  
Fax: 317-773-5453

**Los Angeles**  
Mission Viejo, CA  
Tel: 949-462-9523  
Fax: 949-462-9608

**Santa Clara**  
Santa Clara, CA  
Tel: 408-961-6444  
Fax: 408-961-6445

**Toronto**  
Mississauga, Ontario,  
Canada  
Tel: 905-673-0699  
Fax: 905-673-6509

### ASIA/PACIFIC

**Asia Pacific Office**  
Suites 3707-14, 37th Floor  
Tower 6, The Gateway  
Harbour City, Kowloon  
Hong Kong  
Tel: 852-2401-1200  
Fax: 852-2401-3431

**Australia - Sydney**  
Tel: 61-2-9868-6733  
Fax: 61-2-9868-6755

**China - Beijing**  
Tel: 86-10-8528-2100  
Fax: 86-10-8528-2104

**China - Chengdu**  
Tel: 86-28-8665-5511  
Fax: 86-28-8665-7889

**China - Chongqing**  
Tel: 86-23-8980-9588  
Fax: 86-23-8980-9500

**China - Hong Kong SAR**  
Tel: 852-2401-1200  
Fax: 852-2401-3431

**China - Nanjing**  
Tel: 86-25-8473-2460  
Fax: 86-25-8473-2470

**China - Qingdao**  
Tel: 86-532-8502-7355  
Fax: 86-532-8502-7205

**China - Shanghai**  
Tel: 86-21-5407-5533  
Fax: 86-21-5407-5066

**China - Shenyang**  
Tel: 86-24-2334-2829  
Fax: 86-24-2334-2393

**China - Shenzhen**  
Tel: 86-755-8203-2660  
Fax: 86-755-8203-1760

**China - Wuhan**  
Tel: 86-27-5980-5300  
Fax: 86-27-5980-5118

**China - Xian**  
Tel: 86-29-8833-7252  
Fax: 86-29-8833-7256

**China - Xiamen**  
Tel: 86-592-2388138  
Fax: 86-592-2388130

**China - Zhuhai**  
Tel: 86-756-3210040  
Fax: 86-756-3210049

### ASIA/PACIFIC

**India - Bangalore**  
Tel: 91-80-3090-4444  
Fax: 91-80-3090-4123

**India - New Delhi**  
Tel: 91-11-4160-8631  
Fax: 91-11-4160-8632

**India - Pune**  
Tel: 91-20-2566-1512  
Fax: 91-20-2566-1513

**Japan - Yokohama**  
Tel: 81-45-471- 6166  
Fax: 81-45-471-6122

**Korea - Daegu**  
Tel: 82-53-744-4301  
Fax: 82-53-744-4302

**Korea - Seoul**  
Tel: 82-2-554-7200  
Fax: 82-2-558-5932 or  
82-2-558-5934

**Malaysia - Kuala Lumpur**  
Tel: 60-3-6201-9857  
Fax: 60-3-6201-9859

**Malaysia - Penang**  
Tel: 60-4-227-8870  
Fax: 60-4-227-4068

**Philippines - Manila**  
Tel: 63-2-634-9065  
Fax: 63-2-634-9069

**Singapore**  
Tel: 65-6334-8870  
Fax: 65-6334-8850

**Taiwan - Hsin Chu**  
Tel: 886-3-6578-300  
Fax: 886-3-6578-370

**Taiwan - Kaohsiung**  
Tel: 886-7-213-7830  
Fax: 886-7-330-9305

**Taiwan - Taipei**  
Tel: 886-2-2500-6610  
Fax: 886-2-2508-0102

**Thailand - Bangkok**  
Tel: 66-2-694-1351  
Fax: 66-2-694-1350

### EUROPE

**Austria - Wels**  
Tel: 43-7242-2244-39  
Fax: 43-7242-2244-393

**Denmark - Copenhagen**  
Tel: 45-4450-2828  
Fax: 45-4485-2829

**France - Paris**  
Tel: 33-1-69-53-63-20  
Fax: 33-1-69-30-90-79

**Germany - Munich**  
Tel: 49-89-627-144-0  
Fax: 49-89-627-144-44

**Italy - Milan**  
Tel: 39-0331-742611  
Fax: 39-0331-466781

**Netherlands - Drunen**  
Tel: 31-416-690399  
Fax: 31-416-690340

**Spain - Madrid**  
Tel: 34-91-708-08-90  
Fax: 34-91-708-08-91

**UK - Wokingham**  
Tel: 44-118-921-5869  
Fax: 44-118-921-5820