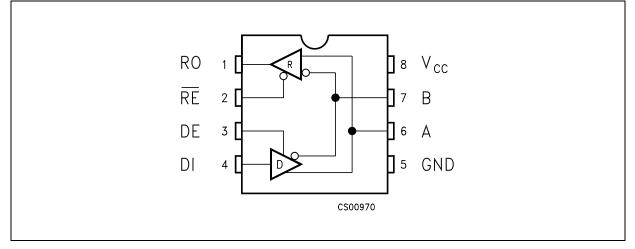
## Contents

1	Pin configuration
2	Truth tables
3	Maximum ratings
4	Electrical characteristics
5	Test circuit and typical characteristics9
6	Package mechanical data 14
7	Revision history



## 1 Pin configuration





#### Table 2. Pin description

Pin n°	Symbol	Name and function
1	RO	Receiver output
2	RE	Receiver output enable
3	DE	Driver output enable
4	DI	Driver input
5	GND	Ground
6	A	Non-inverting receiver input and non-inverting driver output
7	В	Inverting receiver input and inverting driver output
8	V <sub>CC</sub>	Supply voltage



## 2 Truth tables

## Table 3. Truth table (driver)

Inputs			Out	puts
RE	DE	DI	В	А
Х	Н	Н	L	Н
Х	Н	L	Н	L
Х	L	Х	Z	Z

Note: X = Don't care; Z = High impedance

### Table 4.Truth table (receiver)

Inputs			Outputs
RE	DE	A-B	RO
L	L	≥ +0.2V	н
L	L	≤ -0.2V	L
L	L	Inputs open	н
Н	L	Х	Z

Note: X = Don't care; Z = High impedance



## 3 Maximum ratings

#### Table 5. Absolute maximum ratings

Symbol	Parameter	Parameter Value	
V <sub>CC</sub>	Supply voltage	7	V
VI	Control input voltage (RE, DE)	-0.5 to (V <sub>CC</sub> + 0.5)	V
V <sub>DI</sub>	Driver input voltage (DI)	-0.5 to (V <sub>CC</sub> + 0.5)	V
V <sub>DO</sub>	Driver output voltage (A, B)	± 14	V
V <sub>RI</sub>	Receiver input voltage (A, B)	± 14	V
V <sub>RO</sub>	Receiver output voltage (RO)	-0.5 to (V <sub>CC</sub> + 0.5)	V

Note: Absolute maximum ratings are those values beyond which damage to the device may occur. Functional operation under these is not implied.



57

## 4 Electrical characteristics

Symbol	Parameter	Test conditions	Min.	Тур.	Max.	Unit
ESD	ESD protection voltage	Human body model	±15			kV
ESD	ESD protection voltage	IEC-1000-4-2	±8			kV

 Table 6.
 ESD performance: transmitter outputs, receiver inputs

 $V_{CC}$  = 5 V ± 5 %,  $T_A$  =  $T_{MIN}$  to  $T_{MAX},$  unless otherwise specified. Typical values are referred to  $T_A$  = 25  $^\circ C$ 

#### Table 7. DC electrical characteristics

Symbol	Parameter	Test conditions <sup>(1)</sup>	Min.	Тур.	Max.	Unit
V <sub>OD1</sub>	Differential driver output (no load)				5	V
V <sub>OD2</sub>	Differential driver output (with load)	$R_L = 27 \Omega$ (RS-485) ( <i>Figure 2</i> ) $R_L = 50 \Omega$ (RS-422) ( <i>Figure 2</i> .)	1.5		5 5	V V
$\Delta V_{OD}$	Change in magnitude of driver differential output voltage for complementary output states	R <sub>L</sub> = 27 Ω or 50 Ω ( <i>Figure 2</i> )			0.2	V
V <sub>OC</sub>	Driver common-mode output voltage	$R_L = 27 \Omega$ or 50 Ω ( <i>Figure 2</i> )			3	V
ΔV <sub>OC</sub>	Change in magnitude of driver common-mode output voltage for complementary output states	R <sub>L</sub> = 27 Ω or 50 Ω ( <i>Figure 2</i> )			0.2	V
V <sub>IH</sub>	Input high voltage	RE, DE, DI	2.0			V
V <sub>IL</sub>	Input low voltage	RE, DE, DI			0.8	V
I <sub>IN1</sub>	Input current	RE, DE, DI			±2	μA
I <sub>IN2</sub>	Input current (A, B)	$V_{CM} = 0 V \text{ or } 5.25 V, V_{DE} = 0 V$ $V_{IN} = 12 V$ $V_{IN} = -7 V$			1 -0.8	mA mA
V <sub>TH</sub>	Receiver differential threshold voltage	V <sub>CM</sub> = -7 to 12 V	-0.2		0.2	V
$\Delta V_{TH}$	Receiver input hysteresis	V <sub>CM</sub> = 0 V		70		mV
V <sub>OH</sub>	Receiver output high voltage	I <sub>O</sub> = -4 mA, V <sub>ID</sub> = 200 mV	3.5			V
V <sub>OL</sub>	Receiver output low voltage	I <sub>O</sub> = 4 mA, V <sub>ID</sub> = -200 mV			0.4	V
I <sub>OZR</sub>	3-State (high impedance) output current at receiver	V <sub>O</sub> = 0.4 to 2.4 V			± 1	μA
R <sub>IN</sub>	Receiver input resistance	V <sub>CM</sub> = -7 to 12 V	96			kΩ
I <sub>CC</sub>	No load supply current <sup>(2)</sup>	$V_{RE} = 0V \text{ or } V_{CC}$ $V_{DE} = V_{CC}$ $V_{DE} = 0 V$		400 300	900 500	μΑ μΑ

6/18

Table 7.	DC electrical c	haracteristics	(continued)	)
----------	-----------------	----------------	-------------	---

Symbol	Parameter	Test conditions <sup>(1)</sup>	Min.	Тур.	Max.	Unit
I <sub>OSD1</sub>	Driver short-circuit current, V <sub>O</sub> =High	$V_{O} = -7$ to 12 V <sup>(3)</sup>	35		250	mA
I <sub>OSD2</sub>	Driver short-circuit current, V <sub>O</sub> =Low	$V_0 = -7$ to 12 V <sup>(3)</sup>	35		250	mA
I <sub>OSR</sub>	Receiver short-circuit current	$V_{O} = 0 V \text{ to } V_{CC}$	7		95	mA

1. All currents into device pins are positive; all out of device pins are negative; all voltages are referenced to device ground unless specified.

2. Supply current specification is valid for loaded transmitters when  $V_{\text{DE}}$  = 0 V

3. Applies to peak current. See typical Operating Characteristics.

 $V_{CC}$  = 5 V  $\pm$  5 %,  $T_A$  =  $T_{MIN}$  to  $T_{MAX},$  unless otherwise specified. Typical values are referred to  $T_A$  = 25  $^\circ C$ 

Symbol	Parameter	Test conditions <sup>(1)</sup>	Min.	Тур.	Max.	Unit
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation delay input to output	$R_{DIFF} = 54 \Omega$ , $C_{L1} = C_{L2} = 100 pF$ (See <i>Figure 4</i> and <i>Figure 6</i> )		25	45	ns
t <sub>SK</sub>	Output skew to output	$R_{DIFF} = 54 \Omega$ , $C_{L1} = C_{L2} = 100 pF$ (See <i>Figure 4</i> and <i>Figure 6</i> )		2	5	ns
t <sub>TLH</sub> t <sub>THL</sub>	Rise or fall time	$R_{DIFF} = 54 \Omega, C_{L1} = C_{L2} = 100 \text{ pF}$ (See <i>Figure 4</i> and <i>Figure 6</i> )		15	40	ns
t <sub>PZH</sub>	Output enable time	C <sub>L</sub> = 100 pF, S2 = Closed (See <i>Figure 5</i> and <i>Figure 7</i> )		35	50	ns
t <sub>PZL</sub>	Output enable time	C <sub>L</sub> = 100 pF, S1 = Closed (See <i>Figure 5</i> and <i>Figure 7</i> )		25	40	ns
t <sub>PLZ</sub>	Output disable time	C <sub>L</sub> = 15 pF, S1 = Closed (See <i>Figure 5</i> and <i>Figure 7</i> )		25	40	ns
t <sub>PHZ</sub>	Output disable time	C <sub>L</sub> = 15 pF, S2 = Closed (See <i>Figure 5</i> and <i>Figure 7</i> )		35	50	ns

 Table 8.
 Driver switching characteristics

1. All currents into device pins are positive; all out of device pins are negative; all voltages are referenced to device ground unless specified.




 $V_{CC}$  = 5 V  $\pm$  5%,  $T_A$  =  $T_{MIN}$  to  $T_{MAX}$ , unless otherwise specified. Typical values are referred to  $T_A$  = 25  $^\circ C$ 

Symbol	Parameter	Test conditions <sup>(1)</sup>	Min.	Тур.	Max.	Unit
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation delay input to output	$R_{DIFF} = 54 \Omega$ , $C_{L1} = C_{L2} = 100 pF$ (See <i>Figure 4</i> and <i>Figure 8</i> )		110	130	ns
t <sub>SKD</sub>	Differential receiver skew	$R_{DIFF} = 54 \Omega$ , $C_{L1} = C_{L2} = 100 pF$ (See <i>Figure 4</i> and <i>Figure 8</i> )		5	10	ns
t <sub>PZH</sub>	Output enable time	C <sub>RL</sub> = 15 pF, S1 = Closed (See <i>Figure 2</i> and <i>Figure 9</i> )		11	35	ns
t <sub>PZL</sub>	Output enable time	C <sub>RL</sub> = 15 pF, S2 = Closed (See <i>Figure 2</i> and <i>Figure 9</i> )		13	35	ns
t <sub>PLZ</sub>	Output disable time	C <sub>RL</sub> = 15 pF, S1 = Closed (See <i>Figure 2</i> and <i>Figure 9</i> )		13	35	ns
t <sub>PHZ</sub>	Output disable time	C <sub>RL</sub> = 15 pF, S2 = Closed (See <i>Figure 2</i> and <i>Figure 9</i> )		11	35	ns
f <sub>MAX</sub>	Maximum data rate		5			Mbps

 Table 9.
 Receiver switching characteristics


1. All currents into device pins are positive; all out of device pins are negative; all voltages are referenced to device ground unless specified
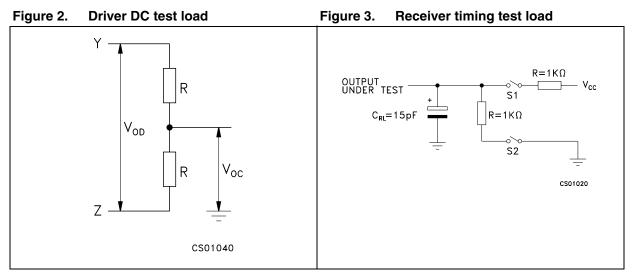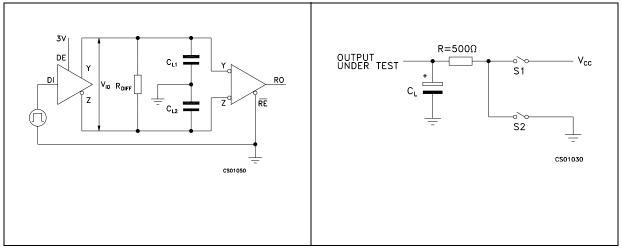
## 5 Test circuit and typical characteristics














57



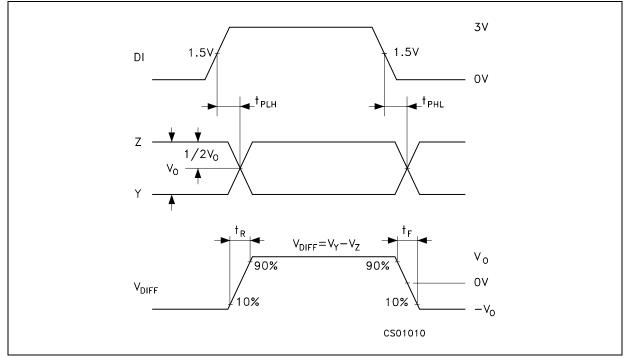

#### Figure 7. Driver enable and disable time

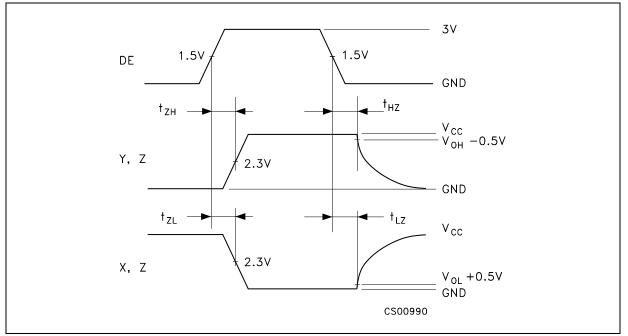

#### 10/18



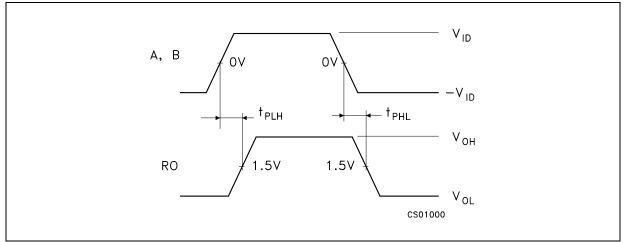


Figure 9. Receiver enable and disable time

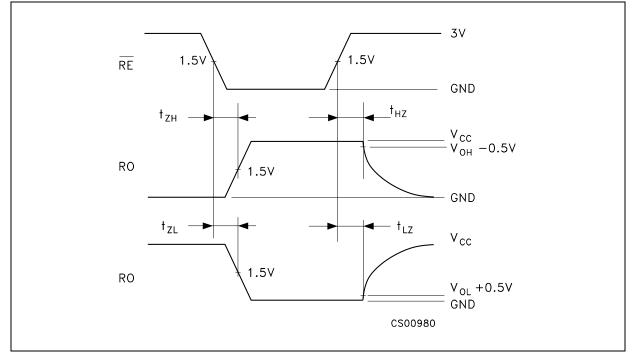


Figure 10. Receiver output current vs. output Figure 11. Receiver output current vs. output low voltage high voltage

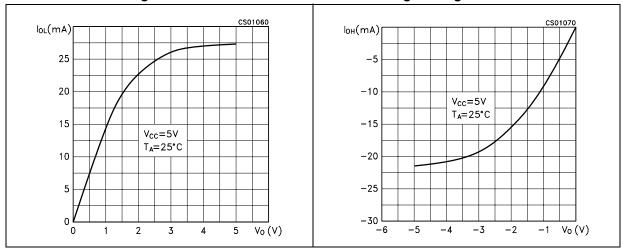


Figure 12. Driver output current vs. output low Figure 13. Driver output current vs. output voltage high voltage

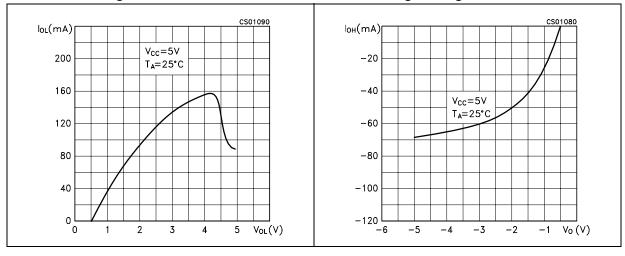
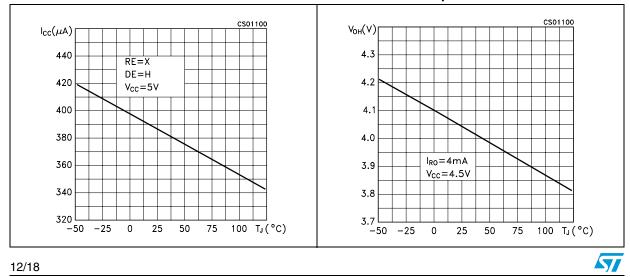





Figure 15. Receiver high level output voltage vs. temperature



#### CS01120 CS01130 Vod(V) ‰∟(V)[ 0.40 4.5 NO LOAD 0.35 4.0 0.30 3.5 $V_{CC}=4.5V$ 0.25 3.0 I<sub>RO</sub>=4mA $R_L = 50\Omega$ 0.20 2.5 $V_{CC}=4.5V$ $R_{L}=27\Omega$ 0.15 2.0 1.5└── −50 −25 0.10 0 25 50 75 100 T」(°C) 0 25 50 75 100 T<sub>J</sub>(°C)

# Figure 16. Receiver low level output voltage vs. temperature



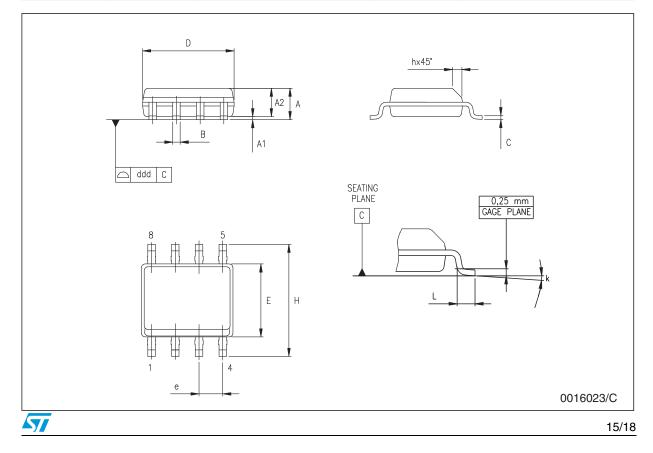


## 6 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK<sup>®</sup> packages, depending on their level of environmental compliance. ECOPACK<sup>®</sup> specifications, grade definitions and product status are available at: www.st.com. ECOPACK is an ST trademark.




	SO-8 mechanical data							
Dim.		mm.			inch.			
Dini.	Min.	Тур.	Max.	Min.	Тур.	Max.		
А	1.35		1.75	0.053		0.069		
A1	0.10		0.25	0.04		0.010		
A2	1.10		1.65	0.043		0.065		
В	0.33		0.51	0.013		0.020		
С	0.19		0.25	0.007		0.010		
D	4.80		5.00	0.189		0.197		
E	3.80		4.00	0.150		0.157		
е		1.27			0.050			
Н	5.80		6.20	0.228		0.244		
h	0.25		0.50	0.010		0.020		
L	0.40		1.27	0.016		0.050		
k		8° (max.)						
ddd			0.1			0.04		



#### Downloaded from Arrow.com.

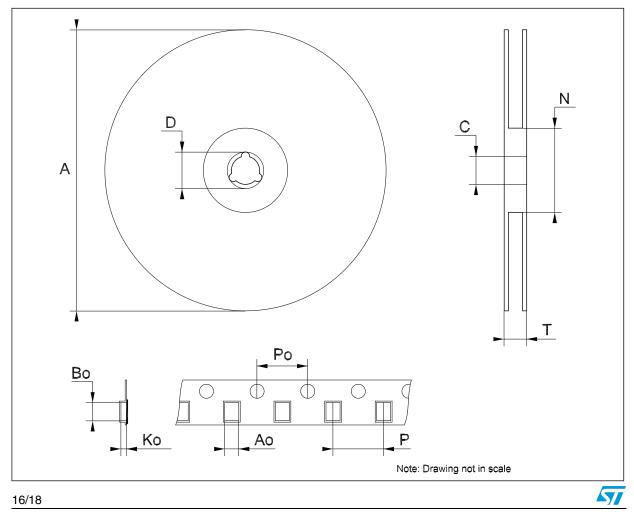	Tape & reel SO-8 mechanical data							
Dim.	mm.			inch.				
	Min.	Тур.	Max.	Min.	Тур.	Max.		
А			330			12.992		
С	12.8		13.2	0.504		0.519		
D	20.2			0.795				
Ν	60			2.362				
Т			22.4			0.882		
Ao	8.1		8.5	0.319		0.335		
Во	5.5		5.9	0.216		0.232		
Ko	2.1		2.3	0.082		0.090		
Po	3.9		4.1	0.153		0.161		
Р	7.9		8.1	0.311		0.319		



## 7 Revision history

Date	Revision	Changes	
21-Mar-2006	9	Order codes has been updated and new template.	
05-Jun-2006	10	Change value row 10 on the features and R <sub>IN</sub> in <i>Table 7</i> .	
29-Jan-2007	11	Typo mistake on page 1.	
29-Aug-2007	12	Change value R <sub>IN</sub> min. on <i>Table 7</i> .	
07-Feb-2008	13	Modified: Table 1 on page 1.	
16-Feb-2009	14	Modified: Note: on page 5.	

Table 10.Document revision history



#### **Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2009 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan -Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

