

## ELECTRICAL SPECIFICATIONS

| Input                              |   |  |
|------------------------------------|---|--|
| Input voltage range                |   | 3 - 13.8 Vdc   |
| Input current                      | Minimum load<br>Remote OFF  | 50 mA<br>5 mA  |
| Input current (max.)               | See Note 3  | 10 A @ I <sub>o</sub> max.                                     |
| Start-up time                      | Power up<br>Remote ON/OFF   | 3 ms<br>2 ms   |
| Output                             |   |  |
| Output voltage                     | See Note 5  | 0.59 - 5.1 V   |
| Output setpoint accuracy           | 0.1% trim resistors   | ±1.0%  |
| Line regulation                    | Low line to high line   | ±0.2%  |
| Load regulation                    | Full load to min. load  | ±0.5%  |
| Min./max. load                     |   | 0 A/10 A   |
| Overshoot                          | At turn-on  | 0.5% max.  |
| Undershoot                         | At turn-off   | 100 mV max.  |
| Ripple and noise<br>5 Hz to 20 MHz | See Note 1  | 20 mV<br>V <sub>in</sub> = 5 V, V <sub>out</sub> = 2.5 V       |
| Transient response                 | See Note 1, 2   | 130 mV max. deviation 15 µs recovery to within regulation band |
| General                            |   |  |
| Efficiency (high input)            | V <sub>in</sub> = 5 V, V <sub>o</sub> = 2.5 V, I <sub>o</sub> = 6 A | 91%  |
| Switching frequency                | Fixed   | 620 kHz  |
| Material flammability              |   | UL94V-0  |
| Weight                             |   | 1.899 g (0.067 oz.)  |
| MTBF                               | 12 V @ 40 °C, 100% load<br>Bellcore 332                             | >8,222,210 hours   |
| Coplanarity                        | Surface mount models  | 150 µm   |

## ENVIRONMENTAL SPECIFICATIONS

| <b>Thermal performance</b>     | Operating ambient temperature     | -40 °C to +85 °C  |
|--------------------------------|-----------------------------------|-------------------|
| <b>See Note 5</b>              | Non-operating ambient temperature | -40 °C to +125 °C |
| Protection                     |                                   |                   |
| <b>Short-circuit</b>           | Hiccup, non-latching              |                   |
| Recommended System Capacitance |                                   |                   |
| <b>Input</b>                   | See Note 6                        | 0 µF              |
| <b>Output</b>                  | See Note 7                        | 0 µF              |

## ORDERING INFORMATION

| Model Number <sup>(3,5)</sup> | Output Power (Max.) | Input Voltage | Output Voltage | Output Current (Min.) | Output Current (Max.) | Efficiency (Typical) | Regulation |       |
|-------------------------------|---------------------|---------------|----------------|-----------------------|-----------------------|----------------------|------------|-------|
|                               |                     |               |                |                       |                       |                      | Line       | Load  |
| LDO10C-005W05-VJ              | 50 W                | 3 - 13.8 Vdc  | 0.59 - 5.1 V   | 0 A                   | 10 A                  | 94%                  | ±0.2%      | ±0.5% |
| LDO10C-005W05-V1J             | 50 W                | 3 - 13.8 Vdc  | 0.59 - 5.1 V   | 0 A                   | 10 A                  | 94%                  | ±0.2%      | ±0.5% |
| LDO10C-005W05-HJ              | 50 W                | 3 - 13.8 Vdc  | 0.59 - 5.1 V   | 0 A                   | 10 A                  | 94%                  | ±0.2%      | ±0.5% |
| LDO10C-005W05-SJ              | 50 W                | 3 - 13.8 Vdc  | 0.59 - 5.1 V   | 0 A                   | 10 A                  | 94%                  | ±0.2%      | ±0.5% |

## PART NUMBER SYSTEM WITH OPTIONS


| Product Family                     | Rated Output Current                | Performance                       | Input Voltage                    | Number of Pins Type of Output                  | Output Voltage                      | Mounting Option  | Custom Option                                    | RoHS Compliance                                     |
|------------------------------------|-------------------------------------|-----------------------------------|----------------------------------|--|-------------------------------------|--|--|---|
| <b>LDO</b>                         | <b>10</b>                           | <b>C</b>                          | <b>00</b>                        | <b>5W</b>                                      | <b>05</b>                           | <b>V</b>   | <b>1</b>   | <b>J</b>  |
| Product Family<br>LDO = LDO Series | Rated Output Current<br>10 = 10 Amp | Performance<br>C = Cost Optimized | Input Voltage<br>00 = 3 - 13.8 V | Type of Output<br>5 W = 5 Pins and Wide Output | Output Voltage<br>05 = 0.59 - 5.1 V | Mounting Option<br>V = Vertical<br>H = Horizontal<br>S = SMT | Custom Option<br>1 = Vertical, 0.199" pin length | RoHS Compliance<br>J = Pb free (RoHS 6/6 compliant) |

## OUTPUT VOLTAGE ADJUSTMENT OF THE LDO10C SERIES

The ultra-wide output voltage trim range offers major advantages to users who select the LDO10C series. It is no longer necessary to purchase a variety of modules in order to cover different output voltages. The output voltage can be trimmed in a range of 0.59 - 5.1 Vdc. When the LDO10C converter leaves the factory, the output has been adjusted to the default voltage of 0.59 V.

## Notes:

1. Measured as per recommended system capacitance. See Application Note 186.
2.  $di/dt = 10 \text{ A}/\mu\text{s}$ ,  $V_{in} = \text{Nom}$ ,  $T_c = 25^\circ\text{C}$ , load change = 0.50 Io to full Io and full Io to 0.50.
3. External input fusing is recommended.
4. Additional part numbers may be available with different output voltages.
5. Airflow dependent, 100 LFM minimum required.
6. No capacitors needed for ripple current stability.
7. No capacitors needed for stability.
8. NOTICE: the input voltage must be greater than the programmed output voltage. The max duty cycle is 95%. These non-isolated dc-dc modules are buck converters.

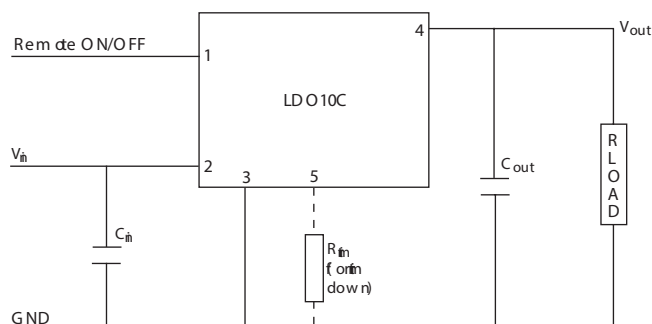


MECHANICAL DRAWINGS

Vertical Mount (Model LDO10C-005W05-VJ)

Dimensions in inches (mm). Tolerances (unless otherwise specified) 2 Places  $\pm 0.030$  ( $\pm 0.76$ ) 3 Places  $\pm 0.010$  ( $\pm 0.25$ )


| Pin Assignments |            |
|-----------------|------------|
| Pin No.         | Function   |
| 1               | Enable     |
| 2               | Vin        |
| 3               | Common/RTN |
| 4               | Vout       |
| 5               | Trim       |

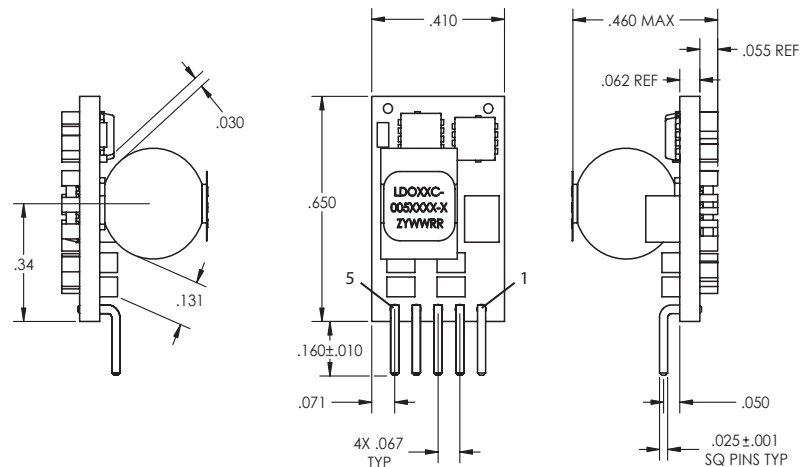

Vertical Mount (Model LDO10C-005W05-V1J)

Dimensions in inches (mm). Tolerances (unless otherwise specified) 2 Places  $\pm 0.030$  ( $\pm 0.76$ ) 3 Places  $\pm 0.010$  ( $\pm 0.25$ )

| Pin Assignments |            |
|-----------------|------------|
| Pin No.         | Function   |
| 1               | Enable     |
| 2               | Vin        |
| 3               | Common/RTN |
| 4               | Vout       |
| 5               | Trim       |

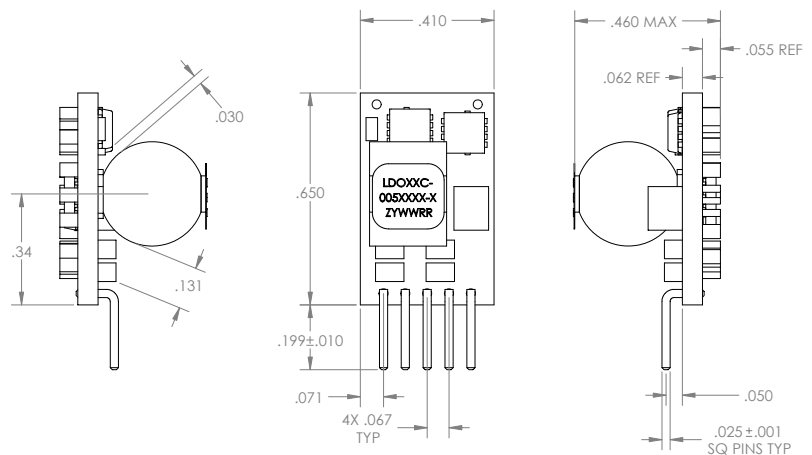


## MECHANICAL DRAWINGS (CONTINUED)

## Horizontal Mount (Model LDO10C-005W05-HJ)

Dimensions in inches (mm). Tolerances (unless otherwise specified) 2 Places  $\pm 0.030$  ( $\pm 0.76$ ) 3 Places  $\pm 0.010$  ( $\pm 0.25$ )


| Pin Assignments |            |
|-----------------|------------|
| Pin No.         | Function   |
| 1               | Enable     |
| 2               | Vin        |
| 3               | Common/RTN |
| 4               | Vout       |
| 5               | Trim       |
| 6               | Mech Pin   |

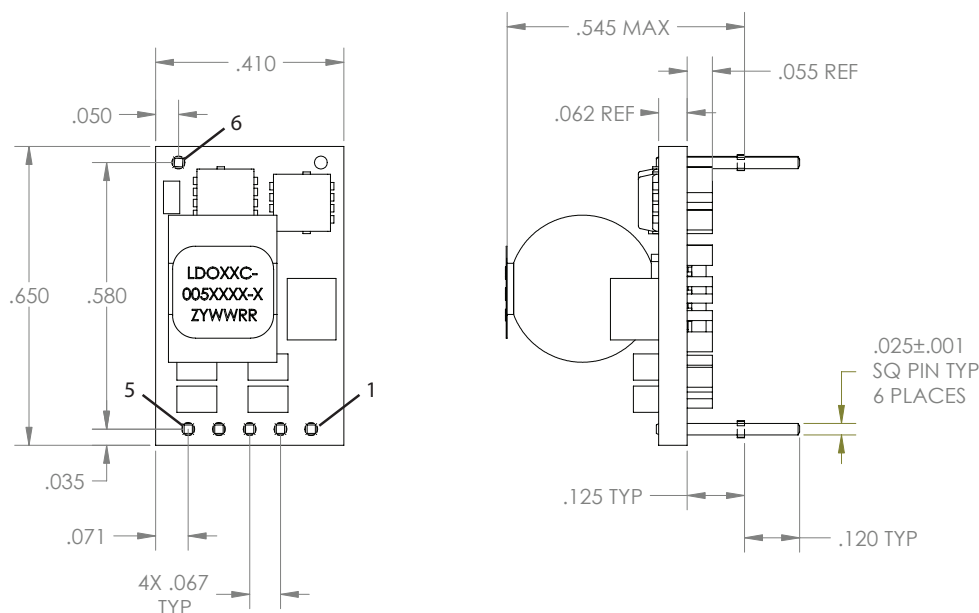

## Surface Mount (Model LDO10C-005W05-SJ)

Dimensions in inches (mm). Tolerances (unless otherwise specified) 2 Places  $\pm 0.030$  ( $\pm 0.76$ ) 3 Places  $\pm 0.010$  ( $\pm 0.25$ )

| Pin Assignments |            |
|-----------------|------------|
| Pin No.         | Function   |
| 1               | Enable     |
| 2               | Vin        |
| 3               | Common/RTN |
| 4               | Vout       |
| 5               | Trim       |
| 6               | Mech Pin   |
| 7               | Mech Pin   |

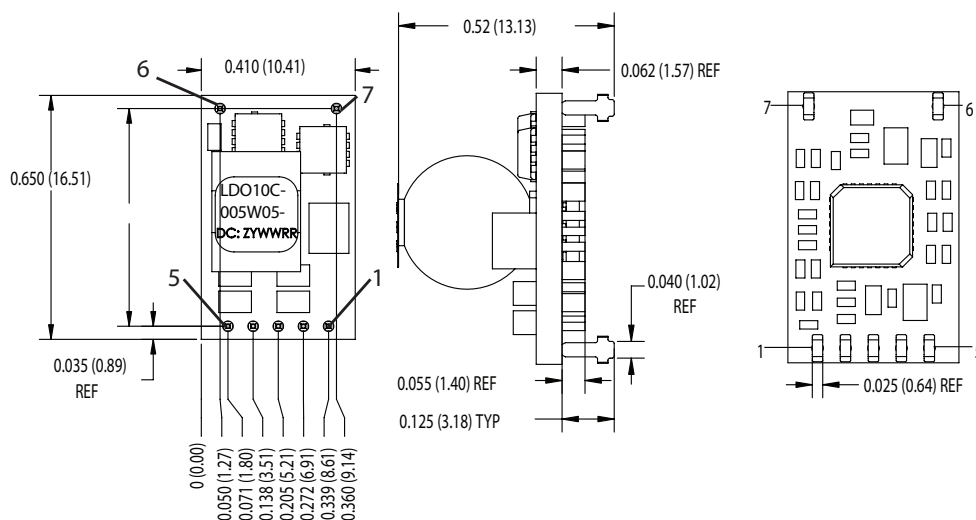



For international contact information,  
visit [advancedenergy.com](http://advancedenergy.com).

[powersales@aei.com](mailto:powersales@aei.com) (Sales Support)  
[productsupport.ep@aei.com](mailto:productsupport.ep@aei.com) (Technical Support)  
+1 888 412 7832

## ABOUT ADVANCED ENERGY

Advanced Energy (AE) has devoted more than three decades to perfecting power for its global customers. AE designs and manufactures highly engineered, precision power conversion, measurement and control solutions for mission-critical applications and processes.

Our products enable customer innovation in complex applications for a wide range of industries including semiconductor equipment, industrial, manufacturing, telecommunications, data center computing, and medical. With deep applications know-how and responsive service and support across the globe, we build collaborative partnerships to meet rapid technological developments, propel growth for our customers, and innovate the future of power.

## PRECISION | POWER | PERFORMANCE

---

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2020 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, AE® and Artesyn™ are U.S. trademarks of Advanced Energy Industries, Inc.