



6 Pin, 2KVRms DC/DC Converter Isolation Modules

The TGM-NS and TDM-NE, 6 pin transformers provide the isolation and voltage outputs required for small, low cost DC/DC converter circuits. UL1950, IEC950 and EN60950 recognized. Designed specifically for use with the Maxim™ MAX253 and MAX845 monolithic oscillator/power drivers with 3.3V or 5V power source. Other packages are available with isolation voltages up to 4.5KVRms. For more information, pertaining to the MAX845 please contact Maxim at (408) 737-7600. Maxim is a registered trademark of Maxim Integrated Products.


NE Package

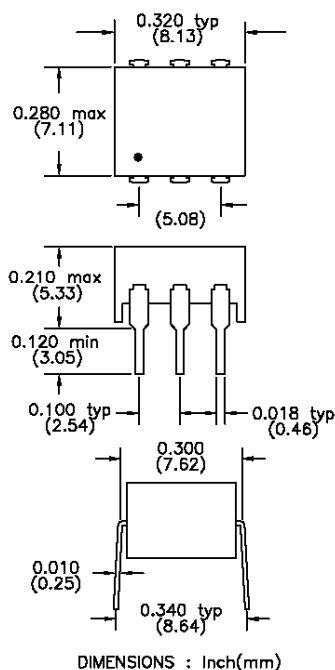

NS Package

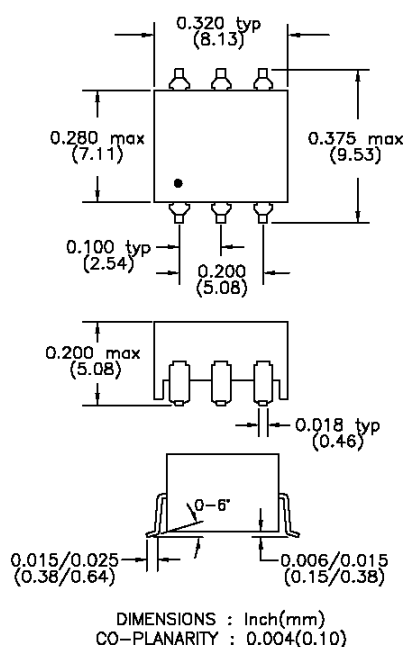

Circuit Diagram



Patented Construction, Pat. No. 5,656,985

Electrical Specifications @ 25°C

Operating Temp: -40 to +85°C
 Pri Pins: 1-3
 Pri OCL: 960μH typ


Pri DCR: 0.8Ω max
 ET Constant: 11 V-μs min

SMD	Part Number	DIL	Turns Ratio (±3%) PRI:SEC	Pri LL μH typ.	Isolation Vrms
TGM-210NS	TDM-210NE		2CT:1CT	0.40	2,000
TGM-220NS	TDM-220NE		8CT:3CT	0.40	2,000
TGM-230NS	TDM-230NE		4CT:3CT	0.40	2,000
TGM-240NS	TDM-240NE		3CT:4CT	0.40	2,000
TGM-250NS	TDM-250NE		1CT:1CT	0.40	2,000
TGM-280NS	TDM-280NE		3CT:8CT	0.40	2,000


Maxim MAX253/MAX845 DC/DC Converter Application Note

The TDM and TGM series of transformers have been designed specifically for use with the Maxim™ MAX253 and MAX845 monolithic oscillator/power driver with 3.3V or 5V power source. Multiple output voltages can be achieved depending on the diode circuit and transformer selected. For more information, pertaining to the MAX253/MAX845 please contact Maxim at (408) 737-7600. Maxim is a registered trademark of Maxim Integrated Products.


Bridge Rectifier Circuit

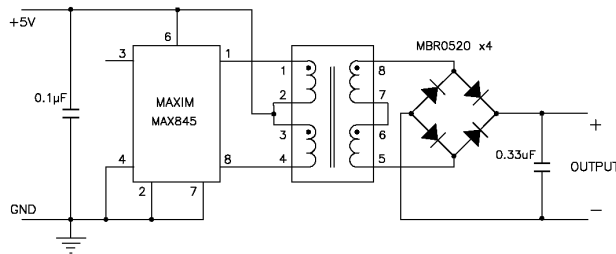


Output Voltages

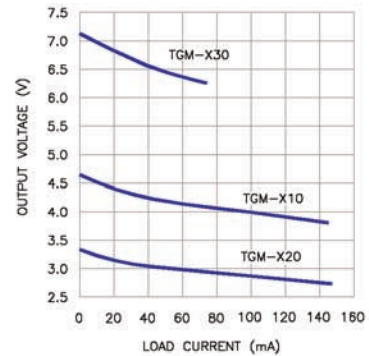


Doubler Circuit

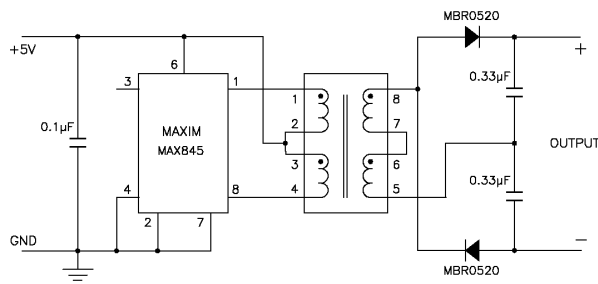

Output Voltages

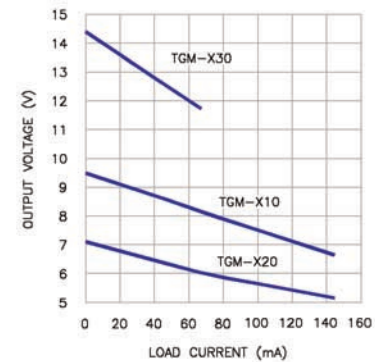

Full Wave Rectifier Circuit

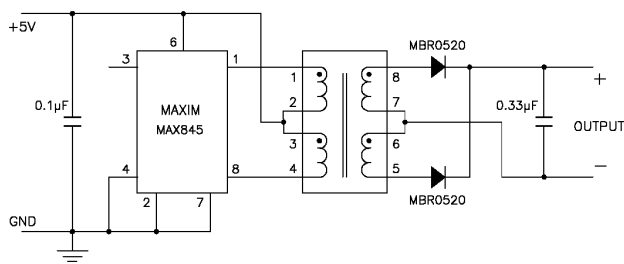

Output Voltages

