

# LV5026MC

## Recommended Operating Conditions at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Input voltage	V <sub>IN</sub>		8.5 to 24	V

\* Note : supply the stabilized voltage.

## Electrical Characteristics at Ta = 25°C, V<sub>IN</sub> = 12V, unless otherwise specified.

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
Reference voltage block						
Built-in reference voltage	VREF		0.585	0.605	0.625	V
VREF V <sub>IN</sub> line regulation	VREF_LN	V <sub>IN</sub> = 8.5 to 24V		±0.5		%
Reference output voltage	REFOUT	I <sub>REFOUT</sub> = 0.5mA		3.0		V
- Maximum load	REFOUT_MAX		0.5			mA
- equivalent output impedance	REFOUT_RO			10		Ω
Under voltage lockout						
Operation start Input voltage	UVLOON		8	9	10	V
Operation stop input voltage	UVLOOFF		6.3	7.3	8.3	V
Hysteresis voltage	UVLOH			1.7		V
Oscillation						
Frequency	FOSC1	RT =OPEN	40	50	60	kHz
	FOSC2	RT = REF_OUT	55	70	85	kHz
FOSC1 Switch voltage	V <sub>O</sub> SC1		2		5	V
FOSC2 Switch voltage	V <sub>O</sub> SC2				0.5	V
Maximum ON duty	MAXDuty			93		%
Comparator						
Input offset voltage (Between CS and VREF)	V <sub>IO</sub> _VR			1	10	mV
Input offset voltage (Between CS and REFIN)	V <sub>IO</sub> _RI			1	10	mV
Input current	I <sub>IO</sub> SC			160		nA
	I <sub>IO</sub> REF			80		nA
CS pin max voltage	VOM				1	V
malfunction prevention mask time	TMSK			150		ns
PWM_D circuit						
OFF voltage	V <sub>OFF</sub>		2		5	V
ON voltage	V <sub>ON</sub>		0		0.6	V
Thermal protection circuit						
Thermal shutdown temperature	TSD	*Design guarantee		165		°C
Thermal shutdown hysteresis	ΔTSD	*Design guarantee		30		°C
Drive Circuit						
OUT sink current	I <sub>O</sub> I		500	1000		mA
OUT source current	I <sub>O</sub> O			120		mA
Minimum On time	TMIN			200	300	ns

Continued on next page.

LV5026MC

Continued from preceding page.



Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
TRIAC Stabilization circuit						
Threshold of OUT2	V <sub>ACS</sub>	OUT2 = High [less than right record]	2.8	3.0	3.2	V
OUT2 sink current	I <sub>O2I</sub>	V <sub>IN</sub> = 12V, OUT2 = 6V		0.6		mA
OUT2 source current	I <sub>O2O</sub>	V <sub>IN</sub> = 12V, OUT2 = 6V		0.6		mA
V <sub>CC</sub> current						
UVLO mode V <sub>IN</sub> current	I <sub>CCOFF</sub>	V <sub>IN</sub> < UVLOON		80	120	μA
Normal mode V <sub>IN</sub> current	I <sub>CCON</sub>	V <sub>IN</sub> > UVLOON, OUT = OPEN		0.8		mA
V <sub>IN</sub> over voltage protection circuit						
V <sub>IN</sub> over voltage protection voltage	V <sub>IN</sub> OVP		24	27	30	V
V <sub>IN</sub> current at OVP	I <sub>IN</sub> OVP	V <sub>IN</sub> = 30V	0.7	1.0	1.5	mA
CS terminal abnormal sensing circuit						
Abnormal sensing voltage	CSOCP			1.9		V

∗: Design guarantee (value guaranteed by design and not tested before shipment)


Package Dimensions

unit : mm (typ)

3426A

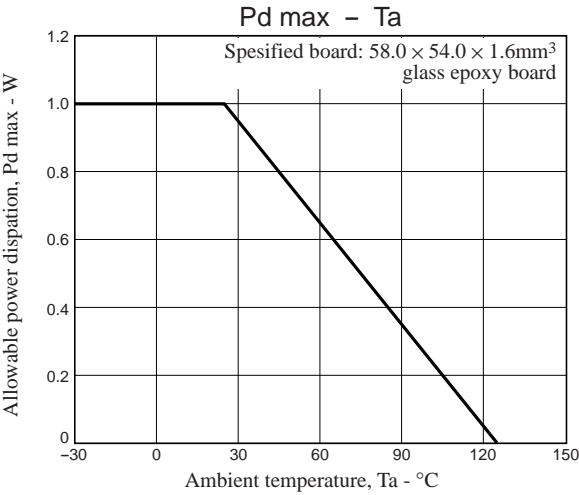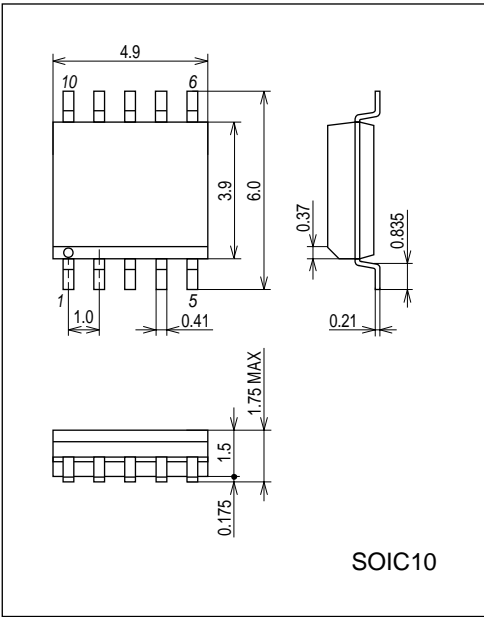


Pin Assignment

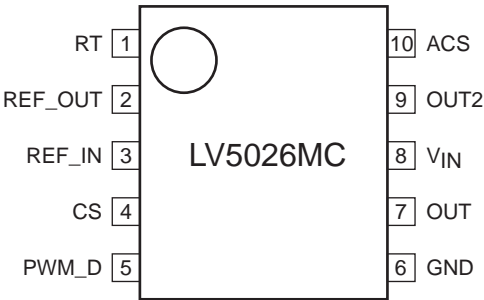


(Top view)

## Block Diagram

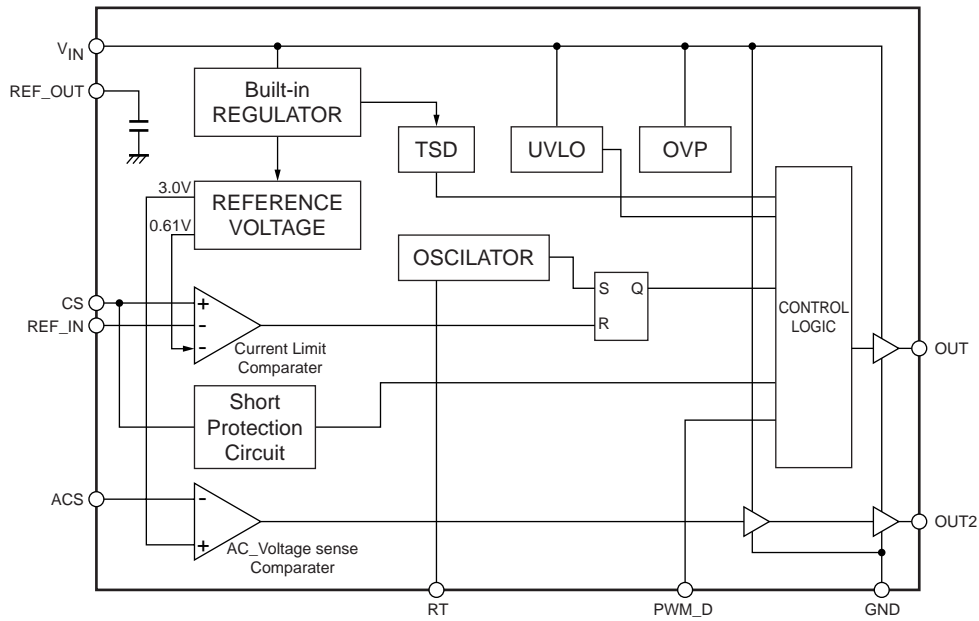


## Sample Application Circuit

Non isolation

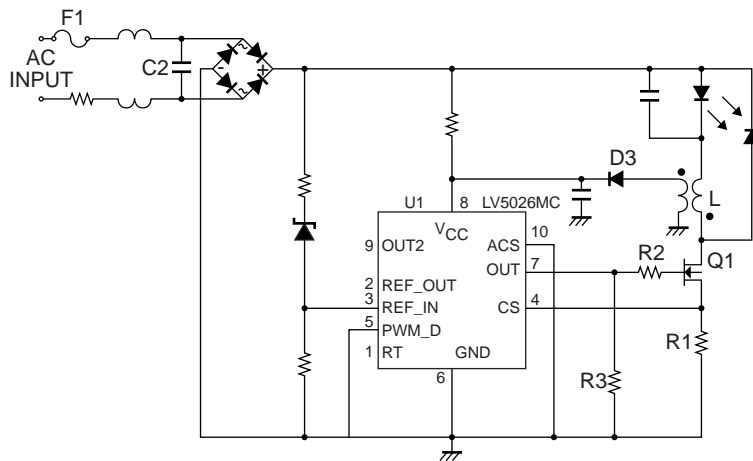

Isolation

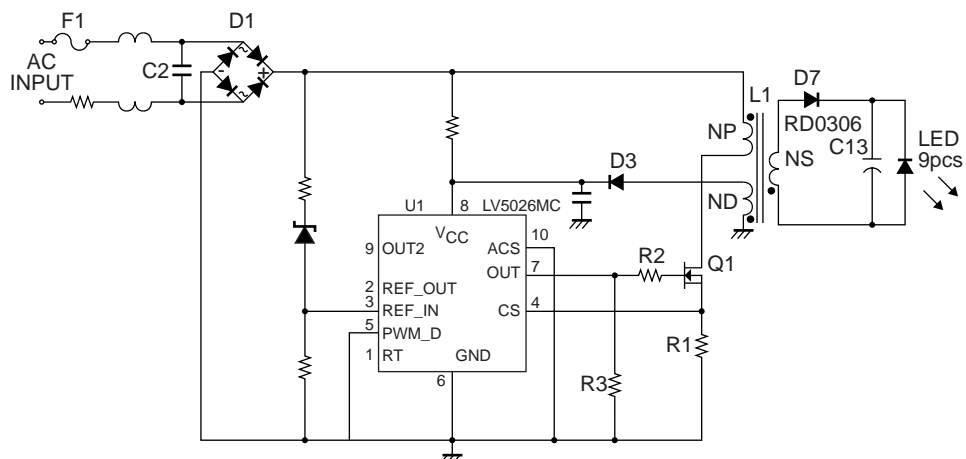

# LV5026MC

## Pin Functions

Pin No.	Pin name	Pin function	Equivalent circuit
1	RT	Switching frequency selection pin. L or Open : 50kHz switching, H: 70 kHz switching. In case of 70kHz,connect RT pin to REFOUT pin. on time	
2	REF_OUT	Built-in 3V Regulate out Pin. If this function isn't used, please connect to nothing.	
3	REF_IN	External LED current Limit Setting pin. If less than VREF (0.61V) voltage is input, Peak current value is used at the input voltage. If more than REF_IN voltage is input, it is done at VREF voltage. If this function isn't used, please connect nothing.	
4	CS	LED current sensing in. If this terminal voltage exceeds VREF (Or REF_IN), external FET is OFF. And if the voltage of the terminal exceeds 1.9V, LV5026MC turns to latch-off mod	
5	PWM_D	PWM Dimming pin.L or open: normal operation, H: Stop operation.	
6	GND	GND pin.	
7	OUT	Driving the external FET Gate Pin.	
8	VIN	Power supply pin. Operation : VIN > UVLOON Stop: VIN < UVLOOFF Switching Stop : VIN > VINOV	
9	OUT2	This pin drive the FET which is stabilized the TRIAC dimming application. If ACS is less than 3V, OUT2 turn High voltage. If this function isn't used, please connect nothing.	
10	ACS	ACS pin senses AC Voltage. If this function isn't used, please connect GND.	

## LED current and inductance setting

### • Relation ship between REF\_IN and CS pin voltage(Power Factor Crrction(PFC))



The output current value is the average of the current value that flows during one cycle. The current value that flows into coil is a triangular wave shown in the figure below. Make sure to set  $I_{pk}$  so that (average of current value at one cycle) is equal to (LED current value).  $I_{pk}$  is set by the relationship between REF\_IN voltage and  $R_{cs}$  voltage.

This relationship make Power Factor Correction (PFC). Therefore, it is available to make LED current a sine curve.

### • Setting Zener voltage

$V_{zd}$  depend on LED voltage ( $V_f$ ). Choose Zener diode around  $V_f$  (LED voltage). When VAC voltage is lower than  $V_f$ , LED operation is not normal. Using Zener diode prevents incorrect operating during VAC voltage lower than  $V_f$ . In detail, refer to [LED current and inductance setting]

In case of REF\_IN pin open, this error amplifier negative input(-) is under control of internal VREF voltage (0.605V typ).

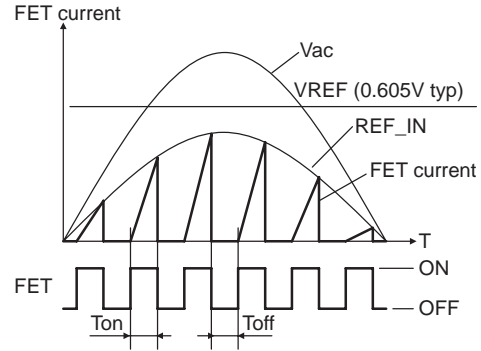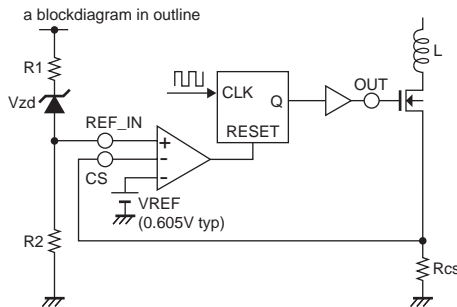

$$I_{pk} = \frac{(V_{ac} - V_{zd}) \times \frac{R_2}{R_1 + R_2}}{R_{cs}}$$




$I_{pk}$ : peak inductor current  
 $V_f$ : LED forward voltage drop  
 $V_{ac}$ : effective value, R.M.S value  
 $V_{REF}$ : Built-in reference voltage (0.605V)  
 $V_{REF\_IN}$ : REF\_IN voltage (6 pin)  
 $R_s$ : External sense resistor  
 $V_{zd}$ : Zener diode voltage (REF\_IN pin)

## LED current and inductance setting

It is available to use both no-isolation and isolation applications.

(For non-isolation application)

The output current value is the average of the current value that flows during one cycle. The current value that flows into coil is a triangular wave shown in the figure below. Make sure to set  $I_{L\_PK}$  so that (average of current value at one cycle) is equal to (LED current value).

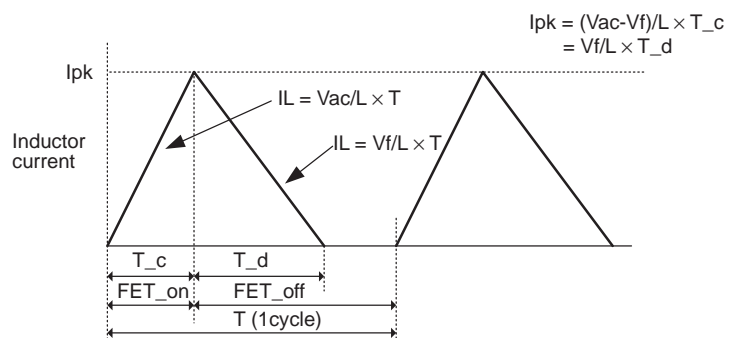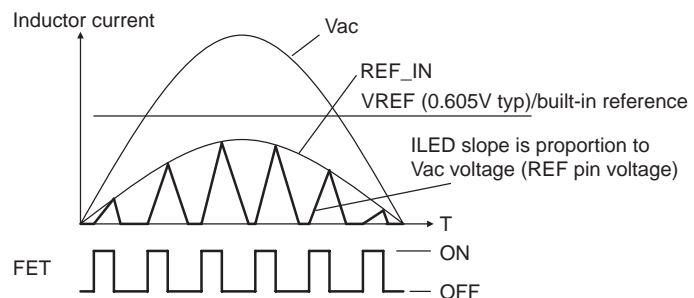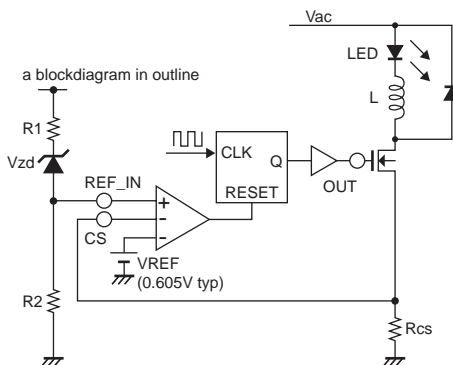

Given that the period when current flows into coil is

$$\text{DutyI} = \frac{T_c + T_d}{T}$$

$$I_{pk} \times \frac{1}{2} \times (\text{Duty} \times T) / T = I_{LED}$$

$$I_{pk} \times \frac{2 \times I_{LED}}{\text{DutyI}} \quad (1) \text{ since } I_{pk} \times \frac{V_{REF\_IN}}{R_{cs}}$$

$$R_{cs} \times \frac{V_{FEF\_IN}}{I_{pk}} = \frac{\text{DutyI} \times V_{FEF\_IN}}{2I_{LED}} \quad (2)$$

$I_{pk}$ : peak inductor current

$V_f$ : LED forward voltage drop

$V_{ac}$ : effective value(R.M.S value)

$V_{REF}$ : Built-in reference voltage (0.605V)

$V_{REF\_IN}$ :  $REF\_IN$  voltage (6 pin)

$R_s$ : External sense resistor

$V_{zd}$ : Zener diode voltage ( $REF\_IN$  pin)

Since formula for LED current is different between on period and off period as shown above,

$$I_{pk} \times \frac{V_{ac} - V_f}{L} \times T_c = \frac{V_f}{L} \times T_d \quad (3)$$


$$\text{Since } T_c + T_d = \text{DutyI} \times T, T_c = \text{DutyI} \times T - T_d \quad (4)$$

$$\text{Based on the result of (3) and (4), } T_d = \text{DutyI} \times T \times \frac{V_{ac} - V_f}{V_{ac}} \quad (5)$$

To obtain L from the equation (1), (3), (5),

$$L \times \frac{V_f \times \text{DutyI}}{2 \times I_{LED}} \times \text{DutyI} \times T = \frac{V_{ac} - V_f}{V_{ac}} = \frac{V_f}{2 \times I_{LED}} \times \frac{1}{f_{osc}} \times \frac{V_{ac} - V_f}{V_{ac}} \times (\text{DutyI})^2 \quad (6)$$

Since LED and inductor are connected in serial in non-isolation mode, LED current flows only when AC voltage exceed  $V_f$ .

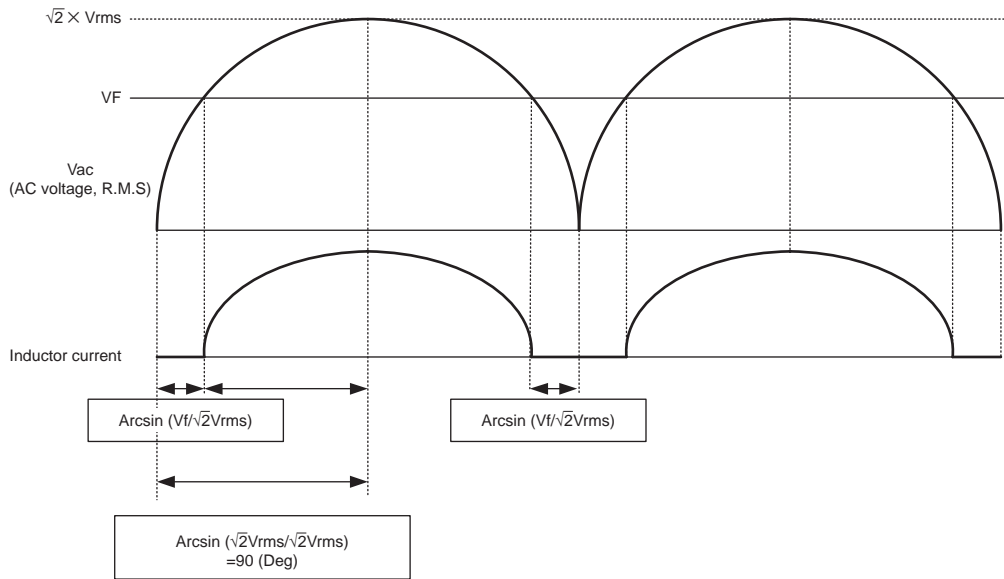

Given that the ratio of inductor current to AC input is DutyAC.





$$\text{DutyAC} = \frac{90 - \arcsin\left(\frac{V_f}{\sqrt{2} V_{rms}}\right)}{90}$$

Since the period when the inductor current flows are limited by DutyAC, the formula (6) is represented as follows:

$$L = \frac{V_f}{2 \times I_{LED}} \times \frac{1}{f_{osc}} \times \frac{V_{ac} - V_f}{V_{IN}} \times (\text{DutyI})^2 \times \left( \frac{90 - \arcsin\left(\frac{V_f}{\sqrt{2} V_{rms}}\right)}{90} \right)^2 \quad (7)$$

(for Isolation circuit)

Using the circuit diagram below, the wave form of the current that flows to Np and Ns is as follows.  
Current waveform flows to primary side and secondary.

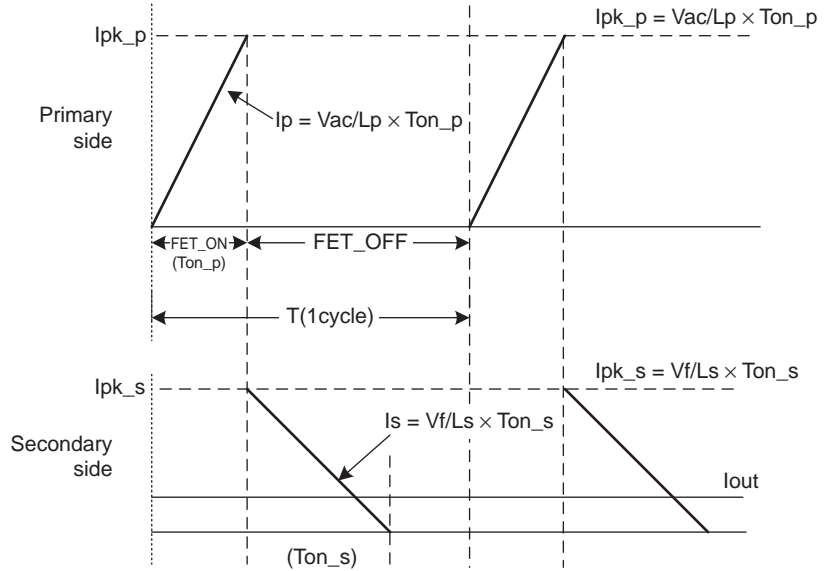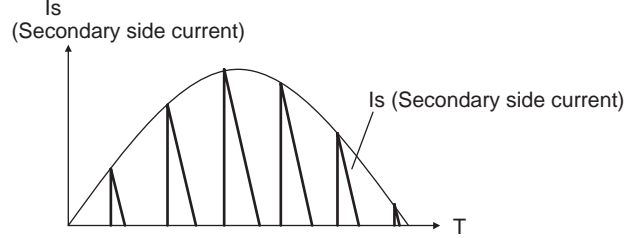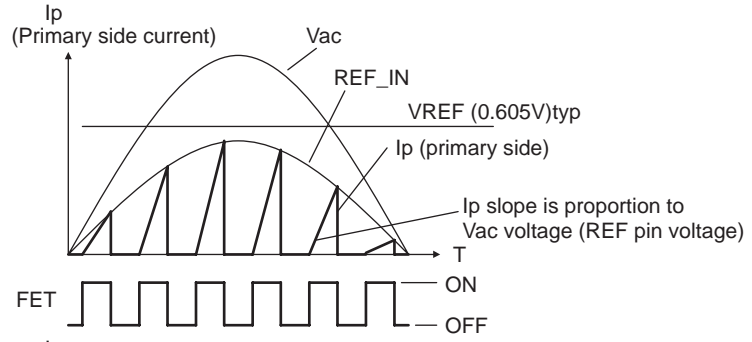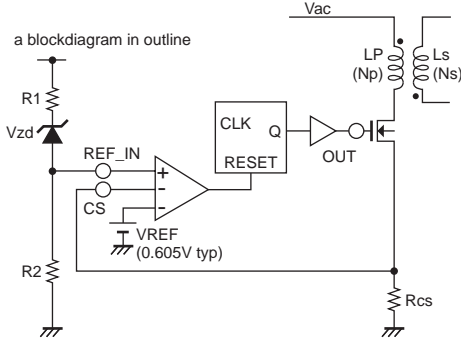

[Inductance  $L_p$  of primary side and sense resistor  $R_s$ ]

If a peak current flow to transformer is represented as  $I_{pk\_p}$ , the power ( $P_{in}$ ) charged to the transformer on primary side can be represented as:

$$P_{in} = \frac{1}{2} \times L_p \times (I_{pk\_p})^2 \times f_{osc} \quad (11)$$

$$I_{pk\_p} = \frac{V_{ac}}{L_p} \times T_{on\_p} \quad (12)$$

$$L_p = \frac{V_{ac}^2 \times T_{on\_p}^2 \times f_{osc}}{2 \times P_{in}} = \frac{V_{ac}^2 \times Don\_p^2}{2 \times P_{in} \times f_{osc}} \quad (13)$$

$$(Don\_p = \frac{T_{on\_p}}{T} = T_{on\_p} \times f_{osc}),$$

To substitute the following to the formula below,

$$\therefore \eta = \frac{P_{out}}{P_{in}} \quad (14)$$

$$\therefore L_p = \frac{V_{ac}^2 \times T_{on\_p}^2 \times f_{osc} \times \eta}{2 \times P_{out}} = \frac{V_{ac}^2 \times Don^2 \times \eta}{2 \times P_{out} \times f_{osc}} \quad (15)$$

Sense resistor is obtained as follows.

$$R_s = \frac{V_{REF\_IN}}{I_{pk\_p}} = \frac{V_{REF\_IN} \times L_p}{V_{ac} \times T_{on\_p}} = \frac{V_{REF\_IN} \times L_p}{V_{ac} \times D_{on\_p} \times T} \quad (16)$$

[Inductance  $L_s$  of secondary side]

Since output current  $I_{out}$  is the average value of current flows to transformer of secondary side

$$I_{out} = I_{pk\_s} \times \frac{T_{on\_s}}{T} \times \frac{1}{2} = \frac{I_{pk\_s} \times D_{on\_s}}{2} \quad (D_{on\_s} = \frac{T_{on\_s}}{T} = T_{on\_s} \times f_{osc}) \quad (17)$$

$$I_{pk\_s} = \frac{V_{out}}{L_s} \times T_{on\_s} = \frac{V_{out}}{L_s} = \frac{D_{on\_s}}{f_{osc}} \quad (18)$$

$$L_s = \frac{V_{out} \times T \times D_{on\_s}^2}{2 \times I_{out}} = \frac{V_{out} \times D_{on\_s}^2}{2 \times I_{out} \times f_{osc}} = \frac{V_{out}^2 \times D_{on\_s}^2}{2 \times P_{out} \times f_{osc}} \quad (19)$$

Calculation of the ratio of transformer coil on primary side and secondary side

Since ratio and inductance of transformer coil is

$$\frac{N_s}{N_p} = \frac{\sqrt{L_s}}{\sqrt{L_p}} \quad (20)$$

substituted equations (15), (19) for (20)

$$\therefore \frac{N_p}{N_s} = \frac{V_{ac}}{V_{out}} \times \sqrt{\eta} \times \frac{D_{on\_p}}{D_{on\_s}} \quad (21)$$

Calculation of transformer coil on primary side and secondary side

$$N = \frac{V_{ac} \times 10^8}{2 \times \Delta B \times A_e \times f_{osc}} \quad (22)$$

$\Delta B$ : variation range of core flux density [Gauss]

$A_e$ : core section area [cm<sup>2</sup>]

To use  $A_l$  (L value at 100T),

$$N = \sqrt{\frac{L}{A_l}} \times 10^2 \quad (23)$$

L: inductance [μH]

$A_l$ : L value at 100T [uH/N<sup>2</sup>]

lg (Air gap) is obtained as follows:

$$lg = \frac{\mu_r \mu_0 N^2 A_e 10^2}{L} \quad (24)$$

$\mu_r$ : relative magnetic permeability,  $\mu_r = 1$

$\mu_0$ : vacuum magnetic permeability  $\mu_0 = 4\pi \times 10^{-7}$

N: turn count [T]

$A_e$ : core section area [m<sup>2</sup>]

L: inductance [H]



## Bleeder current cuircuit for TRIAC dimmer

### 1. Operating voltage setting

ACS pin voltage set operating voltage at OUT2. ACS pin threshold voltage is 3V typ.

OUT2 operating voltage is set by R1 and R2. R1 and R2 is determined below.


$$ACS = Vac \times \frac{R2}{R1+R2}$$

### 2. Bleeder current setting


Rd set hold current at Triac dimmer.

Bleeder current is set at Rd depending on Triac dimmer.

a blockdiagram in outline



a blockdiagram in outline

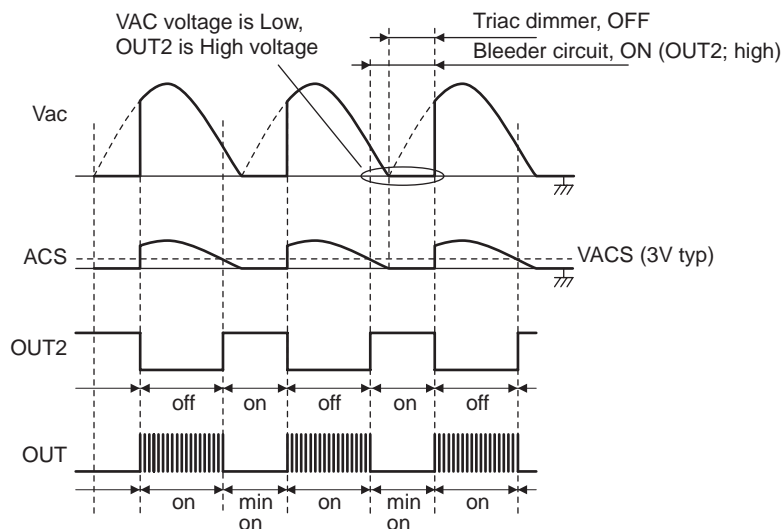


Description of operation  
protection function

	tilte	outline	monitor point	note
1	UVLO	Under voltage lock out	V <sub>CC</sub> voltage	
2	OC	Over current protection	CS voltage	available FET current
3	OVP	Over voltage protection	V <sub>CC</sub> voltage	
4	OTP (TSD)	Over Temperature Protection (Thermal Shut Down)	PN Junction temperature	

1. UVLO (Under voltage lock out)


If V<sub>IN</sub> voltage is 7.3V or lower, then UVLO operates and the IC stops. When UVLO operates, the power supply current of the IC is about 80μA or lower. If V<sub>IN</sub> voltage is 9V or higher, then the IC starts switching operation.

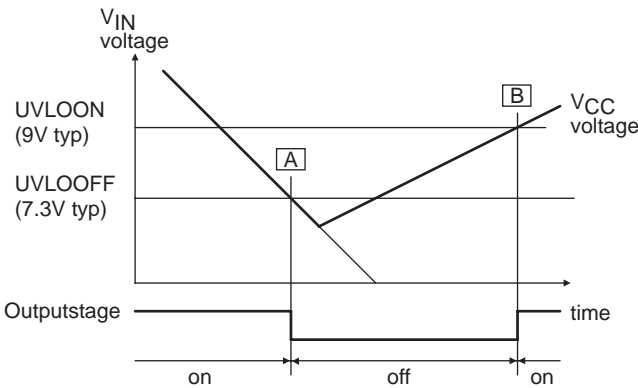

2. UVLO (Under voltage lock out)

The CS pin sense the current through the MOS FET switch and the primary side of the transformer. This provides an additional level of protection in the event of a fault. If the voltage of the CS pin exceeds VCSOCP (1.9V typ) (A), the internal comparator will detect the event and turn off the MOSFET. The peak switch current is calculated  $I_o \text{ (peak) [A]} = VSOCP \text{ [V]} / R_{sense} \text{ [\Omega]}$


The V<sub>CC</sub> pin is pulled down to fixed level, keeping the controller latched off. The lach reset occurs when the user disconnects LED from V<sub>AC</sub> and lets the V<sub>CC</sub> falls below the V<sub>CC</sub> reset voltage, UVLOOFF (7.3V typ)(B). Then V<sub>CC</sub> rise UVLOON (9V typ) (C), restart the switching.

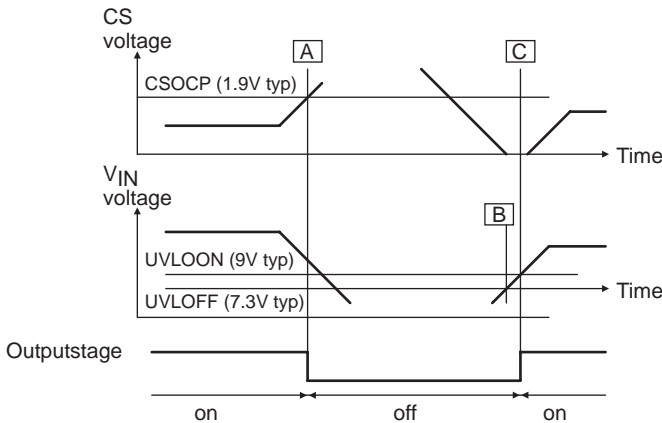

### 3. OVP (Over voltage protection)


If the voltage of  $V_{IN}$  pin is higher than the internal reference voltage  $V_{INOVP}$  (27V typ), switching operation is stopped.

The stopping operation is kept until the voltage of  $V_{IN}$  is lower than 7.3V. If the voltage of  $V_{IN}$  pin is higher than 9V, the switching operation is restated.

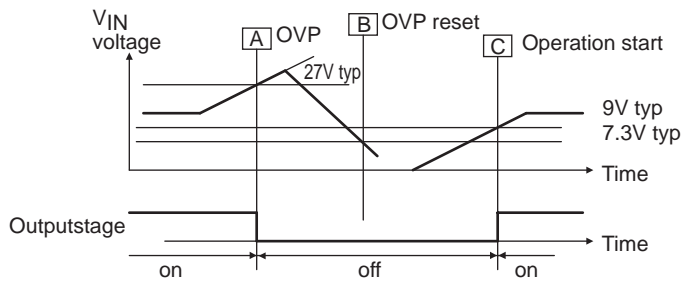


### 4. TSD (Thermal shut down protection)

The thermal shutdown function works when the junction temperature of IC is 165°C (typ) (A), and the IC switching stops. The IC starts switching operation again when the junction temperature is 135°C typ (B) or lower.

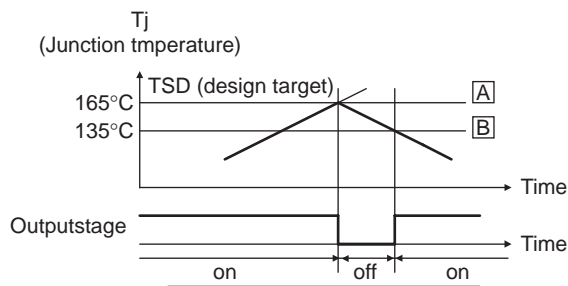

### Skip frequency function

LV5026MC contains the skip frequency function for reduction of the peak value of conduction noise. This function changes the frequency as follows.

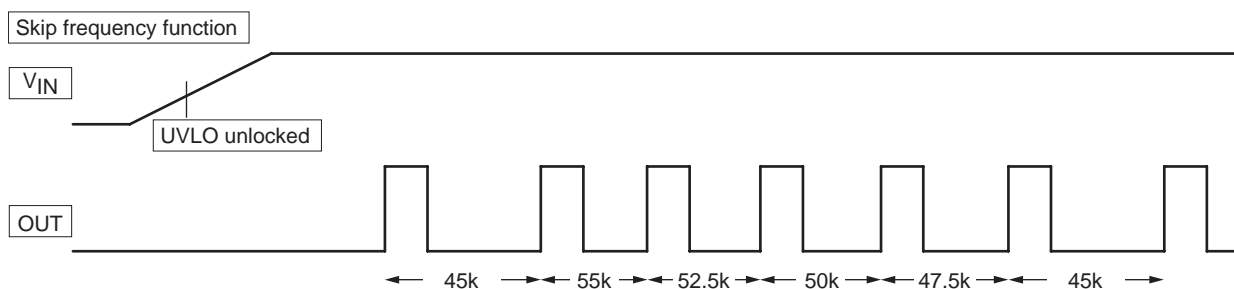

Switching frequency is changed as follows.


...  $\times 0.9 \rightarrow \times 1.1 \rightarrow \times 1.05 \rightarrow \times 1 \rightarrow \times 0.95 \rightarrow \times 0.9 \rightarrow \times 1.1$  ...

It's repeated by this loop.



## PWM dimmer function









LED current can be adjusted according to Duty of PWM pulse input to PWM dimmer pin. PWM pulse is High (2V to 5V) then switching operation stops, and LED current stops flowing. PWM pulse is Low (under 0.6V), then switching operation stop is released, and it returns to normal operation.








### An outline of PWM\_D pin

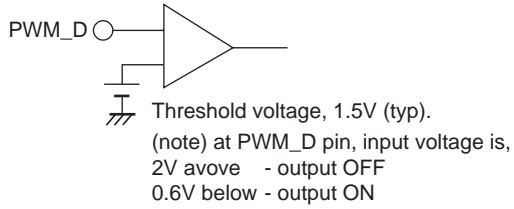



### LED current vs PWM\_D duty (outline)

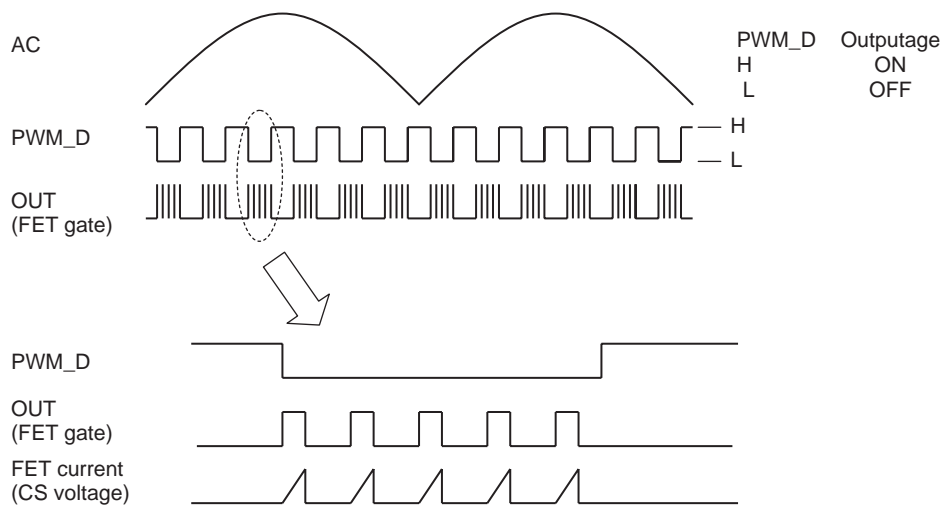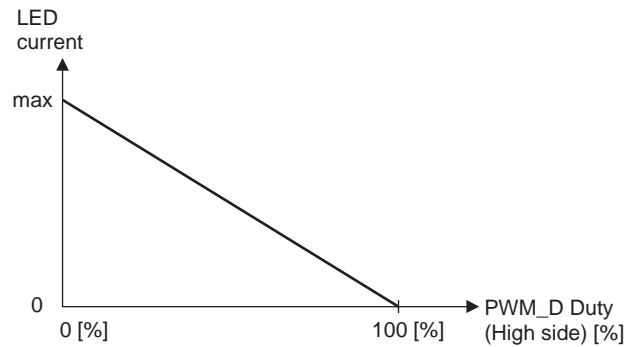

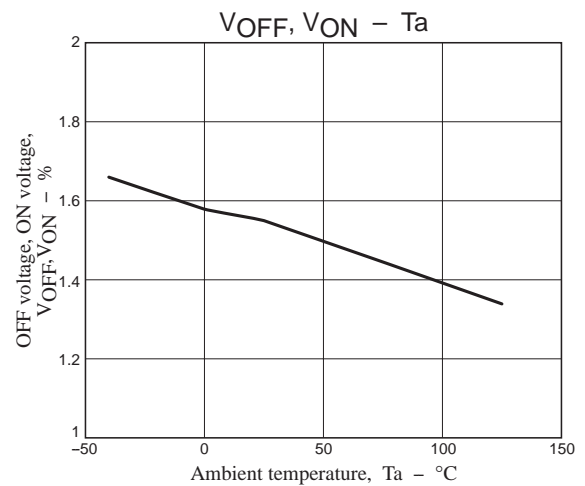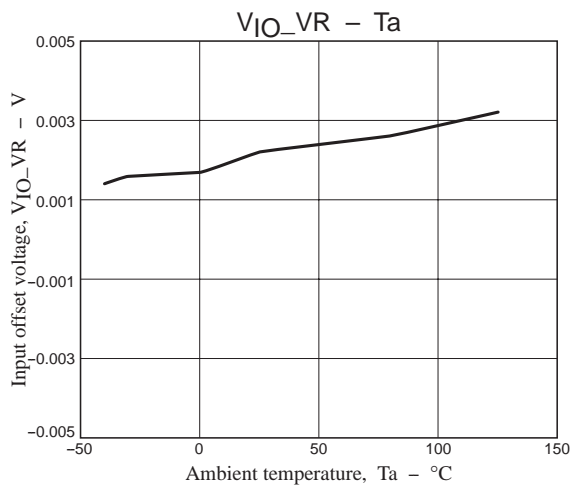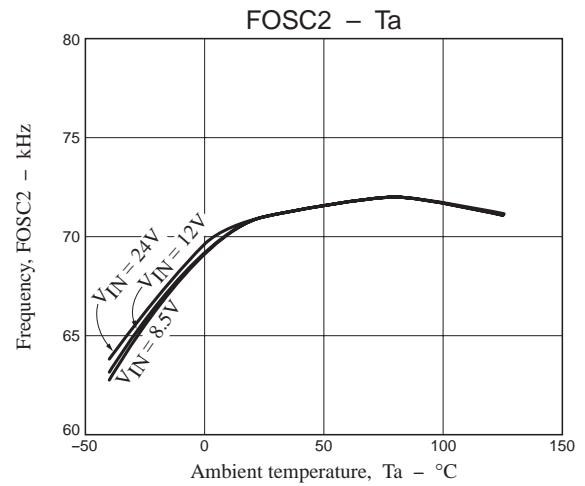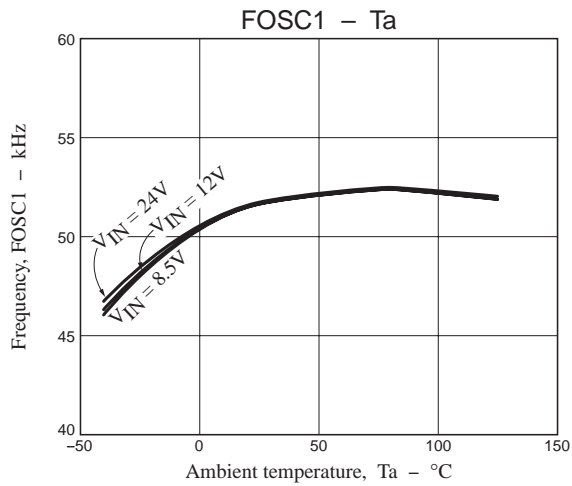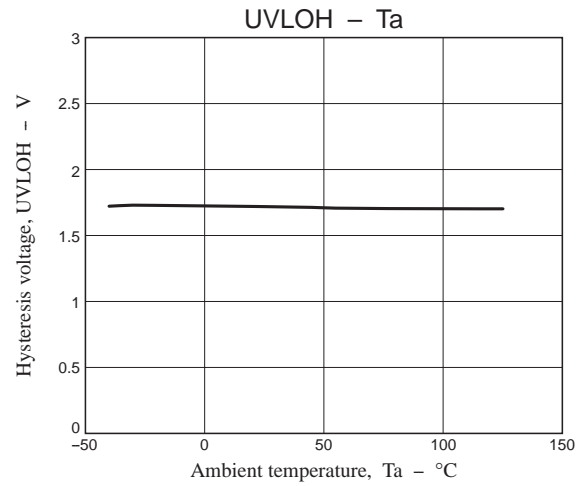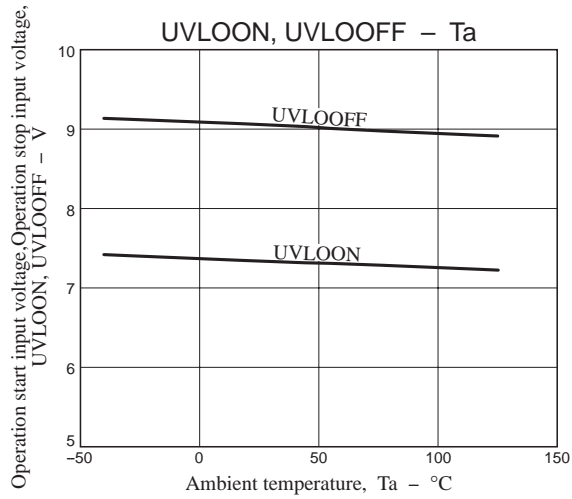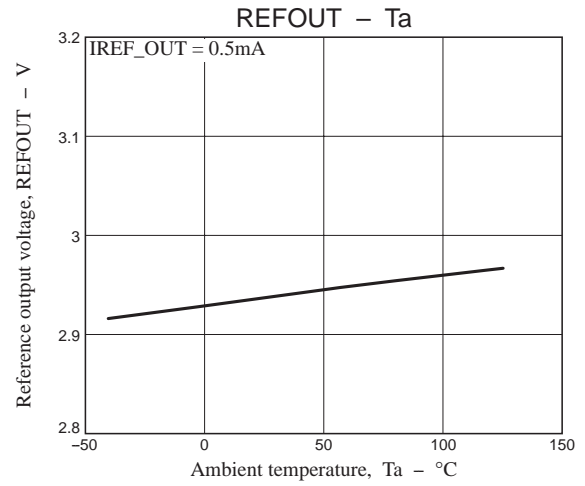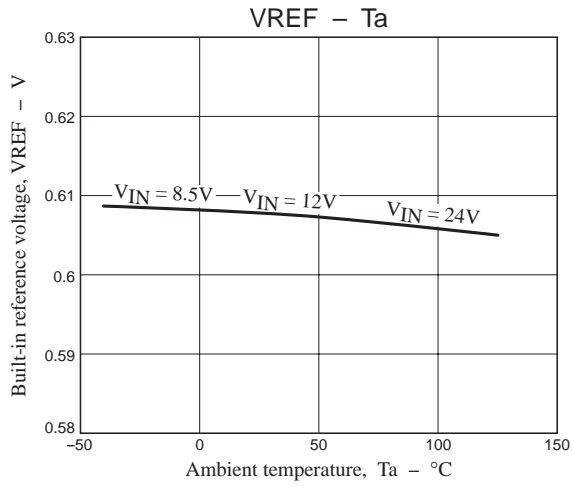

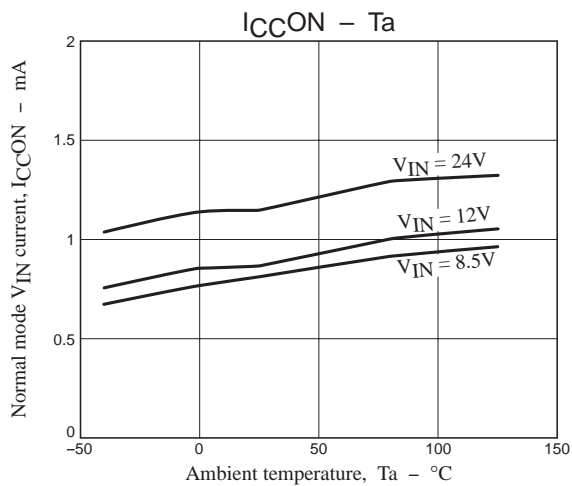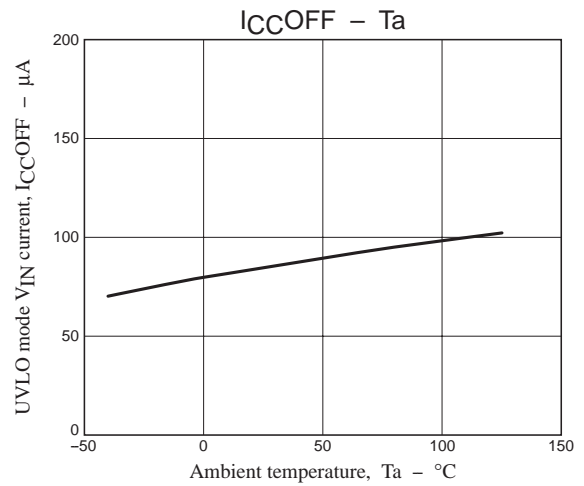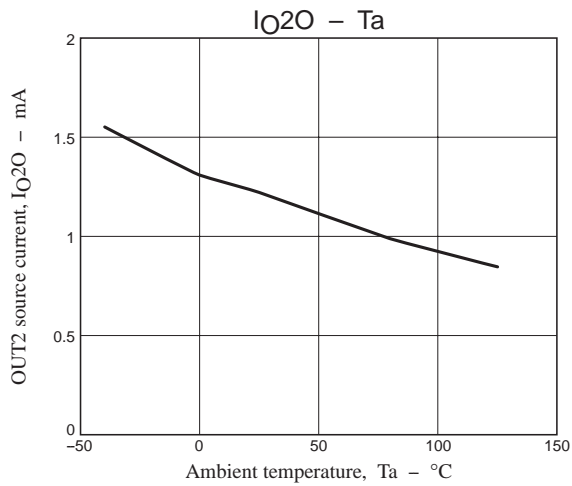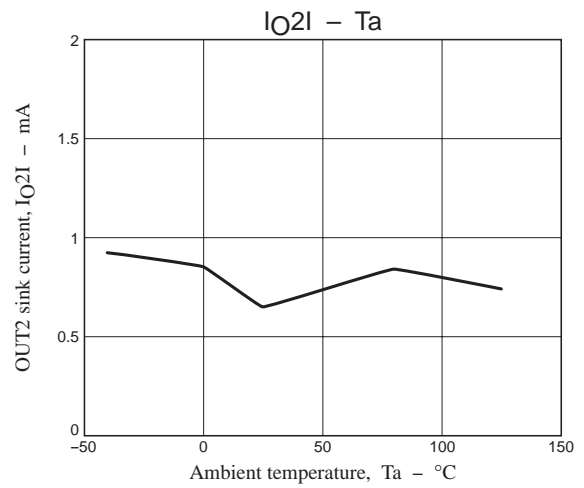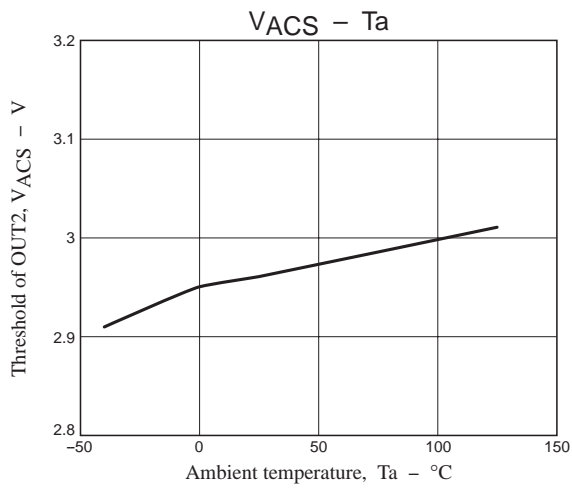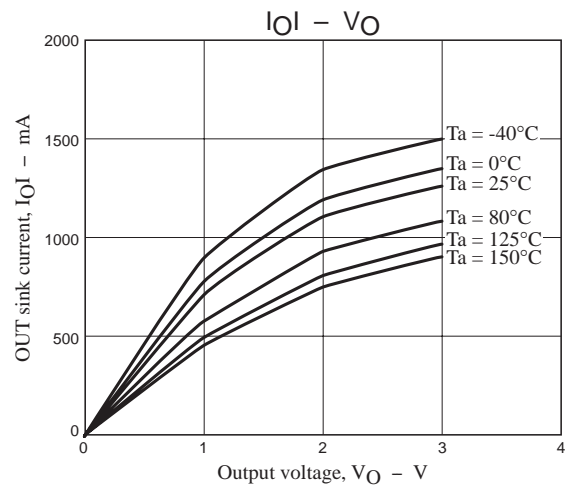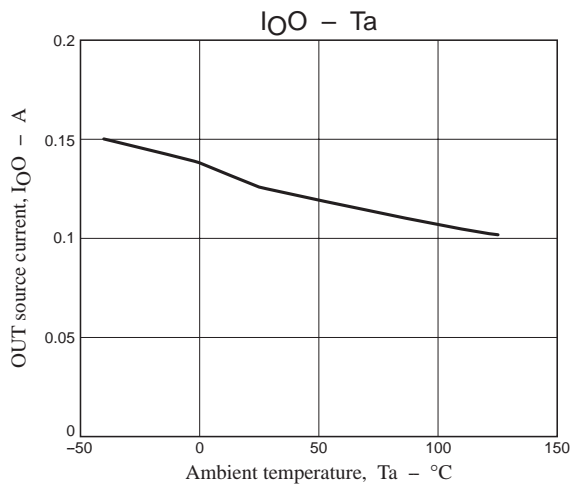

## LV5026MC

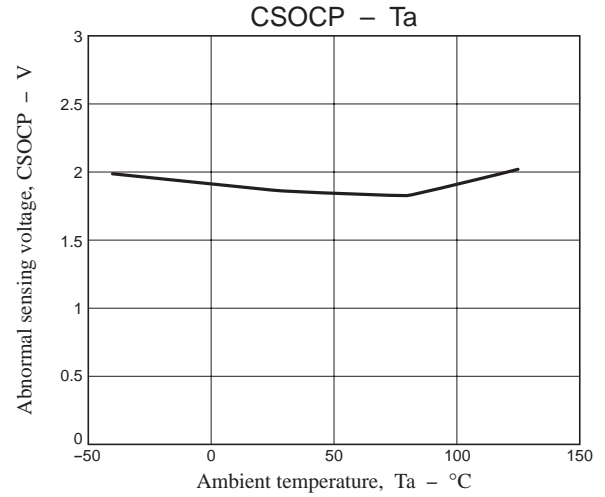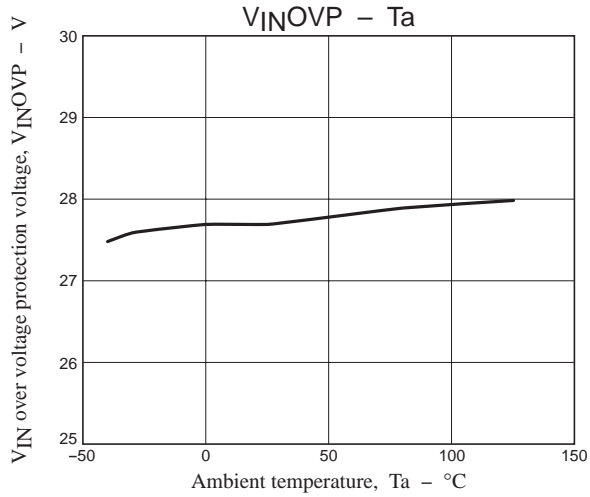

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.