

# **EGP30A - EGP30K** 3.0 Ampere Glass Passivated High Efficiency Rectifiers

### Features

- Glass passivated cavity-free junction
- High surge current capability
- Low leakage current
- Superfast recovery time for high efficiency
- Low forward voltage, high current capability



## DO-201AD Glass case

#### COLOR BAND DENOTES CATHODE

### Absolute Maximum Ratings\* T<sub>a</sub> = 25°C unless otherwise noted

Symbol	Parameter	Value	Units	
IO Average Rectified Current   .375 " lead length @ TL = 55°C   i <sub>f(surge)</sub> Peak Forward Surge Current   8.3 ms single half-sine-wave   Superimposed on rated load (JEDEC method)		3.0	А	
		125	А	
P <sub>D</sub>	Total Device Dissipation Derate above 25°C	6.25 50	W mW°C	
Reja Thermal Resistance, Junction to Ambient		20	°C/W	
RejL Thermal Resistance, Junction to Lead		8.5	°C/W	
T <sub>J</sub> , T <sub>STG</sub>	Junction and Storage Temperature Range	-65 ~ 150	°C	

These ratings are limiting values above which the serviceability of any semiconductor device may be impaired.

## $\label{eq:transformation} Electrical Characteristics^{*} \quad {\tt T_a=25^{\circ}C} \ {\tt unless \ otherwise \ noted}$


	Device								
Parameter	30A	30B	30C	30D	30F	30G	30J	30K	Units
Peak Repetitive Reverse Voltage	50	100	150	200	300	400	600	800	V
Maximum RMS Voltage	35	70	105	140	210	280	420	560	V
DC Reverse Voltage (Rated VR)	50	100	150	200	300	400	600	800	V
Maximum Reverse Current @ rated VR TA = 25°C TA = 125°C		5.0 100						μA μA	
Maximum Reverse Recovery Time IF = 0.5 A, IR = 1.0 A, Irr = 0.25 A		50 75						nS	
Maximum Forward Voltage @ 3.0 A		0.95			1.25 1		.7	V	
Typical Junction Capacitance VR = 4.0 V, f = 1.0 MHz		95			75			pF	

1

\* Pulse Test: Pulse Width $\leq$ 300 $\mu$ s, Duty Cycle $\leq$ 2%

©2007 Fairchild Semiconductor Corporation EGP30A - EGP30K Rev. A

July 2007

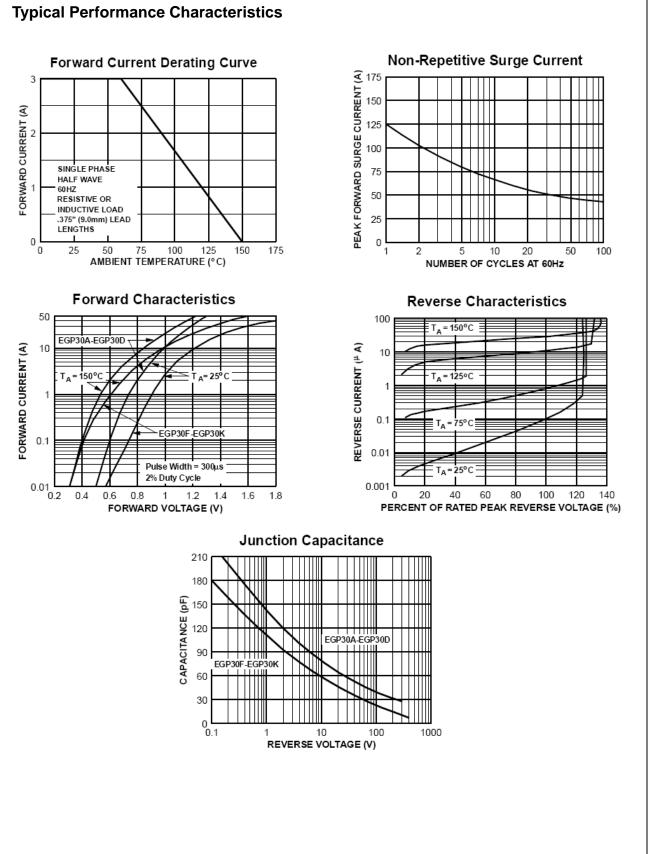

EGP30A - EGP30K 3.0 Ampere Glass Passivated High Efficiency Rectifiers



trr -

🗕 1.0cm 🖛

SET TIME BASE FOR

5/10 ns/ cm


+0.5A

0

-0.25A

-1.0A

## **Reverse Recovery Time Characterstic and Test Circuit Diagram**

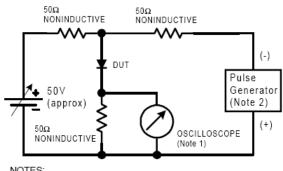

NOTES:



<sup>1.</sup> Rise time = 7.0 ns max; Input impedance = 1.0 megaohm 22 pf. 2. Rise time = 10 ns max; Source impedance = 50 ohms.



SEMICONDUCTOR

#### TRADEMARKS

The following are registered and unregistered trademarks and service marks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACEx®	Green FPS™	Power247 <sup>®</sup>	SuperSOT™-8
			•
Build it Now™	Green FPS™ e-Series™	POWEREDGE®	SyncFET™
CorePLUS™	GTO™	Power-SPM™	The Power Franchise <sup>®</sup>
CROSSVOLT™	<i>i-Lo</i> ™	PowerTrench <sup>®</sup>	franchise
CTL™	IntelliMAX™	Programmable Active Droop™	franchise
Current Transfer Logic™	ISOPLANAR™	QFET <sup>®</sup>	TinyBoost™
EcoSPARK <sup>®</sup>	MegaBuck™	QS™	TinyBuck™
<b>F</b> <sup>®</sup>	MICROCOUPLER™	QT Optoelectronics <sup>™</sup>	TinyLogic <sup>®</sup>
Fairchild <sup>®</sup>	MicroFET™	Quiet Series™	TINYOPTO™
Fairchild Semiconductor <sup>®</sup>	MicroPak™	RapidConfigure™	TinyPower™
FACT Quiet Series™	Motion-SPM™	SMART START™	TinyPWM™
FACT <sup>®</sup>	OPTOLOGIC <sup>®</sup>	SPM®	TinyWire™
FAST <sup>®</sup>	OPTOPLANAR <sup>®</sup>	STEALTH™	µSerDes™
FastvCore™	®	SuperFET™	UHC®
FPS™	PDP-SPM™	SuperSOT™-3	UniFET™
FRFET <sup>®</sup>	Power220 <sup>®</sup>	SuperSOT™-6	VCX™
Global Power Resource <sup>SM</sup>			

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
- 2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data; supplementary data will be pub- lished at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontin- ued by Fairchild semiconductor. The datasheet is printed for reference infor- mation only.

## PRODUCT STATUS DEFINITIONS

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor haves against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death a

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910 Japan Customer Focus Center Phone: 81–3–5817–1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC

Downloaded from Arrow.com.