

Small Signal Product

RATINGS AND CHARACTERISTICS CURVES

($T_A=25^{\circ}\text{C}$ unless otherwise noted)

Fig. 1 Non-Repetitive Peak Pulse Power VS. Pulse Time

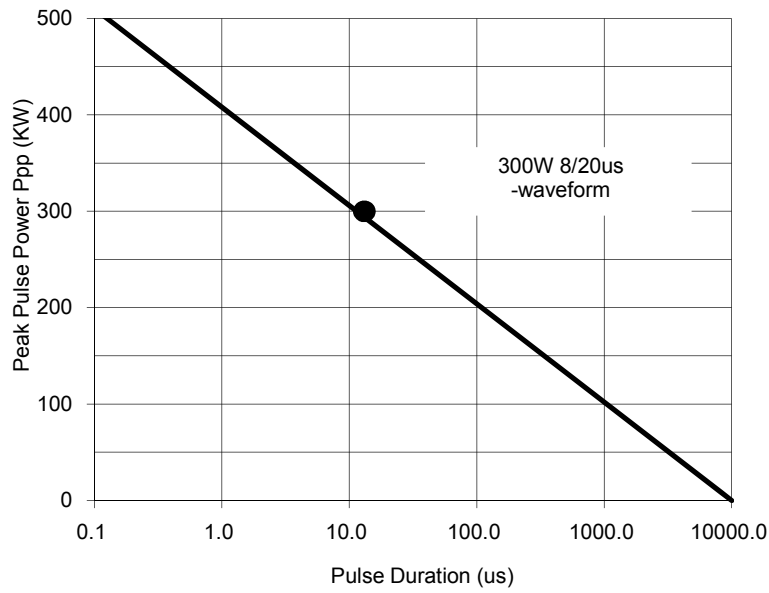


Fig. 2 Pulse Waveform

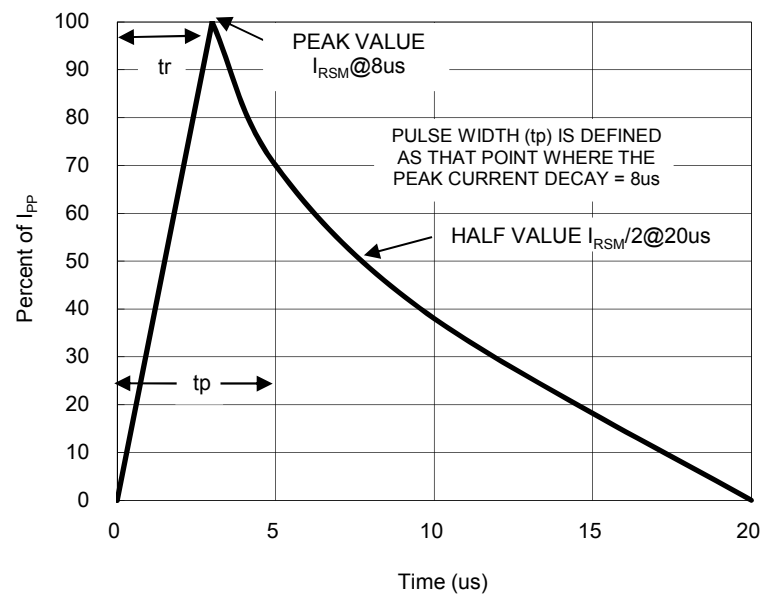


Fig.3 Admissible Power Dissipation Curve

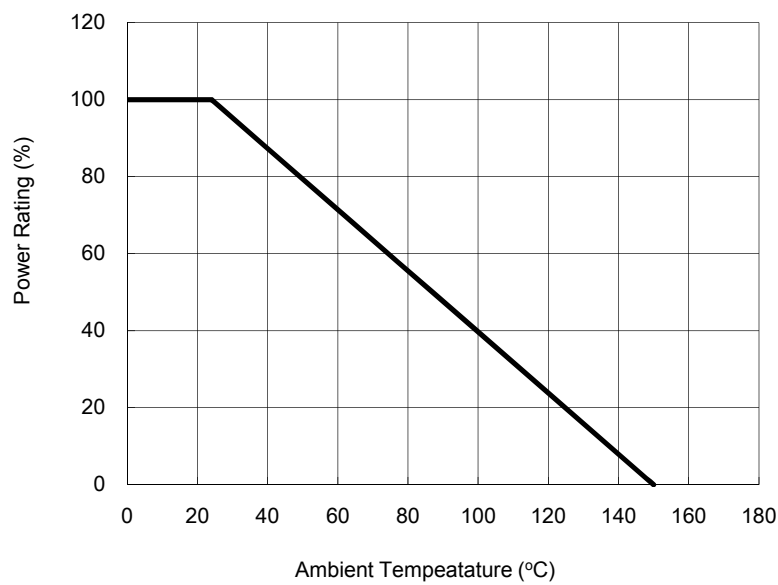


Fig. 4 Typical Junction Capacitance



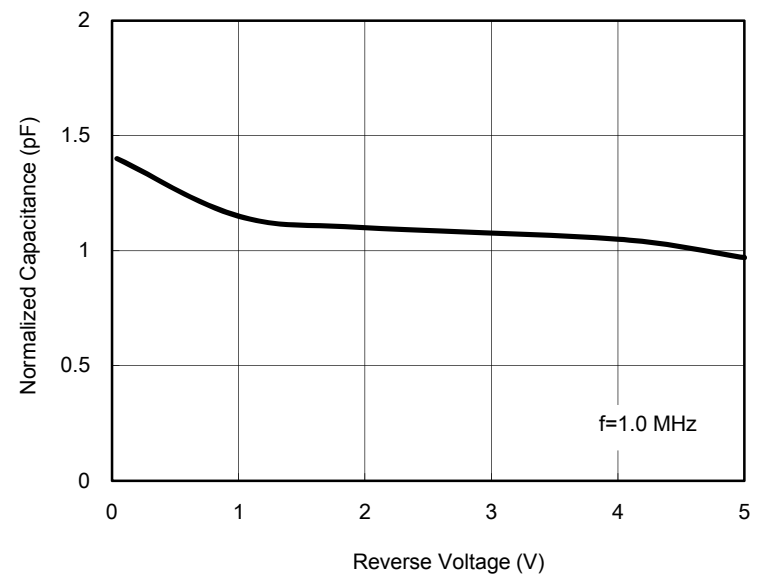


Fig. 5 Clamping Voltage VS. Peak Pulse Current

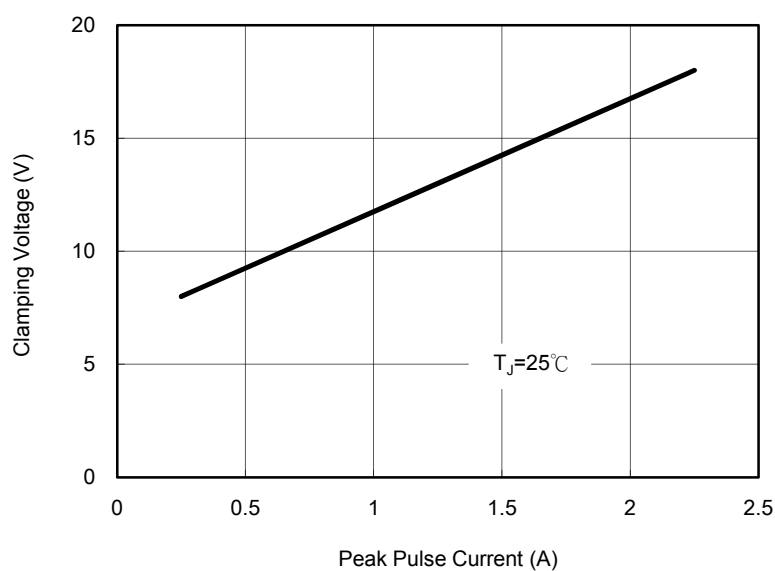


Small Signal Product

ORDER INFORMATION (EXAMPLE)

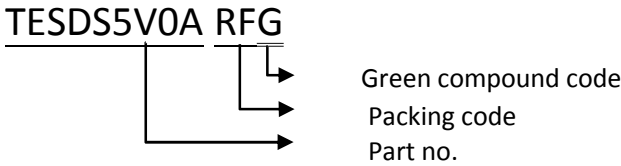


PACKAGE OUTLINE DIMENSIONS
SOT-26

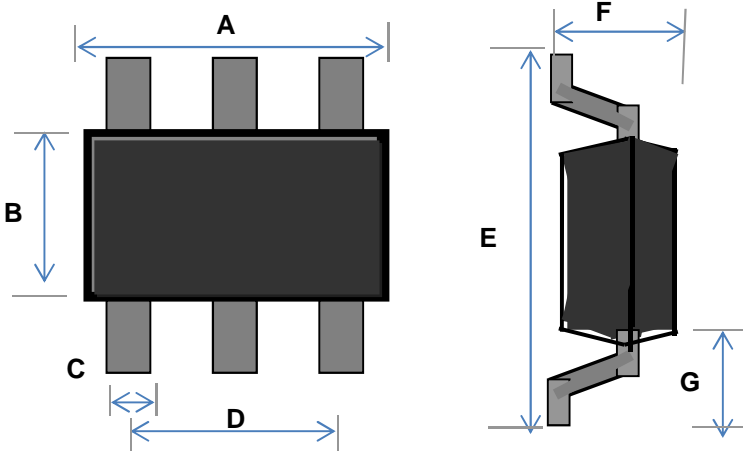

DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	2.800	3.100	0.110	0.122
B	1.500	1.750	0.059	0.069
C	0.250	0.500	0.010	0.020
D	1.800	2.000	0.071	0.079
E	2.650	2.950	0.104	0.116
F	0.900	1.450	0.035	0.057
G	0.475	0.725	0.019	0.029

SUGGEST PAD LAYOUT

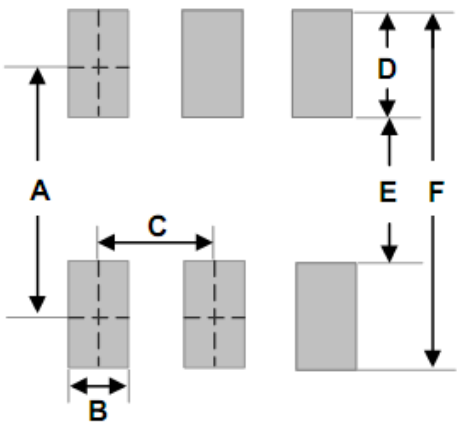

DIM.	Unit (mm)	Unit (inch)
	Typ.	Typ.
A	2.50	0.098
B	0.60	0.024
C	0.95	0.037
D	1.10	0.043
E	1.40	0.055
F	3.60	0.142

Note: 1. The suggested land pattern dimensions have been provided for reference only, as actual pad layouts may vary depending on application.


APPLICATIONS INFORMATION

- ◇ Designed to protect high speed data interfaces
- ◇ Designed to protect four data lines from transient over-voltages by clamping them to a fixed reference
- ◇ Designed to protect sensitive components which are connected to data and transmission lines from overvoltage caused by electrostatic discharge (ESD), electrical fast transients (EFT), and lightning.
- ◇ TESDS5V0A incorporates eight surge rated, low capacitance steering diodes and a TVS diode in a single package
- ◇ During transient conditions, the steering diodes direct the transient to either the positive side of the power supply line or to ground
- ◇ The internal TVS diode prevents over-voltage on the power line, protecting any downstream components


Small Signal Product

CIRCUIT BOARD LAYOUT RECOMMENDATIONS


- ◇ To protect data lines and the power line, connect pin 5 directly to the VDD. In this configuration the data lines are referenced to the supply voltage. The internal TVS diode prevents over-voltage on the supply rail.
- ◇ The TESDS5V0A can be isolated from the power supply by adding a series resistor between pin 5 and VDD. A value of 100k Ω is recommended. The internal TVS and steering diodes remain biased, providing the advantage of lower capacitance.
- ◇ In applications where no positive supply reference is available, or complete supply isolation is desired, the internal TVS may be used as the reference. In this case, pin 5 is not connected. The steering diodes will begin to conduct when the voltage on the protected line exceeds the working voltage of the TVS (plus one diode drop).

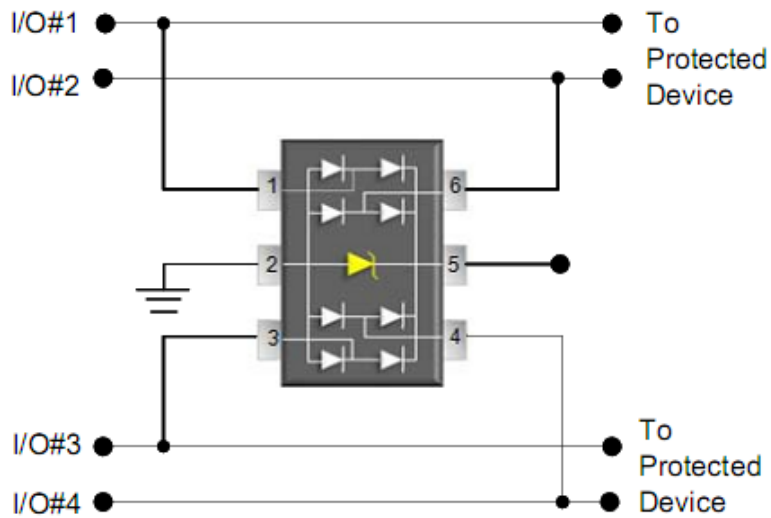

Data Line and Power Supply Protection Using Vcc as reference

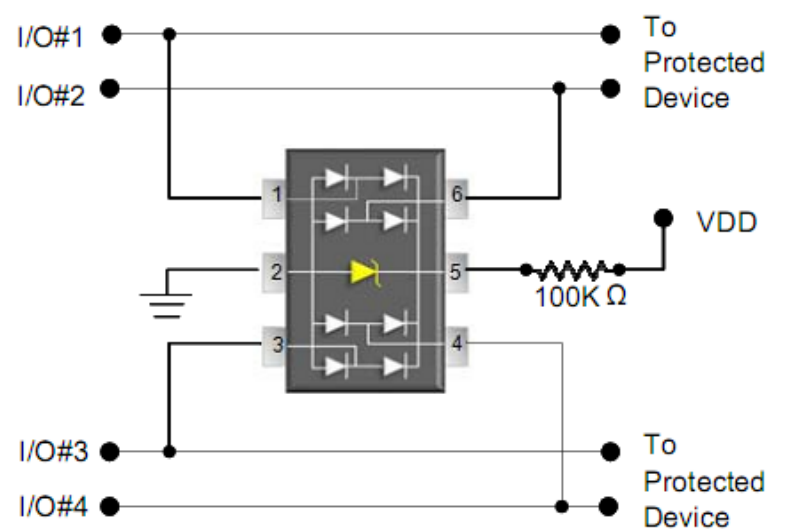

Data Line Protection with Bias and Power Supply Isolation

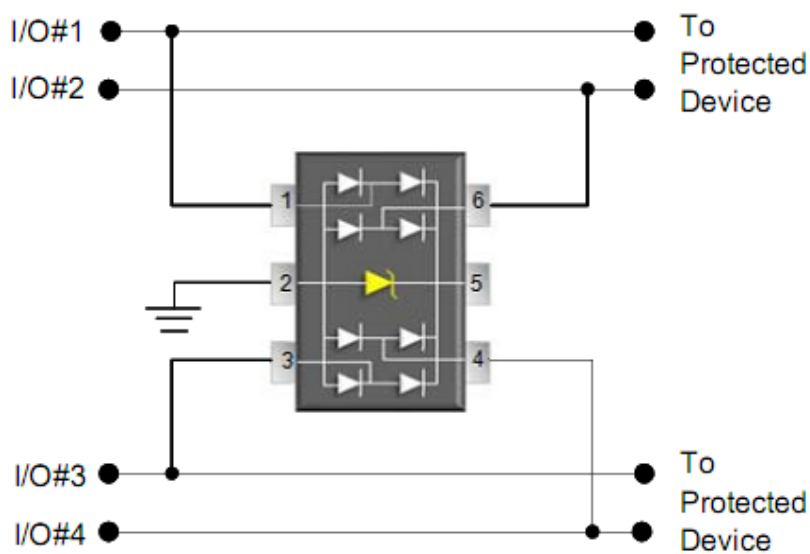

Data Line Protection Using Internal TVS Diode as Reference

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.