

SPECIFICATIONS (T _J = 25 °C UNLESS OTHERWISE NOTED)							
Parameter	Symbol	Test Condition		Min	Typ	Max	Unit
Static							
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{GS} = 0 V, I _D = 10 μA	N-Ch	20	24		V
		V _{GS} = 0 V, I _D = -10 μA	P-Ch	-20	-24		
Gate Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 50 μA	N-Ch	0.4	0.9	1.5	
		V _{DS} = V _{GS} , I _D = -50 μA	P-Ch	-0.4	-0.9	-1.5	
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±8 V	N-Ch		±2	±100	nA
			P-Ch		±2	±100	
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 20 V, V _{GS} = 0 V	N-Ch		0.001	100	
		V _{DS} = -20 V, V _{GS} = 0 V	P-Ch		-0.001	-100	
		V _{DS} = 20 V, V _{GS} = 0 V, T _J = 55 °C	N-Ch			1	μA
		V _{DS} = -20 V, V _{GS} = 0 V, T _J = 55 °C	P-Ch			-1	
On-State Drain Current ^a	I _{D(on)}	V _{DS} ≥ 2.5 V, V _{GS} = 5.0 V	N-Ch	120			mA
		V _{DS} ≤ -2.5 V, V _{GS} = -5.0 V	P-Ch	-120			
		V _{DS} ≥ 4.5 V, V _{GS} = 8.0 V	N-Ch	400			
		V _{DS} ≤ -4.5 V, V _{GS} = -8.0 V	P-Ch	-400			
Drain-Source On-State Resistance ^a	r _{DS(on)}	V _{GS} = 2.5 V, I _D = 150 mA	N-Ch		1.6	2.5	Ω
		V _{GS} = -2.5 V, I _D = -75 mA	P-Ch		4	5	
		V _{GS} = 4.5 V, I _D = 250 mA	N-Ch		1.2	2.0	
		V _{GS} = -4.5 V, I _D = -180 mA	P-Ch		2.6	3.8	
Forward Transconductance ^a	g _{fs}	V _{DS} = 2.5 V, I _D = 50 mA	N-Ch		150		mS
		V _{DS} = -2.5 V, I _D = -50 mA	P-Ch		200		
Diode Forward Voltage ^a	V _{SD}	I _S = 50 mA, V _{GS} = 0 V	N-Ch		0.7	1.2	V
		I _S = -50 mA, V _{GS} = 0 V	P-Ch		-0.7	-1.2	
Dynamic ^b							
Total Gate Charge	Q _g	N-Channel V _{DS} = 5 V, V _{GS} = 4.5 V, I _D = 100 mA P-Channel V _{DS} = -5 V, V _{GS} = -4.5 V, I _D = -100 mA	N-Ch		300	450	pC
			P-Ch		300	450	
Gate-Source Charge	Q _{gs}		N-Ch		25		
			P-Ch		25		
Gate-Drain Charge	Q _{gd}		N-Ch		100		
			P-Ch		100		
Input Capacitance	C _{iss}	N-Channel V _{DS} = 5 V, V _{GS} = 0 V P-Channel V _{DS} = -5 V, V _{GS} = 0 V	N-Ch		15		pF
			P-Ch		15		
Output Capacitance	C _{oss}		N-Ch		11		
			P-Ch		11		
Reverse Transfer Capacitance	C _{rss}		N-Ch		5		
			P-Ch		5		
Switching							
Turn-On Time	t _{d(on)}	N-Channel V _{DD} = 3 V, R _L = 100 Ω I _D = 0.25 A, V _{GEN} = 4.5 V, R _g = 10 Ω P-Channel V _{DD} = -3 V, R _L = 100 Ω I _D = -0.25 A, V _{GEN} = -4.5 V, R _g = 10 Ω	N-Ch		7	12	ns
			P-Ch		7	12	
Rise Time	t _r		N-Ch		25	35	
			P-Ch		25	35	
Turn-Off Delay Time	t _{d(off)}		N-Ch		19	30	
			P-Ch		19	30	
Fall Time	t _f		N-Ch		9	15	
			P-Ch		9	15	







Notes

- a. Guaranteed by design, not subject to production testing.
 b. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.






TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

N-CHANNEL

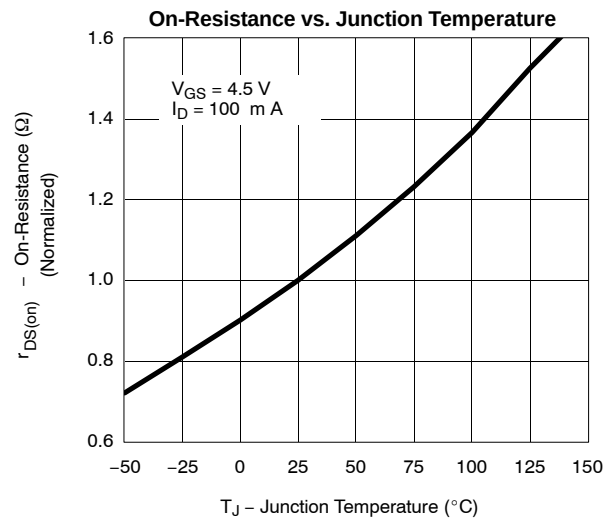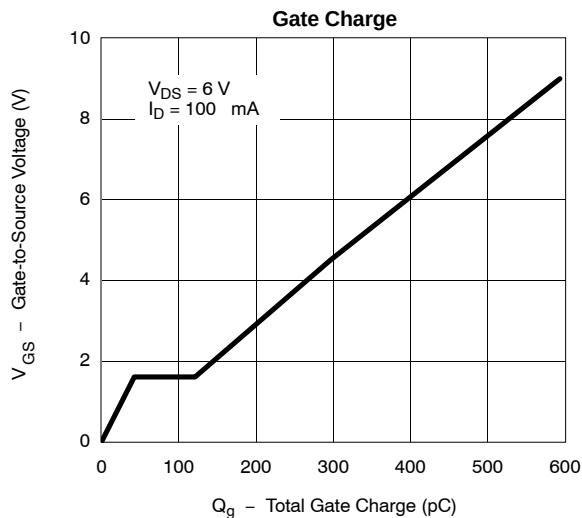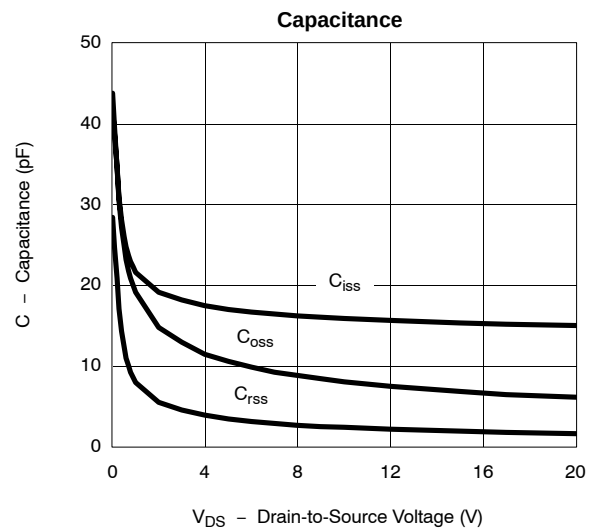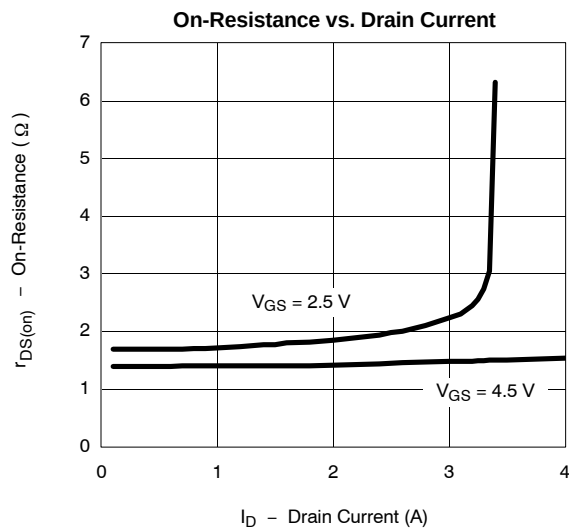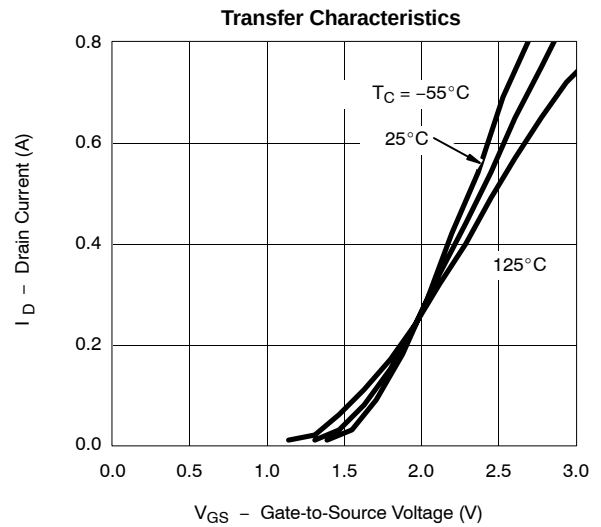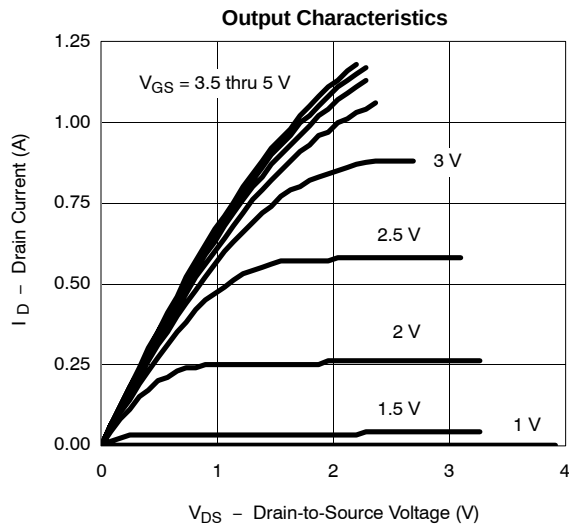

TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)







N-CHANNEL

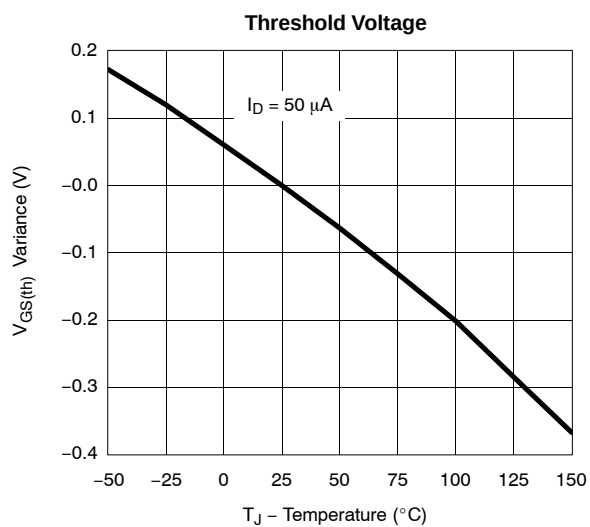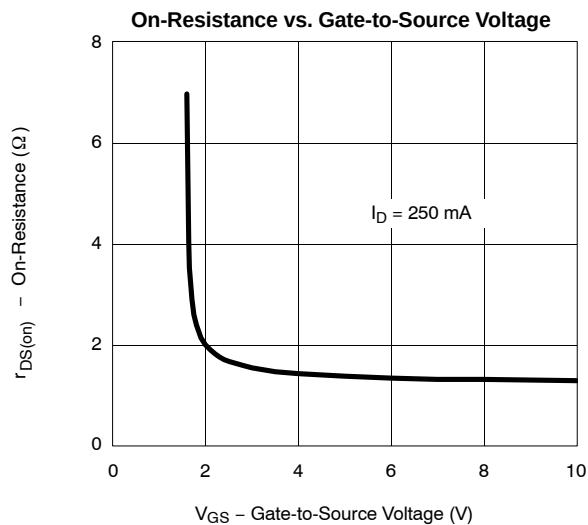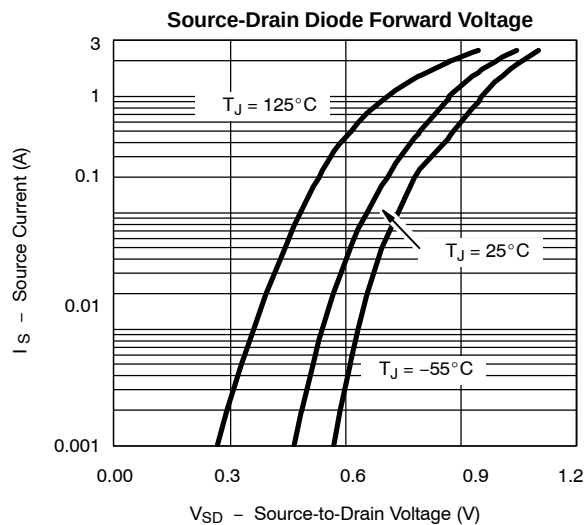






TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

P-CHANNEL

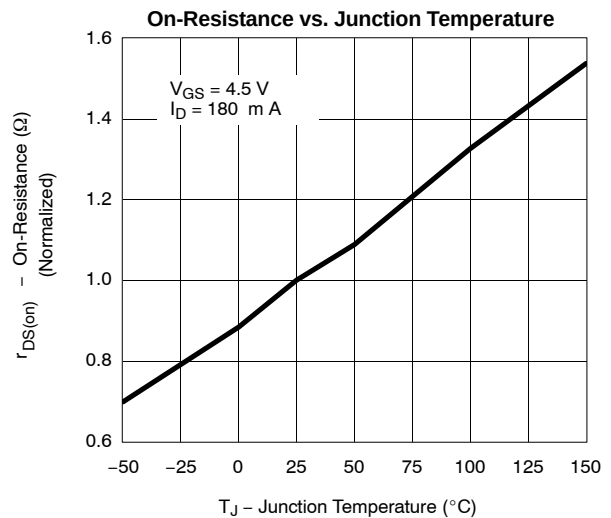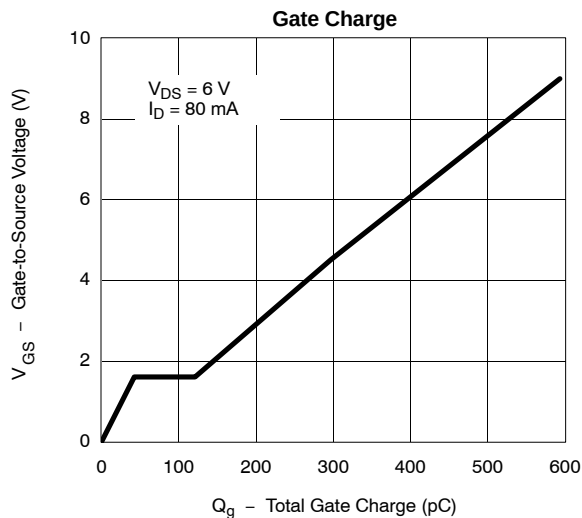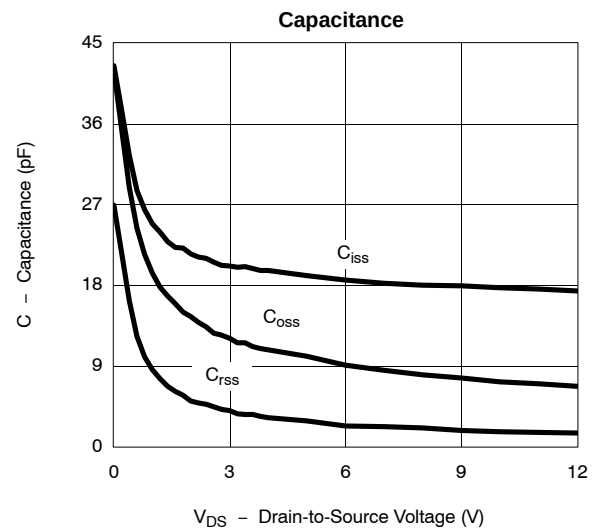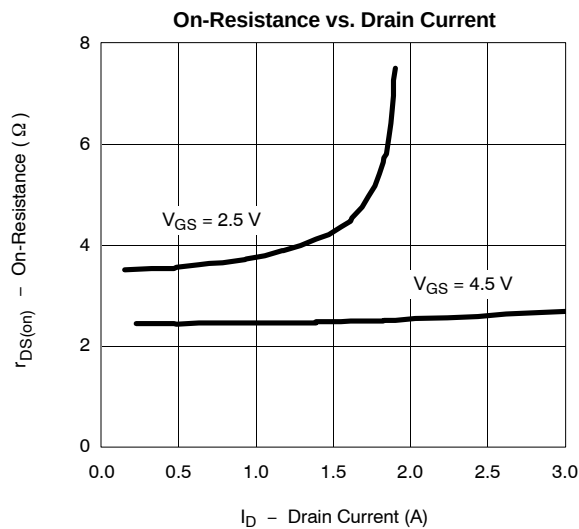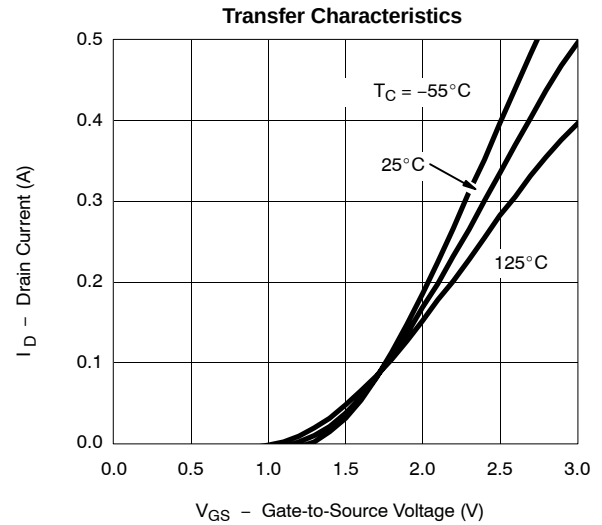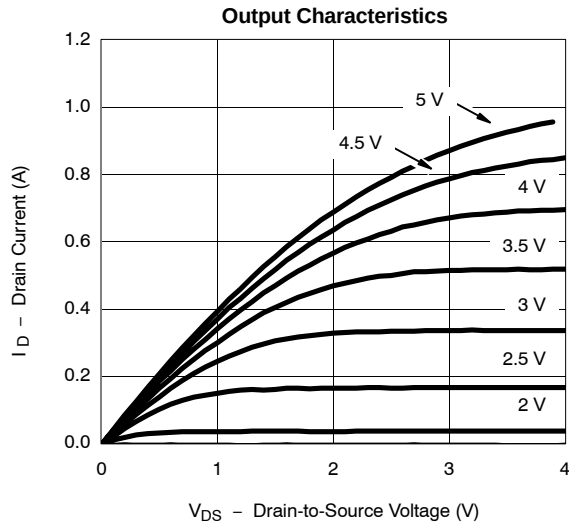

TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)

P-CHANNEL

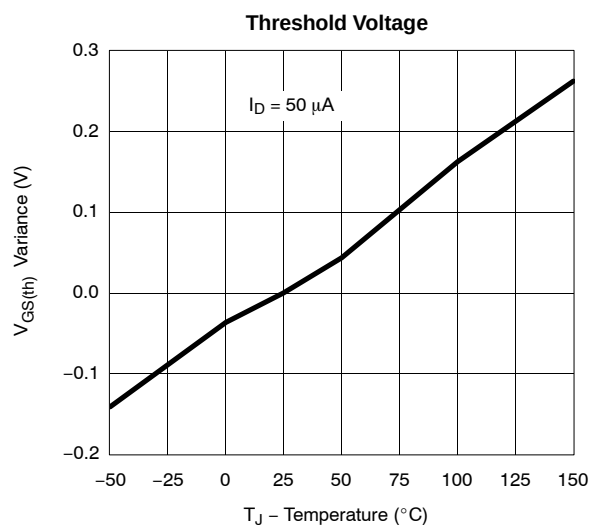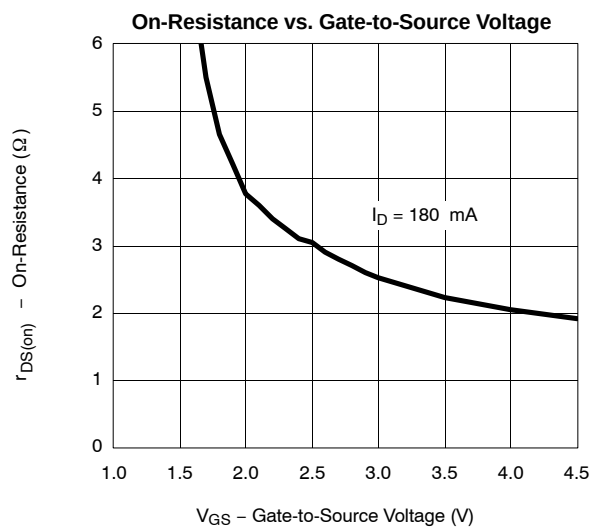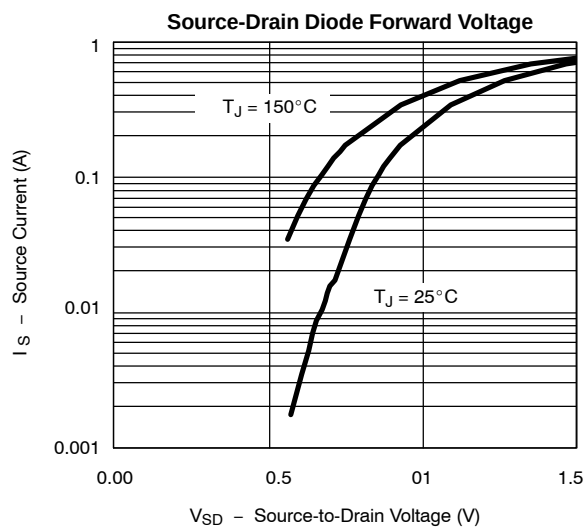



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.