

## TRUTH TABLE

| TC74VHCT125A   |   |         | TC74VHCT126A |   |         |
|----------------|---|---------|--------------|---|---------|
| INPUTS         |   | OUTPUTS | INPUTS       |   | OUTPUTS |
| $\overline{G}$ | A | Y       | G            | A | Y       |
| H              | X | Z       | L            | X | Z       |
| L              | L | L       | H            | L | L       |
| L              | H | H       | H            | H | H       |

X: Don't Care  
Z: High Impedance

X: Don't Care  
Z: High Impedance

## ABSOLUTE MAXIMUM RATINGS

| PARAMETER             | SYMBOL    | VALUE                          | UNIT |
|-----------------------|-----------|--------------------------------|------|
| Supply Voltage Range  | $V_{CC}$  | -0.5~7.0                       | V    |
| DC Input Voltage      | $V_{IN}$  | -0.5~7.0                       | V    |
| DC Output Voltage     | $V_{OUT}$ | -0.5~7.0 (Note 1)              | V    |
|                       |           | -0.5 ~ $V_{CC}$ + 0.5 (Note 2) |      |
| Input Diode Current   | $I_{IK}$  | -20                            | mA   |
| Output Diode Current  | $I_{OK}$  | ±20 (Note 3)                   | mA   |
| DC Output Current     | $I_{OUT}$ | ±25                            | mA   |
| DC Vcc/Ground Current | $I_{CC}$  | ±50                            | mA   |
| Power Dissipation     | $P_D$     | 180                            | mW   |
| Storage Temperature   | $T_{stg}$ | -65~150                        | °C   |

(Note 1) : Output in Off-State

(Note 2) : High or Low State.  $I_{OUT}$  absolute maximum rating must be observed.(Note 3) :  $V_{OUT} < GND$ ,  $V_{OUT} > V_{CC}$ 

## RECOMMENDED OPERATING CONDITIONS

| PARAMETER                | SYMBOL    | VALUE                | UNIT |
|--------------------------|-----------|----------------------|------|
| Supply Voltage           | $V_{CC}$  | 4.5~5.5              | V    |
| Input Voltage            | $V_{IN}$  | 0~5.5                | V    |
| Output Voltage           | $V_{OUT}$ | 0~5.5 (Note 4)       | V    |
|                          |           | 0~ $V_{CC}$ (Note 5) |      |
| Operating Temperature    | $T_{opr}$ | -40~85               | °C   |
| Input Rise and Fall Time | $dt/dV$   | 0~20                 | ns/V |

(Note 4) : Output in Off-State

(Note 5) : High or Low State

## DC ELECTRICAL CHARACTERISTICS

| PARAMETER                        | SYMBOL           | CONDITON                                                                                          |                           | Ta = 25°C           |      |      | Ta = - 40~85°C |      | UNIT   |      |
|----------------------------------|------------------|---------------------------------------------------------------------------------------------------|---------------------------|---------------------|------|------|----------------|------|--------|------|
|                                  |                  |                                                                                                   |                           | V <sub>CC</sub> (V) | MIN. | TYP. | MAX.           | MIN. |        | MAX. |
| High - Level Input Voltage       | V <sub>IH</sub>  |                                                                                                   |                           | 4.5~5.5             | 2.0  | —    | —              | 2.0  | —      | V    |
| Low - Level Input Voltage        | V <sub>IL</sub>  |                                                                                                   |                           | 4.5~5.5             | —    | —    | 0.8            | —    | 0.8    | V    |
| High - Level Output Voltage      | V <sub>OH</sub>  | V <sub>IN</sub> =<br>V <sub>IH</sub> or V <sub>IL</sub>                                           | I <sub>OH</sub> = - 50 μA | 4.5                 | 4.40 | 4.50 | —              | 4.40 | —      | V    |
|                                  |                  |                                                                                                   | I <sub>OH</sub> = - 8 mA  | 4.5                 | 3.94 | —    | —              | 3.80 | —      |      |
| Low - Level Output Voltage       | V <sub>OL</sub>  | V <sub>IN</sub> =<br>V <sub>IH</sub> or V <sub>IL</sub>                                           | I <sub>OL</sub> = 50 μA   | 4.5                 | —    | 0.0  | 0.1            | —    | 0.1    | V    |
|                                  |                  |                                                                                                   | I <sub>OL</sub> = 8 mA    | 4.5                 | —    | —    | 0.36           | —    | 0.44   |      |
| Input Leakage Current            | I <sub>IN</sub>  | V <sub>IN</sub> = 5.5 V or GND                                                                    |                           | 0~5.5               | —    | —    | ± 0.1          | —    | ± 1.0  | μA   |
| 3-State Output Off-state Current | I <sub>OZ</sub>  | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub><br>V <sub>OUT</sub> = V <sub>CC</sub> or GND |                           | 5.5                 | —    | —    | ± 0.25         | —    | ± 2.50 |      |
| Quiescent Supply Current         | I <sub>CC</sub>  | V <sub>IN</sub> = V <sub>CC</sub> or GND                                                          |                           | 5.5                 | —    | —    | 4.0            | —    | 40.0   |      |
|                                  | I <sub>CCT</sub> | PER INPUT : V <sub>IN</sub> = 3.4 V<br>OTHER INPUT : V <sub>CC</sub> or GND                       |                           | 5.5                 | —    | —    | 1.35           | —    | 1.50   | mA   |
| Output Leakage Current           | I <sub>OPD</sub> | V <sub>OUT</sub> = 5.5 V                                                                          |                           | 0                   | —    | —    | 0.5            | —    | 5.0    | μA   |

AC ELECTRICAL CHARACTERISTICS (Input  $t_r = t_f = 3\text{ ns}$ )

| PARAMETER                                 | SYMBOL                                 | TEST CONDITION |                     |         | Ta = 25°C |      |      | Ta = - 40~85°C |      | UNIT |
|-------------------------------------------|----------------------------------------|----------------|---------------------|---------|-----------|------|------|----------------|------|------|
|                                           |                                        |                | V <sub>CC</sub> (V) | CL (pF) | MIN.      | TYP. | MAX. | MIN.           | MAX. |      |
| Propagation Delay Time                    | t <sub>pLH</sub>                       |                | 5.0 ± 0.5           | 15      | —         | 3.8  | 5.5  | 1.0            | 6.5  | ns   |
|                                           | t <sub>pHL</sub>                       |                |                     | 50      | —         | 5.3  | 7.5  | 1.0            | 8.5  |      |
| Output Enable Time                        | t <sub>pZL</sub>                       | RL = 1 kΩ      | 5.0 ± 0.5           | 15      | —         | 3.6  | 5.1  | 1.0            | 6.0  |      |
|                                           | t <sub>pZH</sub>                       |                |                     | 50      | —         | 5.1  | 7.1  | 1.0            | 8.0  |      |
| Output Disable Time                       | t <sub>pLZ</sub><br>t <sub>pHZ</sub>   | RL = 1 kΩ      | 5.0 ± 0.5           | 50      | —         | 6.1  | 8.8  | 1.0            | 10.0 |      |
| Output to Output Skew                     | t <sub>osLH</sub><br>t <sub>osHL</sub> | (Note 6)       | 5.0 ± 0.5           | 50      | —         | —    | 1.0  | —              | 1.0  |      |
| Input Capacitance                         | C <sub>IN</sub>                        |                |                     |         | —         | 4    | 10   | —              | 10   | pF   |
| Output Capacitance                        | C <sub>OUT</sub>                       |                |                     |         | —         | 6    | —    | —              | —    |      |
| Power Dissipation<br>Capacitance (Note 7) | C <sub>PD</sub>                        | TC74VHCT125A   |                     |         | —         | 14   | —    | —              | —    |      |
|                                           |                                        | TC74VHCT126A   |                     |         | —         | 15   | —    | —              | —    |      |

(Note 6) : Parameter guaranteed by design.  $t_{osLH} = |t_{pLHm} - t_{pLHn}|$ ,  $t_{osHL} = |t_{pHLm} - t_{pHLn}|$

(Note 7) : C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load.

Average operating current can be obtained by the equation :


$$I_{CC(opr.)} = C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC}/4 \text{ (per Gate)}$$

NOISE CHARACTERISTICS (Input  $t_r = t_f = 3\text{ ns}$ )

| PARAMETER                                       | SYMBOL           | TEST CONDITION         | Ta = 25°C           |               | UNIT |
|-------------------------------------------------|------------------|------------------------|---------------------|---------------|------|
|                                                 |                  |                        | V <sub>CC</sub> (V) | TYP.<br>LIMIT |      |
| Quiet Output<br>Maximum Dynamic V <sub>OL</sub> | V <sub>OLP</sub> | C <sub>L</sub> = 50 pF | 5.0                 | 0.5<br>0.8    | V    |
| Quiet Output<br>Minimum Dynamic V <sub>OL</sub> | V <sub>OLV</sub> | C <sub>L</sub> = 50 pF | 5.0                 | -0.5<br>-0.8  | V    |
| Minimum High Level<br>Dynamic Input Voltage     | V <sub>IHD</sub> | C <sub>L</sub> = 50 pF | 5.0                 | —<br>2.0      | V    |
| Maximum Low Level<br>Dynamic Input Voltage      | V <sub>ILD</sub> | C <sub>L</sub> = 50 pF | 5.0                 | —<br>0.8      | V    |


SOP 14 PIN (200 mil BODY) PACKAGE DIMENSIONS (SOP14-P-300-1.27)

Unit in mm

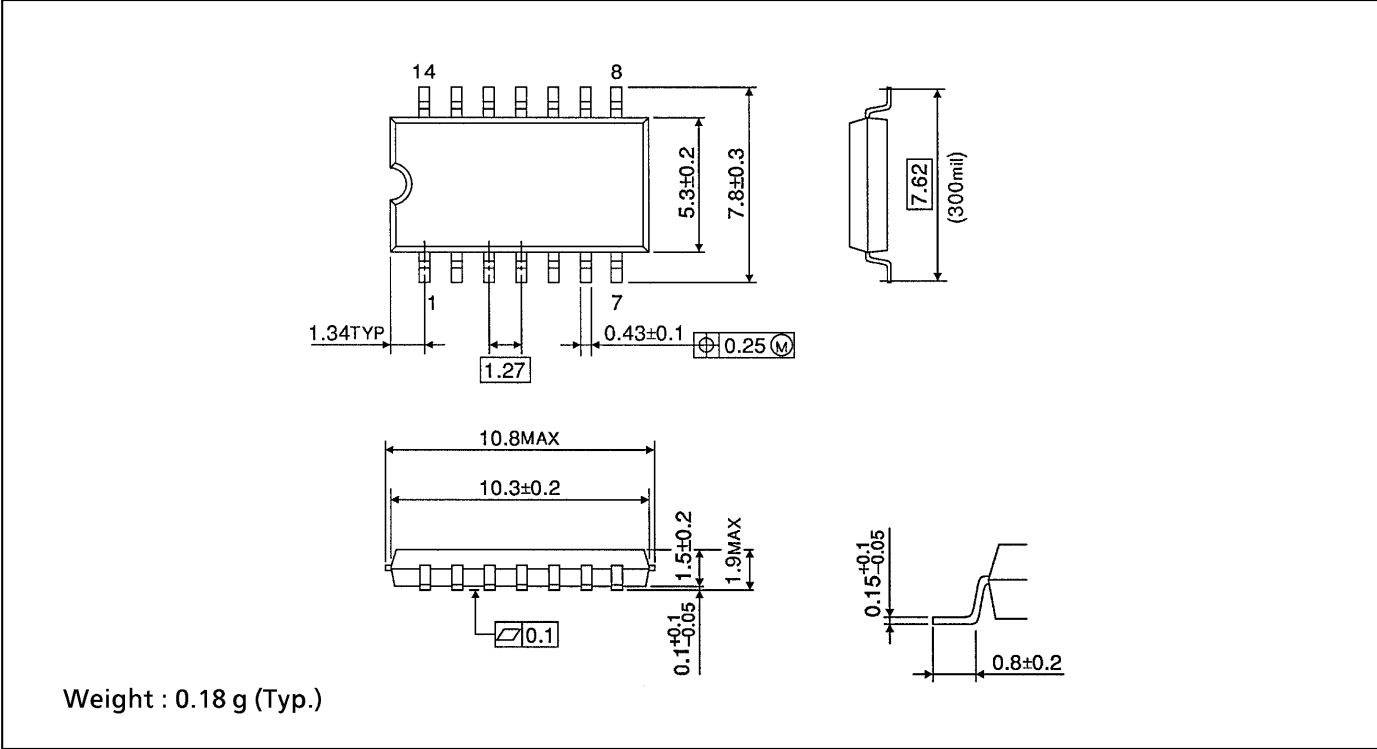


SOP 14 PIN (150 mil BODY) PACKAGE DIMENSIONS (SOP14-P-150-1.27)

Unit in mm

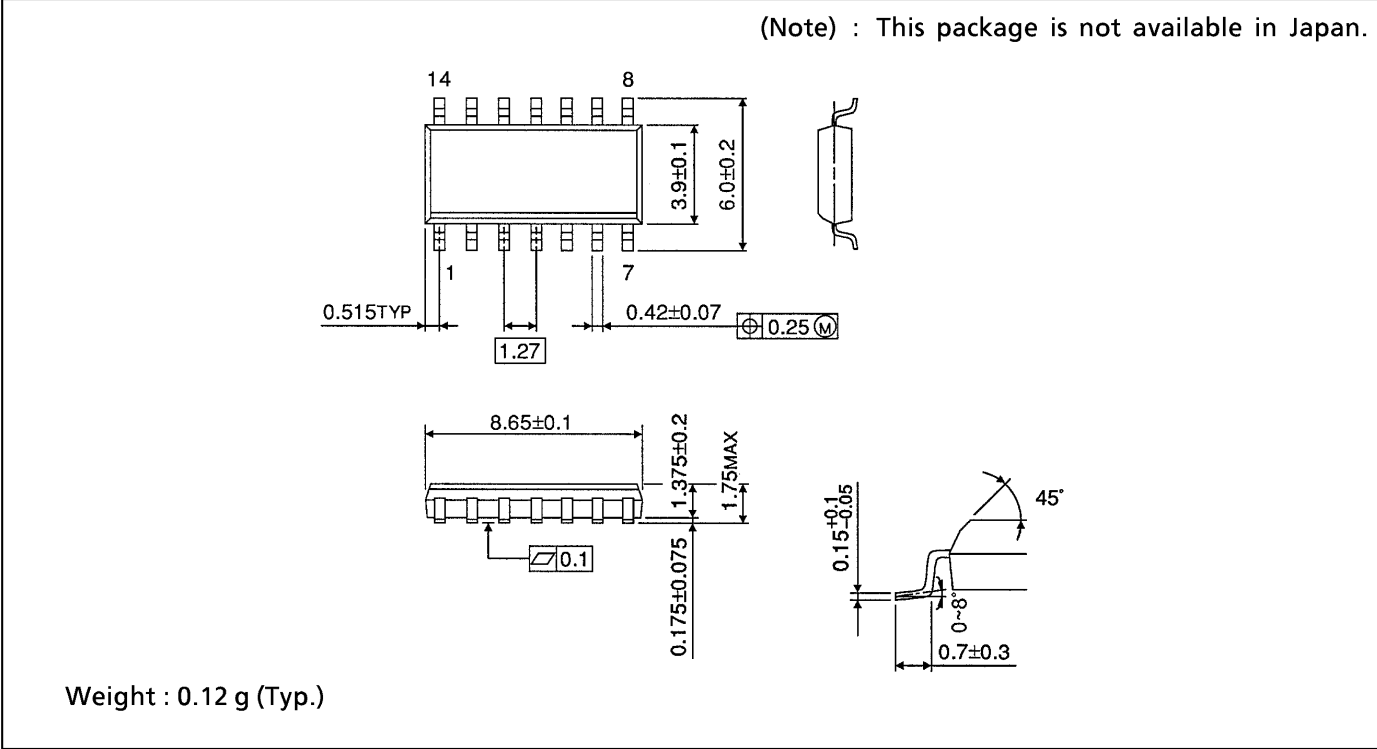

TSSOP 14 PIN PACKAGE DIMENSIONS (TSSOP14-P-0044-0.65)

Unit in mm

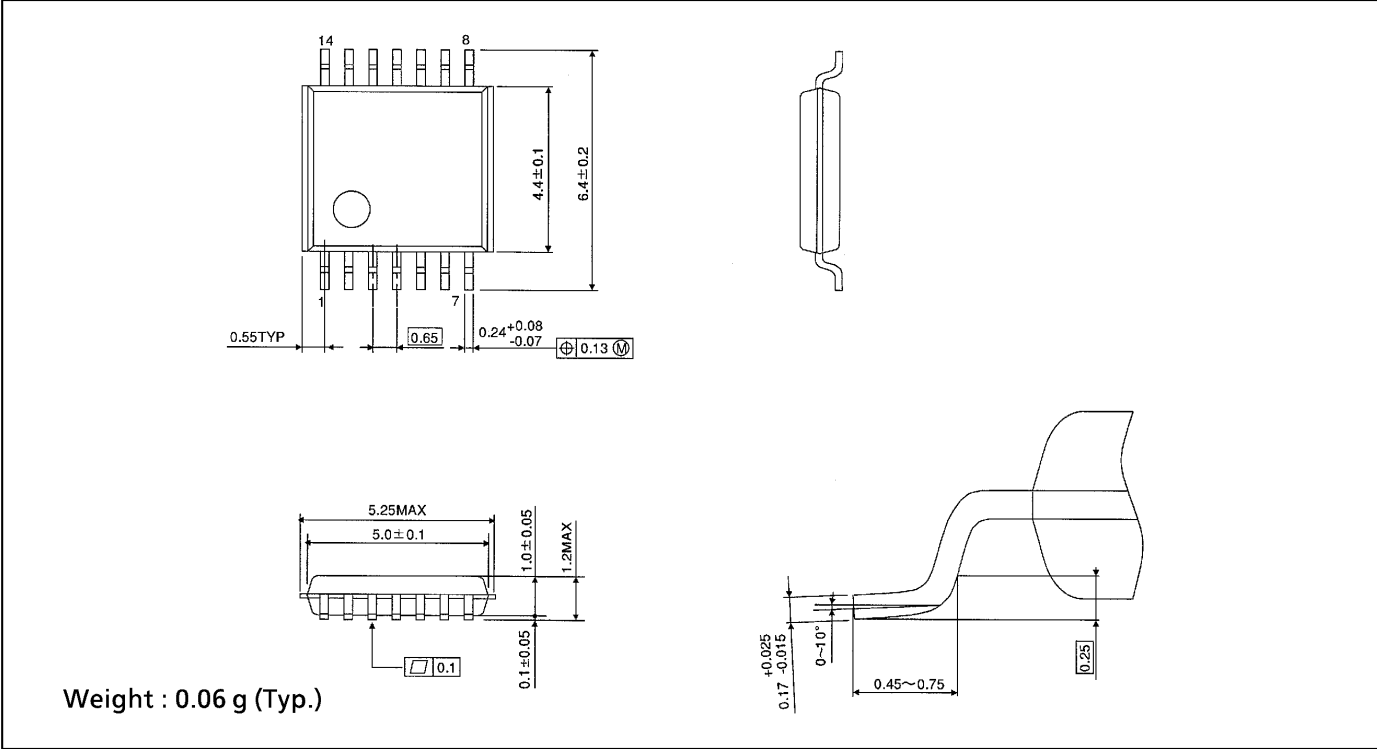

**RESTRICTIONS ON PRODUCT USE**

000707EBA

- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.