
Dimensions (mm)											
Part Number	D	D'	L	Ľ	F	ď	C	E			
A0820-2R5474-R	8.0	8.5	20.5	21.0	3.5	0.50	20.0	25.0			
A1020-2R5105-R	10.0	10.5	21.8	22.3	5.0	0.60	20.0	25.0			
A1030-2R5155-R	10.0	10.5	31.0	31.5	5.0	0.60	20.0	25.0			
A1635-2R5475-R	16.0	16.5	37.5	38.0	7.5	0.80	20.0	25.0			
Tolerances		Maxi	mum	•	± 0.5	± 0.02	Minimum				

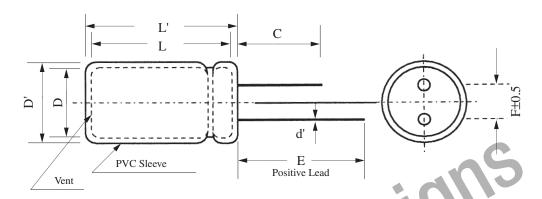

Part Numbering System									
Α			-	2 R 5					
Series	Dimensions (mm)			Voltage (V)	Capacitance (µF)				
Code	Dillicitati	ons (IIIIII)		R is decimal	Capacitance (μF)				
B = Very	Diameter	Length	1		Value Multiplier				
Low ESR		-10		2R5 = 2.5V	Example: 475 = 47 x 10 <sup>5</sup> µF or 4.7F				

# **Packaging Information**

Standard packaging: Bulk, 100 units per package.

Special packaging available upon request. Contact factory.

## **Part Marking**

Manufacturer
Capacitance (F)
Max. Operating Voltage (V)
Series Code (or part number)
Polarity Marking

### **North America**

Cooper Bussmann 1225 Broken Sound Parkway NW Suite F Boca Raton, FL 33487-3533 Tel: 1-561-998-4100

Tel: 1-561-998-4100 Fax: 1-561-241-6640 Toll Free: 1-888-414-2645 Cooper Bussmann P.O. Box 14460 St. Louis, MO 63178-4460 Tel: 1-636-394-2877 Fax: 1-636-527-1607

#### **Europe**

Cooper Bussmann Cooper (UK) Limited Burton-on-the-Wolds Leicestershire • LE12 5TH UK Tel: +44 (0) 1509 882 737 Fax: +44 (0) 1509 882 786 Cooper Bussmann Avda. Santa Eulalia, 290 08223

Terrassa, (Barcelona), Spain Tel: +34 937 362 812 +34 937 362 813 Fax: +34 937 362 719

### Asia Pacific

Cooper Bussmann 1 Jalan Kilang Timor #06-01 Pacific Tech Centre Singapore 159303 Tel: +65 278 6151 Fax: +65 270 4160

This bulletin is intended to present product design solutions and technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Cooper Bussmann does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

© 2007 Cooper Bussmann St. Louis, MO 63178 www.cooperbussmann.com





**PowerStor**®

Data Sheet 4302



1207 BU-SB07352 Page 2 of 2