

# Contents

|          |                                      |           |
|----------|--------------------------------------|-----------|
| <b>1</b> | <b>Description</b>                   | <b>6</b>  |
| <b>2</b> | <b>Signal description</b>            | <b>8</b>  |
| 2.1      | Serial Data output (Q)               | 8         |
| 2.2      | Serial Data input (D)                | 8         |
| 2.3      | Serial Clock (C)                     | 8         |
| 2.4      | Chip Select ( $\overline{S}$ )       | 8         |
| 2.5      | Hold ( $\overline{HOLD}$ )           | 8         |
| 2.6      | Write Protect ( $\overline{W}$ )     | 9         |
| 2.7      | $V_{SS}$ ground                      | 9         |
| 2.8      | Supply voltage ( $V_{CC}$ )          | 9         |
| 2.9      | Supply voltage ( $V_{CC}$ )          | 9         |
| 2.9.1    | Operating supply voltage $V_{CC}$    | 9         |
| 2.9.2    | Device reset                         | 9         |
| 2.9.3    | Power-up conditions                  | 10        |
| 2.9.4    | Power-down                           | 10        |
| <b>3</b> | <b>Connecting to the SPI bus</b>     | <b>11</b> |
| 3.1      | SPI modes                            | 12        |
| <b>4</b> | <b>Operating features</b>            | <b>13</b> |
| 4.1      | Hold condition                       | 13        |
| 4.2      | Status register                      | 13        |
| 4.3      | Data protection and protocol control | 14        |
| <b>5</b> | <b>Memory organization</b>           | <b>15</b> |
| <b>6</b> | <b>Instructions</b>                  | <b>16</b> |
| 6.1      | Write Enable (WREN)                  | 16        |
| 6.2      | Write Disable (WRDI)                 | 17        |
| 6.3      | Read Status Register (RDSR)          | 18        |
| 6.3.1    | WIP bit                              | 18        |
| 6.3.2    | WEL bit                              | 18        |

|           |                                     |           |
|-----------|-------------------------------------|-----------|
| 6.3.3     | BP1, BP0 bits                       | 18        |
| 6.4       | Write Status Register (WRSR)        | 20        |
| 6.5       | Read from Memory Array (READ)       | 22        |
| 6.6       | Write to Memory Array (WRITE)       | 23        |
| <b>7</b>  | <b>Power-up and delivery states</b> | <b>25</b> |
| 7.1       | Power-up state                      | 25        |
| 7.2       | Initial delivery state              | 25        |
| <b>8</b>  | <b>Maximum rating</b>               | <b>26</b> |
| <b>9</b>  | <b>DC and AC parameters</b>         | <b>27</b> |
| <b>10</b> | <b>Package mechanical data</b>      | <b>37</b> |
| <b>11</b> | <b>Part numbering</b>               | <b>40</b> |
| <b>12</b> | <b>Revision history</b>             | <b>41</b> |

## List of tables

|           |                                                                                                 |    |
|-----------|-------------------------------------------------------------------------------------------------|----|
| Table 1.  | Device summary . . . . .                                                                        | 1  |
| Table 2.  | Signal names . . . . .                                                                          | 7  |
| Table 3.  | Write-protected block size . . . . .                                                            | 14 |
| Table 4.  | Instruction set . . . . .                                                                       | 16 |
| Table 5.  | Status register format . . . . .                                                                | 18 |
| Table 6.  | Address range bits . . . . .                                                                    | 22 |
| Table 7.  | Absolute maximum ratings . . . . .                                                              | 26 |
| Table 8.  | Operating conditions (M950x0) . . . . .                                                         | 27 |
| Table 9.  | Operating conditions (M950x0-W) . . . . .                                                       | 27 |
| Table 10. | Operating conditions (M950x0-R) . . . . .                                                       | 27 |
| Table 11. | AC test measurement conditions . . . . .                                                        | 27 |
| Table 12. | Capacitance . . . . .                                                                           | 28 |
| Table 13. | DC characteristics (M950x0, device grade 3) . . . . .                                           | 28 |
| Table 14. | DC characteristics (M950x0-W, device grade 6) . . . . .                                         | 29 |
| Table 15. | DC characteristics (M950x0-W, device grade 3) . . . . .                                         | 30 |
| Table 16. | DC characteristics (M950x0-R, device grade 6) . . . . .                                         | 30 |
| Table 17. | AC characteristics (M950x0, device grade 3) . . . . .                                           | 31 |
| Table 18. | AC characteristics (M950x0-W, device grade 6) . . . . .                                         | 32 |
| Table 19. | AC characteristics (M950x0-W, device grade 3) . . . . .                                         | 33 |
| Table 20. | AC characteristics (M950x0-R, device grade 6) . . . . .                                         | 34 |
| Table 21. | SO8N — 8-lead plastic small outline, 150 mils body width, package<br>mechanical data . . . . .  | 37 |
| Table 22. | TSSOP8 — 8-lead thin shrink small outline, package mechanical data . . . . .                    | 38 |
| Table 23. | UFDFPN8 (MLP8) 8-lead ultra thin fine pitch dual flat package no lead<br>2 × 3mm, data. . . . . | 39 |
| Table 24. | Ordering information scheme . . . . .                                                           | 40 |
| Table 25. | Document revision history . . . . .                                                             | 41 |

## List of figures

|            |                                                                                                     |    |
|------------|-----------------------------------------------------------------------------------------------------|----|
| Figure 1.  | Logic diagram . . . . .                                                                             | 6  |
| Figure 2.  | 8-pin package connections . . . . .                                                                 | 6  |
| Figure 3.  | Bus master and memory devices on the SPI bus . . . . .                                              | 11 |
| Figure 4.  | SPI modes supported . . . . .                                                                       | 12 |
| Figure 5.  | Hold condition activation . . . . .                                                                 | 13 |
| Figure 6.  | Block diagram . . . . .                                                                             | 15 |
| Figure 7.  | Write Enable (WREN) sequence . . . . .                                                              | 16 |
| Figure 8.  | Write Disable (WRDI) sequence . . . . .                                                             | 17 |
| Figure 9.  | Read Status Register (RDSR) sequence . . . . .                                                      | 19 |
| Figure 10. | Write Status Register (WRSR) sequence . . . . .                                                     | 20 |
| Figure 11. | Read from Memory Array (READ) sequence . . . . .                                                    | 22 |
| Figure 12. | Byte Write (WRITE) sequence . . . . .                                                               | 23 |
| Figure 13. | Page Write (WRITE) sequence . . . . .                                                               | 24 |
| Figure 14. | AC test measurement I/O waveform . . . . .                                                          | 28 |
| Figure 15. | Serial input timing . . . . .                                                                       | 35 |
| Figure 16. | Hold timing . . . . .                                                                               | 35 |
| Figure 17. | Serial output timing . . . . .                                                                      | 36 |
| Figure 18. | SO8N — 8-lead plastic small outline 150 mils body width, package outline . . . . .                  | 37 |
| Figure 19. | TSSOP8 — 8-lead thin shrink small outline, package outline . . . . .                                | 38 |
| Figure 20. | UFDFPN8 (MLP8) 8-lead ultra thin fine pitch dual flat package no lead<br>2 × 3mm, outline . . . . . | 39 |


# 1 Description

The M95040 is a 4 Kbit (512 x 8) electrically erasable programmable memory (EEPROM), accessed by a high-speed SPI-compatible bus. The other members of the family (M95020 and M95010) are identical, though proportionally smaller (2 and 1 Kbit, respectively).


Each device is accessed by a simple serial interface that is SPI-compatible. The bus signals are C, D and Q.

The device is selected when Chip Select ( $\overline{S}$ ) is taken low. Communications with the device can be interrupted using Hold ( $\overline{HOLD}$ ). WRITE instructions are disabled by Write Protect ( $\overline{W}$ ).

**Figure 1. Logic diagram**

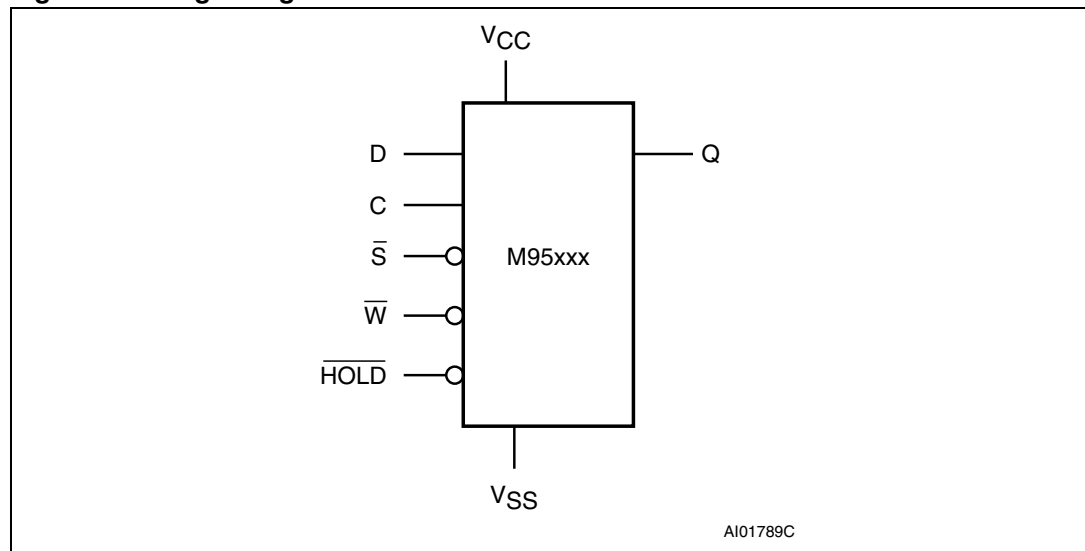

**Figure 2. 8-pin package connections**

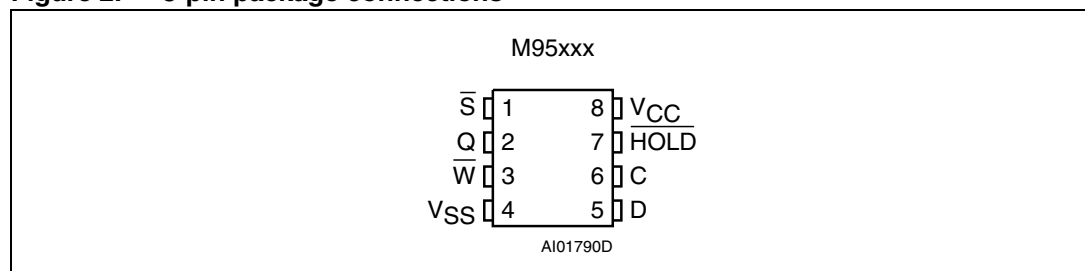

1. See [Section 10: Package mechanical data](#) for package dimensions, and how to identify pin-1.

**Table 2. Signal names**

| Signal name       | Function           |
|-------------------|--------------------|
| C                 | Serial Clock       |
| D                 | Serial Data input  |
| Q                 | Serial Data output |
| $\overline{S}$    | Chip Select        |
| $\overline{W}$    | Write Protect      |
| $\overline{HOLD}$ | Hold               |
| V <sub>CC</sub>   | Supply voltage     |
| V <sub>SS</sub>   | Ground             |

## 2 Signal description

During all operations,  $V_{CC}$  must be held stable and within the specified valid range:  $V_{CC}(\min)$  to  $V_{CC}(\max)$ .

All of the input and output signals can be held high or low (according to voltages of  $V_{IH}$ ,  $V_{OH}$ ,  $V_{IL}$  or  $V_{OL}$ , as specified in [Table 13: DC characteristics \(M950x0, device grade 3\)](#) to [Table 16: DC characteristics \(M950x0-R, device grade 6\)](#)). These signals are described next.

### 2.1 Serial Data output (Q)

This output signal is used to transfer data serially out of the device. Data is shifted out on the falling edge of Serial Clock (C).

### 2.2 Serial Data input (D)

This input signal is used to transfer data serially into the device. It receives instructions, addresses, and the data to be written. Values are latched on the rising edge of Serial Clock (C).

### 2.3 Serial Clock (C)

This input signal provides the timing of the serial interface. Instructions, addresses, or data present at Serial Data Input (D) are latched on the rising edge of Serial Clock (C). Data on Serial Data Output (Q) changes after the falling edge of Serial Clock (C).

### 2.4 Chip Select ( $\overline{S}$ )

When this input signal is high, the device is deselected and Serial Data Output (Q) is at high impedance. Unless an internal Write cycle is in progress, the device will be in the Standby Power mode. Driving Chip Select ( $\overline{S}$ ) low selects the device, placing it in the Active Power mode.

After Power-up, a falling edge on Chip Select ( $\overline{S}$ ) is required prior to the start of any instruction.

### 2.5 Hold ( $\overline{HOLD}$ )

The Hold ( $\overline{HOLD}$ ) signal is used to pause any serial communications with the device without deselecting the device.

During the Hold condition, the Serial Data Output (Q) is high impedance, and Serial Data Input (D) and Serial Clock (C) are Don't Care.

To start the Hold condition, the device must be selected, with Chip Select ( $\overline{S}$ ) driven low.

## 2.6 Write Protect ( $\overline{W}$ )

This input signal is used to control whether the memory is write protected. When Write Protect ( $\overline{W}$ ) is held low, writes to the memory are disabled, but other operations remain enabled. Write Protect ( $\overline{W}$ ) must either be driven high or low, but must not be left floating.

## 2.7 $V_{SS}$ ground

$V_{SS}$  is the reference for the  $V_{CC}$  supply voltage.

## 2.8 Supply voltage ( $V_{CC}$ )

## 2.9 Supply voltage ( $V_{CC}$ )

### 2.9.1 Operating supply voltage $V_{CC}$

Prior to selecting the memory and issuing instructions to it, a valid and stable  $V_{CC}$  voltage within the specified [ $V_{CC}(\text{min})$ ,  $V_{CC}(\text{max})$ ] range must be applied (see [Table 8: Operating conditions \(M950x0\)](#), [Table 9: Operating conditions \(M950x0-W\)](#) and [Table 10: Operating conditions \(M950x0-R\)](#)). This voltage must remain stable and valid until the end of the transmission of the instruction and, for a Write instruction, until the completion of the internal write cycle ( $t_W$ ). In order to secure a stable DC supply voltage, it is recommended to decouple the  $V_{CC}$  line with a suitable capacitor (usually of the order of 10 nF to 100 nF) close to the  $V_{CC}/V_{SS}$  package pins.

### 2.9.2 Device reset

In order to prevent inadvertent write operations during power-up, a power-on-reset (POR) circuit is included. At power-up, the device does not respond to any instruction until  $V_{CC}$  reaches the internal reset threshold voltage (this threshold is defined in [Table 8: Operating conditions \(M950x0\)](#), [Table 9: Operating conditions \(M950x0-W\)](#) and [Table 10: Operating conditions \(M950x0-R\)](#) as  $V_{RES}$ ).

When  $V_{CC}$  passes over the POR threshold, the device is reset and is in the following state:

- in Standby Power mode
- deselected (note that, to be executed, an instruction must be preceded by a falling edge on Chip Select ( $\overline{S}$ ))
- Status register value:
  - the Write Enable Latch (WEL) is reset to 0
  - Write In Progress (WIP) is reset to 0
  - The SRWD, BP1 and BP0 bits remain unchanged (non-volatile bits)

When  $V_{CC}$  passes over the POR threshold, the device is reset and enters the Standby Power mode. The device must not be accessed until  $V_{CC}$  reaches a valid and stable  $V_{CC}$  voltage within the specified [ $V_{CC}(\text{min})$ ,  $V_{CC}(\text{max})$ ] range defined in [Table 8: Operating conditions \(M950x0\)](#), [Table 9: Operating conditions \(M950x0-W\)](#) and [Table 10: Operating conditions \(M950x0-R\)](#).



### 2.9.3 Power-up conditions

When the power supply is turned on,  $V_{CC}$  rises continuously from  $V_{SS}$  to  $V_{CC}$ . During this time, the Chip Select ( $\overline{S}$ ) line is not allowed to float but should follow the  $V_{CC}$  voltage. It is therefore recommended to connect the  $\overline{S}$  line to  $V_{CC}$  via a suitable pull-up resistor (see [Figure 3: Bus master and memory devices on the SPI bus](#)).

In addition, the Chip Select ( $\overline{S}$ ) input offers a built-in safety feature, as the  $\overline{S}$  input is edge sensitive as well as level sensitive: after power-up, the device does not become selected until a falling edge has first been detected on Chip Select ( $\overline{S}$ ). This ensures that Chip Select ( $\overline{S}$ ) must have been high, prior to going low to start the first operation.

The  $V_{CC}$  voltage has to rise continuously from 0 V up to the minimum  $V_{CC}$  operating voltage defined in [Table 8: Operating conditions \(M950x0\)](#), [Table 9: Operating conditions \(M950x0-W\)](#) and [Table 10: Operating conditions \(M950x0-R\)](#) and the rise time must not vary faster than 1 V/ $\mu$ s.

### 2.9.4 Power-down

During power-down (continuous decrease in the  $V_{CC}$  supply voltage below the minimum  $V_{CC}$  operating voltage defined in [Table 8: Operating conditions \(M950x0\)](#), [Table 9: Operating conditions \(M950x0-W\)](#) and [Table 10: Operating conditions \(M950x0-R\)](#)), the device must be:

- deselected (Chip Select  $\overline{S}$  should be allowed to follow the voltage applied on  $V_{CC}$ )
- in Standby Power mode (there should not be any internal write cycle in progress).

### 3 Connecting to the SPI bus

The device is fully compatible with the SPI protocol.

All instructions, addresses and input data bytes are shifted in to the device, most significant bit first. The Serial Data Input (D) is sampled on the first rising edge of the Serial Clock (C) after Chip Select ( $\overline{S}$ ) goes low.


All output data bytes are shifted out of the device, most significant bit first. The Serial Data Output (Q) is latched on the first falling edge of the Serial Clock (C) after the instruction (such as the Read from Memory Array and Read Status Register instructions) have been clocked into the device.

*Figure 3: Bus master and memory devices on the SPI bus* shows an example of three memory devices connected to an MCU, on an SPI bus. Only one memory device is selected at a time, so only one memory device drives the Serial Data output (Q) line at a time, the other memory devices are high impedance.

The pull-up resistor R (represented in *Figure 3: Bus master and memory devices on the SPI bus*) ensures that a device is not selected if the bus master leaves the  $\overline{S}$  line in the high impedance state.

In applications where the bus master might enter a state where all SPI bus inputs/outputs would be in high impedance at the same time (for example, if the bus master is reset during the transmission of an Instruction), the clock line (C) must be connected to an external pull-down resistor so that, if all inputs/outputs become high impedance, the C line is pulled low (while the  $\overline{S}$  line is pulled high): this ensures that  $\overline{S}$  and C do not become high at the same time, and so, that the  $t_{SHCH}$  requirement is met. The typical value of R is 100 k $\Omega$ .

**Figure 3. Bus master and memory devices on the SPI bus**

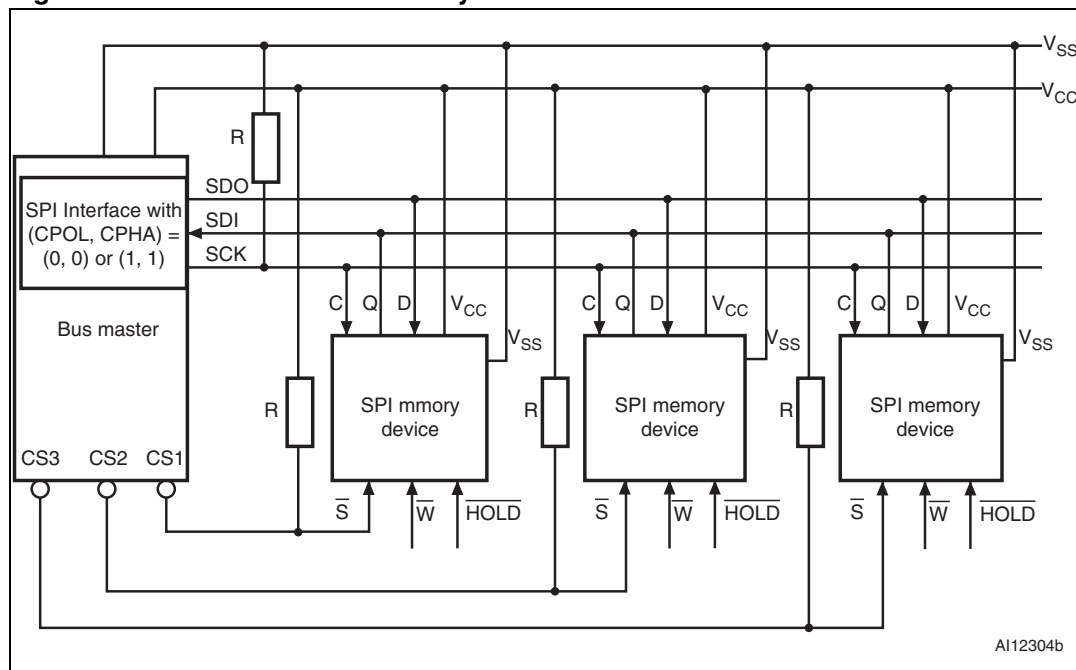

1. The Write Protect ( $\overline{W}$ ) and Hold ( $\overline{HOLD}$ ) signals should be driven, high or low as appropriate.

### 3.1 SPI modes

The device can be driven by a microcontroller with its SPI peripheral running in either of the two following modes:


- CPOL=0, CPHA=0
- CPOL=1, CPHA=1

For these two modes, input data is latched in on the rising edge of Serial Clock (C), and output data is available from the falling edge of Serial Clock (C).

The difference between the two modes, as shown in [Figure 4: SPI modes supported](#), is the clock polarity when the bus master is in Stand-by mode and not transferring data:

- C remains at 0 for (CPOL=0, CPHA=0)
- C remains at 1 for (CPOL=1, CPHA=1)

**Figure 4. SPI modes supported**

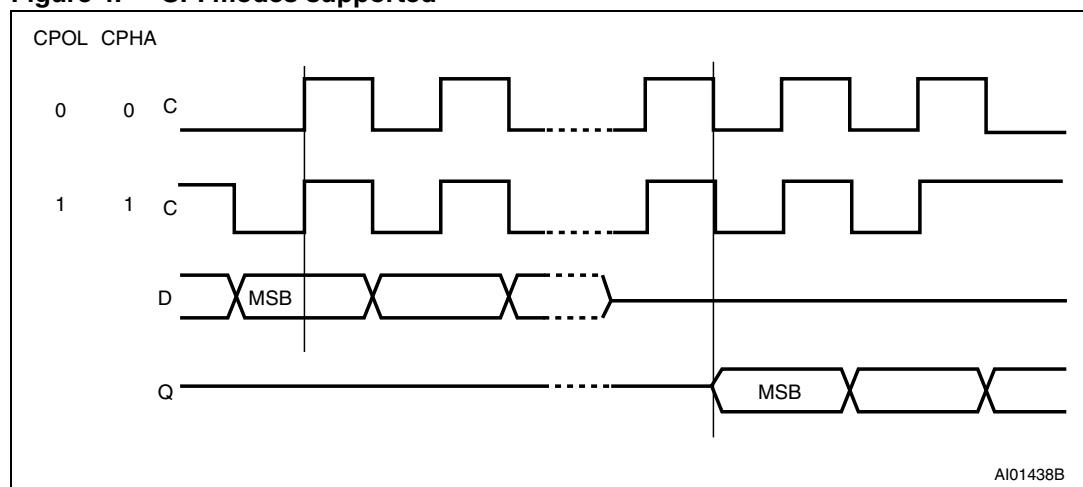

## 4 Operating features

### 4.1 Hold condition

The Hold ( $\overline{\text{HOLD}}$ ) signal is used to pause any serial communications with the device without resetting the clocking sequence.

During the Hold condition, the Serial Data Output (Q) is high impedance, and Serial Data Input (D) and Serial Clock (C) are Don't Care.

To enter the Hold condition, the device must be selected, with Chip Select ( $\overline{\text{S}}$ ) low.


Normally, the device is kept selected, for the whole duration of the Hold condition. Deselecting the device while it is in the Hold condition has the effect of resetting the state of the device, and this mechanism can be used if it is required to reset any processes that had been in progress.

The Hold condition starts when the Hold ( $\overline{\text{HOLD}}$ ) signal is driven low at the same time as Serial Clock (C) already being low (as shown in [Figure 5: Hold condition activation](#)).

The Hold condition ends when the Hold ( $\overline{\text{HOLD}}$ ) signal is driven high at the same time as Serial Clock (C) already being low.

[Figure 5: Hold condition activation](#) also shows what happens if the rising and falling edges are not timed to coincide with Serial Clock (C) being low.

**Figure 5. Hold condition activation**

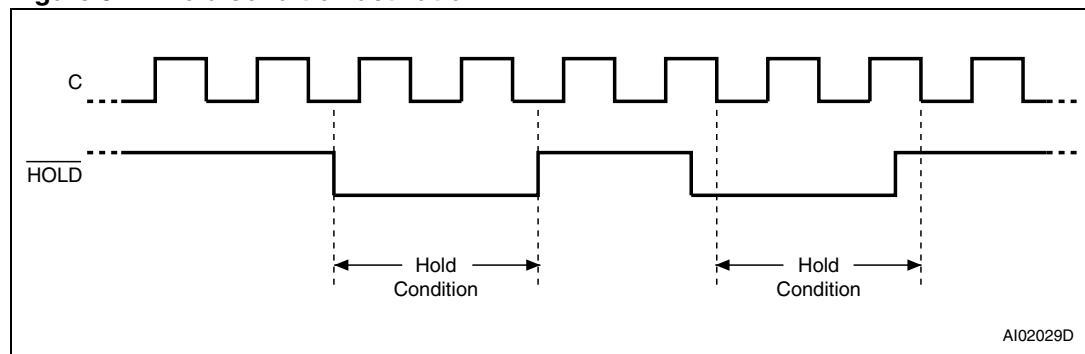

### 4.2 Status register

[Figure 6: Block diagram](#) shows the position of the Status register in the control logic of the device. This register contains a number of control bits and status bits, as shown in [Table 5: Status register format](#). For a detailed description of the Status register bits, see [Section 6.3: Read Status Register \(RDSR\)](#).

### 4.3 Data protection and protocol control

To help protect the device from data corruption in noisy or poorly controlled environments, a number of safety features have been built in to the device. The main security measures can be summarized as follows:

- The WEL bit is reset at power-up.
- Chip Select ( $\overline{S}$ ) must rise after the eighth clock count (or multiple thereof) in order to start a non-volatile Write cycle (in the memory array or in the Status register).
- Accesses to the memory array are ignored during the non-volatile programming cycle, and the programming cycle continues unaffected.
- Invalid Chip Select ( $\overline{S}$ ) and Hold ( $\overline{HOLD}$ ) transitions are ignored.

For any instruction to be accepted and executed, Chip Select ( $\overline{S}$ ) must be driven high after the rising edge of Serial Clock (C) that latches the last bit of the instruction, and before the next rising edge of Serial Clock (C).

For this, “the last bit of the instruction” can be the eighth bit of the instruction code, or the eighth bit of a data byte, depending on the instruction (except in the case of RDSR and READ instructions). Moreover, the “next rising edge of CLOCK” might (or might not) be the next bus transaction for some other device on the bus.

When a Write cycle is in progress, the device protects it against external interruption by ignoring any subsequent READ, WRITE or WRSR instruction until the present cycle is complete.


**Table 3. Write-protected block size**

| Status register bits |     | Protected block | Protected array addresses |           |           |
|----------------------|-----|-----------------|---------------------------|-----------|-----------|
| BP1                  | BP0 |                 | M95040                    | M95020    | M95010    |
| 0                    | 0   | none            | none                      | none      | none      |
| 0                    | 1   | Upper quarter   | 180h - 1FFh               | C0h - FFh | 60h - 7Fh |
| 1                    | 0   | Upper half      | 100h - 1FFh               | 80h - FFh | 40h - 7Fh |
| 1                    | 1   | Whole memory    | 000h - 1FFh               | 00h - FFh | 00h - 7Fh |

## 5 Memory organization

The memory is organized as shown in [Figure 6: Block diagram](#).

**Figure 6. Block diagram**

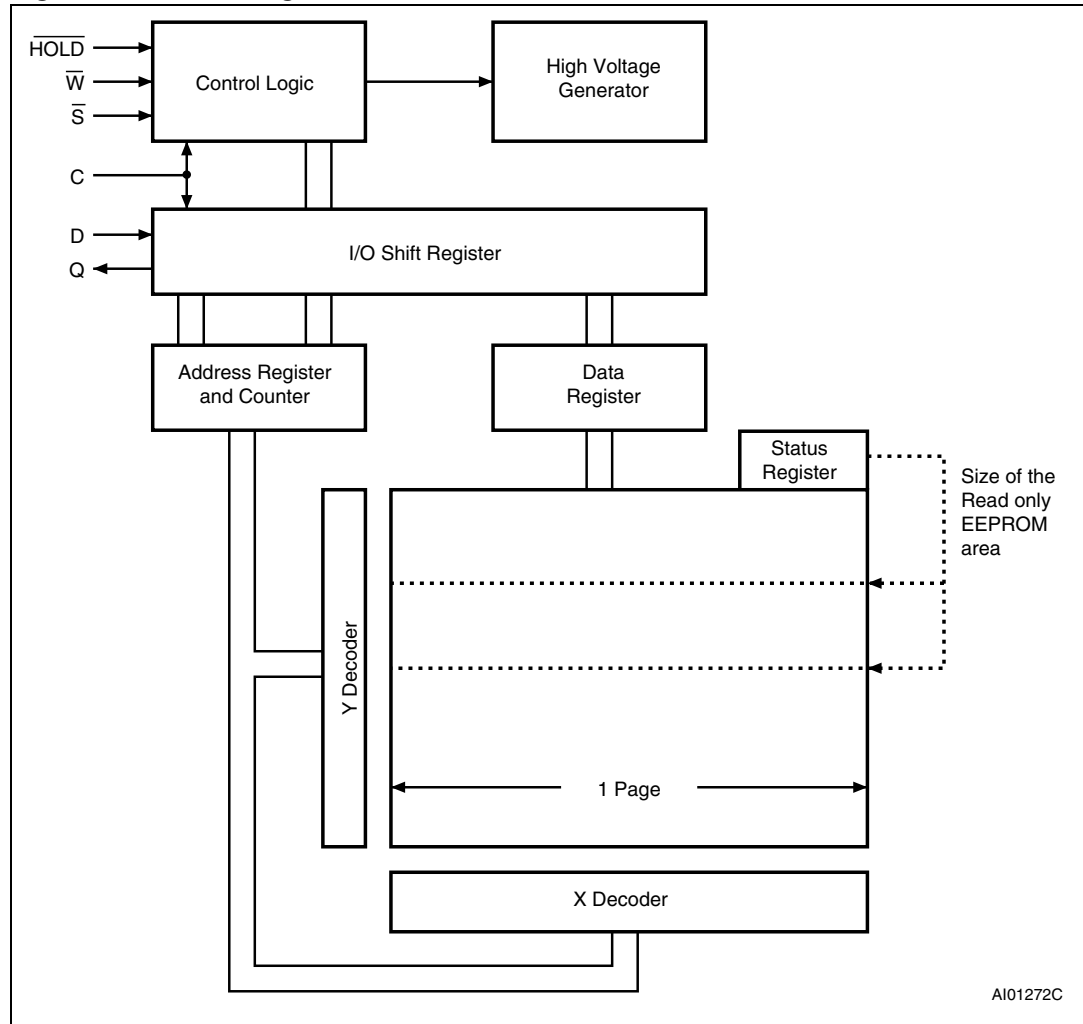

# 6 Instructions

Each instruction starts with a single-byte code, as summarized in [Table 4: Instruction set](#). If an invalid instruction is sent (one not contained in [Table 4: Instruction set](#)), the device automatically deselects itself.

Table 4. Instruction set

| Instruction | Description            | Instruction Format                     |
|-------------|------------------------|----------------------------------------|
| WREN        | Write Enable           | 0000 X110 <sup>(1)</sup>               |
| WRDI        | Write Disable          | 0000 X100 <sup>(1)</sup>               |
| RDSR        | Read Status Register   | 0000 X101 <sup>(1)</sup>               |
| WRSR        | Write Status Register  | 0000 X001 <sup>(1)</sup>               |
| READ        | Read from Memory Array | 0000 A <sub>8</sub> 011 <sup>(2)</sup> |
| WRITE       | Write to Memory Array  | 0000 A <sub>8</sub> 010 <sup>(2)</sup> |


- 1. X = Don't Care.
- 2. A<sub>8</sub> = 1 for the upper half of the memory array of the M95040, and 0 for the lower half, and is Don't Care for other devices.

## 6.1 Write Enable (WREN)

The Write Enable Latch (WEL) bit must be set prior to each WRITE and WRSR instruction. The only way to do this is to send a Write Enable instruction to the device.

As shown in [Figure 7: Write Enable \(WREN\) sequence](#), to send this instruction to the device, Chip Select ( $\overline{S}$ ) is driven low, and the bits of the instruction byte are shifted in, on Serial Data Input (D). The device then enters a wait state. It waits for a the device to be deselected, by Chip Select ( $\overline{S}$ ) being driven high.

Figure 7. Write Enable (WREN) sequence

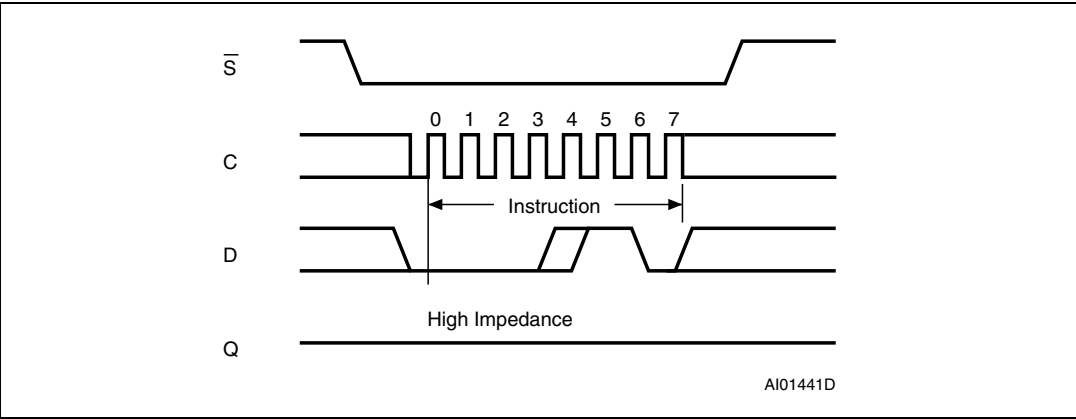

## 6.2 Write Disable (WRDI)

One way of resetting the Write Enable Latch (WEL) bit is to send a Write Disable instruction to the device.


As shown in [Figure 8: Write Disable \(WRDI\) sequence](#), to send this instruction to the device, Chip Select ( $\overline{S}$ ) is driven low, and the bits of the instruction byte are shifted in, on Serial Data Input (D).

The device then enters a wait state. It waits for the device to be deselected, by Chip Select ( $\overline{S}$ ) being driven high.

The Write Enable Latch (WEL) bit, in fact, becomes reset by any of the following events:

- Power-up
- WRDI instruction execution
- WRSR instruction completion
- WRITE instruction completion
- Write Protect ( $\overline{W}$ ) line being held low.

**Figure 8. Write Disable (WRDI) sequence**

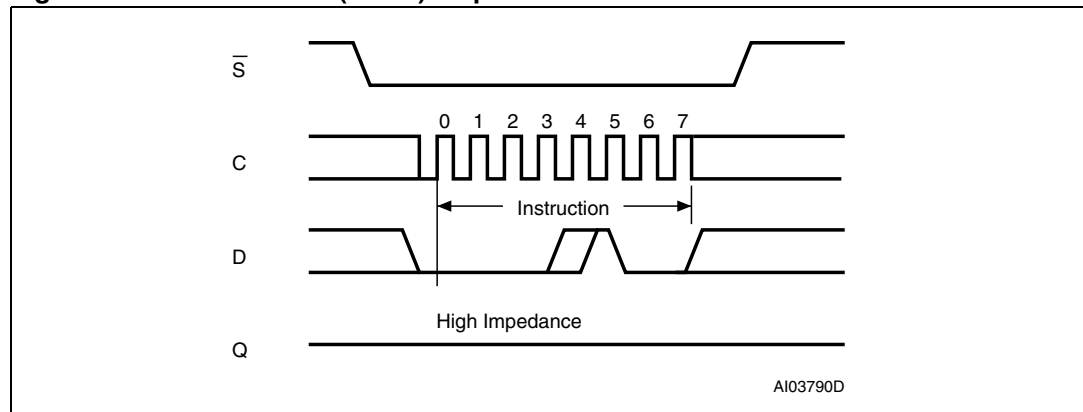



6.3 Read Status Register (RDSR)

The Read Status Register instruction is used to read the Status Register.


As shown in [Figure 9](#), to send this instruction to the device, Chip Select ( $\overline{S}$ ) is first driven low. The bits of the instruction byte are then shifted in, on Serial Data Input (D). The current state of the bits in the Status register is shifted out, on Serial Data Out (Q). The Read Cycle is terminated by driving Chip Select ( $\overline{S}$ ) high.

The Status Register is always readable, even if a Write or Write Status Register cycle is in progress. During a Write Status Register cycle, the values of the non-volatile bits (BP0, BP1) become available when a new RDSR instruction is executed, after completion of the Write cycle. On the other hand, the two read-only bits (Write Enable Latch (WEL), Write In Progress (WIP)) are dynamically updated during the ongoing Write cycle.

It is also possible to read the Status Register contents continuously, as described in [Figure 9](#).

Bits b7, b6, b5 and b4 are always read as 1. The status and control bits of the Status register are as follows:

Table 5. Status register format

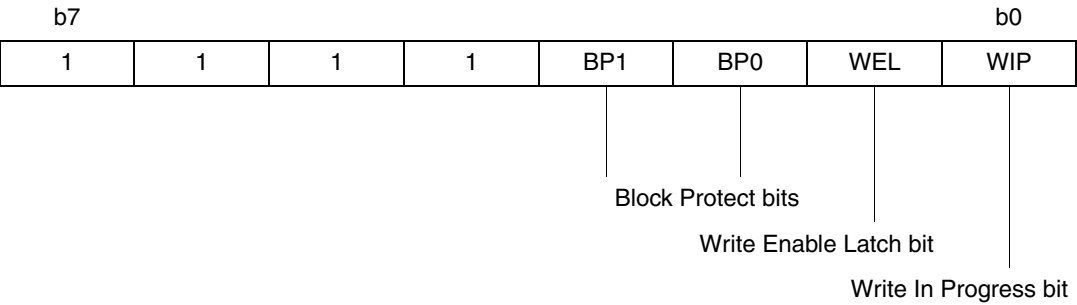

6.3.1 WIP bit

The Write In Progress (WIP) bit indicates whether the memory is busy with a Write or Write Status register cycle. When set to 1, such a cycle is in progress, when reset to 0 no such cycle is in progress.


6.3.2 WEL bit

The Write Enable Latch (WEL) bit indicates the status of the internal Write Enable Latch. When set to 1 the internal Write Enable Latch is set, when set to 0 the internal Write Enable Latch is reset and no Write or Write Status Register instruction is accepted.

6.3.3 BP1, BP0 bits

The Block Protect (BP1, BP0) bits are non-volatile. They define the size of the area to be software protected against Write instructions. These bits are written with the Write Status Register (WRSR) instruction. When one or both of the Block Protect (BP1, BP0) bits is set to 1, the relevant memory area (as defined in [Table 3: Write-protected block size](#)) becomes protected against Write (WRITE) instructions. The Block Protect (BP1, BP0) bits can be written provided that the Hardware Protected mode has not been set.

Figure 9. Read Status Register (RDSR) sequence

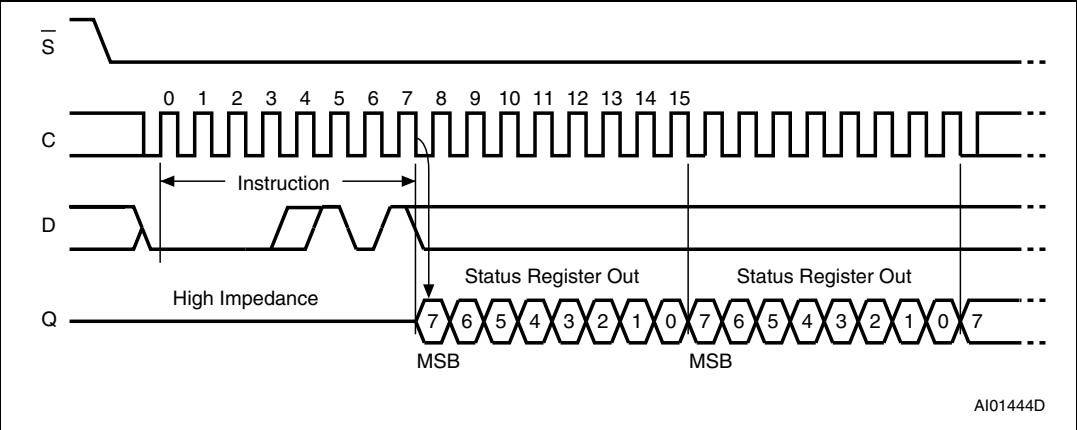

## 6.4 Write Status Register (WRSR)

The Write Status Register (WRSR) instruction allows new values to be written to the Status register. Before it can be accepted, a Write Enable (WREN) instruction must previously have been executed.

The Write Status Register (WRSR) instruction is entered by driving Chip Select ( $\bar{S}$ ) low, sending the instruction code followed by the data byte on Serial Data input (D), and driving the Chip Select ( $\bar{S}$ ) signal high. Chip Select ( $\bar{S}$ ) must be driven high after the rising edge of Serial Clock (C) that latches in the eighth bit of the data byte, and before the next rising edge of Serial Clock (C). Otherwise, the Write Status Register (WRSR) instruction is not executed.

Driving the Chip Select ( $\bar{S}$ ) signal high at a byte boundary of the input data triggers the self-timed write cycle that takes  $t_W$  to complete (as specified in [Table 13: DC characteristics \(M950x0, device grade 3\)](#) to [Table 20: AC characteristics \(M950x0-R, device grade 6\)](#)). The instruction sequence is shown in [Figure 10: Write Status Register \(WRSR\) sequence](#).


While the Write Status Register cycle is in progress, the Status register may still be read to check the value of the Write in progress (WIP) bit: the WIP bit is 1 during the self-timed write cycle  $t_W$ , and, 0 when the write cycle is complete. The WEL bit (Write enable latch) is also reset at the end of the write cycle  $t_W$ .

The Write Status Register (WRSR) instruction allows the user to change the values of the BP1, BP0 bits which define the size of the area that is to be treated as read only, as defined in [Table 3: Write-protected block size](#).

The contents of the BP1, BP0 bits are updated after the completion of the WRSR instruction, including the  $t_W$  write cycle.

The Write Status Register (WRSR) instruction has no effect on the b7, b6, b5, b4, b1 and b0 bits in the Status register. Bits b7, b6, b5, b4 are always read as 0.

**Figure 10. Write Status Register (WRSR) sequence**

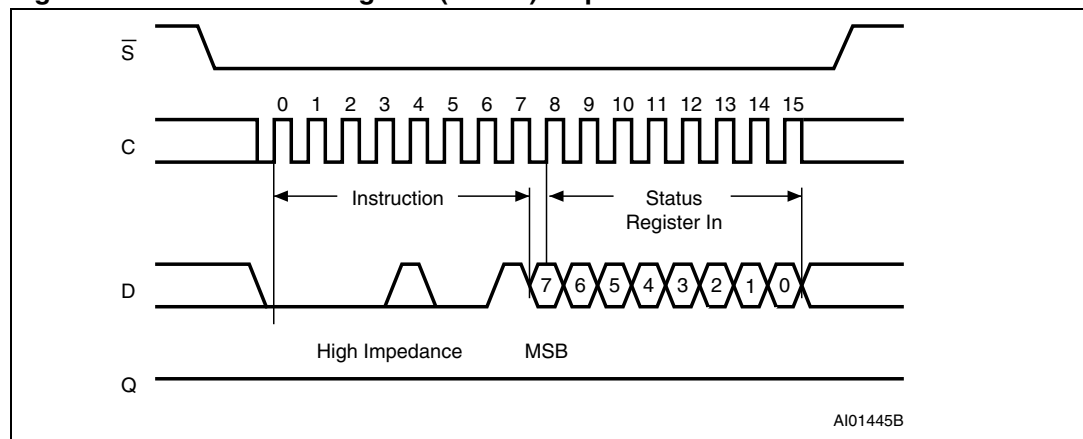

The instruction is not accepted, and is not executed, under the following conditions:

- if the Write Enable Latch (WEL) bit has not been set to 1 (by executing a Write Enable instruction just before)
- if a write cycle is already in progress
- if the device has not been deselected, by Chip Select ( $\overline{S}$ ) being driven high, after the eighth bit, b0, of the data byte has been latched in
- if Write Protect ( $\overline{WP}$ ) is low during the WRSR command (instruction, address and data)

## 6.5 Read from Memory Array (READ)

As shown in [Figure 11: Read from Memory Array \(READ\) sequence](#), to send this instruction to the device, Chip Select ( $\overline{S}$ ) is first driven low. The bits of the instruction byte and address byte are then shifted in, on Serial Data Input (D). For the M95040, the most significant address bit, A8, is incorporated as bit b3 of the instruction byte, as shown in [Table 4: Instruction set](#). The address is loaded into an internal address register, and the byte of data at that address is shifted out, on Serial Data Output (Q).

If Chip Select ( $\overline{S}$ ) continues to be driven low, an internal bit-pointer is automatically incremented at each clock cycle, and the corresponding data bit is shifted out.

When the highest address is reached, the address counter rolls over to zero, allowing the Read cycle to be continued indefinitely. The whole memory can, therefore, be read with a single READ instruction.

The Read cycle is terminated by driving Chip Select ( $\overline{S}$ ) high. The rising edge of the Chip Select ( $\overline{S}$ ) signal can occur at any time during the cycle.


The first byte addressed can be any byte within any page.

The instruction is not accepted, and is not executed, if a Write cycle is currently in progress.

**Table 6. Address range bits**

| Device       | M95040 | M95020 | M95010 |
|--------------|--------|--------|--------|
| Address Bits | A8-A0  | A7-A0  | A6-A0  |

**Figure 11. Read from Memory Array (READ) sequence**

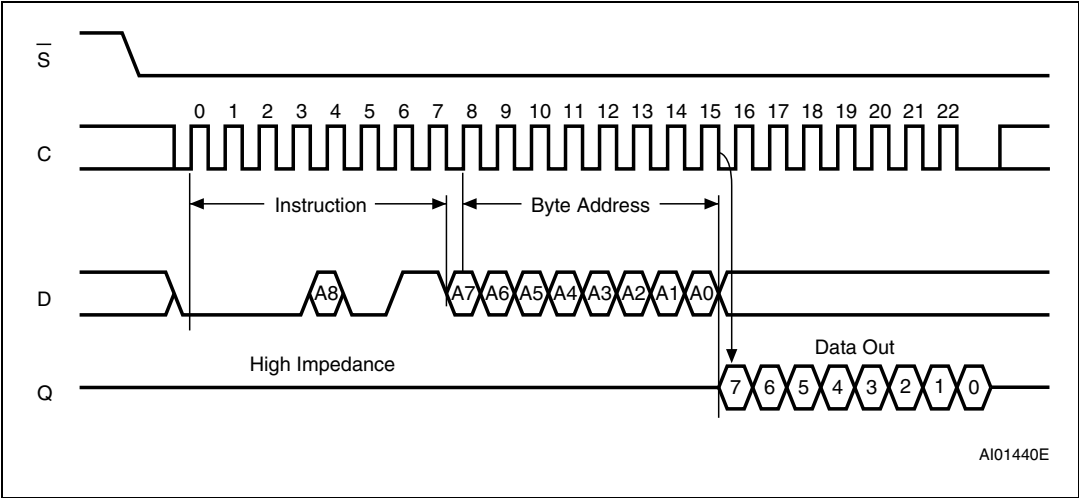

1. Depending on the memory size, as shown in [Table 6: Address range bits](#), the most significant address bits are Don't Care.

## 6.6 Write to Memory Array (WRITE)

As shown in [Figure 12: Byte Write \(WRITE\) sequence](#), to send this instruction to the device, Chip Select ( $\overline{S}$ ) is first driven low. The bits of the instruction byte, address byte, and at least one data byte are then shifted in, on Serial Data input (D). The instruction is terminated by driving Chip Select ( $\overline{S}$ ) high at a byte boundary of the input data. The self-timed Write cycle, triggered by the rising edge of Chip Select ( $\overline{S}$ ), continues for a period  $t_W$  (as specified in [Table 13: DC characteristics \(M950x0, device grade 3\)](#) to [Table 20: AC characteristics \(M950x0-R, device grade 6\)](#)). After this time, the Write in Progress (WIP) bit is reset to 0.


In the case of [Figure 12: Byte Write \(WRITE\) sequence](#), Chip Select ( $\overline{S}$ ) is driven high after the eighth bit of the data byte has been latched in, indicating that the instruction is being used to write a single byte. If, though, Chip Select ( $\overline{S}$ ) continues to be driven low, as shown in [Figure 13: Page Write \(WRITE\) sequence](#), the next byte of input data is shifted in, so that more than a single byte, starting from the given address towards the end of the same page, can be written in a single internal Write cycle. If Chip Select ( $\overline{S}$ ) still continues to be driven low, the next byte of input data is shifted in, and used to overwrite the byte at the start of the current page.

The instruction is not accepted, and is not executed, under the following conditions:

- if the Write Enable Latch (WEL) bit has not been set to 1 (by executing a Write Enable instruction just before)
- if a Write cycle is already in progress
- if the device has not been deselected, by Chip Select ( $\overline{S}$ ) being driven high, at a byte boundary (after the rising edge of Serial Clock (C) that latches the last data bit, and before the next rising edge of Serial Clock (C) occurs anywhere on the bus)
- if Write Protect ( $\overline{WP}$ ) is low or if the addressed page is in the area protected by the Block Protect (BP1 and BP0) bits


**Note:** The self-timed write cycle  $t_W$  is internally executed as a sequence of two consecutive events: [Erase addressed byte(s)], followed by [Program addressed byte(s)]. An erased bit is read as “0” and a programmed bit is read as “1”.

**Figure 12. Byte Write (WRITE) sequence**

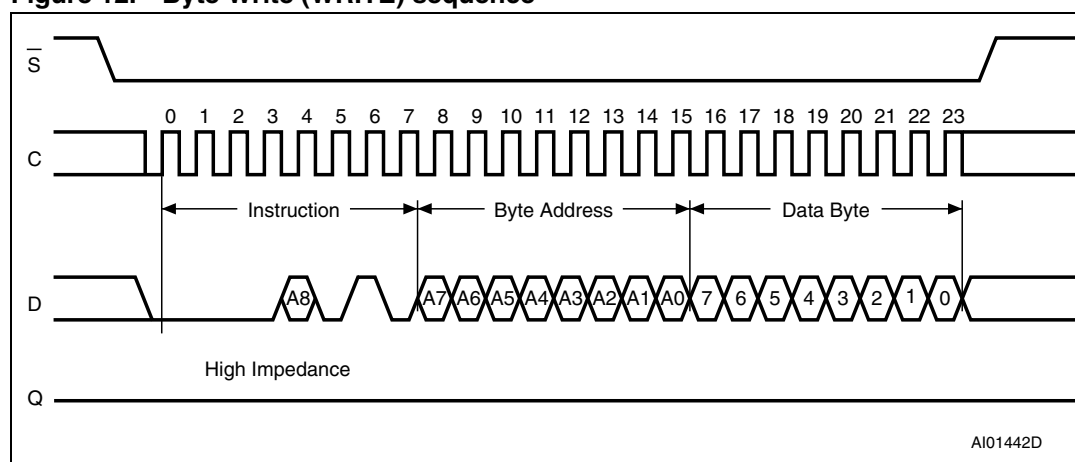

1. Depending on the memory size, as shown in [Table 6: Address range bits](#), the most significant address bits are Don't Care.

Figure 13. Page Write (WRITE) sequence

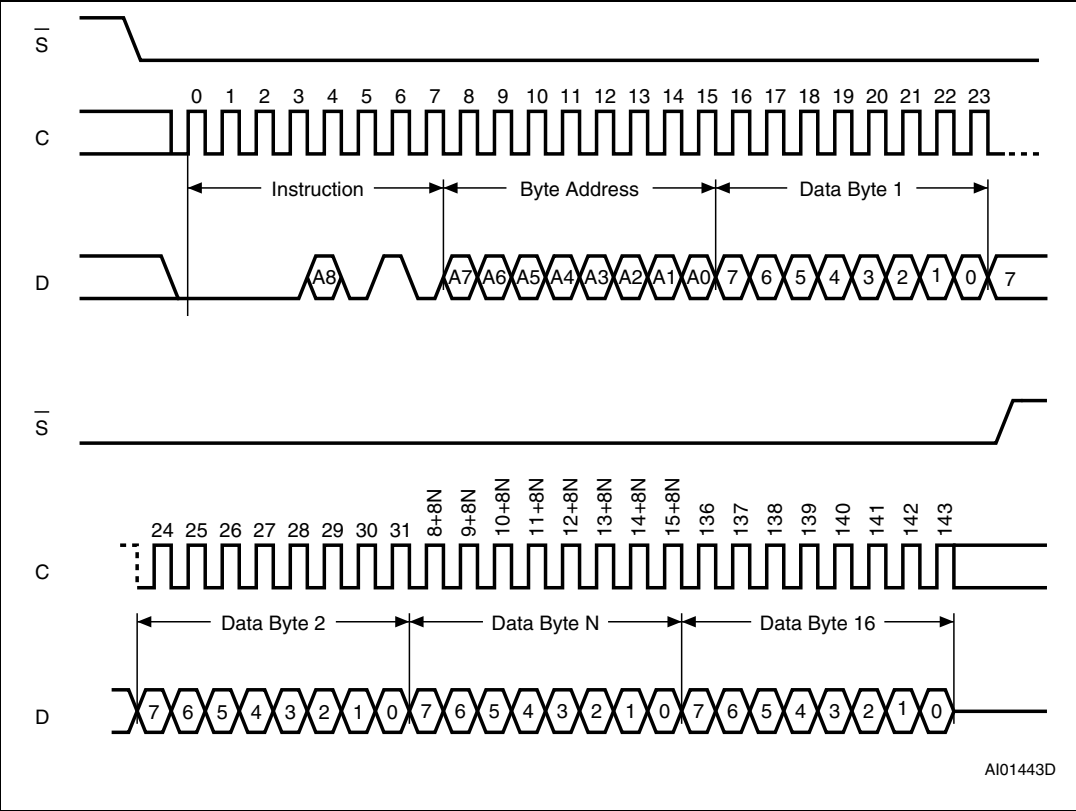

- 1. Depending on the memory size, as shown in [Table 6: Address range bits](#), the most significant address bits are Don't Care.

## 7 Power-up and delivery states

### 7.1 Power-up state

After Power-up, the device is in the following state:

- low power Standby Power mode
- deselected (after Power-up, a falling edge is required on Chip Select ( $\overline{S}$ ) before any instructions can be started).
- not in the Hold Condition
- the Write Enable Latch (WEL) is reset to 0
- Write In Progress (WIP) is reset to 0

The BP1 and BP0 bits of the Status register are unchanged from the previous power-down (they are non-volatile bits).

### 7.2 Initial delivery state

The device is delivered with the memory array set at all 1s (FFh). The Block Protect (BP1 and BP0) bits are initialized to 0.



## 8 Maximum rating

Stressing the device outside the ratings listed in [Table 7: Absolute maximum ratings](#) may cause permanent damage to the device. These are stress ratings only, and operation of the device at these, or any other conditions outside those indicated in the operating sections of this specification, is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Refer also to the STMicroelectronics SURE Program and other relevant quality documents.

**Table 7. Absolute maximum ratings**

| Symbol            | Parameter                                                     | Min.                    | Max.                 | Unit |
|-------------------|---------------------------------------------------------------|-------------------------|----------------------|------|
|                   | Ambient operating temperature                                 | −40                     | 130                  | °C   |
| T <sub>STG</sub>  | Storage temperature                                           | −65                     | 150                  | °C   |
| T <sub>LEAD</sub> | Lead temperature during soldering                             | see note <sup>(1)</sup> |                      | °C   |
| V <sub>O</sub>    | Output voltage                                                | −0.50                   | V <sub>CC</sub> +0.6 | V    |
| V <sub>I</sub>    | Input voltage                                                 | −0.50                   | V <sub>CC</sub> +1.0 | V    |
| I <sub>OL</sub>   | DC output current (Q = 0)                                     | -                       | 5                    | mA   |
| I <sub>IH</sub>   | DC output current (Q = 1)                                     | -                       | 5                    | mA   |
| V <sub>CC</sub>   | Supply voltage                                                | −0.50                   | 6.5                  | V    |
| V <sub>ESD</sub>  | Electrostatic pulse (Human Body Model) voltage <sup>(2)</sup> | -                       | 4000                 | V    |

1. Compliant with JEDEC Std J-STD-020C (for small body, Sn-Pb or Pb assembly), the ST ECOPACK® 7191395 specification, and the European directive on Restrictions on Hazardous Substances (RoHS) 2002/95/EU.
2. Positive and negative pulses applied on pin pairs, according to the AEC-Q100-002 (compliant with JEDEC Std JESD22-A114, C1=100pF, R1=1500Ω, R2=500Ω)

## 9 DC and AC parameters

This section summarizes the operating and measurement conditions, and the DC and AC characteristics of the device. The parameters in the DC and AC characteristic tables that follow are derived from tests performed under the measurement conditions summarized in the relevant tables. Designers should check that the operating conditions in their circuit match the measurement conditions when relying on the quoted parameters.

**Table 8. Operating conditions (M950x0)**

| Symbol   | Parameter                                      | Min. | Max. | Unit |
|----------|------------------------------------------------|------|------|------|
| $V_{CC}$ | Supply voltage                                 | 4.5  | 5.5  | V    |
| $T_A$    | Ambient operating temperature (device grade 3) | −40  | 125  | °C   |

**Table 9. Operating conditions (M950x0-W)**

| Symbol   | Parameter                                      | Min. | Max. | Unit |
|----------|------------------------------------------------|------|------|------|
| $V_{CC}$ | Supply voltage                                 | 2.5  | 5.5  | V    |
| $T_A$    | Ambient operating temperature (device grade 6) | −40  | 85   | °C   |
|          | Ambient operating temperature (device grade 3) | −40  | 125  | °C   |


**Table 10. Operating conditions (M950x0-R)**

| Symbol   | Parameter                     | Min. | Max. | Unit |
|----------|-------------------------------|------|------|------|
| $V_{CC}$ | Supply voltage                | 1.8  | 5.5  | V    |
| $T_A$    | Ambient operating temperature | −40  | 85   | °C   |

**Table 11. AC test measurement conditions**

| Symbol | Parameter                                  | Min.                         | Max. | Unit |
|--------|--------------------------------------------|------------------------------|------|------|
| $C_L$  | Load capacitance                           | 30                           |      | pF   |
|        | Input rise and fall times                  | -                            | 50   | ns   |
|        | Input pulse voltages                       | 0.2 $V_{CC}$ to 0.8 $V_{CC}$ |      | V    |
|        | Input and output timing reference voltages | 0.3 $V_{CC}$ to 0.7 $V_{CC}$ |      | V    |

1. Output Hi-Z is defined as the point where data out is no longer driven.

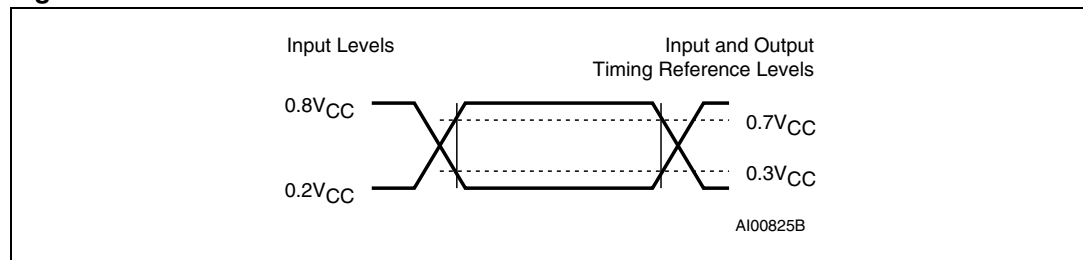**Figure 14. AC test measurement I/O waveform****Table 12. Capacitance**

| Symbol    | Parameter                      | Test condition         | Min. | Max. | Unit |
|-----------|--------------------------------|------------------------|------|------|------|
| $C_{OUT}$ | Output capacitance (Q)         | $V_{OUT} = 0\text{ V}$ | -    | 8    | pF   |
| $C_{IN}$  | Input capacitance (D)          | $V_{IN} = 0\text{ V}$  | -    | 8    | pF   |
|           | Input capacitance (other pins) | $V_{IN} = 0\text{ V}$  | -    | 6    | pF   |

1. Sampled only, not 100% tested, at  $T_A = 25^\circ\text{C}$  and a frequency of 5MHz.

**Table 13. DC characteristics (M950x0, device grade 3)**

| Symbol          | Parameter                              | Test condition                                                                     | Min.         | Max.         | Unit          |
|-----------------|----------------------------------------|------------------------------------------------------------------------------------|--------------|--------------|---------------|
| $I_{LI}$        | Input leakage current                  | $V_{IN} = V_{SS}\text{ or }V_{CC}$                                                 | -            | $\pm 2$      | $\mu\text{A}$ |
| $I_{LO}$        | Output leakage current                 | $\overline{S} = V_{CC}, V_{OUT} = V_{SS}\text{ or }V_{CC}$                         | -            | $\pm 2$      | $\mu\text{A}$ |
| $I_{CC}$        | Supply current                         | $C = 0.1V_{CC}/0.9V_{CC}$ at 5 MHz,<br>$V_{CC} = 5\text{ V}, Q = \text{open}$      | -            | 3            | mA            |
| $I_{CC1}$       | Supply current<br>(Standby Power mode) | $\overline{S} = V_{CC}, V_{IN} = V_{SS}\text{ or }V_{CC}$<br>$V_{CC} = 5\text{ V}$ | -            | 5            | $\mu\text{A}$ |
| $V_{IL}$        | Input low voltage                      |                                                                                    | -0.45        | $0.3 V_{CC}$ | V             |
| $V_{IH}$        | Input high voltage                     |                                                                                    | $0.7 V_{CC}$ | $V_{CC} + 1$ | V             |
| $V_{OL}$        | Output low voltage                     | $I_{OL} = 2\text{ mA}, V_{CC} = 5\text{ V}$                                        | -            | 0.4          | V             |
| $V_{OH}$        | Output high voltage                    | $I_{OH} = -2\text{ mA}, V_{CC} = 5\text{ V}$                                       | $0.8 V_{CC}$ | -            | V             |
| $V_{RES}^{(1)}$ | Internal reset threshold<br>voltage    |                                                                                    | 2.5          | 4.0          | V             |

1. Characterized only, not 100% tested.

Table 14. DC characteristics (M950x0-W, device grade 6)

| Symbol          | Parameter                              | Test condition                                                                     | Min.         | Max.         | Unit          |
|-----------------|----------------------------------------|------------------------------------------------------------------------------------|--------------|--------------|---------------|
| $I_{LI}$        | Input leakage current                  | $V_{IN} = V_{SS} \text{ or } V_{CC}$                                               | -            | $\pm 2$      | $\mu\text{A}$ |
| $I_{LO}$        | Output leakage current                 | $\bar{S} = V_{CC}, V_{OUT} = V_{SS} \text{ or } V_{CC}$                            | -            | $\pm 2$      | $\mu\text{A}$ |
| $I_{CC}$        | Supply current                         | $C = 0.1V_{CC}/0.9V_{CC}$ at 5 MHz,<br>$V_{CC} = 2.5 \text{ V}$ , Q = open         | -            | 2            | mA            |
| $I_{CC1}$       | Supply current<br>(Standby Power mode) | $\bar{S} = V_{CC}, V_{IN} = V_{SS} \text{ or } V_{CC}$<br>$V_{CC} = 2.5 \text{ V}$ | -            | 1            | $\mu\text{A}$ |
| $V_{IL}$        | Input low voltage                      |                                                                                    | -0.45        | $0.3 V_{CC}$ | V             |
| $V_{IH}$        | Input high voltage                     |                                                                                    | $0.7 V_{CC}$ | $V_{CC}+1$   | V             |
| $V_{OL}$        | Output low voltage                     | $I_{OL} = 1.5 \text{ mA}$ , $V_{CC} = 2.5 \text{ V}$                               | -            | 0.4          | V             |
| $V_{OH}$        | Output high voltage                    | $I_{OH} = -0.4 \text{ mA}$ , $V_{CC} = 2.5 \text{ V}$                              | $0.8 V_{CC}$ | -            | V             |
| $V_{RES}^{(1)}$ | Internal reset threshold<br>voltage    |                                                                                    | 1.0          | 1.65         | V             |

1. Characterized only, not 100% tested.

**Table 15. DC characteristics (M950x0-W, device grade 3)**

| Symbol          | Parameter                              | Test condition                                                              | Min.         | Max.         | Unit    |
|-----------------|----------------------------------------|-----------------------------------------------------------------------------|--------------|--------------|---------|
| $I_{LI}$        | Input leakage current                  | $V_{IN} = V_{SS}$ or $V_{CC}$                                               | -            | $\pm 2$      | $\mu A$ |
| $I_{LO}$        | Output leakage current                 | $\bar{S} = V_{CC}$ , $V_{OUT} = V_{SS}$ or $V_{CC}$                         | -            | $\pm 2$      | $\mu A$ |
| $I_{CC}$        | Supply current                         | $C = 0.1V_{CC}/0.9V_{CC}$ at 5 MHz,<br>$V_{CC} = 2.5 V$ , $Q = \text{open}$ | -            | 2            | mA      |
| $I_{CC1}$       | Supply current<br>(Standby Power mode) | $\bar{S} = V_{CC}$ , $V_{IN} = V_{SS}$ or $V_{CC}$<br>$V_{CC} = 2.5 V$      | -            | 2            | $\mu A$ |
| $V_{IL}$        | Input low voltage                      |                                                                             | -0.45        | $0.3 V_{CC}$ | V       |
| $V_{IH}$        | Input high voltage                     |                                                                             | $0.7 V_{CC}$ | $V_{CC}+1$   | V       |
| $V_{OL}$        | Output low voltage                     | $I_{OL} = 1.5 \text{ mA}$ , $V_{CC} = 2.5 V$                                | -            | 0.4          | V       |
| $V_{OH}$        | Output high voltage                    | $I_{OH} = -0.4 \text{ mA}$ , $V_{CC} = 2.5 V$                               | $0.8 V_{CC}$ | -            | V       |
| $V_{RES}^{(1)}$ | Internal reset threshold voltage       |                                                                             | 1.0          | 1.65         | V       |

1. Characterized only, not 100% tested.

**Table 16. DC characteristics (M950x0-R, device grade 6)**

| Symbol          | Parameter                        | Test condition                                                                                                                                          | Min.         | Max.         | Unit    |
|-----------------|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------|---------|
| $I_{LI}$        | Input leakage current            | $V_{IN} = V_{SS}$ or $V_{CC}$                                                                                                                           | -            | $\pm 2$      | $\mu A$ |
| $I_{LO}$        | Output leakage current           | $S = V_{CC}$ , voltage applied on $Q = V_{SS}$ or $V_{CC}$                                                                                              | -            | $\pm 2$      | $\mu A$ |
| $I_{CCR}$       | Supply current<br>(Read)         | $V_{CC} = 2.5 V$ , $C = 0.1 V_{CC}$ or $0.9V_{CC}$ ,<br>$f_C = 5 \text{ MHz}$ , $Q = \text{open}$                                                       | -            | 3            | mA      |
|                 |                                  | $V_{CC} = 1.8 V$ , $C = 0.1V_{CC}$ or $0.9V_{CC}$ at<br>max clock frequency, $Q = \text{open}$                                                          | -            | 2            | mA      |
| $I_{CC1}$       | Supply current<br>(Standby)      | $V_{CC} = 5.0 V$ , $\bar{S} = V_{CC}$ , $V_{IN} = V_{SS}$ or $V_{CC}$                                                                                   | -            | 2            | $\mu A$ |
|                 |                                  | $V_{CC} = 2.5 V$ , $\bar{S} = V_{CC}$ , $V_{IN} = V_{SS}$ or $V_{CC}$                                                                                   | -            | 1            | $\mu A$ |
|                 |                                  | $V_{CC} = 1.8 V$ , $\bar{S} = V_{CC}$ , $V_{IN} = V_{SS}$ or $V_{CC}$                                                                                   | -            | 1            | $\mu A$ |
| $V_{IL}$        | Input low voltage                | $2.5 V < V_{CC} < 5.5 V$                                                                                                                                | -0.45        | $0.3V_{CC}$  | V       |
|                 |                                  | $1.8 V < V_{CC} < 2.5 V$                                                                                                                                | -0.45        | $0.25V_{CC}$ | V       |
| $V_{IH}$        | Input high voltage               | $2.5 V < V_{CC} < 5.5 V$                                                                                                                                | $0.7V_{CC}$  | $V_{CC}+1$   | V       |
|                 |                                  | $1.8 V < V_{CC} < 2.5 V$                                                                                                                                | $0.75V_{CC}$ | $V_{CC}+1$   | V       |
| $V_{OL}$        | Output low voltage               | $V_{CC} = 2.5 V$ , $I_{OL} = 1.5 \text{ mA}$ ,<br>or $V_{CC} = 5.5 V$ , $I_{OL} = 2 \text{ mA}$                                                         | -            | $0.2V_{CC}$  | V       |
|                 |                                  | $V_{CC} = 1.8 V$ , $I_{OL} = 0.15 \text{ mA}$                                                                                                           | -            | 0.3          | V       |
| $V_{OH}$        | Output high voltage              | $V_{CC} = 2.5 V$ , $I_{OH} = -0.4 \text{ mA}$ ,<br>or $V_{CC} = 5.5 V$ , $I_{OH} = -2 \text{ mA}$ ,<br>or $V_{CC} = 1.8 V$ , $I_{OH} = -0.1 \text{ mA}$ | $0.8V_{CC}$  | -            | V       |
| $V_{RES}^{(1)}$ | Internal reset threshold voltage |                                                                                                                                                         | 1.0          | 1.65         | V       |

1. Characterized only, not 100% tested.

Table 17. AC characteristics (M950x0, device grade 3)

| Test conditions specified in <a href="#">Table 11</a> and <a href="#">Table 8</a> |            |                                                          |      |      |         |
|-----------------------------------------------------------------------------------|------------|----------------------------------------------------------|------|------|---------|
| Symbol                                                                            | Alt.       | Parameter                                                | Min. | Max. | Unit    |
| $f_C$                                                                             | $f_{SCK}$  | Clock frequency                                          | D.C. | 5    | MHz     |
| $t_{SLCH}$                                                                        | $t_{CSS1}$ | $\overline{S}$ active setup time                         | 90   | -    | ns      |
| $t_{SHCH}$                                                                        | $t_{CSS2}$ | $\overline{S}$ not active setup time                     | 90   | -    | ns      |
| $t_{SHSL}$                                                                        | $t_{CS}$   | $\overline{S}$ deselect time                             | 100  | -    | ns      |
| $t_{CHSH}$                                                                        | $t_{CSH}$  | $\overline{S}$ active hold time                          | 90   | -    | ns      |
| $t_{CHSL}$                                                                        |            | $\overline{S}$ not active hold time                      | 90   | -    | ns      |
| $t_{CH}^{(1)}$                                                                    | $t_{CLH}$  | Clock high time                                          | 90   | -    | ns      |
| $t_{CL}^{(1)}$                                                                    | $t_{CLL}$  | Clock low time                                           | 90   | -    | ns      |
| $t_{CLCH}^{(2)}$                                                                  | $t_{RC}$   | Clock rise time                                          |      | 1    | $\mu s$ |
| $t_{CHCL}^{(2)}$                                                                  | $t_{FC}$   | Clock fall time                                          |      | 1    | $\mu s$ |
| $t_{DVCH}$                                                                        | $t_{DSU}$  | Data in setup time                                       | 20   | -    | ns      |
| $t_{CHDX}$                                                                        | $t_{DH}$   | Data in hold time                                        | 30   | -    | ns      |
| $t_{HHCH}$                                                                        |            | Clock low hold time after $\overline{HOLD}$ not active   | 70   | -    | ns      |
| $t_{HLCH}$                                                                        |            | Clock low hold time after $\overline{HOLD}$ active       | 40   | -    | ns      |
| $t_{CLHL}$                                                                        |            | Clock low setup time before $\overline{HOLD}$ active     | 0    | -    | ns      |
| $t_{CLHH}$                                                                        |            | Clock low setup time before $\overline{HOLD}$ not active | 0    | -    | ns      |
| $t_{SHQZ}^{(2)}$                                                                  | $t_{DIS}$  | Output disable time                                      | -    | 100  | ns      |
| $t_{CLQV}$                                                                        | $t_V$      | Clock low to output valid                                | -    | 60   | ns      |
| $t_{CLQX}$                                                                        | $t_{HO}$   | Output hold time                                         | 0    | -    | ns      |
| $t_{QLQH}^{(2)}$                                                                  | $t_{RO}$   | Output rise time                                         | -    | 50   | ns      |
| $t_{QHQL}^{(2)}$                                                                  | $t_{FO}$   | Output fall time                                         | -    | 50   | ns      |
| $t_{HHQV}$                                                                        | $t_{LZ}$   | $\overline{HOLD}$ high to output valid                   | -    | 50   | ns      |
| $t_{HLQZ}^{(2)}$                                                                  | $t_{HZ}$   | $\overline{HOLD}$ low to output high-Z                   | -    | 100  | ns      |
| $t_W$                                                                             | $t_{WC}$   | Write time                                               | -    | 5    | ms      |

1.  $t_{CH} + t_{CL}$  must never be less than the shortest possible clock period,  $1 / f_C(\max)$

2. Value guaranteed by characterization, not 100% tested in production.

Table 18. AC characteristics (M950x0-W, device grade 6)

| Test conditions specified in Table 11 and Table 9 |            |                                                          |      |      |         |
|---------------------------------------------------|------------|----------------------------------------------------------|------|------|---------|
| Symbol                                            | Alt.       | Parameter                                                | Min. | Max. | Unit    |
| $f_C$                                             | $f_{SCK}$  | Clock frequency                                          | D.C. | 10   | MHz     |
| $t_{SLCH}$                                        | $t_{CSS1}$ | $\overline{S}$ active setup time                         | 15   | -    | ns      |
| $t_{SHCH}$                                        | $t_{CSS2}$ | $\overline{S}$ not active setup time                     | 15   | -    | ns      |
| $t_{SHSL}$                                        | $t_{CS}$   | $\overline{S}$ deselect time                             | 40   | -    | ns      |
| $t_{CHSH}$                                        | $t_{CSH}$  | $\overline{S}$ active hold time                          | 25   | -    | ns      |
| $t_{CHSL}$                                        |            | $\overline{S}$ not active hold time                      | 15   | -    | ns      |
| $t_{CH}^{(1)}$                                    | $t_{CLH}$  | Clock high time                                          | 40   | -    | ns      |
| $t_{CL}^{(1)}$                                    | $t_{CLL}$  | Clock low time                                           | 40   | -    | ns      |
| $t_{CLCH}^{(2)}$                                  | $t_{RC}$   | Clock rise time                                          | -    | 1    | $\mu s$ |
| $t_{CHCL}^{(2)}$                                  | $t_{FC}$   | Clock fall time                                          | -    | 1    | $\mu s$ |
| $t_{DVCH}$                                        | $t_{DSU}$  | Data in setup time                                       | 15   | -    | ns      |
| $t_{CHDX}$                                        | $t_{DH}$   | Data in hold time                                        | 15   | -    | ns      |
| $t_{HHCH}$                                        |            | Clock low hold time after $\overline{HOLD}$ not active   | 15   | -    | ns      |
| $t_{HLCH}$                                        |            | Clock low hold time after $\overline{HOLD}$ active       | 20   | -    | ns      |
| $t_{CLHL}$                                        |            | Clock low setup time before $\overline{HOLD}$ active     | 0    | -    | ns      |
| $t_{CLHH}$                                        |            | Clock low setup time before $\overline{HOLD}$ not active | 0    | -    | ns      |
| $t_{SHQZ}^{(2)}$                                  | $t_{DIS}$  | Output disable time                                      | -    | 25   | ns      |
| $t_{CLQV}$                                        | $t_V$      | Clock low to output valid                                | -    | 35   | ns      |
| $t_{CLQX}$                                        | $t_{HO}$   | Output hold time                                         | 0    | -    | ns      |
| $t_{QLQH}^{(2)}$                                  | $t_{RO}$   | Output rise time                                         | -    | 20   | ns      |
| $t_{QHQL}^{(2)}$                                  | $t_{FO}$   | Output fall time                                         | -    | 20   | ns      |
| $t_{HHQV}$                                        | $t_{LZ}$   | $\overline{HOLD}$ high to output valid                   | -    | 25   | ns      |
| $t_{HLQZ}^{(2)}$                                  | $t_{HZ}$   | $\overline{HOLD}$ low to output high-Z                   | -    | 35   | ns      |
| $t_W$                                             | $t_{WC}$   | Write time                                               | -    | 5    | ms      |

1.  $t_{CH} + t_{CL}$  must never be less than the shortest possible clock period,  $1 / f_C(\max)$

2. Value guaranteed by characterization, not 100% tested in production.

Table 19. AC characteristics (M950x0-W, device grade 3)

| Test conditions specified in Table 11 and Table 9 |            |                                                          |      |      |         |
|---------------------------------------------------|------------|----------------------------------------------------------|------|------|---------|
| Symbol                                            | Alt.       | Parameter                                                | Min. | Max. | Unit    |
| $f_C$                                             | $f_{SCK}$  | Clock frequency                                          | D.C. | 5    | MHz     |
| $t_{SLCH}$                                        | $t_{CSS1}$ | $\overline{S}$ active setup time                         | 90   | -    | ns      |
| $t_{SHCH}$                                        | $t_{CSS2}$ | $\overline{S}$ not active setup time                     | 90   | -    | ns      |
| $t_{SHSL}$                                        | $t_{CS}$   | $\overline{S}$ deselect time                             | 100  | -    | ns      |
| $t_{CHSH}$                                        | $t_{CSH}$  | $\overline{S}$ active hold time                          | 90   | -    | ns      |
| $t_{CHSL}$                                        |            | $\overline{S}$ not active hold time                      | 90   | -    | ns      |
| $t_{CH}^{(1)}$                                    | $t_{CLH}$  | Clock high time                                          | 90   | -    | ns      |
| $t_{CL}^{(1)}$                                    | $t_{CLL}$  | Clock low time                                           | 90   | -    | ns      |
| $t_{CLCH}^{(2)}$                                  | $t_{RC}$   | Clock rise time                                          | -    | 1    | $\mu s$ |
| $t_{CHCL}^{(2)}$                                  | $t_{FC}$   | Clock fall time                                          | -    | 1    | $\mu s$ |
| $t_{DVCH}$                                        | $t_{DSU}$  | Data in setup time                                       | 20   | -    | ns      |
| $t_{CHDX}$                                        | $t_{DH}$   | Data in hold time                                        | 30   | -    | ns      |
| $t_{HHCH}$                                        |            | Clock low hold time after $\overline{HOLD}$ not active   | 70   | -    | ns      |
| $t_{HLCH}$                                        |            | Clock low hold time after $\overline{HOLD}$ active       | 40   | -    | ns      |
| $t_{CLHL}$                                        |            | Clock low setup time before $\overline{HOLD}$ active     | 0    | -    | ns      |
| $t_{CLHH}$                                        |            | Clock low setup time before $\overline{HOLD}$ not active | 0    | -    | ns      |
| $t_{SHQZ}^{(2)}$                                  | $t_{DIS}$  | Output disable time                                      | -    | 100  | ns      |
| $t_{CLQV}$                                        | $t_V$      | Clock low to output valid                                | -    | 60   | ns      |
| $t_{CLQX}$                                        | $t_{HO}$   | Output hold time                                         | 0    | -    | ns      |
| $t_{QLQH}^{(2)}$                                  | $t_{RO}$   | Output rise time                                         | -    | 50   | ns      |
| $t_{QHQL}^{(2)}$                                  | $t_{FO}$   | Output fall time                                         | -    | 50   | ns      |
| $t_{HHQV}$                                        | $t_{LZ}$   | $\overline{HOLD}$ high to output valid                   | -    | 50   | ns      |
| $t_{HLQZ}^{(2)}$                                  | $t_{HZ}$   | $\overline{HOLD}$ low to output high-Z                   | -    | 100  | ns      |
| $t_W$                                             | $t_{WC}$   | Write time                                               | -    | 5    | ms      |

1.  $t_{CH} + t_{CL}$  must never be less than the shortest possible clock period,  $1 / f_C(\max)$

2. Value guaranteed by characterization, not 100% tested in production.



**Table 20. AC characteristics (M950x0-R, device grade 6)**

| Test conditions specified in <a href="#">Table 11</a> and <a href="#">Table 10</a> <sup>(1)</sup> |            |                                                          |      |      |         |
|---------------------------------------------------------------------------------------------------|------------|----------------------------------------------------------|------|------|---------|
| Symbol                                                                                            | Alt.       | Parameter                                                | Min. | Max. | Unit    |
| $f_C$                                                                                             | $f_{SCK}$  | Clock frequency                                          | D.C. | 5    | MHz     |
| $t_{SLCH}$                                                                                        | $t_{CSS1}$ | $\overline{S}$ active setup time                         | 90   | -    | ns      |
| $t_{SHCH}$                                                                                        | $t_{CSS2}$ | $\overline{S}$ not active setup time                     | 90   | -    | ns      |
| $t_{SHSL}$                                                                                        | $t_{CS}$   | $\overline{S}$ deselect time                             | 100  | -    | ns      |
| $t_{CHSH}$                                                                                        | $t_{CSH}$  | $\overline{S}$ active hold time                          | 90   | -    | ns      |
| $t_{CHSL}$                                                                                        |            | $\overline{S}$ not active hold time                      | 90   | -    | ns      |
| $t_{CH}^{(2)}$                                                                                    | $t_{CLH}$  | Clock high time                                          | 90   | -    | ns      |
| $t_{CL}^{(1)}$                                                                                    | $t_{CLL}$  | Clock low time                                           | 90   | -    | ns      |
| $t_{CLCH}^{(3)}$                                                                                  | $t_{RC}$   | Clock rise time                                          | -    | 1    | $\mu s$ |
| $t_{CHCL}^{(2)}$                                                                                  | $t_{FC}$   | Clock fall time                                          | -    | 1    | $\mu s$ |
| $t_{DVCH}$                                                                                        | $t_{DSU}$  | Data in setup time                                       | 20   | -    | ns      |
| $t_{CHDX}$                                                                                        | $t_{DH}$   | Data in hold time                                        | 30   | -    | ns      |
| $t_{HHCH}$                                                                                        |            | Clock low hold time after $\overline{HOLD}$ not active   | 70   | -    | ns      |
| $t_{HLCH}$                                                                                        |            | Clock low hold time after $\overline{HOLD}$ active       | 40   | -    | ns      |
| $t_{CLHL}$                                                                                        |            | Clock low setup time before $\overline{HOLD}$ active     | 0    | -    | ns      |
| $t_{CLHH}$                                                                                        |            | Clock low setup time before $\overline{HOLD}$ not active | 0    | -    | ns      |
| $t_{SHQZ}^{(2)}$                                                                                  | $t_{DIS}$  | Output disable time                                      | -    | 100  | ns      |
| $t_{CLQV}$                                                                                        | $t_V$      | Clock low to output valid                                | -    | 80   | ns      |
| $t_{CLQX}$                                                                                        | $t_{HO}$   | Output hold time                                         | 0    | -    | ns      |
| $t_{QLQH}^{(2)}$                                                                                  | $t_{RO}$   | Output rise time                                         | -    | 50   | ns      |
| $t_{QHQL}^{(2)}$                                                                                  | $t_{FO}$   | Output fall time                                         | -    | 50   | ns      |
| $t_{HHQV}$                                                                                        | $t_{LZ}$   | $\overline{HOLD}$ high to output valid                   | -    | 50   | ns      |
| $t_{HLQZ}^{(2)}$                                                                                  | $t_{HZ}$   | $\overline{HOLD}$ low to output high-Z                   | -    | 100  | ns      |
| $t_W$                                                                                             | $t_{WC}$   | Write time                                               | -    | 5    | ms      |

1. The test flow guarantees the AC parameter values defined in this table (when  $V_{CC} = 1.8$  V) and the AC parameter values defined in [Table 18: AC characteristics \(M950x0-W, device grade 6\)](#) (when  $V_{CC} = 2.5$  or when  $V_{CC} = 5.0$  V).
2.  $t_{CH} + t_{CL}$  must never be less than the shortest possible clock period,  $1 / f_C(\max)$
3. Value guaranteed by characterization, not 100% tested in production.

Figure 15. Serial input timing

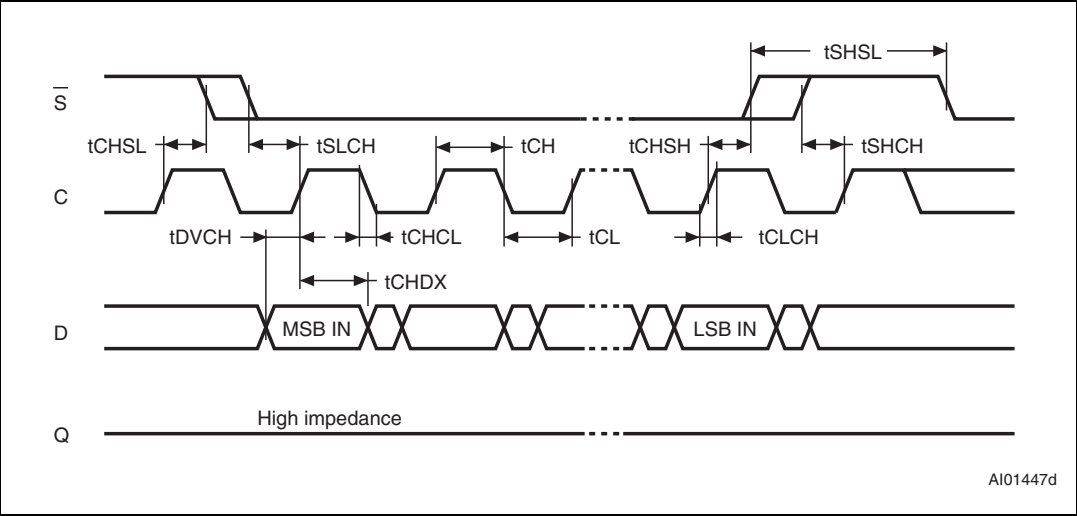


Figure 16. Hold timing


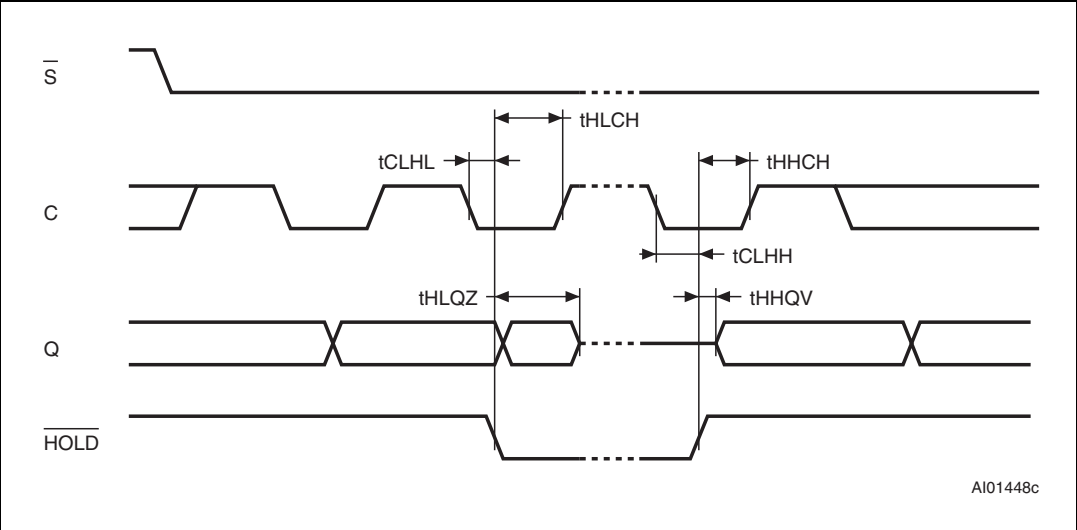



Figure 17. Serial output timing

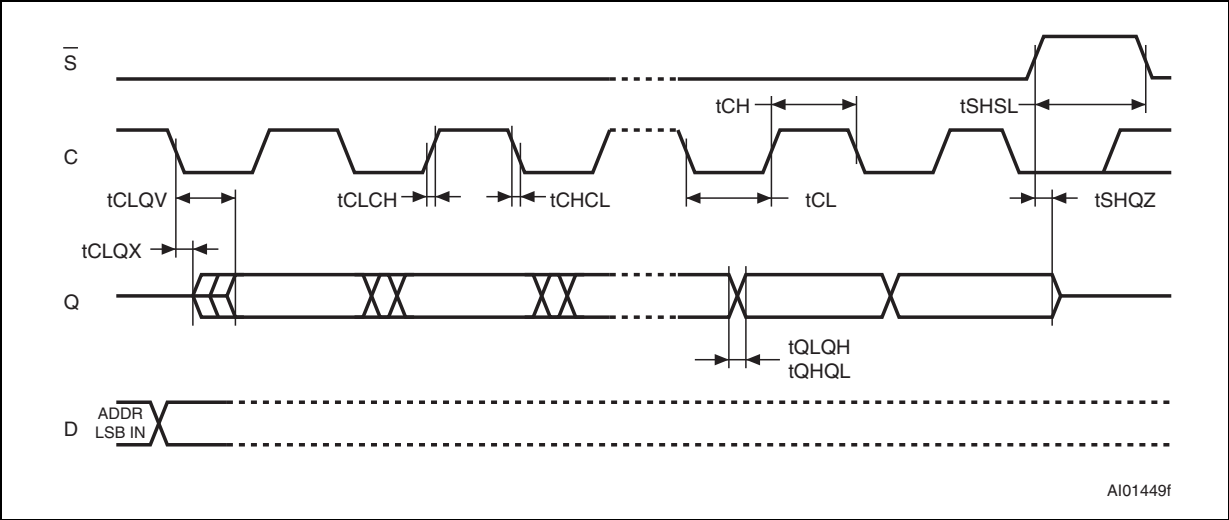

## 10 Package mechanical data

In order to meet environmental requirements, ST offers the device in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK® is an ST trademark.

**Figure 18. SO8N — 8-lead plastic small outline 150 mils body width, package outline**

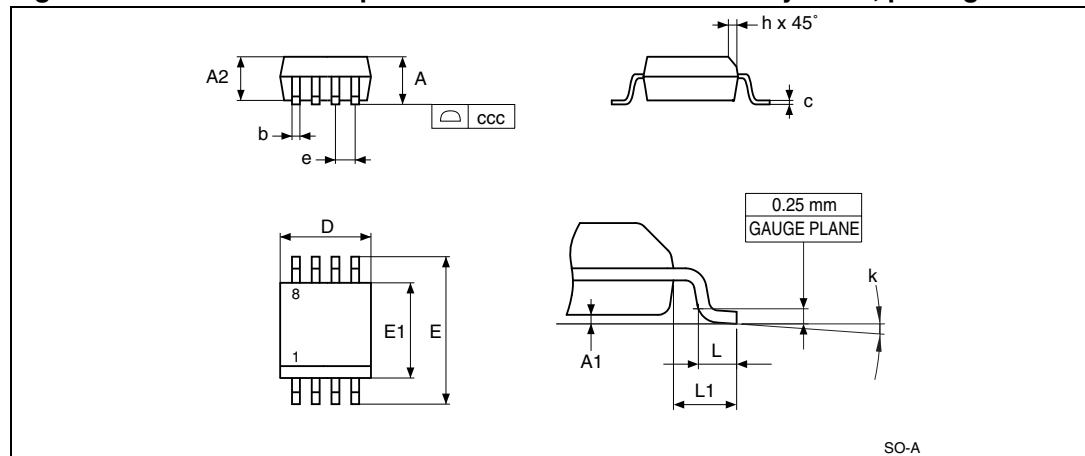


1. Drawing is not to scale.

**Table 21. SO8N — 8-lead plastic small outline, 150 mils body width, package mechanical data**

| Symbol | millimeters |      |      | inches <sup>(1)</sup> |        |        |
|--------|-------------|------|------|-----------------------|--------|--------|
|        | Typ         | Min  | Max  | Typ                   | Min    | Max    |
| A      | -           | -    | 1.75 | -                     | -      | 0.0689 |
| A1     | -           | 0.1  | 0.25 | -                     | 0.0039 | 0.0098 |
| A2     | -           | 1.25 | -    | -                     | 0.0492 | -      |
| b      | -           | 0.28 | 0.48 | -                     | 0.011  | 0.0189 |
| c      | -           | 0.17 | 0.23 | -                     | 0.0067 | 0.0091 |
| ccc    | -           | -    | 0.1  | -                     | -      | 0.0039 |
| D      | 4.9         | 4.8  | 5    | 0.1929                | 0.189  | 0.1969 |
| E      | 6           | 5.8  | 6.2  | 0.2362                | 0.2283 | 0.2441 |
| E1     | 3.9         | 3.8  | 4    | 0.1535                | 0.1496 | 0.1575 |
| e      | 1.27        | -    | -    | 0.05                  | -      | -      |
| h      | -           | 0.25 | 0.5  | -                     | 0.0098 | 0.0197 |
| k      | -           | 0°   | 8°   | -                     | 0°     | 8°     |
| L      | -           | 0.4  | 1.27 | -                     | 0.0157 | 0.05   |
| L1     | 1.04        | -    | -    | 0.0409                | -      | -      |

1. Values in inches are converted from mm and rounded to 4 decimal digits.

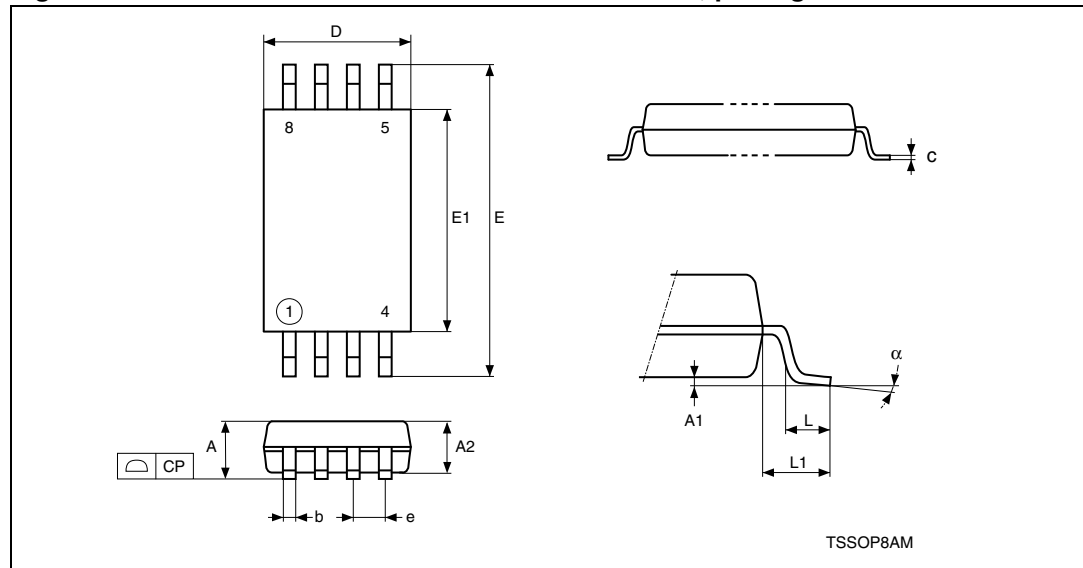**Figure 19. TSSOP8 — 8-lead thin shrink small outline, package outline**


1. Drawing is not to scale.

**Table 22. TSSOP8 — 8-lead thin shrink small outline, package mechanical data**

| Symbol              | millimeters |      |      | inches <sup>(1)</sup> |        |        |
|---------------------|-------------|------|------|-----------------------|--------|--------|
|                     | Typ         | Min  | Max  | Typ                   | Min    | Max    |
| A                   | -           | -    | 1.2  | -                     | -      | 0.0472 |
| A1                  | -           | 0.05 | 0.15 | -                     | 0.002  | 0.0059 |
| A2                  | 1           | 0.8  | 1.05 | 0.0394                | 0.0315 | 0.0413 |
| b                   | -           | 0.19 | 0.3  | -                     | 0.0075 | 0.0118 |
| c                   | -           | 0.09 | 0.2  | -                     | 0.0035 | 0.0079 |
| CP                  | -           | -    | 0.1  | -                     | -      | 0.0039 |
| D                   | 3           | 2.9  | 3.1  | 0.1181                | 0.1142 | 0.122  |
| e                   | 0.65        | -    | -    | 0.0256                | -      | -      |
| E                   | 6.4         | 6.2  | 6.6  | 0.252                 | 0.2441 | 0.2598 |
| E1                  | 4.4         | 4.3  | 4.5  | 0.1732                | 0.1693 | 0.1772 |
| L                   | 0.6         | 0.45 | 0.75 | 0.0236                | 0.0177 | 0.0295 |
| L1                  | 1           | -    | -    | 0.0394                | -      | -      |
| $\alpha$            | -           | 0°   | 8°   | -                     | 0°     | 8°     |
| N (number of leads) | 8           |      |      | 8                     |        |        |

1. Values in inches are converted from mm and rounded to 4 decimal digits.

**Figure 20. UFDFPN8 (MLP8) 8-lead ultra thin fine pitch dual flat package no lead  
2 × 3mm, outline**

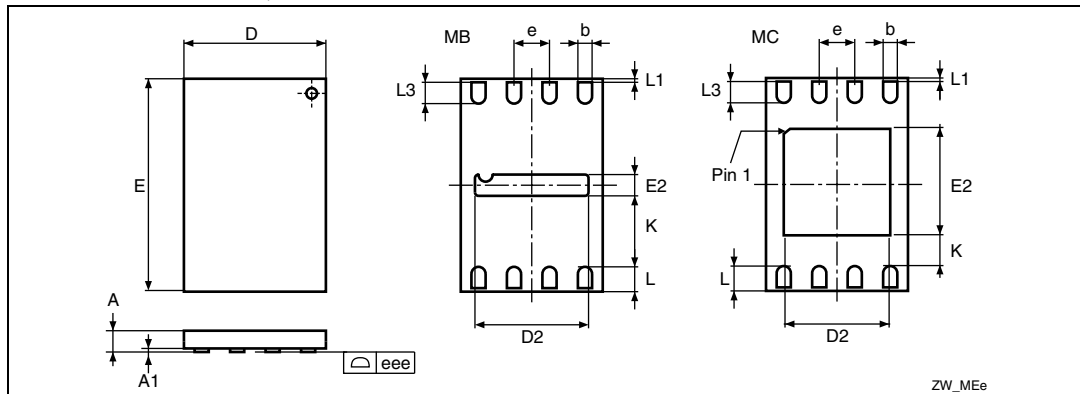

1. Drawing is not to scale.
2. The central pad (the area E2 by D2 in the above illustration) is pulled, internally, to  $V_{SS}$ . It must not be allowed to be connected to any other voltage or signal line on the PCB, for example during the soldering process.
3. The circle in the top view of the package indicates the position of pin 1.

**Table 23. UFDFPN8 (MLP8) 8-lead ultra thin fine pitch dual flat package no lead  
2 × 3mm, data**

| Symbol             | millimeters |       |       | inches <sup>(1)</sup> |        |        |
|--------------------|-------------|-------|-------|-----------------------|--------|--------|
|                    | Typ         | Min   | Max   | Typ                   | Min    | Max    |
| A                  | 0.550       | 0.450 | 0.600 | 0.0217                | 0.0177 | 0.0236 |
| A1                 | 0.020       | 0.000 | 0.050 | 0.0008                | 0.0000 | 0.0020 |
| b                  | 0.250       | 0.200 | 0.300 | 0.0098                | 0.0079 | 0.0118 |
| D                  | 2.000       | 1.900 | 2.100 | 0.0787                | 0.0748 | 0.0827 |
| D2 (rev MB)        | 1.600       | 1.500 | 1.700 | 0.0630                | 0.0591 | 0.0669 |
| D2 (rev MC)        | -           | 1.200 | 1.600 | -                     | 0.0472 | 0.0630 |
| E                  | 3.000       | 2.900 | 3.100 | 0.1181                | 0.1142 | 0.1220 |
| E2 (rev MB)        | 0.200       | 0.100 | 0.300 | 0.0079                | 0.0039 | 0.0118 |
| E2 (rev MC)        | -           | 1.200 | 1.600 | -                     | 0.0472 | 0.0630 |
| e                  | 0.500       | -     | -     | 0.0197                | -      | -      |
| K (rev MB)         | -           | 0.800 | -     | -                     | 0.0315 | -      |
| K (rev MC)         | -           | 0.300 | -     | -                     | 0.0118 | -      |
| L (rev MB)         | 0.450       | 0.400 | 0.500 | 0.0177                | 0.0157 | 0.0197 |
| L (rev MC)         | -           | 0.300 | 0.500 | -                     | 0.0118 | 0.0197 |
| L1                 | -           | -     | 0.150 | -                     | -      | 0.0059 |
| L3                 | -           | 0.300 | -     | -                     | 0.0118 | -      |
| eee <sup>(2)</sup> | 0.080       |       |       | 0.0031                |        |        |

1. Values in inches are converted from mm and rounded to 4 decimal digits.
2. Applied for exposed die paddle and terminals. Exclude embedding part of exposed die paddle from measuring.

# 11 Part numbering

**Table 24. Ordering information scheme**

|                                                                         |        |   |   |    |   |   |   |    |
|-------------------------------------------------------------------------|--------|---|---|----|---|---|---|----|
| Example:                                                                | M95040 | – | W | MN | 6 | T | P | /G |
| <b>Device type</b>                                                      |        |   |   |    |   |   |   |    |
| M95 = SPI serial access EEPROM                                          |        |   |   |    |   |   |   |    |
| <b>Device function</b>                                                  |        |   |   |    |   |   |   |    |
| 040 = 4 Kbit (512 x 8)                                                  |        |   |   |    |   |   |   |    |
| 020 = 2 Kbit (256 x 8)                                                  |        |   |   |    |   |   |   |    |
| 010 = 1 Kbit (128 x 8)                                                  |        |   |   |    |   |   |   |    |
| <b>Operating voltage</b>                                                |        |   |   |    |   |   |   |    |
| blank = V <sub>CC</sub> = 4.5 to 5.5V                                   |        |   |   |    |   |   |   |    |
| W = V <sub>CC</sub> = 2.5 to 5.5V                                       |        |   |   |    |   |   |   |    |
| R = V <sub>CC</sub> = 1.8 to 5.5V                                       |        |   |   |    |   |   |   |    |
| <b>Package</b>                                                          |        |   |   |    |   |   |   |    |
| MN = SO8 (150 mil width)                                                |        |   |   |    |   |   |   |    |
| DW = TSSOP8 (169 mil width)                                             |        |   |   |    |   |   |   |    |
| MB or MC = UDFPN8 (MLP8) 2 x 3mm                                        |        |   |   |    |   |   |   |    |
| <b>Device grade</b>                                                     |        |   |   |    |   |   |   |    |
| 6 = Industrial temperature range, –40 to 85 °C.                         |        |   |   |    |   |   |   |    |
| Device tested with standard test flow                                   |        |   |   |    |   |   |   |    |
| 3 = Device tested with high reliability certified flow <sup>(1)</sup> . |        |   |   |    |   |   |   |    |
| Automotive temperature range (–40 to 125 °C)                            |        |   |   |    |   |   |   |    |
| <b>Option</b>                                                           |        |   |   |    |   |   |   |    |
| blank = Standard packing                                                |        |   |   |    |   |   |   |    |
| T = Tape and reel packing                                               |        |   |   |    |   |   |   |    |
| <b>Plating technology</b>                                               |        |   |   |    |   |   |   |    |
| P or G = ECOPACK <sup>®</sup> (RoHS compliant)                          |        |   |   |    |   |   |   |    |
| <b>Process<sup>(2)</sup></b>                                            |        |   |   |    |   |   |   |    |
| /G or /S = F6SP36%                                                      |        |   |   |    |   |   |   |    |

1. ST strongly recommends the use of the Automotive Grade devices for use in an automotive environment. The high reliability certified flow (HRCF) is described in the quality note QNEE9801. Please ask your nearest ST sales office for a copy.
2. Used only for device grade 3

For a list of available options (speed, package, etc.) or for further information on any aspect of this device, please contact your nearest ST sales office.

## 12 Revision history

**Table 25. Document revision history**

| Date        | Version | Changes                                                                                                                                                                                                                                                                                                                                                           |
|-------------|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 10-May-2000 | 2.2     | s/issuing three bytes/issuing two bytes/ in the 2nd sentence of the Byte Write Operation                                                                                                                                                                                                                                                                          |
| 16-Mar-2001 | 2.3     | Human Body Model meets JEDEC std (Table 2). Minor adjustments to Figs 7,9,10,11 & Tab 9. Wording changes, according to the standard glossary<br>Illustrations and Package Mechanical data updated                                                                                                                                                                 |
| 19-Jul-2001 | 2.4     | Temperature range '3' added to the -W supply voltage range in DC and AC characteristics                                                                                                                                                                                                                                                                           |
| 11-Oct-2001 | 3.0     | Document reformatted using the new template                                                                                                                                                                                                                                                                                                                       |
| 26-Feb-2002 | 3.1     | Description of chip deselect after 8th clock pulse made more explicit                                                                                                                                                                                                                                                                                             |
| 27-Sep-2002 | 3.2     | Position of A8 in Read Instruction Sequence Figure corrected. Load Capacitance $C_L$ changed                                                                                                                                                                                                                                                                      |
| 24-Oct-2002 | 3.3     | Minimum values for $t_{CHHL}$ and $t_{CHHH}$ changed.                                                                                                                                                                                                                                                                                                             |
| 24-Feb-2003 | 3.4     | Description of Read from Memory Array (READ) instruction corrected, and clarified                                                                                                                                                                                                                                                                                 |
| 28-May-2003 | 3.5     | New products, identified by the process letter W, added                                                                                                                                                                                                                                                                                                           |
| 25-Jun-2003 | 3.6     | Correction to current products, identified by the process letter K not L. $I_{CC}$ changed in DC characteristics, and $t_{CHHL}$ , $t_{CHHH}$ substituted in AC characteristics<br>Voltage range -S upgraded by removing it, and adding the -R voltage range in its place<br>Temperature range 5 removed.                                                         |
| 21-Nov-2003 | 4.0     | Table of contents, and Pb-free options added. $V_{IL}(\min)$ improved to -0.45V                                                                                                                                                                                                                                                                                   |
| 02-Feb-2004 | 4.1     | $V_{IL}(\max)$ and $t_{CLQV}(\max)$ changed                                                                                                                                                                                                                                                                                                                       |
| 01-Mar-2004 | 5.0     | Absolute Maximum Ratings for $V_{IO}(\min)$ and $V_{CC}(\min)$ improved. Soldering temperature information clarified for RoHS compliant devices. New 5V and 2.5V devices, with process letter W, promoted from preliminary data to full data. Device Grade 3 clarified, with reference to HRCF and automotive environments                                        |
| 05-Oct-2004 | 6.0     | Product List summary table added. Process identification letter "G" information added. Order information for Tape and Reel changed to T. AEC-Q100-002 compliance. Device Grade information clarified. $t_{HHQX}$ corrected to $t_{HHQV}$ . Signal Description updated.<br>10MHz, 5ms Write is now the present product. $t_{CH}+t_{CL}<1/f_C$ constraint clarified |



Table 25. Document revision history

| Date        | Version | Changes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 06-Nov-2006 | 7       | <p>Document converted to new template, <a href="#">Table 5: Status register format</a> moved to below <a href="#">Section 6.3: Read Status Register (RDSR)</a>.</p> <p>PDIP package removed. UDFPN8 (MB) package added (see <a href="#">Figure 20</a> and <a href="#">Table 23</a>) and SO8N package specifications updated (see <a href="#">Figure 18</a> and <a href="#">Table 21</a>). Packages are ECOPACK® compliant.</p> <p><a href="#">Section 6.7: Cycling</a> added. <a href="#">Section 2.8: Supply voltage (VCC)</a> added and information removed below <a href="#">Section 4: Operating features</a>.</p> <p><a href="#">Figure 3: Bus master and memory devices on the SPI bus</a> modified.</p> <p><math>T_{LEAD}</math> parameter modified, <a href="#">Note 1</a> changed, and <math>T_A</math> added to <a href="#">Table 7: Absolute maximum ratings</a>.</p> <p>Characteristics of previous product identified by process letter K removed.</p> <p>CL modified in <a href="#">Table 11: AC test measurement conditions</a>. Note removed below <a href="#">Table 13</a> and <a href="#">Table 13</a>.</p> <p>Information in <a href="#">Table 16</a> is no longer Preliminary data, <math>I_{CC}</math>, <math>I_{CC1}</math> and <math>V_{IL}</math> modified. End timing line of <math>t_{SHQZ}</math> moved in <a href="#">Figure 17</a>.</p> <p><math>t_{CHHL}</math> and <math>t_{CHHH}</math> changed to <math>t_{CLHL}</math> and <math>t_{CLHH}</math>, respectively in <a href="#">Figure 16</a>, <a href="#">Table 18</a>, <a href="#">Table 17</a>, <a href="#">Table 18</a>, <a href="#">Table 19</a> and <a href="#">Table 20</a>.</p> <p><a href="#">Plating technology</a> and <a href="#">Process</a> updated in <a href="#">Table 24: Ordering information scheme</a>.</p> |
| 20-Mar-2008 | 8       | <p><a href="#">Section 2.8: Supply voltage (VCC)</a> updated.</p> <p><a href="#">Section 3: Connecting to the SPI bus</a> modified.</p> <p><a href="#">Section 6.6: Write to Memory Array (WRITE)</a> modified.</p> <p>Device grade 6 removed in the 4.5 to 5.5 V <math>V_{CC}</math> range (see <a href="#">Table 8</a>).</p> <p><a href="#">Table 16: DC characteristics (M950x0-R, device grade 6)</a> modified.</p> <p><a href="#">Table 18: AC characteristics (M950x0-W, device grade 6)</a> modified: frequency changed from 5 MHz to 10 MHz.</p> <p><a href="#">Table 20: AC characteristics (M950x0-R, device grade 6)</a> modified: frequency changed from 2 MHz to 5 MHz.</p> <p><a href="#">Section 10: Package mechanical data</a>:</p> <ul style="list-style-type: none"> <li>– Inches are calculated from millimeters and rounded to the third decimal digit.</li> <li>– UDFPN8 package specifications modified.</li> </ul> <p>Blank option removed below <a href="#">Plating technology</a> in <a href="#">Table 24: Ordering information scheme</a>. <a href="#">Table 25</a>, <a href="#">Table 26</a> and <a href="#">Table 27</a> added.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

Table 25. Document revision history

| Date        | Version | Changes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 24-Sep-2009 | 9       | <p><a href="#">Section 2.8: Supply voltage (VCC)</a> and <a href="#">Section 6.4: Write Status Register (WRSR)</a> updated.</p> <p><a href="#">Section 6.6: Write to Memory Array (WRITE)</a> clarified.</p> <p><math>I_{OL}</math> and <math>I_{OH}</math> added to <a href="#">Table 7: Absolute maximum ratings</a>.</p> <p><math>V_{RES}</math> added to DC characteristics tables <a href="#">13</a>, <a href="#">14</a>, <a href="#">15</a> and <a href="#">16</a>. <math>t_{CLQV}</math> modified in <a href="#">Figure 20: AC characteristics (M950x0-R, device grade 6)</a>.</p> <p>Note added to <a href="#">Table 20: AC characteristics (M950x0-R, device grade 6)</a>.</p> <p><a href="#">Figure 15: Serial input timing</a>, <a href="#">Figure 16: Hold timing</a> and <a href="#">Figure 17: Serial output timing</a> updated.</p> <p>Note added below <a href="#">Figure 20: UDFPN8 (MLP8) 8-lead ultra thin fine pitch dual flat package no lead 2 × 3mm, outline</a>.</p> <p>/W process option removed from <a href="#">Table 24: Ordering information scheme</a>.</p> <p>ECOPACK text updated. Small text changes.</p> |
| 02-Feb-2012 | 10      | <p>Document renamed from “M95040 M95020 M95010” to “M950x0 M950x0-W M950x0-R”</p> <p>Silhouette of UDFPN8 (MB or MC) on the cover page updated.</p> <p><a href="#">Section 6.3: Read Status Register (RDSR)</a> updated.</p> <p>Text modified in <a href="#">Section 6.3.1: WIP bit</a>.</p> <p><a href="#">Table 7: Absolute maximum ratings</a> updated.</p> <p><a href="#">Figure 20: UDFPN8 (MLP8) 8-lead ultra thin fine pitch dual flat package no lead 2 × 3mm, outline</a> modified.</p> <p><a href="#">Table 23: UDFPN8 (MLP8) 8-lead ultra thin fine pitch dual flat package no lead 2 × 3mm, data</a> updated.</p> <p>Removed tables of available products from <a href="#">Section 11: Part numbering</a>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                 |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**UNLESS EXPRESSLY APPROVED IN WRITING BY TWO AUTHORIZED ST REPRESENTATIVES, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2012 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)