# NT5CB(C)256M8FN / NT5CB(C)128M16FP



### **Fundamental AC Specifications – Core Timing**

#### DDR3-2133, DDR3(L)-1866, DDR3(L)-1600 and DDR3(L)-1333

Speed Bine	DDR3-2133			DDR3(I	DDR3(L)-1866			DDR3(L)-1600		DDR3(L)-1333			
Speed Bins	14-1	4-14	12-1	2-12	13-1	3-13	11-1	1-11	9-9	9-9	10-1	0-10	Unit
Parameter	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
tAA	13.09	20	12.84	20.0	13.91	20	13.75	20	13.5	20	15	20	ns
tRCD	13.09	-	12.84	-	13.91	-	13.75	-	13.5	-	15	-	ns
tRP	13.09	-	12.84	-	13.91	-	13.75	-	13.5	-	15	-	ns
tRC	46.09	-	46.84	-	47.91	-	48.75	-	49.5	-	51	-	ns
tRAS	33	9*tREFI	34.0	9*tREFI	34	9*tREFI	35	9*tREFI	36	9*tREFI	36	9*tREFI	ns

### DDR3(L)-1066 and DDR3(L)-800

Speed Bins		DDR3(I	L)-1066		DDR3(L)-800					
Speed Bills	7-	7-7	8-8	8-8	5-	5-5	6-6-6		Unit	
Parameter	Min	Max	Min	Max						
tAA	13.125	20	15	20	12.5	20	15	20	ns	
tRCD	13.125	-	15	-	12.5 - 15		15	-	ns	
tRP	13.125	-	15	-	12.5	-	15	-	ns	
tRC	50.625	-	52.5	-	50	-	52.5	-	ns	
tRAS	37.5	9*tREFI	37.5	9*tREFI	37.5	9*tREFI	37.5	9*tREFI	ns	

### NT5CB(C)256M8FN / NT5CB(C)128M16FP



### **Descriptions**

The 2Gb Double-Data-Rate-3 (DDR3(L)) is double data rate architecture to achieve high-speed operation. It is internally configured as an eight bank DRAMs.

The 2Gb chip is organized as 32Mbit x 8 I/Os x 8 banks or 16Mbit x 16 I/Os x 8 bank devices. These synchronous devices achieve high speed double-data-rate transfer rates of up to 1866 Mb/sec/pin for general applications.

The chip is designed to comply with all key DDR3(L) DRAM key features and all of the control and address inputs are synchronized with a pair of externally supplied differential clocks. Inputs are latched at the cross point of differential clocks (CK rising and  $\overline{\text{CK}}$  falling). All I/Os are synchronized with a single ended DQS or differential DQS pair in a source synchronous fashion.

These devices operate with a single  $1.5V \pm 0.075V$  or 1.35V - 0.067V + 0.1V power supply and are available in BGA packages.



### **Ordering Information**

	<b>5</b>			Speed <sup>3</sup>			
Organization	Part Number	Package	Clock (MHz)	rade  800	CL-TRCD-TRP		
	DDR	3 Commerci	al Grade				
	NT5CB256M8FN-DI		800	DDR3-1600	11-11-11		
256M x 8	NT5CB256M8FN-EJ	70 D-II	933	DDR3-1866	12-12-12		
ZOON X O	NT5CB256M8FN-EK1	78-Ball	933	DDR3-1866	13-13-13		
	NT5CB256M8FN-FL		1066	DDR3-2133	14-14-14		
	NT5CB128M16FP-DI		800	DDR3-1600	11-11-11		
128M x 16	NT5CB128M16FP-EJ	OG Dall	933	DDR3-1866	12-12-12		
120101 X 10	NT5CB128M16FP-EK1	96-Ball	933	DDR3-1866	13-13-13		
	NT5CB128M16FP-FL		1066	DDR3-2133	14-14-14		
	DDR3	L Commerc	ial Grade				
Organization	Part Number	Package		Speed <sup>3</sup>			
Organization	rait Nullibei	rackage	Clock (MHz)	Data Rate (Mb/s)	CL-TRCD-TRP		
	NT5CC256M8FN-DI		800	DDR3L-1600 <sup>4</sup>	11-11-11		
256M x 8	NT5CC256M8FN-DIB	78-Ball	800	DDR3L RS-1600	11-11-11		
	NT5CC256M8FN-EK		933	DDR3L-1866 <sup>4</sup>	13-13-13		
	NT5CC128M16FP-DI		800	DDR3L-1600 <sup>4</sup>	11-11-11		
128M x 16	NT5CC128M16FP-DIB	96-Ball	800	DDR3L RS-1600	11-11-11		
	NT5CC128M16FP-EK		933	DDR3L-1866 <sup>4</sup>	13-13-13		
	DDF	R3 Industria	Grade				
Organization	Part Number	Package	Speed <sup>3</sup>				
	i art ivamber	1 ackage	Clock (MHz)	Data Rate (Mb/s)	CL-TRCD-TRP		
256M x 8	NT5CC256M8FN-DII	78-Ball	800	DDR3L-1600 <sup>4</sup>	11-11-11		
	NT5CB256M8FN-DII	70-0411	800	DDR3-1600	11-11-11		
128M x 16	NT5CC128M16FP-DII	96-Ball	800	DDR3L-1600 <sup>4</sup>	11-11-11		
IZOWIX IO	NT5CB128M16FP-DII			DDR3-1600	11-11-11		
	DDR3(I	L) Automoti	ve Grade <sup>2</sup>				
	NT5CB128M16FP-DIA		800	DDR3-1600	11-11-11		
128M x 16	NT5CB128M16FP-DIH	96-Ball	800	DDR3-1600	11-11-11		
IZOWIX IO	NT5CC128M16FP-DIA	oo ball	800	DDR3L-1600 <sup>4</sup>	11-11-11		
	NT5CC128M16FP-DIH		800	DDR3L-1600 <sup>4</sup>	11-11-11		

NOTE 1 Mainstream Product.

NOTE 2 Please confirm with NTC for the available schedule.


NOTE 3 The timing specification of high speed bin is backward compatible with low speed bin.

NOTE 4 1.35V DDR3L are backward compatible to 1.5V DDR3 parts. 1.35V DDR3L-RS parts are exceptional and unallowable to be compatible to 1.35V DDR3L and 1.5V DDR3 parts.

# NT5CB(C)256M8FN / NT5CB(C)128M16FP



### **NANYA Component Part Numbering Guide**

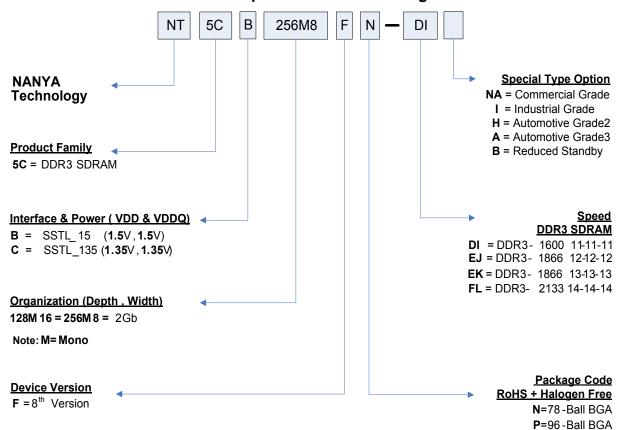





### **Ball Configuration – 78 Ball BGA Package (X8)**

#### <TOP View>

See the balls through the package

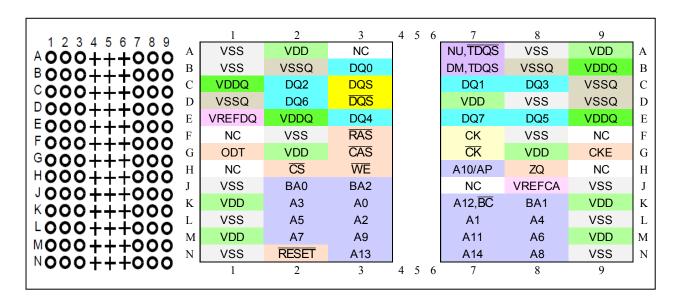

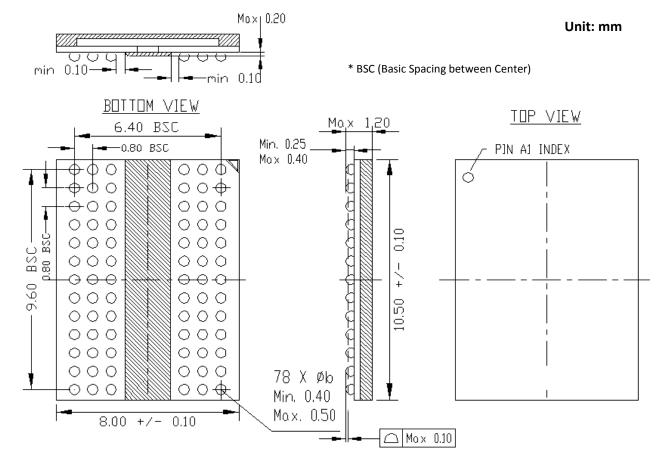





### Ball Configuration – 96 Ball BGA Package (X16)

#### <TOP View>

See the balls through the package

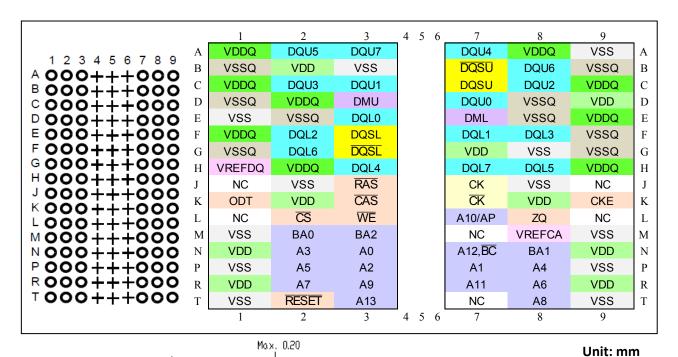

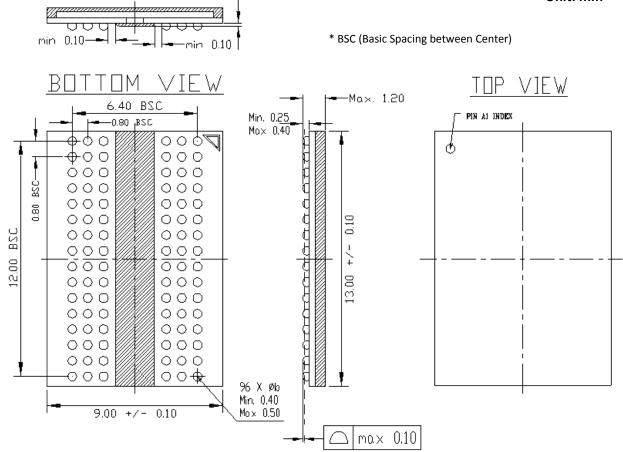





**Ball Descriptions** 

Symbol	Туре	Function
CK, CK	Input	Clock: CK and $\overline{\text{CK}}$ are differential clock inputs. All address and control input signals are sampled on the crossing of the positive edge of CK and negative edge of $\overline{\text{CK}}$ .
CKE	Input	Clock Enable: CKE high activates, and CKE low deactivates, internal clock signals and device input buffers and output drivers. Taking CKE low provides Precharge Power-Down and Self-Refresh operation (all banks idle), or Active Power-Down (row Active in any bank). CKE is synchronous for power down entry and exit and for Self-Refresh entry. CKE is asynchronous for Self-Refresh exit. After VREF has become stable during the power on and initialization sequence it must be maintained for proper operation of the CKE receiver. For proper self-refresh entry and exit, VREF must maintain to this input. CKE must be maintained high throughout read and write accesses. Input buffers, excluding CK, $\overline{\text{CK}}$ , ODT and CKE are disabled during Power Down. Input buffers, excluding CKE, are disabled during Self-Refresh.
<u>CS</u>	Input	<b>Chip Select:</b> All commands are masked when $\overline{CS}$ is registered high. $\overline{CS}$ provides for external rank selection on systems with multiple memory ranks. $\overline{CS}$ is considered part of the command code.
$\overline{RAS}$ , $\overline{CAS}$ , $\overline{WE}$	Input	
For x8,  DM  For x16,  DMU, DML	Input	Input Data Mask: DM is an input mask signal for write data. Input data is masked when DM is sampled HIGH coincident with that input data during a Write access. DM is sampled on both edges of DQS. For x8 device, the function of DM or TDQS/TDQS is enabled by Mode Register A11 setting in MR1.
BA0 - BA2	Input	Bank Address Inputs: BA0, BA1, and BA2 define to which bank an Active, Read, Write or Precharge command is being applied. Bank address also determines which mode register is to be accessed during a MRS cycle.
A10 / AP	Input	Auto-Precharge: A10 is sampled during Read/Write commands to determine whether Autoprecharge should be performed to the accessed bank after the Read/Write operation. (HIGH: Autoprecharge; LOW: no Autoprecharge). A10 is sampled during a Precharge command to determine whether the Precharge applies to one bank (A10 LOW) or all banks (A10 HIGH). If only one bank is to be precharged, the bank is selected by bank addresses.
For x8, A0 – A14 For x16, A0 – A13	Input	Address Inputs: Provide the row address for Activate commands and the column address for Read/Write commands to select one location out of the memory array in the respective bank.  (A10/AP and A12/BC have additional function as below.) The address inputs also provide the op-code during Mode Register Set commands.
A12/BC	Input	<b>Burst Chop:</b> A12/BC is sampled during Read and Write commands to determine if burst chop (on the fly) will be performed. (HIGH - no burst chop; LOW - burst chopped).
ODT	Input	On Die Termination: ODT (registered HIGH) enables termination resistance internal to the DDR3 SDRAM. When enabled, ODT is applied to each DQ, DQS, DQS and DM/TDQS, NU/TDQS (when TDQS is enabled via Mode Register A11=1 in MR1) signal for x8 configurations. The ODT pin will be ignored if Mode-registers, MR1and MR2, are programmed to disable RTT.



#### NT5CB(C)256M8FN / NT5CB(C)128M16FP


Symbol	Туре	Function
RESET	Input	Active Low Asynchronous Reset: Reset is active when RESET is LOW, and inactive when RESET is HIGH. RESET must be HIGH during normal operation. RESET is a CMOS rail to rail signal with DC high and low at 80% and 20% of VDD, i.e. 1.20V for DC high and 0.30V.
DQ	Input/output	<b>Data Inputs/Output:</b> Bi-directional data bus. DQ0 is the prime DQ in a low byte lane of x4/x8/x16 configuration and DQ8 is the prime DQ in a high byte lane of x16 configuration for write leveling.
For x8,  DQS, $(\overline{DQS})$ For x16,  DQSL, $(\overline{DQSL})$ ,  DQSU, $(\overline{DQSU})$	Input/output	Data Strobe: output with read data, input with write data. Edge aligned with read data, centered with write data. The data strobes DQS, DQSL, DQSU are paired with differential signals $\overline{DQS}$ , $\overline{DQSL}$ , $\overline{DQSU}$ , respectively, to provide differential pair signaling to the system during both reads and writes. DDR3 SDRAM supports differential data strobe only and does not support single-ended.
For x8, TDQS, (TDQS)	Output	<b>Termination Data Strobe:</b> TDQS/TDQS is applicable for X8 DRAMs only. When enabled via Mode Register A11=1 in MR1, DRAM will enable the same termination resistance function on TDQS/TDQS that is applied to DQS/DQS. When disabled via mode register A11=0 in MR1, DM/TDQS will provide the data mask function and TDQS is not used. x16 DRAMs must disable the TDQS function via mode register A11=0 in MR1.
NC	-	No Connect: No internal electrical connection is present.
$V_{DDQ}$	Supply	<b>DQ Power Supply:</b> 1.35V -0.067V/+0.1V or 1.5V ± 0.075V
$V_{DD}$	Supply	<b>Power Supply:</b> 1.35V -0.067V/+0.1V or 1.5V ± 0.075V
V <sub>SSQ</sub>	Supply	DQ Ground
V <sub>SS</sub>	Supply	Ground
V <sub>REFCA</sub>	Supply	Reference voltage for CA
$V_{REFDQ}$	Supply	Reference voltage for DQ
ZQ	Supply	Reference pin for ZQ calibration.

#### Notes:

- 1. Input only pins (BA0-BA2, A0-A14,  $\overline{\text{RAS}}$ ,  $\overline{\text{CAS}}$ ,  $\overline{\text{WE}}$ ,  $\overline{\text{CS}}$ , CKE, ODT, and  $\overline{\text{RESET}}$ ) do not supply termination.
- 2. The signal may show up in a different symbol but it indicates the same thing. e.g.,  $/CK = CK\# = \overline{CK} = CKb$ ,  $/DQS = DQS\# = \overline{DQS} = DQSb$ ,  $/CS = CS\# = \overline{CS} = CSb$ .



### **Simplified State Diagram**

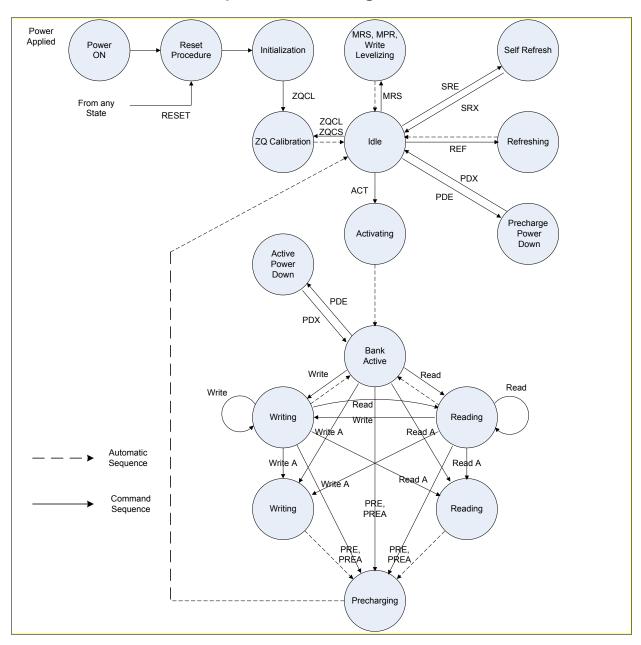

### **State Diagram Command Definitions**

Abbr.	Function	Abbr.	Function	Abbr.	Function
ACT	Active	Read	RD, RDS4, RDS8	PDE	Enter Power-down
PRE	Precharge	Read A	RDA, RDAS4, RDAS8	PDX	Exit Power-down
PREA	Precharge All	Write	WR, WRS4, WRS8	SRE	Self-Refresh entry
MRS	Mode Register Set	Write A	WRA, WRAS4, WRAS8	SRX	Self-Refresh exit
REF	Refresh	RESET	Start RESET Procedure	MPR	Multi-Purpose Register
ZQCL	ZQ Calibration Long	zqcs	ZQ Calibration Short	-	-

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP



### **Basic Functionality**

The DDR3(L) SDRAM is a high-speed dynamic random access memory internally configured as an eight-bank DRAM. The DDR3(L) SDRAM uses an 8n prefetch architecture to achieve high speed operation. The 8n prefetch architecture is combined with an interface designed to transfer two data words per clock cycle at the I/O pins. A single read or write operation for the DDR3(L) SDRAM consists of a single 8n-bit wide, four clock data transfer at the internal DRAM core and two corresponding n-bit wide, one-half clock cycle data transfers at the I/O pins.

Read and write operation to the DDR3(L) SDRAM are burst oriented, start at a selected location, and continue for a burst length of eight or a 'chopped' burst of four in a programmed sequence. Operation begins with the registration of an Active command, which is then followed by a Read or Write command. The address bits registered coincident with the Active command are used to select the bank and row to be activated (BA0-BA2 select the bank; A0-A14 select the row). The address bit registered coincident with the Read or Write command are used to select the starting column location for the burst operation, determine if the auto precharge command is to be issued (via A10), and select BC4 or BL8 mode 'on the fly' (via A12) if enabled in the mode register.

Prior to normal operation, the DDR3(L) SDRAM must be powered up and initialized in a predefined manner. The following sections provide detailed information covering device reset and initialization, register definition, command descriptions and device operation.

#### **RESET and Initialization Procedure**

#### Power-up Initialization sequence

The Following sequence is required for POWER UP and Initialization

- 1. Apply power (RESET is recommended to be maintained below 0.2 x VDD, all other inputs may be undefined). RESET needs to be maintained for minimum 200µs with stable power. CKE is pulled "Low" anytime before RESET being de-asserted (min. time 10ns). The power voltage ramp time between 300mV to VDD<sub>min</sub> must be no greater than 200ms; and during the ramp, VDD>VDDQ and (VDD-VDDQ) <0.3 Volts.
- VDD and VDDQ are driven from a single power converter output, AND
- The voltage levels on all pins other than VDD, VDDQ, VSS, VSSQ must be less than or equal to VDDQ and VDD on one side and must be larger than or equal to VSSQ and VSS on the other side. In addition, VTT is limited to 0.95V max once power ramp is finished, AND
- V<sub>ref</sub> tracks VDDQ/2.
- Apply VDD without any slope reversal before or at the same time as VDDQ.
- Apply VDDQ without any slope reversal before or at the same time as VTT & Vref.
- The voltage levels on all pins other than VDD, VDDQ, VSS, VSSQ must be less than or equal to VDDQ and VDD on one side and must be larger than or equal to VSSQ and VSS on the other side.
- 2. After RESET is de-asserted, wait for another 500us until CKE become active. During this time, the DRAM will start internal state initialization; this will be done independently of external clocks.
- 3. Clock (CK, CK) need to be started and stabilized for at least 10ns or 5tCK (which is larger) before CKE goes active. Since CKE is a synchronous signal, the corresponding set up time to clock (t<sub>IS</sub>) must be meeting. Also a NOP or




#### NT5CB(C)256M8FN / NT5CB(C)128M16FP

Deselect command must be registered (with  $t_{\text{IS}}$  set up time to clock) before CKE goes active. Once the CKE registered "High" after Reset, CKE needs to be continuously registered "High" until the initialization sequence is finished, including expiration of  $t_{\text{DLLK}}$  and  $t_{\text{ZOinit}}$ .

- 4. The DDR3(L) DRAM will keep its on-die termination in high impedance state as long as RESET is asserted. Further, the DRAM keeps its on-die termination in high impedance state after RESET de-assertion until CKE is registered HIGH. The ODT input signal may be in undefined state until tIS before CKE is registered HIGH. When CKE is registered HIGH, the ODT input signal may be statically held at either LOW or HIGH. If RTT\_NOM is to be enabled in MR1, the ODT input signal must be statically held LOW. In all cases, the ODT input signal remains static until the power up initialization sequence is finished, including the expiration of tDLLK and tZQinit.
- **5.** After CKE being registered high, wait minimum of Reset CKE Exit time, tXPR, before issuing the first MRS command to load mode register. [TXPR=max (tXS, 5tCK)]
- **6.** Issue MRS command to load MR2 with all application settings. (To issue MRS command for MR2, provide "Low" to BA0 and BA2, "High" to BA1)
- 7. Issue MRS command to load MR3 with all application settings. (To issue MRS command for MR3, provide "Low" to BA2, "High" to BA0 and BA1)
- **8.** Issue MRS Command to load MR1 with all application settings and DLL enabled. (To issue "DLL Enable" command, provide "Low" to A0, "High" to BA0 and "Low" to BA1 and BA2)
- Issue MRS Command to load MR0 with all application settings and "DLL reset". (To issue DLL reset command, provide "High" to A8 and "Low" to BA0-BA2)
- 10. Issue ZQCL command to starting ZQ calibration.
- **11.** Wait for both  $t_{DLLK}$  and  $t_{ZQinit}$  completed.
- 12. The DDR3 (L) SDRAM is now ready for normal operation.



### Reset and Initialization Sequence at Power- on Ramping (Cont'd)

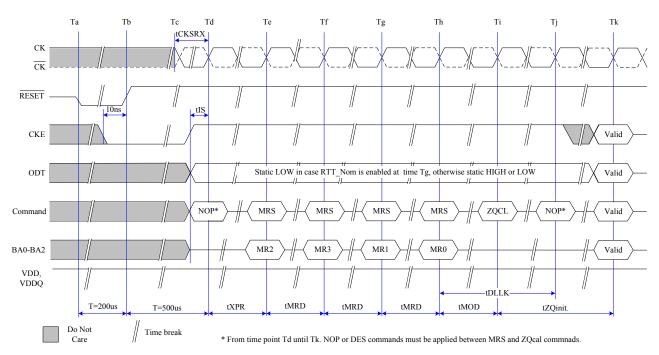


#### Reset Procedure at Stable Power (Cont'd)

The following sequence is required for RESET at no power interruption initialization.

- 1. Asserted RESET below 0.2\*VDD anytime when reset is needed (all other inputs may be undefined). RESET needs to be maintained for minimum 100ns. CKE is pulled "Low" before RESET being de-asserted (min. time 10ns).
- 2. Follow Power-up Initialization Sequence step 2 to 11.
- 3. The Reset sequence is now completed. DDR3 (L) SDRAM is ready for normal operation.


#### **Reset Procedure at Power Stable Condition**

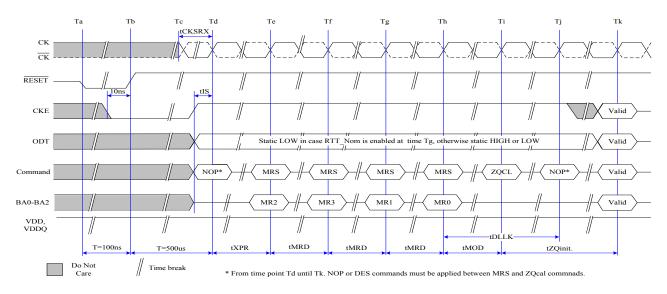

### NT5CB(C)256M8FN / NT5CB(C)128M16FP



### VDDQ/VDDQ Voltage Switch Between DDR3L and DDR3

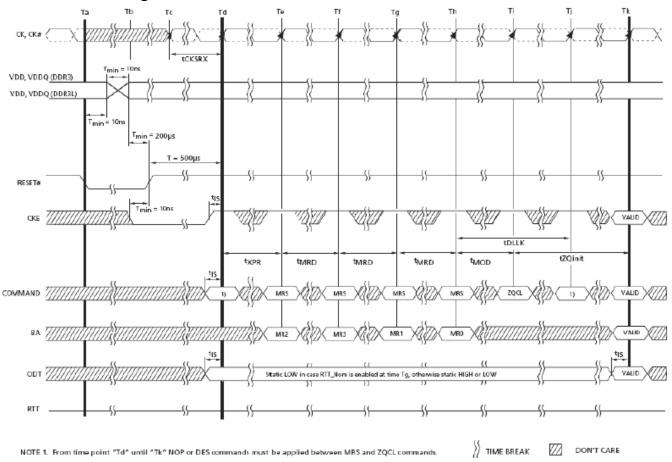

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP




# Register Definition

#### **Programming the Mode Registers**

For application flexibility, various functions, features, and modes are programmable in four Mode Registers, provided by the DDR3 (L) SDRAM, as user defined variables and they must be programmed via a Mode Register Set (MRS) command. As the default values of the Mode Registers (MR) are not defined, contents of Mode Registers must be fully initialized and/or re-initialized, i.e. written, after power up and/or reset for proper operation. Also the contents of the Mode Registers can be altered by re-executing the MRS command during normal operation. When programming the mode registers, even if the user chooses to modify only a sub-set of the MRS fields, all address fields within the accessed mode register must be redefined when the MRS command is issued. MRS command and DLL Reset do not affect array contents, which mean these commands can be executed any time after power-up without affecting the array contents.

The mode register set command cycle time,  $t_{MRD}$  is required to complete the write operation to the mode register and is the minimum time required between two MRS commands shown as below.

#### t<sub>MRD</sub> Timing

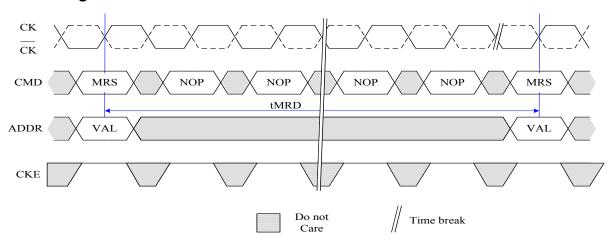


The MRS command to Non-MRS command delay, t<sub>MOD</sub>, is require for the DRAM to update the features except DLL reset, and is the minimum time required from an MRS command to a non-MRS command excluding NOP and DES shown as the following figure.

### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### t<sub>MOD</sub> Timing

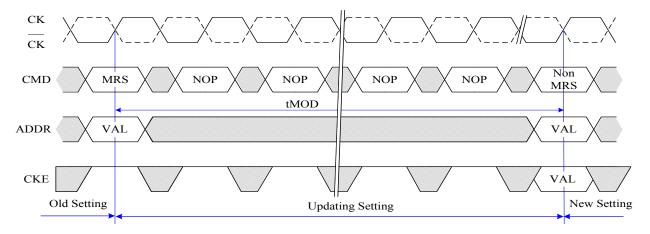

#### **Programming the Mode Registers (Cont'd)**

The mode register contents can be changed using the same command and timing requirements during normal operation as long as the DRAM is in idle state, i.e. all banks are in the precharged state with tRP satisfied, all data bursts are completed and CKE is high prior to writing into the mode register. The mode registers are divided into various fields depending on the functionality and/or modes.


#### **Mode Register MR0**

The mode-register MR0 stores data for controlling various operating modes of DDR3 (L) SDRAM. It controls burst length, read burst type, CAS latency, test mode, DLL reset, WR, and DLL control for precharge Power-Down, which include various vendor specific options to make DDR3(L) SDRAM useful for various applications. The mode register is written by asserting low on  $\overline{CS}$ ,  $\overline{RAS}$ ,  $\overline{CAS}$ ,  $\overline{WE}$ , BA0, BA1, and BA2, while controlling the states of address pins according to the following figure.





#### **MR0** Definition

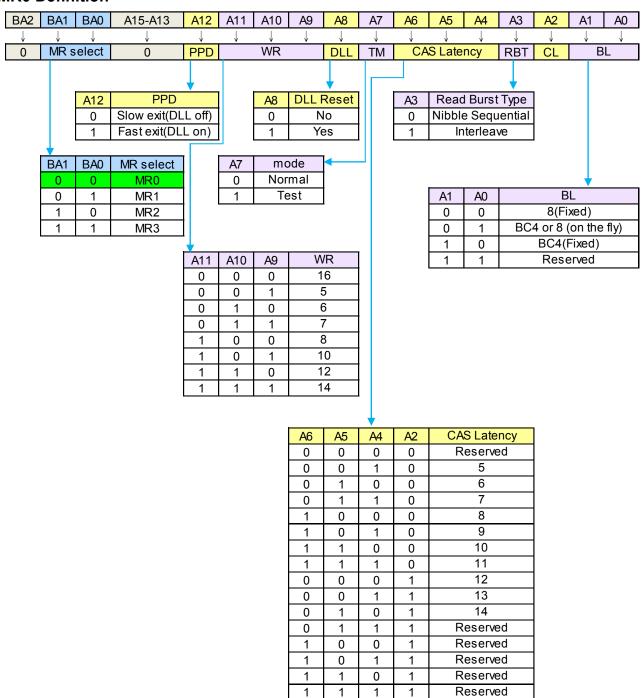

<sup>\*1:</sup> BA2 and A13~A15 are RFU and must be programmed to 0 during MRS.

<sup>\*2:</sup> WR (write recovery for autoprecharge)min in clock cycles is calculated by dividing tWR(in ns) by tCK(in ns) and rounding up to the next integer: WRmin[cycles] = Roundup(tWR[ns] / tCK[ns]). The WR value in the mode register must be programmed to be equal or larger than WRmin. The programmed WR value is used with tRP to determine tDAL.

<sup>\*3:</sup> The table only shows the encodings for a given Cas Latency. For actual supported Cas Latency, please refer to speedbin tables for each frequency

<sup>\*4:</sup> The table only shows the encodings for Write Recovery. For actual Write recovery timing, please refer to AC timingtable.





#### Burst Length, Type, and Order

Accesses within a given burst may be programmed to sequential or interleaved order. The burst type is selected via bit A3 as shown in the MR0 Definition as above figure. The ordering of access within a burst is determined by the burst length, burst type, and the starting column address. The burst length is defined by bits A0-A1. Burst lengths options include fix BC4, fixed BL8, and on the fly which allow BC4 or BL8 to be selected coincident with the registration of a Read or Write command via A12/BC.

#### **Burst Type and Burst Order**

Burst Length	Read Write	Starting Column Address (A2,A1,A0)	Burst type: Sequential (decimal) A3 = 0	Burst type: Interleaved (decimal) A3 = 1	Note
		0,0,0	0,1,2,3,T,T,T,T	0,1,2,3,T,T,T,T	
		0,0,1	1,2,3,0,T,T,T,T	1,0,3,2,T,T,T,T	
		0,1,0	2,3,0,1,T,T,T,T	2,3,0,1,T,T,T,T	
	Burst ength         Read Write         Column Address (decimal) (decimal) (decimal) (decimal) (decimal)         Interleaved (decimal) (decimal)           0,0,0         0,1,2,3,T,T,T         0,1,2,3,T,T,T           0,0,1         1,2,3,0,T,T,T         1,0,3,2,T,T,T           0,1,0         2,3,0,1,T,T,T         2,3,0,1,T,T,T           0,1,1         3,0,1,2,T,T,T         3,2,1,0,T,T,T           1,0,0         4,5,6,7,T,T,T         4,5,6,7,T,T,T	400			
4	Read	1,0,0	4,5,6,7,T,T,T,T	4,5,6,7,T,T,T	1,2,3
Chop		1,0,1	5,6,7,4,T,T,T,T	5,4,7,6,T,T,T	
	Read Write         Column Address (A2,A1,A0)         Sequential (decimal) (decimal)         Interleaved (decimal)           0.0.0         0.1,2,3,T,T,T         0,1,2,3,T,T,T           0.0,1         1,2,3,0,T,T,T         1,0,3,2,T,T,T           0,1,0         2,3,0,1,T,T,T         2,3,0,1,T,T,T           0,1,1         3,0,1,2,T,T,T         3,2,1,0,T,T,T           1,0,0         4,5,6,7,T,T,T         4,5,6,7,T,T,T           1,0,1         5,6,7,4,T,T,T         5,4,7,6,T,T,T           1,1,1         7,4,5,1,T,T,T         6,7,4,5,T,T,T           1,1,1         7,4,5,6,T,T,T,T         7,6,5,4,T,T,T           0,0,V         0,1,2,3,X,X,X         0,1,2,3,X,X,X           1,V,V         4,5,6,7,X,X,X,X         4,5,6,7,X,X,X           0,0,0         0,1,2,3,4,5,6,7         0,1,2,3,4,5,6,7           0,0,1         1,2,3,0,5,6,7,4         1,0,3,2,5,4,7,6           0,1,0         2,3,0,1,6,7,4,5         2,3,0,1,6,7,4,5           0,1,1         3,0,1,2,7,4,5,6         3,2,1,0,7,6,5,4           1,0,0         4,5,6,7,0,1,2,3         4,5,6,7,0,1,2,3           1,0,1         5,6,7,4,1,2,3,0         5,4,7,6,1,0,3,2           1,1,0         6,7,4,5,2,3,0,1         6,7,4,5,2,3,0,1           1,1,1         7,4,5,6,3,0,1,2				
		1,1,1	7,4,5,6,T,T,T,T	7,6,5,4,T,T,T	
	\ \ \ \ - <del> </del>	0,V,V	0,1,2,3,X,X,X,X	0,1,2,3,X,X,X,X	4045
	vvrite	1,V,V	4,5,6,7,X,X,X,X	4,5,6,7,X,X,X,X	1,2,4,5
		0,0,0	0,1,2,3,4,5,6,7	0,1,2,3,4,5,6,7	
		0,0,1	1,2,3,0,5,6,7,4	1,0,3,2,5,4,7,6	
	Length         Write         Address (A2,A1,A0)         (decimal) A3 = 0         (decimal) A3 = 1           A				
	D d	0,1,1	3,0,1,2,7,4,5,6	3,2,1,0,7,6,5,4	_
8	Read	1,0,0	4,5,6,7,0,1,2,3	4,5,6,7,0,1,2,3	2
		1,0,1	5,6,7,4,1,2,3,0	5,4,7,6,1,0,3,2	]
		1,1,0	6,7,4,5,2,3,0,1	6,7,4,5,2,3,0,1	1
		1,1,1	7,4,5,6,3,0,1,2	7,6,5,4,3,2,1,0	
	Write	V,V,V	0,1,2,3,4,5,6,7	0,1,2,3,4,5,6,7	2,4

#### Note:

- 2. 0~7 bit number is value of CA [2:0] that causes this bit to be the first read during a burst.
- 3. T: Output driver for data and strobes are in high impedance.
- 4. V: a valid logic level (0 or 1), but respective buffer input ignores level on input pins.
- 5. X: Do not Care.

<sup>1.</sup> In case of burst length being fixed to 4 by MR0 setting, the internal write operation starts two clock cycles earlier than the BL8 mode. This means that the starting point for tWR and tWTR will be pulled in by two clocks. In case of burst length being selected on-the-fly via A12/BC, the internal write operation starts at the same point in time like a burst of 8 write operation. This means that during on-the-fly control, the starting point for tWR and tWTR will not be pulled in by two clocks.

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### **CAS Latency**

The CAS Latency is defined by MR0 (bit A2, A4~A6) as shown in the MR0 Definition figure. CAS Latency is the delay, in clock cycles, between the internal Read command and the availability of the first bit of output data. DDR3(L) SDRAM does not support any half clock latencies. The overall Read Latency (RL) is defined as Additive Latency (AL) + CAS Latency (CL); RL = AL + CL.

#### **Test Mode**

The normal operating mode is selected by MR0 (bit7=0) and all other bits set to the desired values shown in the MR0 definition figure. Programming bit A7 to a '1' places the DDR3(L) SDRAM into a test mode that is only used by the DRAM manufacturer and should not be used. No operations or functionality is guaranteed if A7=1.

#### **DLL Reset**

The DLL Reset bit is self-clearing, meaning it returns back to the value of '0' after the DLL reset function has been issued. Once the DLL is enabled, a subsequent DLL Reset should be applied. Anytime the DLL reset function is used, tDLLK must be met before any functions that require the DLL can be used (i.e. Read commands or ODT synchronous operations.)

#### Write Recovery

The programmed WR value MR0(bits A9, A10, and A11) is used for the auto precharge feature along with tRP to determine tDAL WR (write recovery for auto-precharge)min in clock cycles is calculated by dividing tWR(ns) by tCK(ns) and rounding up to the next integer: WRmin[cycles] = Roundup(tWR[ns]/tCK[ns]). The WR must be programmed to be equal or larger than tWR (min).

#### Precharge PD DLL

MR0 (bit A12) is used to select the DLL usage during precharge power-down mode. When MR0 (A12=0), or 'slow-exit', the DLL is frozen after entering precharge power-down (for potential power savings) and upon exit requires tXPDLL to be met prior to the next valid command. When MR0 (A12=1), or 'fast-exit', the DLL is maintained after entering precharge power-down and upon exiting power-down requires tXP to be met prior to the next valid command.


# NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### Mode Register MR1

The Mode Register MR1 stores the data for enabling or disabling the DLL, output strength, Rtt\_Nom impedance, additive latency, WRITE leveling enable and Qoff. The Mode Register 1 is written by asserting low on  $\overline{CS}$ ,  $\overline{RAS}$ ,  $\overline{CAS}$ ,  $\overline{WE}$  high on BA0 and low on BA1 and BA2, while controlling the states of address pins according to the following figure.

#### **MR1 Definition**

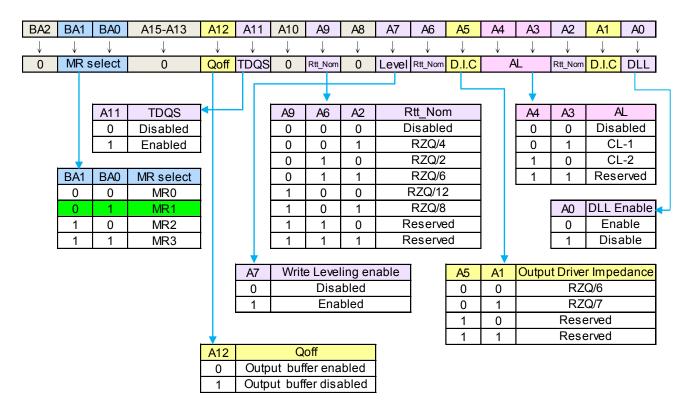

<sup>\* 1 :</sup> BA2 and A8, A10, and A13 ~ A15 are RFU and must be programmed to 0 during MRS.

<sup>\*2:</sup> Outputs disabled - DQs, DQSs, DQSs.

<sup>\*3:</sup> RZQ = 240

<sup>\*4:</sup> In Write leveling Mode (MR1[bit7] = 1) with MR1[bit12]=1, all RTT\_Nom settings are allowed; in Write Leveling Mode (MR1[bit7] = 1) with MR1[bit12]=0, only RTT\_Nom settings of RZQ/2, RZQ/4 and RZQ/6 are allowed.

<sup>\*5:</sup> If RTT Nom is used during Writes, only the values RZQ/2, RZQ/4 and RZQ/6 are allowed.





#### **DLL Enable/Disable**

The DLL must be enabled for normal operation. DLL enable is required during power up initialization, and upon returning to normal operation after having the DLL disabled. During normal operation (DLL-on) with MR1 (A0=0), the DLL is automatically disabled when entering Self-Refresh operation and is automatically re-enable upon exit of Self-Refresh operation. Any time the DLL is enabled and subsequently reset, tDLLK clock cycles must occur before a Read or synchronous ODT command can be issued to allow time for the internal clock to be synchronized with the external clock. Failing to wait for synchronization to occur may result in a violation of the tDQSCK, tAON, or tAOF parameters. During tDLLK, CKE must continuously be registered high. DDR3(L) SDRAM does not require DLL for any Write operation, expect when RTT\_WR is enabled and the DLL is required for proper ODT operation. For more detailed information on DLL Disable operation in DLL-off Mode.

The direct ODT feature is not supported during DLL-off mode. The on-die termination resistors must be disabled by continuously registering the ODT pin low and/or by programming the RTT\_Nom bits MR1{A9,A6,A2} to {0,0,0} via a mode register set command during DLL-off mode.

The dynamic ODT feature is not supported at DLL-off mode. User must use MRS command to set Rtt\_WR, MR2 {A10, A9} = {0, 0}, to disable Dynamic ODT externally.

#### **Output Driver Impedance Control**

The output driver impedance of the DDR3(L) SDRAM device is selected by MR1 (bit A1 and A5) as shown in MR1 definition figure.

#### **ODT Rtt Values**

DDR3(L) SDRAM is capable of providing two different termination values (Rtt\_Nom and Rtt\_WR). The nominal termination value Rtt\_Nom is programmable in MR1. A separate value (Rtt\_WR) may be programmable in MR2 to enable a unique Rtt value when ODT is enabled during writes. The Rtt\_WR value can be applied during writes even when Rtt\_Nom is disabled.

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### Additive Latency (AL)

Additive Latency (AL) operation is supported to make command and data bus efficient for sustainable bandwidth in DDR3(L) SDRAM. In this operation, the DDR3(L) SDRAM allows a read or write command (either with or without auto-precharge) to be issued immediately after the active command. The command is held for the time of the Additive Latency (AL) before it is issued inside the device. The Read Latency (RL) is controlled by the sum of the AL and CAS Latency (CL) register settings. Write Latency (WL) is controlled by the sum of the AL and CAS Write Latency (CWL) register settings. A summary of the AL register options are shown as the following table.

#### Additive Latency (AL) Settings

A4	А3	AL
0	0	0, (AL Disable)
0	1	CL-1
1	0	CL-2
1	1	Reserved

### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### Write leveling

For better signal integrity, DDR3(L) memory module adopted fly by topology for the commands, addresses, control signals, and clocks. The fly by topology has benefits from reducing number of stubs and their length but in other aspect, causes flight time skew between clock and strobe at every DRAM on DIMM. It makes difficult for the Controller to maintain tDQSS, tDSS, and tDSH specification. Therefore, the controller should support 'write leveling' in DDR3(L) SDRAM to compensate for skew.

#### **Output Disable**

The DDR3(L) SDRAM outputs maybe enable/disabled by MR1 (bit12) as shown in MR1 definition. When this feature is enabled (A12=1) all output pins (DQs, DQS, DQS, DQS, etc.) are disconnected from the device removing any loading of the output drivers. This feature may be useful when measuring modules power for example. For normal operation A12 should be set to '0'.

#### TDQS, TDQS

TDQS (Termination Data Strobe) is a feature of x8 DDR3(L) SDRAM that provides additional termination resistance outputs that may be useful in some system configurations.

When enabled via the mode register, the same termination resistance function is applied to be TDQS/TDQS pins that are applied to the DQS/DQS pins.

In contrast to the RDQS function of DDR2 SDRAM, TDQS provides the termination resistance function only. The data strobe function of RDQS is not provided by TDQS.

The TDQS and DM functions share the same pin. When the TDQS function is enabled via the mode register, the DM function is not supported. When the TDQS function is disabled, the DM function is provided and the TDQS pin is not used.

The TDQS function is available in x8 DDR3(L) SDRAM only and must be disabled via the mode register A11=0 in MR1 for x16 configurations.

#### TDQS, TDQS Function Matrix

MR1 (A11)	DM / TDQS	NU / TDQS
0 (TDQS Disabled)	DM	Hi-Z
1 (TDQS Enabled)	TDQS	TDQS

#### Note:

- 1. If TDQS is enabled, the DM function is disabled.
- 2. When not used, TDQS function can be disabled to save termination power.
- 3. TDQS function is only available for x8 DRAM and must be disabled for x16.






#### Mode Register MR2

The Mode Register MR2 stores the data for controlling refresh related features, Rtt\_WR impedance, and CAS write latency. The Mode Register 2 is written by asserting low on  $\overline{CS}$ ,  $\overline{RAS}$ ,  $\overline{CAS}$ ,  $\overline{WE}$  high on BA1 and low on BA0 and BA2, while controlling the states of address pins according to the table below.

#### **MR2 Definition**

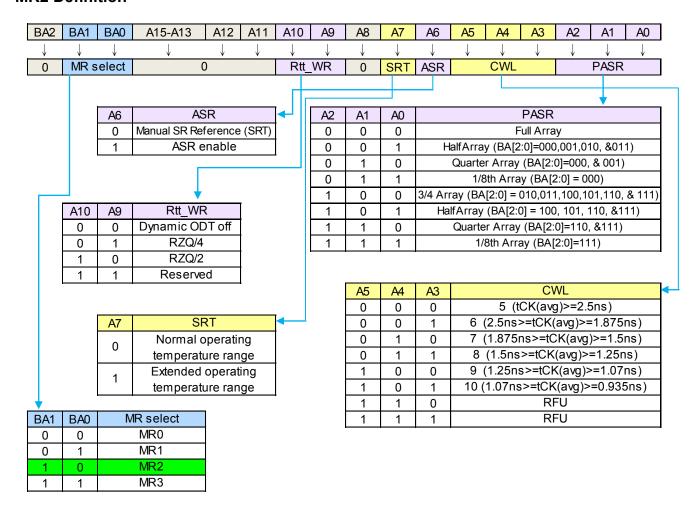

- \* 1 : Default state of PASR is disabed. This is enabled by using an electrical fuse. Please contact with NTC for the demand.
- \* 2 : BA2, A5, A8, A11 ~ A15 are RFU and must be programmed to 0 during MRS.
- \* 3 : The Rtt WR value can be applied during writes even when Rtt Nom is disabled. During write leveling, Dynamic ODT is not available.

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### **CAS Write Latency (CWL)**

The CAS Write Latency is defined by MR2 (bits A3-A5) shown in MR2. CAS Write Latency is the delay, in clock cycles, between the internal Write command and the availability of the first bit of input data. DDR3(L) DRAM does not support any half clock latencies. The overall Write Latency (WL) is defined as Additive Latency (AL) + CAS Write Latency (CWL); WL=AL+CWL.

#### Auto Self-Refresh (ASR) and Self-Refresh Temperature (SRT)

DDR3(L) SDRAM must support Self-Refresh operation at all supported temperatures. Applications requiring Self-Refresh operation in the Extended Temperature Range must use the ASR function or program the SRT bit appropriately.

Optional in DDR3(L) SDRAM: Users should refer to the DRAM supplier data sheet and/or the DIMM SPD to determine if DDR3(L) SDRAM devices support the following options or requirements referred to in this material. For more details refer to "Extended Temperature Usage". DDR3(L) SDRAMs must support Self-Refresh operation at all supported temperatures. Applications requiring Self-Refresh operation in the Extended Temperature Range must use the optional ASR function or program the SRT bit appropriately.

### Dynamic ODT (Rtt\_WR)

DDR3(L) SDRAM introduces a new feature "Dynamic ODT". In certain application cases and to further enhance signal integrity on the data bus, it is desirable that the termination strength of the DDR3(L) SDRAM can be changed without issuing an MRS command. MR2 Register locations A9 and A10 configure the Dynamic ODT settings. In Write leveling mode, only RTT Nom is available. For details on Dynamic ODT operation, refer to "Dynamic ODT".


#### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### Mode Register MR3

The Mode Register MR3 controls Multi-purpose registers. The Mode Register 3 is written by asserting low on  $\overline{CS}$ ,  $\overline{RAS}$ ,  $\overline{CAS}$ ,  $\overline{WE}$  high on BA1 and BA0, and low on BA2 while controlling the states of address pins according to the table below.

#### **MR3 Definition**

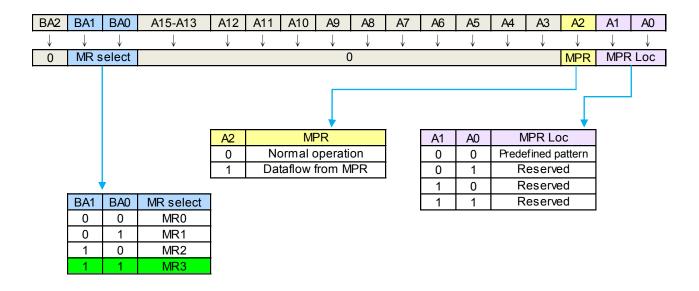

- \* 1 : BA2, A3 A15 are RFU and must be programmed to 0 during MRS.
- \* 2 : The predefined pattern will be used for read synchronization.
- \* 3 : When MPR control is set for normal operation (MR3 A[2] = 0) then MR3 A[1:0] will be ignored.

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### Multi-Purpose Register (MPR)

The Multi Purpose Register (MPR) function is used to Read out a predefined system timing calibration bit sequence. To enable the MPR, a Mode Register Set (MRS) command must be issued to MR3 register with bit A2=1. Prior to issuing the MRS command, all banks must be in the idle state (all banks precharged and tRP met). Once the MPR is enabled, any subsequent RD or RDA commands will be redirected to the Multi Purpose Register. When the MPR is enabled, only RD or RDA commands are allowed until a subsequent MRS command is issued with the MPR disabled (MR3 bit A2=0). Power down mode, Self-Refresh and any other non-RD/RDA command is not allowed during MPR enable mode. The RESET function is supported during MPR enable mode.

The Multi Purpose Register (MPR) function is used to Read out a predefined system timing calibration bit sequence.

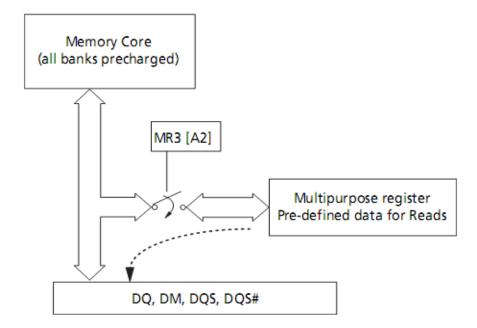


Fig. 1: MPR Block Diagram

To enable the MPR, a MODE Register Set (MRS) command must be issued to MR3 Register with bit A2 = 1, prior to issuing the MRS command, all banks must be in the idle state (all banks precharged and tRP met). Once the MPR is enabled, any subsequent RD or RDA commands will be redirected to the Multi Purpose Register. The resulting operation, when a RD or RDA command is issued, is defined by MR3 bits A[1:0] when the MPR is enabled as shown. When the MPR is enabled, only RD or RDA commands are allowed until a subsequent MRS command is issued with the MPR disabled (MR3 bit A2 = 0). Note that in MPR mode RDA has the same functionality as a READ command which means the auto precharge part of RDA is ignored. Power-Down mode, Self-Refresh and any other non-RD/RDA command is not allowed during MPR enable mode. The RESET function is supported during MPR enable mode.





#### **MPR MR3 Register Definition**

MR3 A[2]	MR3 A[1:0]	Franchica
MPR	MPR-Loc	Function
		Normal operation, no MPR transaction.
0b	don't care (0b or 1b)	All subsequent Reads will come from DRAM array.
		All subsequent Write will go to DRAM array.
1b	See MR3 Table	Enable MPR mode, subsequent RD/RDA commands defined by MR3 A[1:0].

#### **MPR Functional Description**

- One bit wide logical interface via all DQ pins during READ operation.
- Register Read on x8:
- DQ[0] drives information from MPR.
- DQ[7:1] either drive the same information as DQ [0], or they drive 0b.
- Register Read on x16:
- DQL[0] and DQU[0] drive information from MPR.
- DQL[7:1] and DQU[7:1] either drive the same information as DQL [0], or they drive 0b.
- Addressing during for Multi Purpose Register reads for all MPR agents:
- BA [2:0]: don't care
- A[1:0]: A[1:0] must be equal to '00'b. Data read burst order in nibble is fixed
- A[2]: For BL=8, A[2] must be equal to 0b, burst order is fixed to [0,1,2,3,4,5,6,7], \*) For Burst Chop 4 cases, the burst order is switched on nibble base A [2]=0b, Burst order: 0,1,2,3 \*)

  A[2]=1b, Burst order: 4,5,6,7 \*)
- A[9:3]: don't care
- · A10/AP: don't care
- A12/BC: Selects burst chop mode on-the-fly, if enabled within MR0.
- A11, A13... (if available): don't care
- Regular interface functionality during register reads:
- Support two Burst Ordering which are switched with A2 and A[1:0]=00b.
- Support of read burst chop (MRS and on-the-fly via A12/BC)
- All other address bits (remaining column address bits including A10, all bank address bits) will be ignored by the DDR3(L) SDRAM.
- · Regular read latencies and AC timings apply.
- DLL must be locked prior to MPR Reads.

NOTE: \*Burst order bit 0 is assigned to LSB and burst order bit 7 is assigned to MSB of the selected MPR agent.





### **MPR MR3 Register Definition**

MR3 A[2]	MR3 A[1:0]	Function	Burst Length	Read Address A[2:0]	Burst Order and Data Pattern
		Read Predefined	BL8	000b	Burst order 0,1,2,3,4,5,6,7 Pre-defined Data Pattern [0,1,0,1,0,1,0,1]
1b	00b	Pattern for System	BC4	000b	Burst order 0,1,2,3 Pre-defined Data Pattern [0,1,0,1]
		Calibration	BC4	100b	Burst order 4,5,6,7 Pre-defined Data Pattern [0,1,0,1]
			BL8	000b	Burst order 0,1,2,3,4,5,6,7
1b	01b	RFU	BC4	000b	Burst order 0,1,2,3
			BC4	100b	Burst order 4,5,6,7
			BL8	000b	Burst order 0,1,2,3,4,5,6,7
1b	10b	RFU	BC4	000b	Burst order 0,1,2,3
			BC4	100b	Burst order 4,5,6,7
			BL8	000b	Burst order 0,1,2,3,4,5,6,7
1b	11b	RFU	BC4	000b	Burst order 0,1,2,3
			BC4	100b	Burst order 4,5,6,7

NOTE: Burst order bit 0 is assigned to LSB and the burst order bit 7 is assigned to MSB of the selected MPR agent.





# DDR3(L) SDRAM Command Description and Operation Command Truth Table

		СК	E					BA0-	A12	A12-	۸10	A0-	
Function	Abbr.	Previous Cycle	Current Cycle	CS	RAS	CAS	WE	BA2	A14	BC	AP	A9, A11	NOTES
Mode Register Set	MRS	Н	Н	L	L	L	L	BA		OP Code			
Refresh	REF	Н	Н	L	L	L	Н	V	٧	٧	V	V	
Self Refresh Entry	SRE	Н	L	L	L	L	Н	V	٧	V	V	V	7,9,12
Self Refresh Exit	SRX	L	Н	H L	X H	X H	X H	X V	X V	X V	X V	X V	7,8,9,12
Single Bank Precharge	PRE	Н	Н	L	L	Н	L	BA	V	V	L	V	
Precharge all Banks	PREA	Н	Н	L	L	Н	L	V	٧	٧	Н	V	
Bank Activate	ACT	Н	Н	L	L	Н	Н	BA	Ro	w Add	ress (l	RA)	
Write (Fixed BL8 or BC4)	WR	Н	Н	L	Н	L	L	ВА	RFU	V	L	CA	
Write (BC4, on the Fly)	WRS4	Н	Н	L	Н	L	L	ВА	RFU	L	L	CA	
Write (BL8, on the Fly)	WRS8	Н	Н	L	Н	L	L	ВА	RFU	Н	L	CA	
Write with Auto Precharge (Fixed BL8 or BC4)	WRA	Н	Н	L	Н	L	L	BA	RFU	V	Н	CA	
Write with Auto Precharge (BC4, on the Fly)	WRAS4	Н	Н	L	Н	L	L	ВА	RFU	L	Н	CA	
Write with Auto Precharge (BL8, on the Fly)	WRAS8	Н	Н	L	Н	L	L	BA	RFU	Н	Н	CA	
Read (Fixed BL8 or BC4)	RD	Н	Н	L	Н	L	Н	BA	RFU	V	L	CA	
Read (BC4, on the Fly	RDS4	Н	Н	L	Н	L	Н	BA	RFU	L	L	CA	
Read (BL8, on the Fly)	RDS8	Н	Н	L	Н	L	Н	BA	RFU	Н	L	CA	
Read with Auto Precharge (Fixed BL8 or BC4)	RDA	Н	Н	L	Н	L	Н	BA	RFU	V	Н	CA	
Read with Auto Precharge (BC4, on the Fly)	RDAS4	Н	Н	L	Н	L	Н	BA	RFU	L	Н	CA	
Read with Auto Precharge (BL8, on the Fly)	RDAS8	Н	Н	L	Н	L	Н	BA	RFU	Н	Н	CA	
No Operation	NOP	Н	Н	L	Н	Н	Н	V	V	V	V	V	10
Device Deselected	DES	Н	Н	Н	Х	Х	Х	Х	Х	Х	Х	Х	11
Power Down Entry	PDE	Н	L	L	Н	Н	Н	V	V	V	V	V	6,12
TOWER DOWN LINEY	FDE	17	L	Н	Х	Х	Χ	Х	Х	Х	Х	Х	0,12
Power Down Exit	PDX	L	Н	L	Н	Н	Н	V	V	V	V	V	6,12
I OWGI DOWII LAIL	FDX	L	11	Н	Х	Х	Χ	Х	Х	Х	Х	Х	0,12
ZQ Calibration Long	ZQCL	Н	Н	L	Н	Н	L	Х	Х	X	Н	Х	
ZQ Calibration Short	zqcs	Н	Н	L	Н	Н	L	х	х	х	L	Х	

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### DDR3(L) SDRAM Command Description and Operation

### **Command Truth Table (Conti.)**

- NOTE1. All DDR3(L) SDRAM commands are defined by states of  $\overline{CS}$ ,  $\overline{RAS}$ ,  $\overline{CAS}$ ,  $\overline{WE}$  and CKE at the rising edge of the clock. The MSB of BA, RA and CA are device density and configuration dependant.
- NOTE2. RESET is Low enable command which will be used only for asynchronous reset so must be maintained HIGH during any function.
- NOTE3. Bank addresses (BA) determine which bank is to be operated upon. For (E)MRS BA selects an (Extended) Mode Register.
- NOTE4. "V" means "H or L (but a defined logic level)" and "X" means either "defined or undefined (like floating) logic level".
- NOTE5. Burst reads or writes cannot be terminated or interrupted and Fixed/on-the-Fly BL will be defined by MRS.
- NOTE6. The Power-Down Mode does not perform any refresh operation.
- NOTE7. The state of ODT does not affect the states described in this table. The ODT function is not available during Self Refresh.
- NOTE8. Self Refresh Exit is asynchronous.
- NOTE9. VREF (Both VrefDQ and VrefCA) must be maintained during Self Refresh operation.
- NOTE10. The No Operation command should be used in cases when the DDR3(L) SDRAM is in an idle or wait state. The purpose of the No Operation command (NOP) is to prevent the DDR3(L) SDRAM from registering any unwanted commands between operations.

  A No Operation command will not terminate a pervious operation that is still executing, such as a burst read or write cycle.
- NOTE11. The Deselect command performs the same function as No Operation command.
- NOTE12. Refer to the CKE Truth Table for more detail with CKE transition.

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### **CKE Truth Table**

Current State	CKE				
	Previous Cycle (N-1)	Current Cycle (N)	Command (N) RAS, CAS, WE, CS	Action (N)	Notes
Power-Down	L	L	X	Maintain Power-Down	14,15
	L	Н	DESELECT or NOP	Power-Down Exit	11,14
Self-Refresh	L	L	X	Maintain Self-Refresh	15,16
	L	Н	DESELECT or NOP	Self-Refresh Exit	8,12,16
Bank(s) Active	Н	L	DESELECT or NOP	Active Power-Down Entry	11,13,14
Reading	Н	L	DESELECT or NOP	Power-Down Entry	11,13,14,17
Writing	Н	L	DESELECT or NOP	Power-Down Entry	11,13,14,17
Precharging	Н	L	DESELECT or NOP	Power-Down Entry	11,13,14,17
Refreshing	Н	L	DESELECT or NOP	Precharge Power-Down Entry	11
All Banks Idle	Н	L	DESELECT or NOP	Precharge Power-Down Entry	11,13,14,18
	Н	L	REFRESH	Self-Refresh	9,13,18

- NOTE 1 CKE (N) is the logic state of CKE at clock edge N; CKE (N-1) was the state of CKE at the previous clock edge.
- NOTE 2 Current state is defined as the state of the DDR3(L) SDRAM immediately prior to clock edge N.
- NOTE 3 COMMAND (N) is the command registered at clock edge N, and ACTION (N) is a result of COMMAND (N), ODT is not included here.
- NOTE 4 All states and sequences not shown are illegal or reserved unless explicitly described elsewhere in this document.
- NOTE 5 The state of ODT does not affect the states described in this table. The ODT function is not available during Self-Refresh.
- NOTE 6 CKE must be registered with the same value on tCKEmin consecutive positive clock edges. CKE must remain at the valid input level the entire time it takes to achieve the tCKEmin clocks of registrations. Thus, after any CKE transition, CKE may not transition from its valid level during the time period of tIS + tCKEmin + tIH.
- NOTE 7 DESELECT and NOP are defined in the Command Truth Table.
- NOTE 8 On Self-Refresh Exit DESELECT or NOP commands must be issued on every clock edge occurring during the tXS period. Read or ODT commands may be issued only after tXSDLL is satisfied.
- NOTE 9 Self-Refresh modes can only be entered from the All Banks Idle state.
- NOTE 10 Must be a legal command as defined in the Command Truth Table.
- NOTE 11 Valid commands for Power-Down Entry and Exit are NOP and DESELECT only.
- NOTE 12 Valid commands for Self-Refresh Exit are NOP and DESELECT only.
- NOTE 13 Self-Refresh cannot be entered during Read or Write operations.
- NOTE 14 The Power-Down does not perform any refresh operations.
- NOTE 15 "X" means "don't care" (including floating around VREF) in Self-Refresh and Power-Down. It also applies to Address pins.
- NOTE 16 VREF (Both Vref\_DQ and Vref\_CA) must be maintained during Self-Refresh operation.
- NOTE 17 If all banks are closed at the conclusion of the read, write or precharge command, then Precharge Power-Down is entered, otherwise Active Power-Down is entered.
- NOTE 18 'Idle state' is defined as all banks are closed (tRP, tDAL, etc. satisfied), no data bursts are in progress, CKE is high, and all timings from previous operations are satisfied (tMRD, tMOD, tRFC, tZQinit, tZQoper, tZQCS, etc.) as well as all Self-Refresh exit and Power-Down Exit parameters are satisfied (tXS, tXP, tXPDLL, etc).

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### No Operation (NOP) Command

The No operation (NOP) command is used to instruct the selected DDR3(L) SDRAM to perform a NOP ( $\overline{\text{CS}}$  low and  $\overline{\text{RAS}}$ ,  $\overline{\text{CAS}}$ , and  $\overline{\text{WE}}$  high). This prevents unwanted commands from being registered during idle or wait states. Operations already in progress are not affected.

#### **Deselect Command**

The Deselect function ( $\overline{CS}$  HIGH) prevents new commands from being executed by the DDR3(L) SDRAM. The DDR3(L) SDRAM is effectively deselected. Operations already in progress are not affected.

#### **DLL-Off Mode**

DDR3(L) DLL-off mode is entered by setting MR1 bit A0 to "1"; this will disable the DLL for subsequent operations until A0 bit set back to "0". The MR1 A0 bit for DLL control can be switched either during initialization or later.

The DLL-off Mode operations listed below are an optional feature for DDR3(L). The maximum clock frequency for DLL-off Mode is specified by the parameter tCKDLL\_OFF. There is no minimum frequency limit besides the need to satisfy the refresh interval, tREFI.

Due to latency counter and timing restrictions, only one value of CAS Latency (CL) in MR0 and CAS Write Latency (CWL) in MR2 are supported. The DLL-off mode is only required to support setting of both CL=6 and CWL=6.

DLL-off mode will affect the Read data Clock to Data Strobe relationship (tDQSCK) but not the data Strobe to Data relationship (tDQSQ, tQH). Special attention is needed to line up Read data to controller time domain.


Comparing with DLL-on mode, where tDQSCK starts from the rising clock edge (AL+CL) cycles after the Read command, the DLL-off mode tDQSCK starts (AL+CL-1) cycles after the read command. Another difference is that tDQSCK may not be small compared to tCK (it might even be larger than tCK) and the difference between tDQSCKmin and tDQSCKmax is significantly larger than in DLL-on mode.

The timing relations on DLL-off mode READ operation have shown at the following Timing Diagram (CL=6, BL=8)

# NT5CB(C)256M8FN / NT5CB(C)128M16FP



### **DLL-off mode READ Timing Operation**

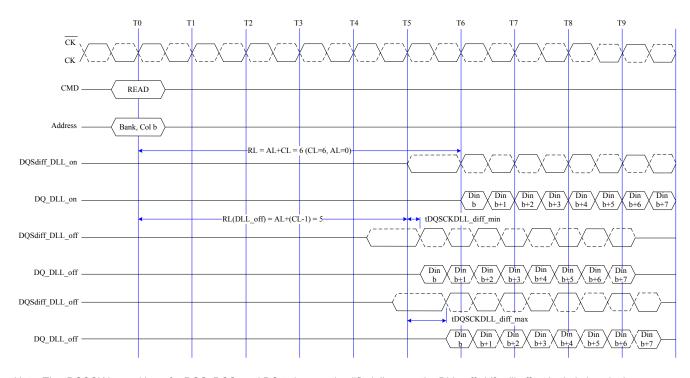

Note: The tDQSCK is used here for DQS, DQS, and DQ to have a simplified diagram; the DLL\_off shift will affect both timings in the same way and the skew between all DQ, DQS, and  $\overline{DQS}$  signals will still be tDQSQ.

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### DLL on/off switching procedure

DDR3(L) DLL-off mode is entered by setting MR1 bit A0 to "1"; this will disable the DLL for subsequent operation until A0 bit set back to "0".

#### DLL "on" to DLL "off" Procedure


To switch from DLL "on" to DLL "off" requires the frequency to be changed during Self-Refresh outlined in the following procedure:

- 1. Starting from Idle state (all banks pre-charged, all timing fulfilled, and DRAMs On-die Termination resistors, RTT, must be in high impedance state before MRS to MR1 to disable the DLL).
- 2. Set MR1 Bit A0 to "1" to disable the DLL.
- 3. Wait tMOD.
- 4. Enter Self Refresh Mode; wait until (tCKSRE) satisfied.
- 5. Change frequency, in guidance with "Input Clock Frequency Change" section.
- 6. Wait until a stable clock is available for at least (tCKSRX) at DRAM inputs.
- 7. Starting with the Self Refresh Exit command, CKE must continuously be registered HIGH until all tMOD timings from any MRS command are satisfied. In addition, if any ODT features were enabled in the mode registers when Self Refresh mode was entered, the ODT signal must continuously be registered LOW until all tMOD timings from any MRS command are satisfied. If both ODT features were disabled in the mode registers when Self Refresh mode was entered, ODT signal can be registered LOW or HIGH.
- **8.** Wait tXS, and then set Mode Registers with appropriate values (especially an update of CL, CWL, and WR may be necessary. A ZQCL command may also be issued after tXS).
- 9. Wait for tMOD, and then DRAM is ready for next command.

### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### **DLL Switch Sequence from DLL-on to DLL-off**

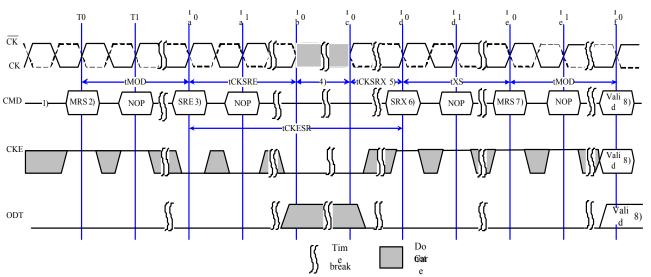

#### Note:

ODT: Static LOW in case RTT\_Nom and RTT\_WR is enabled, otherwise static Low or High

- 1) Starting with Idle State, RTT in Hi-Z State.
- 2) Disable DLL by setting MR1 Bit A0 to 1.
- 3) Enter SR.
- 4) Change Frequency.
- 5) Clock must be stable at least tCKSRX.
- 6) Exit SR.
- 7) Update Mode registers with DLL off parameters setting.
- 8) Any valid command.

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP




#### DLL "off" to DLL "on" Procedure

To switch from DLL "off" to DLL "on" (with requires frequency change) during Self-Refresh:

- 1. Starting from Idle state (all banks pre-charged, all timings fulfilled and DRAMs On-die Termination resistors (RTT) must be in high impedance state before Self-Refresh mode is entered).
- 2. Enter Self Refresh Mode, wait until tCKSRE satisfied.
- 3. Change frequency, in guidance with "Input clock frequency change" section.
- 4. Wait until a stable is available for at least (tCKSRX) at DRAM inputs.
- 5. Starting with the Self Refresh Exit command, CKE must continuously be registered HIGH until tDLLK timing from subsequent DLL Reset command is satisfied. In addition, if any ODT features were enabled in the mode registers when Self Refresh mode was entered. The ODT signal must continuously be registered LOW until tDLLK timings from subsequent DLL Reset command is satisfied. If both ODT features are disabled in the mode registers when Self Refresh mode was entered, ODT signal can be registered LOW or HIGH.
- 6. Wait tXS, then set MR1 Bit A0 to "0" to enable the DLL.
- 7. Wait tMRD, then set MR0 Bit A8 to "1" to start DLL Reset.
- 8. Wait tMRD, then set Mode registers with appropriate values (especially an update of CL, CWL, and WR may be necessary. After tMOD satisfied from any proceeding MRS command, a ZQCL command may also be issued during or after tDLLK).
- **9.** Wait for tMOD, then DRAM is ready for next command (remember to wait tDLLK after DLL Reset before applying command requiring a locked DLL!). In addition, wait also for tZQoper in case a ZQCL command was issued.



#### **DLL Switch Sequence from DLL-off to DLL-on**

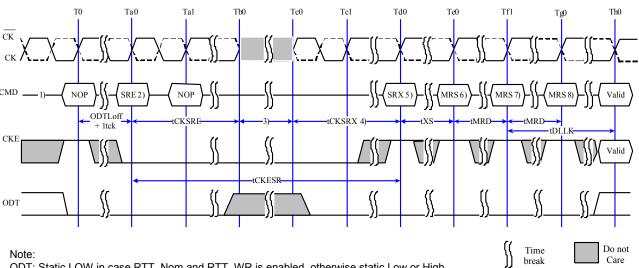

ODT: Static LOW in case RTT\_Nom and RTT\_WR is enabled, otherwise static Low or High

1) Starting from Idle State.

2) Enter SR.

3) Change Frequency.

4) Clock must be stable at least tCKSRX.

5) Exit SR.

6) Set DLL-on by MR1 A0="0"

7) Start DLL Reset

8) Any valid command

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### Input Clock frequency change

Once the DDR3(L) SDRAM is initialized, the DDR3(L) SDRAM requires the clock to be "stable" during almost all states of normal operation. This means once the clock frequency has been set and is to be in the "stable state", the clock period is not allowed to deviate except for what is allowed for by the clock jitter and SSC (spread spectrum clocking) specification.


The input clock frequency can be changed from one stable clock rate to another stable clock rate under two conditions: (1) Self-Refresh mode and (2) Precharge Power-Down mode. Outside of these two modes, it is illegal to change the clock frequency.

For the first condition, once the DDR3(L) SDRAM has been successfully placed in to Self-Refresh mode and tCKSRE has been satisfied, the state of the clock becomes a don't care. Once a don't care, changing the clock frequency is permissible, provided the new clock frequency is stable prior to tCKSRX. When entering and exiting Self-Refresh mode of the sole purpose of changing the clock frequency. The DDR3(L) SDRAM input clock frequency is allowed to change only within the minimum and maximum operating frequency specified for the particular speed grade.

The second condition is when the DDR3(L) SDRAM is in Precharge Power-Down mode (either fast exit mode or slow exit mode). If the RTT\_Nom feature was enabled in the mode register prior to entering Precharge power down mode, the ODT signal must continuously be registered LOW ensuring RTT is in an off state. If the RTT\_Nom feature was disabled in the mode register prior to entering Precharge power down mode, RTT will remain in the off state. The ODT signal can be registered either LOW or HIGH in this case. A minimum of tCKSRE must occur after CKE goes LOW before the clock frequency may change. The DDR3(L) SDRAM input clock frequency is allowed to change only within the minimum and maximum operating frequency specified for the particular speed grade. During the input clock frequency change, ODT and CKE must be held at stable LOW levels. Once the input clock frequency is changed, stable new clocks must be provided to the DRAM tCKSRX before precharge Power Down may be exited; after Precharge Power Down is exited and tXP has expired, the DLL must be RESET via MRS. Depending on the new clock frequency additional MRS commands may need to be issued to appropriately set the WR, CL, and CWL with CKE continuously registered high. During DLL re-lock period, ODT must remain LOW and CKE must remain HIGH. After the DLL lock time, the DRAM is ready to operate with new clock frequency.



#### **Change Frequency during Precharge Power-down**

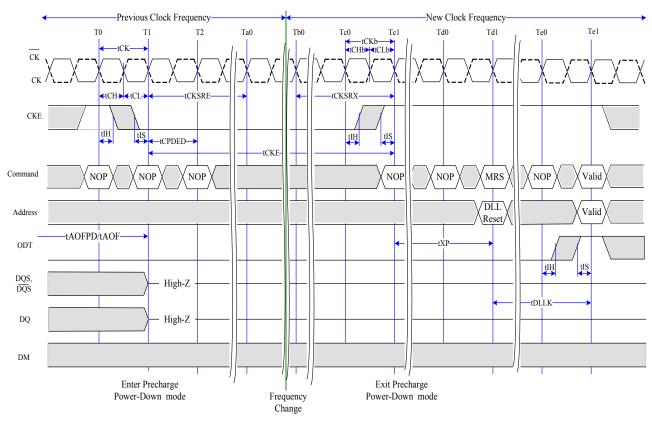

#### NOTES:

- 1. Applicable for both SLOW EXIT and FAST EXIT Precharge Power-down
- 2. tAOFPD and tAOF must be statisfied and outputs High-Z prior to T1; refer to ODT timing section for exact requirements
- 3. If the RTT\_NOM feature was enabled in the mode register prior to entering Precharge power down mode, the ODT signal must continuously be registered LOW ensuring RTT is in an off state. If the RTT\_NOM feature was disabled in the mode register prior to entering Precharge power down mode, RTT will remain in the off state. The ODT signal can be registered either LOW or HIGH in this case.




#### Write Leveling

For better signal integrity, DDR3(L) memory adopted fly by topology for the commands, addresses, control signals, and clocks. The fly by topology has benefits from reducing number of stubs and their length but in other aspect, causes flight time skew between clock and strobe at every DRAM on DIMM. It makes it difficult for the Controller to maintain tDQSS, tDSS, and tDSH specification. Therefore, the controller should support "write leveling" in DDR3(L) SDRAM to compensate the skew.

The memory controller can use the "write leveling" feature and feedback from the DDR3(L) SDRAM to adjust the DQS -  $\overline{DQS}$  to CK -  $\overline{CK}$  relationship. The memory controller involved in the leveling must have adjustable delay setting on DQS -  $\overline{DQS}$  to align the rising edge of DQS -  $\overline{DQS}$  with that of the clock at the DRAM pin. DRAM asynchronously feeds back CK -  $\overline{CK}$ , sampled with the rising edge of DQS -  $\overline{DQS}$ , through the DQ bus. The controller repeatedly delays DQS -  $\overline{DQS}$  until a transition from 0 to 1 is detected. The DQS -  $\overline{DQS}$  delay established though this exercise would ensure tDQSS specification. Besides tDQSS, tDSS, and tDSH specification also needs to be fulfilled. One way to achieve this is to combine the actual tDQSS in the application with an appropriate duty cycle and jitter on the DQS-  $\overline{DQS}$  signals. Depending on the actual tDQSS in the application, the actual values for tDQSL and tDQSH may have to be better than the absolute limits provided in "AC Timing Parameters" section in order to satisfy tDSS and tDSH specification. A conceptual timing of this scheme is show as below figure.

#### Write Leveling Concept

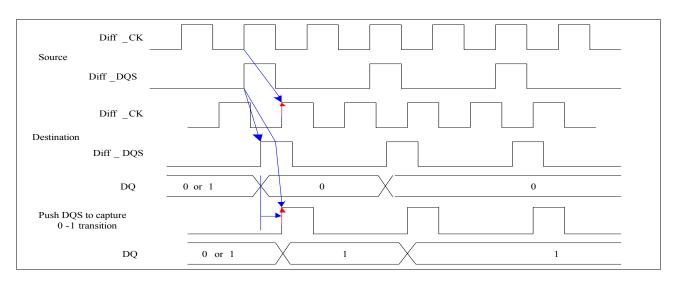

DQS/DQS driven by the controller during leveling mode must be determined by the DRAM based on ranks populated. Similarly, the DQ bus driven by the DRAM must also be terminated at the controller.

A separated feedback mechanism should be able for each byte lane. The low byte lane's prime DQ, DQ0, carries the leveling feedback to the controller across the DRAM configurations x4/x8 whereas DQ0 indicates the lower diff\_DQS (diff\_LDQS) to clock relationship. The high byte lane's prime DQ, DQ8, provides the feedback of the upper diff\_DQS (diff\_UDQS) to clock relationship.





#### DRAM setting for write leveling and DRAM termination unction in that mode

DRAM enters into Write leveling mode if A7 in MR1 set "High" and after finishing leveling, DRAM exits from write leveling mode if A7 in MR1 set "Low". Note that in write leveling mode, only DQS/DQS terminations are activated and deactivated via ODT pin not like normal operation.

#### MR setting involved in the leveling procedure

Function		MR1	Enable	Disable
Write leveling enable		A7	1	0
Output buffer mode (Qoff)		A12	0	1

#### DRAM termination function in the leveling mode

ODT pin at DRAM	DQS/DQS termination	DQs termination
De-asserted	off	off
Asserted	on	off

Note: In write leveling mode with its output buffer disabled (MR1[bit7]=1 with MR1[bit12]=1) all RTT\_Nom settings are allowed; in Write Leveling Mode with its output buffer enabled (MR1[bit7]=1 with MR1[bit12]=0) only RTT\_Nom settings of RZQ/2, RZQ/4, and RZQ/6 are allowed.

#### **Procedure Description**


Memory controller initiates Leveling mode of all DRAMs by setting bit 7 of MR1 to 1. With entering write leveling mode, the DQ pins are in undefined driving mode. During write leveling mode, only NOP or Deselect commands are allowed. As well as an MRS command to exit write leveling mode. Since the controller levels one rank at a time, the output of other rank must be disabled by setting MR1 bit A12 to 1. Controller may assert ODT after tMOD, time at which DRAM is ready to accept the ODT signal.

Controller may drive DQS low and  $\overline{DQS}$  high after a delay of tWLDQSEN, at which time DRAM has applied on-die termination on these signals. After tDQSL and tWLMRD controller provides a single DQS,  $\overline{DQS}$  edge which is used by the DRAM to sample CK –  $\overline{CK}$  driven from controller. tWLMRD (max) timing is controller dependent.

DRAM samples CK -  $\overline{\text{CK}}$  status with rising edge of DQS and provides feedback on all the DQ bits asynchronously after tWLO timing. There is a DQ output uncertainty of tWLOE defined to allow mismatch on DQ bits; there are no read strobes (DQS/DQS) needed for these DQs. Controller samples incoming DQ and decides to increment or decrement DQS –  $\overline{\text{DQS}}$  delay setting and launches the next DQS/ $\overline{\text{DQS}}$  pulse after some time, which is controller dependent. Once a 0 to 1 transition is detected, the controller locks DQS – $\overline{\text{DQS}}$  delay setting and write leveling is achieved for the device. The following figure describes the timing diagram and parameters for the overall Write leveling procedure.



# Timing details of Write leveling sequence (For Information. Only Support prime DQ) DQS - DQS is capturing CK - CK low at T1 and CK - CK high at T2

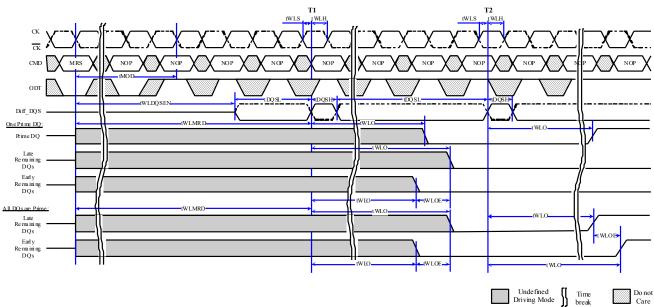

#### Note:

- 1. DRAM has the option to drive leveling feedback on a prime DQ or all DQs. If feedback is driven only on one DQ, the remaining DQs must be driven low as shown in above Figure, and maintained at this state through out the leveling procedure.
- 2. MRS: Load MR1 to enter write leveling mode
- 3. NOP: NOP or deselect
- 4. diff\_DQS is the differential data strobe (DQS,  $\overline{DQS}$ ). Timing reference points are the zero crossings. DQS is shown with solid line,  $\overline{DQS}$  is shown with dotted line.
- 6. DQS/DQS needs to fulfill minimum pulse width requirements tDQSH(min) and tDQSL(min) as defined for regular Writes; the max pulse width is system dependent.


#### Write Leveling Mode Exit

The following sequence describes how Write Leveling Mode should be exited:

- 1. After the last rising strobe edge (see ~T0), stop driving the strobe signals (see ~Tc0). Note: From now on, DQ pins are in undefined driving mode, and will remain undefined, until tMOD after the respective MR command (Te1).
- 2. Drive ODT pin low (tIS must be satisfied) and keep it low (see Tb0).
- 3. After the RTT is switched off, disable Write Level Mode via MRS command (see Tc2).
- 4. After tMOD is satisfied (Te1), any valid command may be registered. (MR commands may be issued after tMRD (Td1).



#### Timing detail of Write Leveling exit

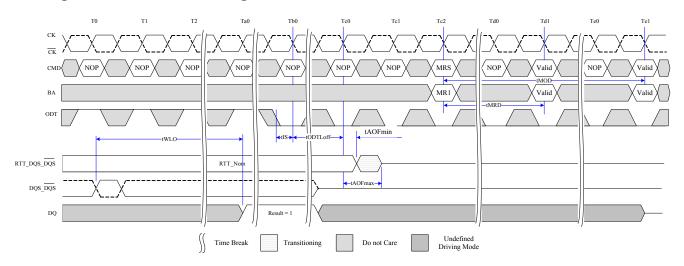

#### **Extended Temperature Usage**

Nanya's DDR3(L) SDRAM supports the optional extended temperature range of 0°C to +95°C, TC. Thus, the SRT and ASR options must be used at a minimum. The extended temperature range DRAM must be refreshed externally at 2X (double refresh) anytime the case temperature is above +85°C (in supporting temperature range). The external refreshing requirement is accomplished by reducing the refresh period from 64ms to 32ms. However, self refresh mode requires either ASR or SRT to support the extended temperature. Thus either ASR or SRT must be enabled when TC is above +85°C or self refresh cannot be used until the case temperature is at or below +85°C.

#### **Mode Register Description**

Field	Bits	Description
ASR	MR2(A6)	Auto Self-Refresh (ASR)  When enabled, DDR3(L) SDRAM automatically provides Self-Refresh power management functions for all supported operating temperature values. If not enabled, the SRT bit must be programmed to indicate Toper during subsequent Self-Refresh operation.  0 = Manual SR Reference (SRT)  1 = ASR enable
SRT	MR2(A7)	Self-Refresh Temperature (SRT) Range  If ASR = 0, the SRT bit must be programmed to indicate T <sub>OPER</sub> during subsequent Self-Refresh operation. If  ASR = 1, SRT bit must be set to 0.  0 = Normal operating temperature range  1 = Extended operating temperature range

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### Auto Self-Refresh mode - ASR mode

DDR3(L) SDRAM provides an Auto-Refresh mode (ASR) for application ease. ASR mode is enabled by setting MR2 bit A6=1 and MR2 bit A7=0. The DRAM will manage Self-Refresh entry in either the Normal or Extended Temperature Ranges. In this mode, the DRAM will also manage Self-Refresh power consumption when the DRAM operating temperature changes, lower at low temperatures and higher at high temperatures. If the ASR option is not supported by DRAM, MR2 bit A6 must set to 0. If the ASR option is not enabled (MR2 bit A6=0), the SRT bit (MR2 bit A7) must be manually programmed with the operating temperature range required during Self-Refresh operation. Support of the ASR option does not automatically imply support of the Extended Temperature Range.

#### Self-Refresh Temperature Range - SRT

SRT applies to devices supporting Extended Temperature Range only. If ASR=0, the Self-Refresh Temperature (SRT) Range bit must be programmed to guarantee proper self-refresh operation. If SRT=0, then the DRAM will set an appropriate refresh rate for Self-Refresh operation in the Normal Temperature Range. If SRT=1, then the DRAM will set an appropriate, potentially different, refresh rate to allow Self-Refresh operation in either the Normal or Extended Temperature Ranges. The value of the SRT bit can effect self-refresh power consumption, please refer to IDD table for details.

#### Self-Refresh mode summary

MR2 A[6]	MR2 A[7]	Self-Refresh operation	Allowed Operating Temperature Range for Self-Refresh mode
0	0	Self-Refresh rate appropriate for the Normal Temperature Range	Normal <sup>1</sup>
0	1	Self-Refresh appropriate for either the Normal or Extended Temperature Ranges.  The DRAM must support Extended Temperature Range. The value of the SRT bit can effect self-refresh power consumption, please refer to the IDD table for details.	Normal and Extended <sup>2</sup>
1	0	ASR enabled (for devices supporting ASR and Normal Temperature Range).  Self-Refresh power consumption is temperature dependent.	Normal <sup>1</sup>
1	0	ASR enabled (for devices supporting ASR and Extended Temperature Range).  Self-Refresh power consumption is temperature dependent.	Normal and Extended <sup>2</sup>
1	1	Illegal	

#### NOTES:

- 1. The Normal range depends on product's grade.
  - Commercial Grade = 0°C~85°C
  - Industrial Grade (-I) = -40 $^{\circ}$ C ~85 $^{\circ}$ C
  - Automotive Grade 2 (-H) = -40°C~85°C
  - Automotive Grade 3 (-**A**) = -40° ~85° €
- 2. The Normal and Extended range depends on product's grade.
  - Commercial Grade = 0°C~95°C
  - Industrial Grade (-I) = -40  $^{\sim}$  ~95  $^{\sim}$
  - Automotive Grade 2 (-**H**) = -40 $^{\circ}$ C ~105 $^{\circ}$ C
  - Automotive Grade 3 (-**A**) = -40 $^{\circ}$ C ~95 $^{\circ}$ C





#### **MPR MR3 Register Definition**

MR3 A[2]	MR3 A[1:0]	Function
0	don't care (0 or 1)	Normal operation, no MPR transaction.  All subsequent Reads will come from DRAM array.  All subsequent Writes will go to DRAM array.
1	See the following table	Enable MPR mode, subsequent RD/RDA commands defined by MR3 A[1:0].

#### **MPR Functional Description**

- One bit wide logical interface via all DQ pins during READ operation.
- Register Read on x8:
- DQ [0] drives information from MPR.
- DQ [7:1] either drive the same information as DQ [0], or they drive 0.
- Addressing during for Multi Purpose Register reads for all MPR agents:
- BA [2:0]: don't care.
- A [1:0]: A [1:0] must be equal to "00". Data read burst order in nibble is fixed.
- A[2]: For BL=8, A[2] must be equal to 0, burst order is fixed to [0,1,2,3,4,5,6,7]; For Burst chop 4 cases, the burst order is switched on nibble base, A[2]=0, burst order: 0,1,2,3, A[2]=1, burst order: 4,5,6,7.\*)
- A [9:3]: don't care.
- A10/AP: don't care.
- A12/BC: Selects burst chop mode on-the-fly, if enabled within MR0
- A11, A13: don't care.
- Regular interface functionality during register reads:
- Support two Burst Ordering which are switched with A2 and A[1:0]=00.
- Support of read burst chop (MRS and on-the-fly via A12/BC).
- All other address bits (remaining column addresses bits including A10, all bank address bits) will be ignored by the DDR3(L) SDRAM.
- · Regular read latencies and AC timings apply.
- DLL must be locked prior to MPR READs.

Note: Burst order bit 0 is assigned to LSB and burst order bit 7 is assigned to MSB of the selected MPR agent.



#### **MPR Register Address Definition**

The following table provide an overview of the available data location, how they are addressed by MR3 A[1:0] during a MRS to MR3, and how their individual bits are mapped into the burst order bits during a Multi Purpose Register Read.

#### **MPR MR3 Register Definition**

MR3 A[2]	MR3 A[1:0]	Function	Burst Length	Read Address A[2:0]	Burst Order and Data Pattern
		Deed	BL8	000	Burst order 0,1,2,3,4,5,6,7
		Read	520		Pre-defined Data Pattern [0,1,0,1,0,1,0,1]
1	00	Predefined Pattern for	BC4	000	Burst order 0,1,2,3
•	00		504	000	Pre-defined Data Pattern [0,1,0,1]
		System Calibration	BC4	100	Burst order 4,5,6,7
		Calibration	20.	100	Pre-defined Data Pattern [0,1,0,1]
			BL8	000	Burst order 0,1,2,3,4,5,6,7
1	01	RFU	BC4	000	Burst order 0,1,2,3
			BC4	100	Burst order 4,5,6,7
			BL8	000	Burst order 0,1,2,3,4,5,6,7
1	10	RFU	BC4	000	Burst order 0,1,2,3
			BC4	100	Burst order 4,5,6,7
			BL8	000	Burst order 0,1,2,3,4,5,6,7
1	11	RFU	BC4	000	Burst order 0,1,2,3
			BC4	100	Burst order 4,5,6,7
Note: Burst ord	er bit 0 is assigned t	o LSB and the bu	ırst order bit 7	is assigned to MSB of the	ne selected MPR agent.

y y

#### **ACTIVE Command**

The ACTIVE command is used to open (or activate) a row in a particular bank for subsequent access. The value on the BA0-BA2 inputs selects the bank, and the addresses provided on inputs A0-A14 selects the row. These rows remain active (or open) for accesses until a precharge command is issued to that bank. A PRECHARGE command must be issued before opening a different row in the same bank.

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### **PRECHARGE Command**

The PRECHARGE command is used to deactivate the open row in a particular bank or the open row in all banks. The bank(s) will be available for a subsequent row activation a specified time (tRP) after the PRECHARGE command is issued, except in the case of concurrent auto precharge, where a READ or WRITE command to a different bank is allowed as long as it does not interrupt the data transfer in the current bank and does not violate any other timing parameters. Once a bank has been precharged, it is in the idle state and must be activated prior to any READ or WRITE commands being issued to that bank. A PRECHARGE command is allowed if there is no open row in that bank (idle bank) or if the previously open row is already in the process of precharging. However, the precharge period will be determined by the last PRECHARGE command issued to the bank.



### **READ Operation**

#### **Read Burst Operation**


During a READ or WRITE command DDR3(L) will support BC4 and BL8 on the fly using address A12 during the READ or WRITE (AUTO PRECHARGE can be enabled or disabled).

A12=0, BC4 (BC4 = burst chop, tCCD=4)


A12=1, BL8

A12 will be used only for burst length control, not a column address.

#### Read Burst Operation RL=5 (AL=0, CL=5, BL=8)

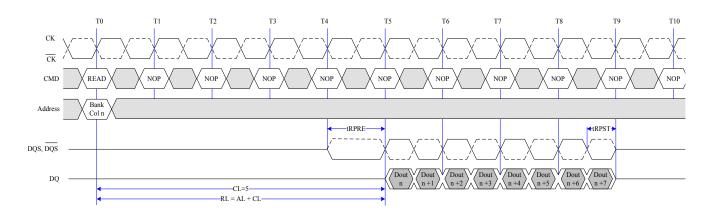

#### READ Burst Operation RL = 9 (AL=4, CL=5, BL=8)

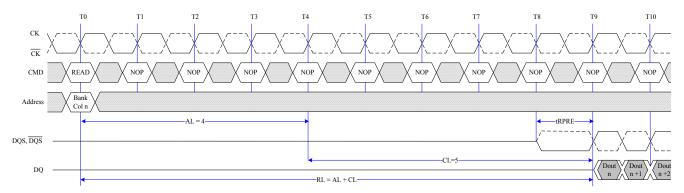





#### **READ Timing Definitions**

Read timing is shown in the following figure and is applied when the DLL is enabled and locked.

Rising data strobe edge parameters:

- tDQSCK min/max describes the allowed range for a rising data strobe edge relative to CK,  $\overline{\text{CK}}$ .
- tDQSCK is the actual position of a rising strobe edge relative to CK, CK.
- tQSH describes the DQS, DQS differential output high time.
- · tDQSQ describes the latest valid transition of the associated DQ pins.
- tQH describes the earliest invalid transition of the associated DQ pins.

Falling data strobe edge parameters:

- tQSL describes the DQS,  $\overline{DQS}$  differential output low time.
- tDQSQ describes the latest valid transition of the associated DQ pins.
- tQH describes the earliest invalid transition of the associated DQ pins.



#### Read Timing; Clock to Data Strobe relationship

Clock to Data Strobe relationship is shown in the following figure and is applied when the DLL is enabled and locked.


Rising data strobe edge parameters:

- tDQSCK min/max describes the allowed range for a rising data strobe edge relative to CK and CK.
- tDQSCK is the actual position of a rising strobe edge relative to CK and CK.
- tQSH describes the data strobe high pulse width.

Falling data strobe edge parameters:

• tQSL describes the data strobe low pulse width.

#### **Clock to Data Strobe Relationship**

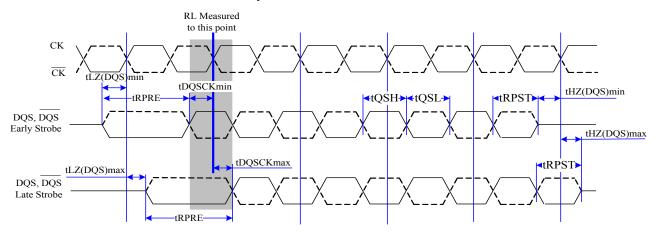

#### NOTES:

- 1. Within a burst, rising strobe edge is not necessarily fixed to be always at tDQSCK(min) or tDQSCK(max). Instead, rising strobe edge can vary between tDQSCK(min) and tDQSCK(max).
- 2. The DQS, DQS differential output high time is defined by tQSH and the DQS, DQS differential output low time is defined by tQSL.
- 3. Likewise, tLZ(DQS)min and tHZ(DQS)min are not tied to tDQSCKmin (early strobe case) and tLZ(DQS)max and tHZ(DQS)max are not tied to tDQSCKmax (late strobe case).
- 4. The minimum pulse width of read preamble is defined by tRPRE(min).
- 5. The maximum read postamble is bound by tDQSCK(min) plus tQSH(min) on the left side and tHZDSQ(max) on the right side.
- 6. The minimum pulse width of read postamble is defined by tRPST(min).
- 7. The maximum read preamble is bound by tLZDQS(min) on the left side and tDQSCK(max) on the right side.



#### Read Timing; Data Strobe to Data Relationship

The Data Strobe to Data relationship is shown in the following figure and is applied when the DLL and enabled and locked.


Rising data strobe edge parameters:

- tDQSQ describes the latest valid transition of the associated DQ pins.
- tQH describes the earliest invalid transition of the associated DQ pins.

Falling data strobe edge parameters:


- tDQSQ describes the latest valid transition of the associated DQ pins.
- tQH describes the earliest invalid transition of the associated DQ pins.
- tDQSQ; both rising/falling edges of DQS, no tAC defined

#### **Data Strobe to Data Relationship**

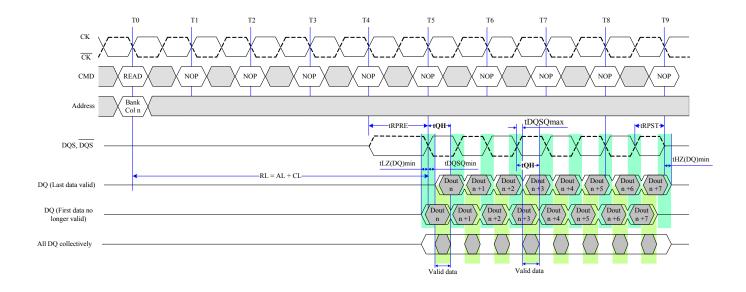




#### Read to Read (CL=5, AL=0)

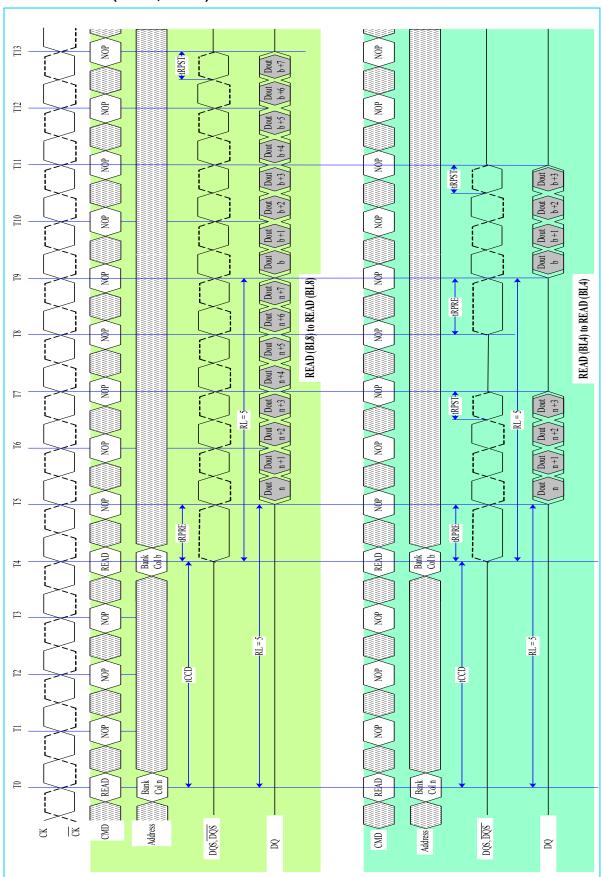




#### READ to WRITE (CL=5, AL=0; CWL=5, AL=0)

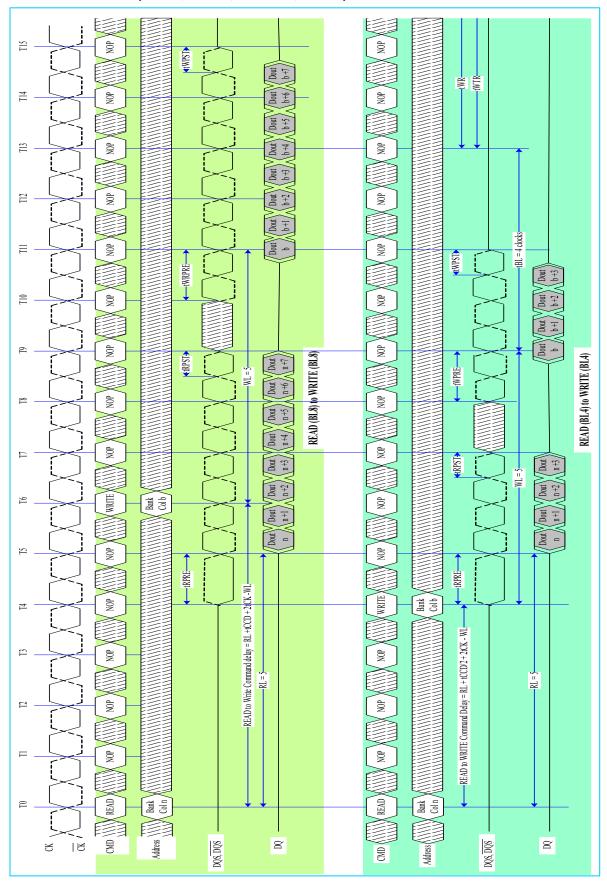




#### READ to READ (CL=5, AL=0)

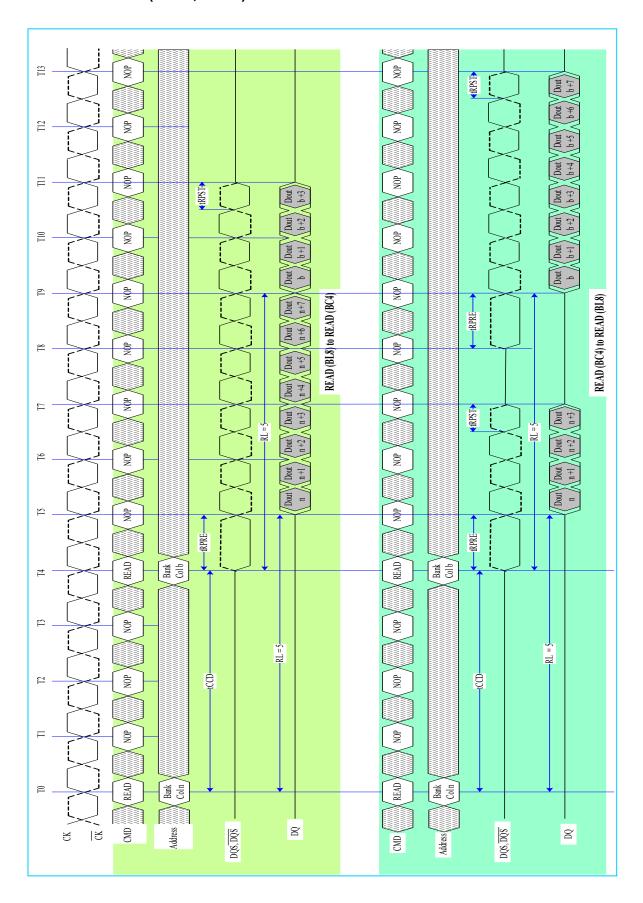



#### READ to WRITE (CL=5, AL=0; CWL=5, AL=0)

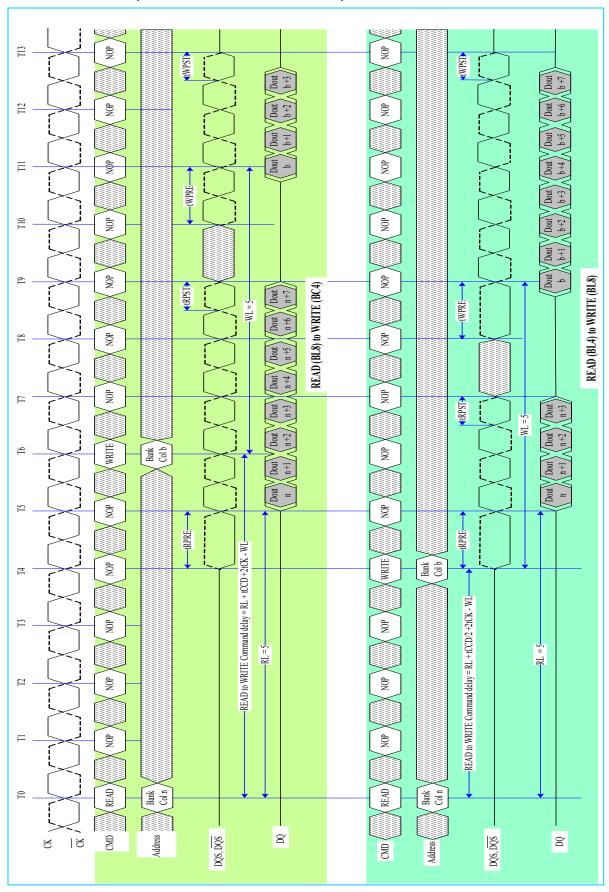

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### Write Operation

#### DDR3(L) Burst Operation

During a READ or WRITE command, DDR3(L) will support BC4 and BL8 on the fly using address A12 during the READ or WRITE (Auto Precharge can be enabled or disabled).

A12=0, BC4 (BC4 = Burst Chop, tCCD=4)

A12=1, BL8

A12 is used only for burst length control, not as a column address.

#### **WRITE Timing Violations**

#### **Motivation**

Generally, if timing parameters are violated, a complete reset/initialization procedure has to be initiated to make sure the DRAM works properly. However, it is desirable for certain minor violations that the DRAM is guaranteed not to "hang up" and errors be limited to that particular operation.

For the following, it will be assumed that there are no timing violations with regard to the Write command itself (including ODT, etc.) and that it does satisfy all timing requirements not mentioned below.

#### **Data Setup and Hold Violations**

Should the strobe timing requirements (tDS, tDH) be violated, for any of the strobe edges associated with a write burst, then wrong data might be written to the memory location addressed with the offending WRITE command.

Subsequent reads from that location might result in unpredictable read data, however, the DRAM will work properly otherwise.

#### Strobe to Strobe and Strobe to Clock Violations

Should the strobe timing requirements (tDQSH, tDQSL, tWPRE, tWPST) or the strobe to clock timing requirements (tDSS, tDSH, tDQSS) be violated, for any of the strobe edges associated with a Write burst, then wrong data might be written to the memory location addressed with the offending WRITE command. Subsequent reads from that location might result in unpredictable read data, however the DRAM will work properly otherwise.


#### **Write Timing Parameters**

This drawing is for example only to enumerate the strobe edges that "belong" to a write burst. No actual timing violations are shown here. For a valid burst all timing parameters for each edge of a burst need to be satisfied (not only for one edge - as shown).

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### Write Timing Definition

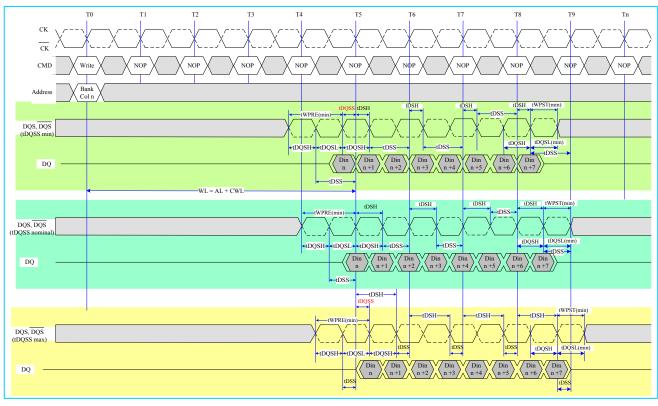


#### Note:

- 1. BL=8, WL=5 (AL=0, CWL=5).
- 2. Din n = data in from column n.
- 3. NOP commands are shown for ease of illustration; other command may be valid at these times.
- 4. BL8 setting activated by either MR0 [A1:0=00] or MR0 [A1:0=01] and A12 = 1 during WRITE command at T0.
- 5. tDQSS must be met at each rising clock edge.




#### WRITE to WRITE (WL=5; CWL=5, AL=0)

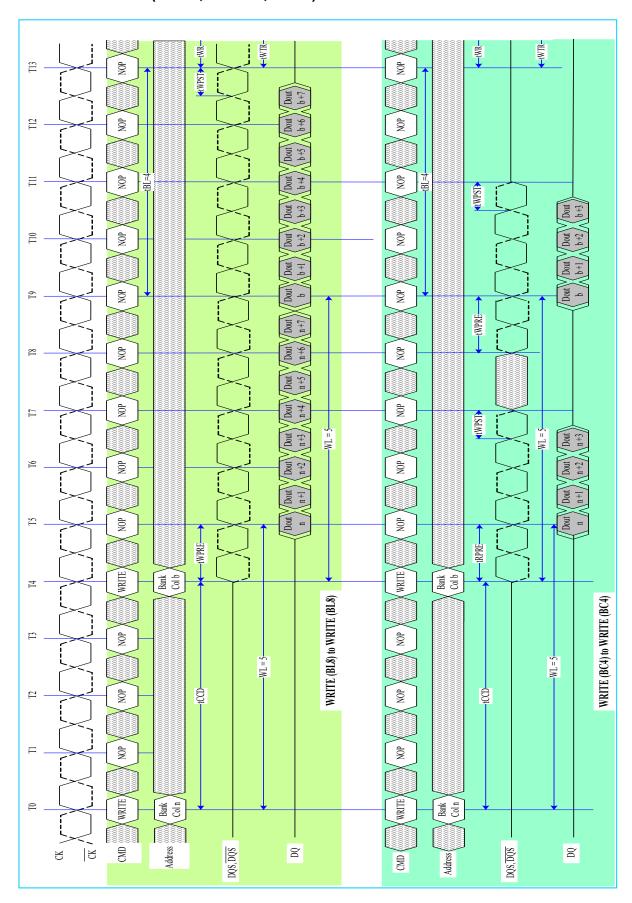




#### WRITE to READ (RL=5, CL=5, AL=0; WL=5, CWL=5, AL=0; BL=4)

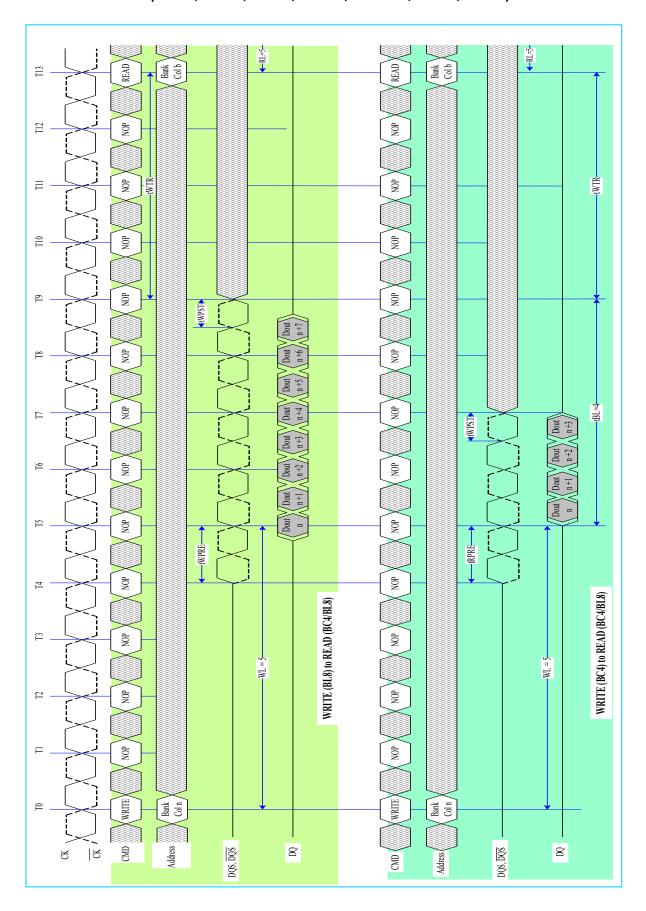



#### WRITE to WRITE (WL=5, CWL=5, AL=0)

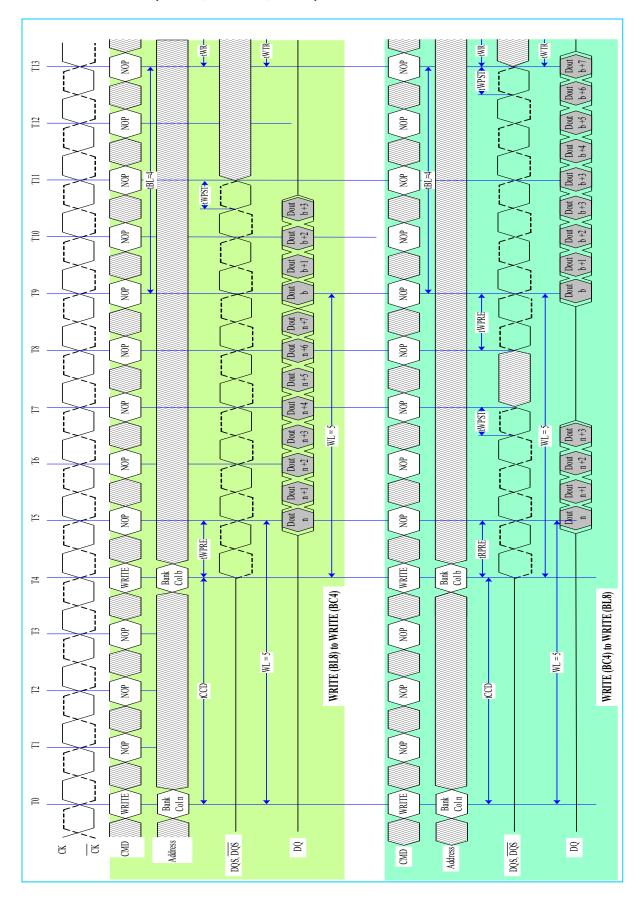

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP




#### **Refresh Command**


The Refresh command (REF) is used during normal operation of the DDR3(L) SDRAMs. This command is not persistent, so it must be issued each time a refresh is required. The DDR3(L) SDRAM requires Refresh cycles at an average periodic interval of tREFI. When  $\overline{CS}$ ,  $\overline{RAS}$ , and  $\overline{CAS}$  are held Low and  $\overline{WE}$  High at the rising edge of the clock, the chip enters a Refresh cycle. All banks of the SDRAM must be precharged and idle for a minimum of the precharge time tRP(min) before the Refresh Command can be applied. The refresh addressing is generated by the internal refresh controller. This makes the address bits "Don't Care" during a Refresh command. An internal address counter suppliers the address during the refresh cycle. No control of the external address bus is required once this cycle has started. When the refresh cycle has completed, all banks of the SDRAM will be in the precharged (idle) state. A delay between the Refresh Command and the next valid command, except NOP or DES, must be greater than or equal to the minimum Refresh cycle time tRFC(min) as shown in the following figure.

In general, a Refresh command needs to be issued to the DDR3(L) SDRAM regularly every tREFI interval. To allow for improved efficiency in scheduling and switching between tasks, some flexibility in the absolute refresh interval is provided. A maximum of 8 Refresh commands can be postponed during operation of the DDR3(L) SDRAM, meaning that at no point in time more than a total of 8 Refresh commands are allowed to be postponed. In case that 8 Refresh commands are postponed in a row, the resulting maximum interval between the surrounding Refresh commands is limited to 9 x tREFI. A maximum of 8 additional Refresh commands can be issued in advance ("pulled in"), with each one reducing the number of regular Refresh commands required later by one. Note that pulling in more than 8 Refresh commands in advance does not further reduce the number of regular Refresh commands required later, so that the resulting maximum interval between two surrounding Refresh command is limited to 9 x tREFI. Before entering Self-Refresh Mode, all postponed Refresh commands must be executed.

#### Self-Refresh Entry/Exit Timing

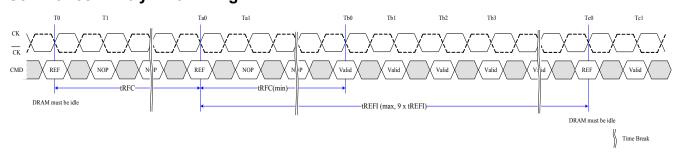


#### Postponing Refresh Commands (Example)

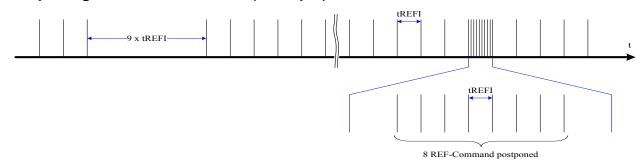

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### **Pulled-in Refresh Commands (Example)**

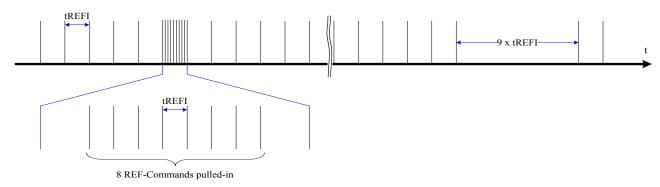

#### **Self-Refresh Operation**

The Self-Refresh command can be used to retain data in the DDR3(L) SDRAM, even if the reset of the system is powered down. When in the Self-Refresh mode, the DDR3(L) SDRAM retains data without external clocking. The DDR3(L) SDRAM device has a built-in timer to accommodate Self-Refresh operation. The Self-Refresh Entry (SRE) Command is defined by having  $\overline{CS}$ ,  $\overline{RAS}$ ,  $\overline{CAS}$ , and  $\overline{CKE}$  held low with WE high at the rising edge of the clock.

Before issuing the Self-Refreshing-Entry command, the DDR3(L) SDRAM must be idle with all bank precharge state with tRP satisfied. Also, on-die termination must be turned off before issuing Self-Refresh-Entry command, by either registering ODT pin low "ODTL + 0.5tCK" prior to the Self-Refresh Entry command or using MRS to MR1 command. Once the Self-Refresh Entry command is registered, CKE must be held low to keep the device in Self-Refresh mode. During normal operation (DLL on), MR1 (A0=0), the DLL is automatically disabled upon entering Self-Refresh and is automatically enabled (including a DLL-RESET) upon exiting Self-Refresh.

When the DDR3(L) SDRAM has entered Self-Refresh mode, all of the external control signals, except CKE and RESET, are "don't care". For proper Self-Refresh operation, all power supply and reference pins (VDD, VDDQ, VSS, VSSQ, VRefCA, and VRefDQ) must be at valid levels. The DRAM initiates a minimum of one Refresh command internally within tCKE period once it enters Self-Refresh mode.

The clock is internally disabled during Self-Refresh operation to save power. The minimum time that the DDR3(L) SDRAM must remain in Self-Refresh mode is tCKE. The user may change the external clock frequency or halt the external clock tCKSRE after Self-Refresh entry is registered; however, the clock must be restarted and stable tCKSRX before the device can exit Self-Refresh mode.

The procedure for exiting Self-Refresh requires a sequence of events. First, the clock must be stable prior to CKE going back HIGH. Once a Self-Refresh Exit Command (SRX, combination of CKE going high and either NOP or Deselect on command bus) is registered, a delay of at least tXS must be satisfied before a valid command not requiring a locked DLL can be issued to the device to allow for any internal refresh in progress. Before a command which requires a locked DLL can be applied, a delay of at least tXSDLL and applicable ZQCAL function requirements must be satisfied.






Before a command that requires a locked DLL can be applied, a delay of at least tXSDLL must be satisfied. Depending on the system environment and the amount of time spent in Self-Refresh, ZQ calibration commands may be required to compensate for the voltage and temperature drift as described in "ZQ Calibration Commands". To issue ZQ calibration commands, applicable timing requirements must be satisfied.

CKE must remain HIGH for the entire Self-Refresh exit period tXSDLL for proper operation except for Self-Refresh re-entry. Upon exit from Self-Refresh, the DDR3(L) SDRAM can be put back into Self-Refresh mode after waiting at least tXS period and issuing one refresh command (refresh period of tRFC). NOP or deselect commands must be registered on each positive clock edge during the Self-Refresh exit interval tXS. ODT must be turned off during tXSDLL.

The use of Self-Refresh mode instructs the possibility that an internally times refresh event can be missed when CKE is raised for exit from Self-Refresh mode. Upon exit from Self-Refresh, the DDR3(L) SDRAM requires a minimum of one extra refresh command before it is put back into Self-Refresh mode.

#### Self-Refresh Entry/Exit Timing

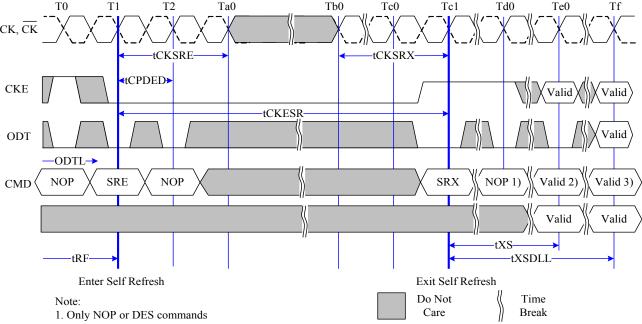

- 2. Valid commands not requiring a locked DLL
- 3. Valid commands requiring a locked DLL

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### **Power-Down Modes**

#### **Power-Down Entry and Exit**

Power-Down is synchronously entered when CKE is registered low (along with NOP or Deselect command). CKE is not allowed to go low while mode register set command, MPR operations, ZQCAL operations, DLL locking or read/write operation are in progress. CKE is allowed to go low while any of other operation such as row activation, precharge or auto precharge and refresh are in progress, but power-down IDD spec will not be applied until finishing those operation.

The DLL should be in a locked state when power-down is entered for fastest power-down exit timing. If the DLL is not locked during power-down entry, the DLL must be reset after exiting power-down mode for proper read operation and synchronous ODT operation. DRAM design provides all AC and DC timing and voltage specification as well proper DLL operation with any CKE intensive operations as long as DRAM controller complies with DRAM specifications.

During Power-Down, if all banks are closed after any in progress commands are completed, the device will be in precharge Power-Down mode; if any bank is open after in progress commands are completed, the device will be in active Power-Down mode.

Entering Power-down deactivates the input and output buffers, excluding CK, CK, ODT, CKE, and RESET. To protect DRAM internal delay on CKE line to block the input signals, multiple NOP or Deselect commands are needed during the CKE switch off and cycle(s) after, this timing period are defined as tCPDED. CKE\_low will result in deactivation of command and address receivers after tCPDED has expired.

#### **Power-Down Entry Definitions**

Status of DRAM	MRS bit A12	DLL	PD Exit	Relevant Parameters
Active (A Bank or more open)	Don't Care	On	Fast	tXP to any valid command.
Precharged (All Banks Precharged)	0	Off	Slow	tXP to any valid command. Since it is in precharge state, commands here will be ACT, AR, MRS/EMRS, PR, or PRA. tXPDLL to commands who need DLL to operate, such as RD, RDA, or ODT control line.
Precharged (All Banks Precharged)	1	On	Fast	tXP to any valid command.


Also the DLL is disabled upon entering precharge power-down (Slow Exit Mode), but the DLL is kept enabled during precharge power-down (Fast Exit Mode) or active power-down. In power-down mode, CKE low, RESET high, and a stable clock signal must be maintained at the inputs of the DDR3(L) SDRAM, and ODT should be in a valid state but all other input signals are "Don't care" (If RESET goes low during Power-Down, the DRAM will be out of PD mode and into reset state). CKE low must be maintain until tCKE has been satisfied. Power-down duration is limited by 9 times tREFI of the device.



#### NT5CB(C)256M8FN / NT5CB(C)128M16FP


The power-down state is synchronously exited when CKE is registered high (along with a NOP or Deselect command). CKE high must be maintained until tCKE has been satisfied. A valid, executable command can be applied with power-down exit latency, tXP and/or tXPDLL after CKE goes high. Power-down exit latency is defined at AC spec table of this datasheet.

#### **Active Power-Down Entry and Exit timing diagram**

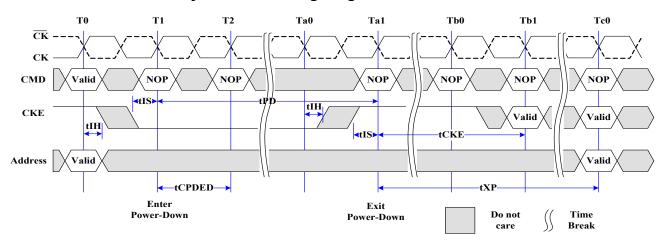

Timing Diagrams for CKE with PD Entry, PD Exit with Read, READ with Auto Precharge, Write and Write with Auto Precharge, Activate, Precharge, Refresh, MRS:


#### Power-Down Entry after Read and Read with Auto Precharge

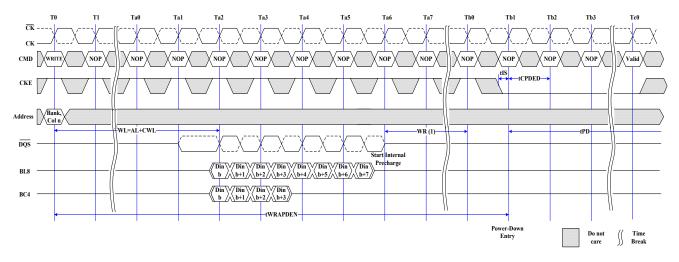






#### Power-Down Entry after Write with Auto Precharge

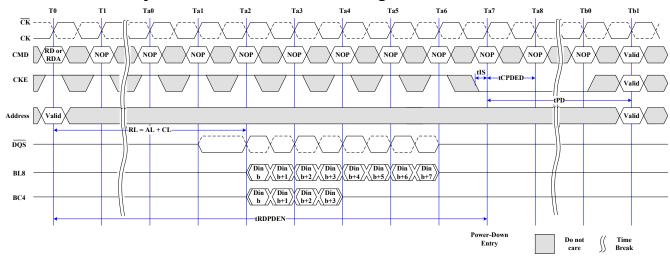


67




#### **Power-Down Entry after Write**

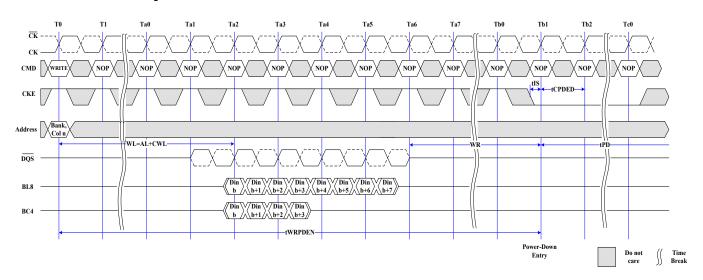

#### Precharge Power-Down (Fast Exit Mode) Entry and Exit

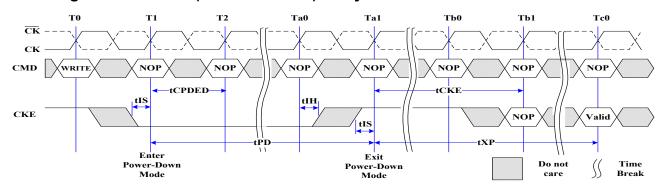


### Precharge Power-Down (Slow Exit Mode) Entry and Exit

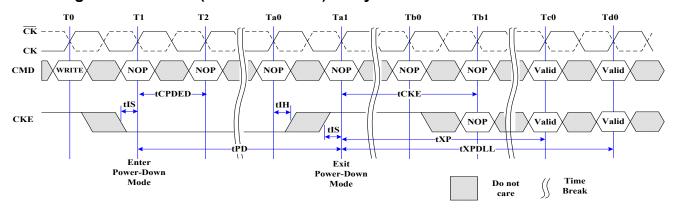




### **Refresh Command to Power-Down Entry**

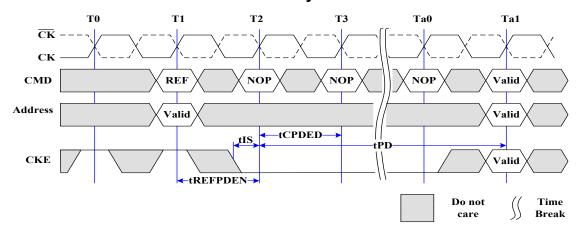





#### **Active Command to Power-Down Entry**

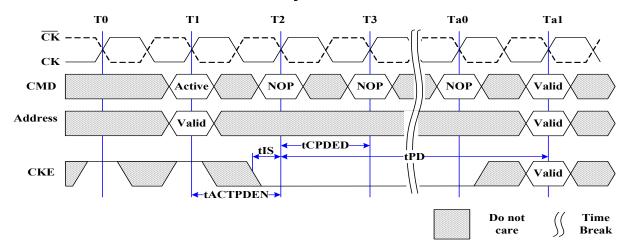

#### Precharge/Precharge all Command to Power-Down Entry

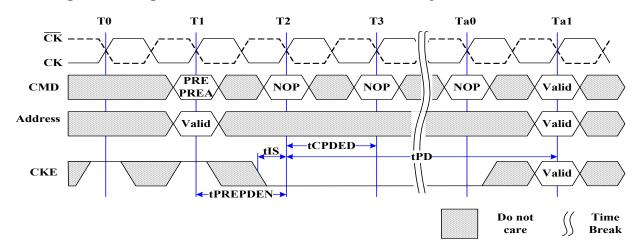

#### MRS Command to Power-Down Entry

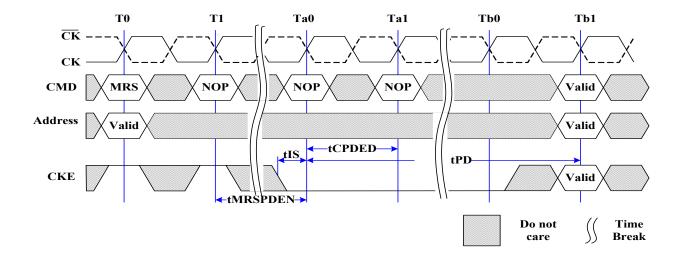






#### **On-Die Termination (ODT)**

ODT (On-Die Termination) is a feature of the DDR3(L) SDRAM that allows the DRAM to turn on/off termination resistance for each DQ, DQS,  $\overline{DQS}$ , and DM for x8 configuration and TDQS,  $\overline{TDQS}$  for x8 configuration, when enabled via A11=1 in MR1) via the ODT control pin. The ODT feature is designed to improve signal integrity of the memory channel by allowing the DRAM controller to independently turn on/off termination resistance for any or all DRAM devices.

The ODT feature is turned off and not supported in Self-Refresh mode.

A simple functional representation of the DRAM ODT feature is shown as below.

#### **Functional Representation of ODT**

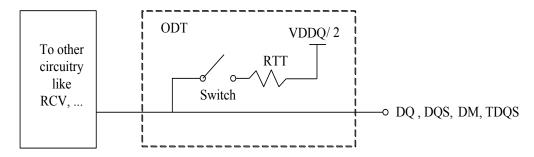

The switch is enabled by the internal ODT control logic, which uses the external ODT pin and other control information. The value of RTT is determined by the settings of Mode Register bits. The ODT pin will be ignored if the Mode Register MR1 and MR2 are programmed to disable ODT and in self-refresh mode.

#### **ODT Mode Register and ODT Truth Table**

The ODT Mode is enabled if either of MR1 {A2, A6, A9} or MR2 {A9, A10} are non-zero. In this case, the value of RTT is determined by the settings of those bits.

Application: Controller sends WR command together with ODT asserted.

One possible application: The rank that is being written to provides termination.

DRAM turns ON termination if it sees ODT asserted (except ODT is disabled by MR)

DRAM does not use any write or read command decode information.

#### **Termination Truth Table**

ODT pin	DRAM Termination State					
0	OFF					
1	ON, (OFF, if disabled by MR1 {A2, A6, A9} and MR2{A9, A10} in general)					





#### **Synchronous ODT Mode**

Synchronous ODT mode is selected whenever the DLL is turned on and locked. Based on the power-down definition, these modes are:

- · Any bank active with CKE high
- · Refresh with CKE high
- Idle mode with CKE high
- Active power down mode (regardless of MR0 bit A12)
- Precharge power down mode if DLL is enabled during precharge power down by MR0 bit A12

The direct ODT feature is not supported during DLL-off mode. The on-die termination resistors must be disabled by continuously registering the ODT pin low and/or by programming the RTT\_Nom bits MR1{A9,A6,A2} to {0,0,0} via a mode register set command during DLL-off mode.

In synchronous ODT mode, RTT will be turned on ODTLon clock cycles after ODT is sampled high by a rising clock edge and turned off ODTLoff clock cycles after ODT is registered low by a rising clock edge. The ODT latency is tied to the write latency (WL) by: ODTLonn = WL - 2; ODTLoff = WL-2.

#### **ODT Latency and Posted ODT**

In synchronous ODT Mode, the Additive Latency (AL) programmed into the Mode Register (MR1) also applies to the ODT signal. The DRAM internal ODT signal is delayed for a number of clock cycles defined by the Additive Latency (AL) relative to the external ODT signal. ODTLon = CWL + AL - 2; ODTLoff = CWL + AL - 2. For details, refer to DDR3(L) SDRAM latency definitions.

#### **ODT Latency**

Symbol	Parameter	DDR3-1600	Unit
ODTLon	ODT turn on Latency	WL - 2 = CWL + AL - 2	tCK
ODTLoff	ODT turn off Latency	WL - 2 = CWL + AL - 2	tCK

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### **Timing Parameters**


In synchronous ODT mode, the following timing parameters apply: ODTLon, ODTLoff, tAON min/max, tAOF min/max.

Minimum RTT turn-on time ( $t_{AON}$  min) is the point in time when the device leaves high impedance and ODT resistance begins to turn on. Maximum RTT turn-on time ( $t_{AON}$  max) is the point in time when the ODT resistance is fully on. Both are measured from ODTLon.


Minimum RTT turn-off time ( $t_{AOF}$  min) is the point in time when the device starts to turn off the ODT resistance. Maximum RTT turn off time ( $t_{AOF}$  max) is the point in time when the on-die termination has reached high impedance. Both are measured from ODTLoff.

When ODT is asserted, it must remain high until ODTH4 is satisfied. If a Write command is registered by the SDRAM with ODT high, then ODT must remain high until ODTH4 (BL=4) or ODTH8 (BL=8) after the write command. ODTH4 and ODTH8 are measured from ODT registered high to ODT registered low or from the registration of a write command until ODT is registered low.

# Synchronous ODT Timing Example for AL=3; CWL=5; ODTLon=AL+CWL-2=6; ODTLoff=AL+CWL-2=6

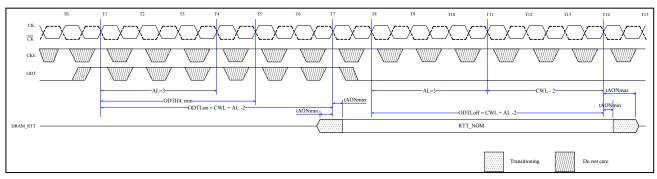

#### Synchronous ODT example with BL=4, WL=7

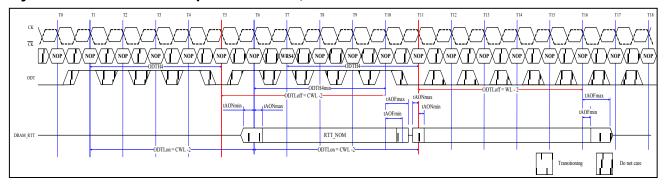

ODT must be held for at least ODTH4 after assertion (T1); ODT must be kept high ODTH4 (BL=4) or ODTH8 (BL=8) after Write command (T7). ODTH is measured from ODT first registered high to ODT first registered low, or from registration of Write command with ODT high to ODT registered low. Note that although ODTH4 is satisfied from ODT registered at T6 ODT must not go low before T11 as ODTH4 must also be satisfied from the registration of the Write command at T7.







#### **ODT during Reads:**

As the DDR3(L) SDRAM cannot terminate and drive at the same time, RTT must be disabled at least half a clock cycle before the read preamble by driving the ODT pin low appropriately. RTT may not be enabled until the end of the post-amble as shown in the following figure. DRAM turns on the termination when it stops driving which is determined by tHZ. If DRAM stops driving early (i.e. tHZ is early), then tAONmin time may apply. If DRAM stops driving late (i.e. tHZ is late), then DRAM complies with tAONmax timing. Note that ODT may be disabled earlier before the Read and enabled later after the Read than shown in this example.

ODT must be disabled externally during Reads by driving ODT low. (Example: CL=6; AL=CL-1=5; RL=AL+CL=11; CWL=5; ODTLon=CWL+AL-2=8; ODTLoff=CWL+AL-2=8)

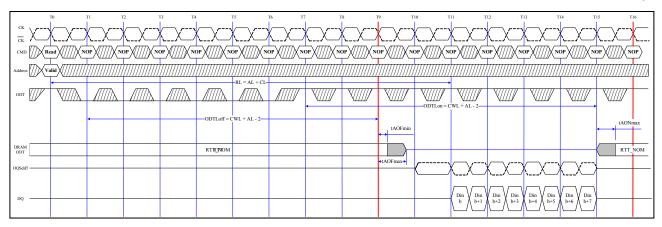





#### **Dynamic ODT**

In certain application cases and to further enhance signal integrity on the data bus, it is desirable that the termination strength of the DDR3(L) SDRAM can be changed without issuing an MRS command. This requirement is supported by the "Dynamic ODT" feature as described as follows:

#### **Functional Description**

The Dynamic ODT Mode is enabled if bit (A9) or (A10) of MR2 is set to '1'. The function is described as follows:

Two RTT values are available: RTT\_Nom and RTT\_WR.

- The value for RTT\_Nom is preselected via bits A[9,6,2] in MR1.
- The value for RTT WR is preselected via bits A[10,9] in MR2.

During operation without write commands, the termination is controlled as follows:

- Nominal termination strength RTT\_Nom is selected.
- Termination on/off timing is controlled via ODT pin and latencies ODTLon and ODTLoff.

When a Write command (WR, WRA, WRS4, WRS8, WRAS4, WRAS8) is registered, and if Dynamic ODT is enabled, the termination is controlled as follows:

- A latency ODTLcnw after the write command, termination strength RTT\_WR is selected.
- A latency ODTLcwn8 (for BL8, fixed by MRS or selected OTF) or ODTLcwn4 (for BC4, fixed by MRS or selected OTF) after the
  write command, termination strength RTT Nom is selected.
- Termination on/off timing is controlled via ODT pin and ODTLon, ODTLoff.

The following table shows latencies and timing parameters which are relevant for the on-die termination control in Dynamic ODT mode.

The dynamic ODT feature is not supported at DLL-off mode. User must use MRS command to set RTT\_WR, MR2[A10,A9 = [0,0], to disable Dynamic ODT externally.

When ODT is asserted, it must remain high until ODTH4 is satisfied. If a Write command is registered by the SDRAM with ODT high, then ODT must remain high until ODTH4 (BL=4) or ODTH8 (BL=8) after the Write command. ODTH4 and ODTH8 are measured from ODT registered high to ODT registered low or from the registration of Write command until ODT is register low.





### Latencies and timing parameters relevant for Dynamic ODT


Name and Description	Abbr.	Defined from	Defined to	Definition for all DDR3(L) speed pin	Unit
ODT turn-on Latency	ODTLon	registering external ODT signal high	turning termination on	ODTLon=WL-2	tCK
ODT turn-off Latency	ODTLoff	registering external ODT signal low	turning termination off	ODTLoff=WL-2	tCK
ODT Latency for changing from RTT_Nom to RTT_WR	ODTLcnw	registering external write command	change RTT strength from RTT_Nom to RTT_WR	ODTLcnw=WL-2	tCK
ODT Latency for change from RTT_WR to RTT_Nom (BL=4)	ODTLcwn4	registering external write command	change RTT strength from RTT_WR to RTT_Nom	ODTLcwn4=4+ODTLoff	tCK
ODT Latency for change from RTT_WR to RTT_Nom (BL=8)	ODTLcwn8	registering external write command	change RTT strength from RTT_WR to RTT_Nom	ODTLcwn8=6+ODTLoff	tCK(avg)
Minimum ODT high time after ODT assertion	ODTH4	registering ODT high	ODT registered low	ODTH4=4	tCK(avg)
Minimum ODT high time after Write (BL=4)	ODTH4	registering write with ODT high	ODT registered low	ODTH4=4	tCK(avg)
Minimum ODT high time after Write (BL=8)	ODTH8	registering write with ODT high	ODT register low	ODTH8=6	tCK(avg)
RTT change skew	tADC	ODTLcnw ODTLcwn	RTT valid	tADC(min)=0.3tCK(avg) tADC(max)=0.7tCK(avg)	tCK(avg)

Note: tAOF,nom and tADC,nom are 0.5tCK (effectively adding half a clock cycle to ODTLoff, ODTcnw, and ODTLcwn)




### **ODT Timing Diagrams**

#### Dynamic ODT: Behavior with ODT being asserted before and after the write

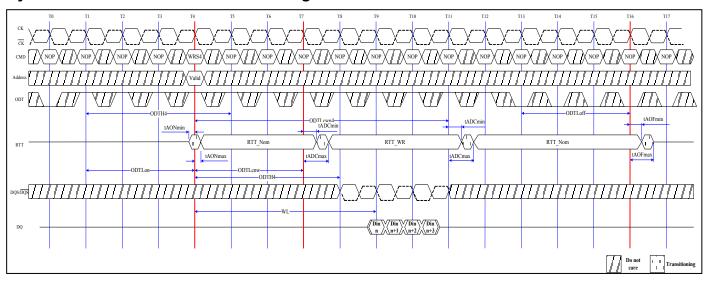

Note: Example for BC4 (via MRS or OTF), AL=0, CWL=5. ODTH4 applies to first registering ODT high and to the registration of the Write command. In this example ODTH4 would be satisfied if ODT went low at T8. (4 clocks after the Write command).


### Dynamic ODT: Behavior without write command, AL=0, CWL=5

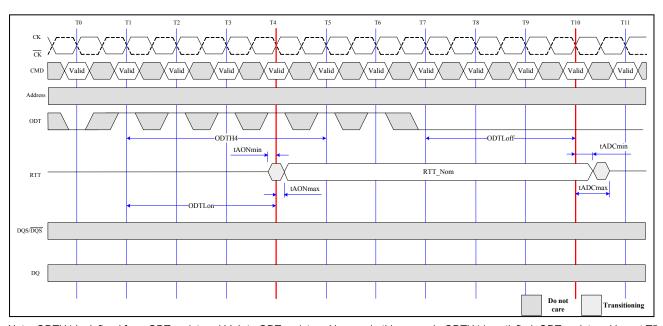

Note: ODTH4 is defined from ODT registered high to ODT registered low, so in this example ODTH4 is satisfied; ODT registered low at T5 would also be legal.




## Dynamic ODT: Behavior with ODT pin being asserted together with write command for the duration of 6 clock cycles.

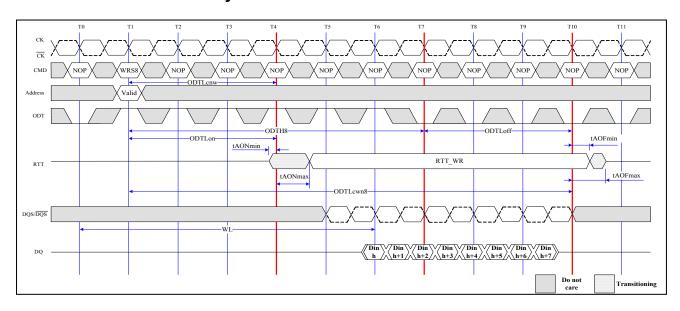

Note: Example for BL8 (via MRS or OTF), AL=0, CWL=5. In this example ODTH8=6 is exactly satisfied.


# Dynamic ODT: Behavior with ODT pin being asserted together with write command for a duration of 6 clock cycles, example for BC4 (via MRS or OTF), AL=0, CWL=5.

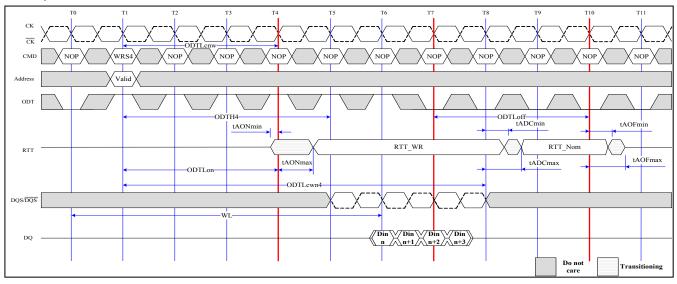





Dynamic ODT: Behavior with ODT pin being asserted together with write command for the duration of 4 clock cycles.

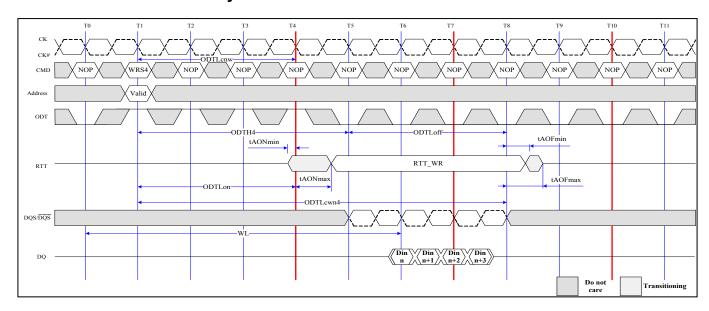





#### **Asynchronous ODT Mode**

Asynchronous ODT mode is selected when DRAM runs in DLLon mode, but DLL is temporarily disabled (i.e. frozen) in precharge power-down (by MR0 bit A12). Based on the power down mode definitions, this is currently Precharge power down mode if DLL is disabled during precharge power down by MR0 bit A12.

In asynchronous ODT timing mode, internal ODT command is NOT delayed by Additive Latency (AL) relative to the external ODT command.


In asynchronous ODT mode, the following timing parameters apply: t<sub>AONPD</sub> min/max, t<sub>AOFPD</sub> min/max.

Minimum RTT turn-on time ( $t_{AONPD}$  min) is the point in time when the device termination circuit leaves high impedance state and ODT resistance begins to turn on. Maximum RTT turn on time ( $t_{AONPD}$  max) is the point in time when the ODT resistance is fully on.

t<sub>AONPD</sub>min and t<sub>AONPD</sub>max are measured from ODT being sampled high.

Minimum RTT turn-off time ( $t_{AOFPD}$ min) is the point in time when the devices termination circuit starts to turn off the ODT resistance. Maximum ODT turn off time ( $t_{AOFPD}$ max) is the point in time when the on-die termination has reached high impedance.  $t_{AOFPD}$ min and  $t_{AOFPD}$ max are measured from ODT being sample low.

## Asynchronous ODT Timings on DDR3(L) SDRAM with fast ODT transition: AL is ignored.

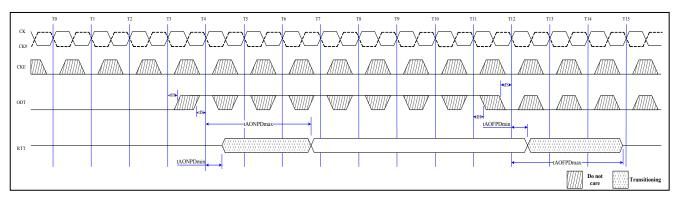

In Precharge Power Down, ODT receiver remains active; however no Read or Write command can be issued, as the respective ADD/CMD receivers may be disabled.

#### **Asynchronous ODT Timing Parameters for all Speed Bins**

Symbol	Description	Min.	Max.	Unit
t <sub>AONPD</sub>	Asynchronous RTT turn-on delay (Power-Down with DLL frozen)	2	8.5	ns
t <sub>AOFPD</sub>	Asynchronous RTT turn-off delay (Power-Down with DLL frozen)	2	8.5	ns

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP



## ODT timing parameters for Power Down (with DLL frozen) entry and exit transition period

Description	Min.	Max.		
ODT to DTT turn on dolou	min{ ODTLon * tCK + tAONmin; tAONPDmin }	max{ ODTLon * tCK + tAONmax; tAONPDmax }		
ODT to RTT turn-on delay	min{ (WL - 2) * tCK + tAONmin; tAONPDmin }	max{ (WL - 2) * tCK + tAONmax; tAONPFmax }		
ODT to DTT towns off dolors	min{ ODTLoff * tCK + tAOFmin; tAOFPDmin }	max{ ODTLoff * tCK + tAOFmax; tAOFPDmax }		
ODT to RTT turn-off delay	min{ (WL - 2) * tCK + tAOFmin; tAOFPDmin }	max{ (WL - 2) * tCK + tAOFmax; tAOFPDmax }		
tANPD	W	/L-1		

#### Synchronous to Asynchronous ODT Mode Transition during Power-Down Entry

If DLL is selected to be frozen in Precharge Power Down Mode by the setting of bit A12 in MR0 to "0", there is a transition period around power down entry, where the DDR3(L) SDRAM may show either synchronous or asynchronous ODT behavior.


The transition period is defined by the parameters tANPD and tCPDED(min). tANPD is equal to (WL-1) and is counted backwards in time from the clock cycle where CKE is first registered low. tCPDED(min) starts with the clock cycle where CKE is first registered low. The transition period begins with the starting point of tANPD and terminates at the end point of tCPDED(min). If there is a Refresh command in progress while CKE goes low, then the transition period ends at the later one of tRFC(min) after the Refresh command and the end point of tCPDED(min). Please note that the actual starting point at tANPD is excluded from the transition period, and the actual end point at tCPDED(min) and tRFC(min, respectively, are included in the transition period.

ODT assertion during the transition period may result in an RTT change as early as the smaller of tAONPDmin and (ODTLon\*tCK + tAONmin) and as late as the larger of tAONPDmax and (ODTLon\*tCK + tAONmax). ODT de-assertion during the transition period may result in an RTT change as early as the smaller of tAOFPDmin and (ODTLoff\*tCK + tAOFmin) and as late as the larger of tAOFPDmax and (ODTLoff\*tCK + tAOFmax). Note that, if AL has a large value, the range where RTT is uncertain becomes quite large. Figure 85 shows the three different cases: ODT\_A, synchronous behavior before tANPD; ODT\_B has a state change during the transition period; ODT\_C shows a state change after the transition period.





Synchronous to asynchronous transition during Precharge Power Down (with DLL frozen) entry (AL=0; CWL=5; tANPD=WL-1=4)

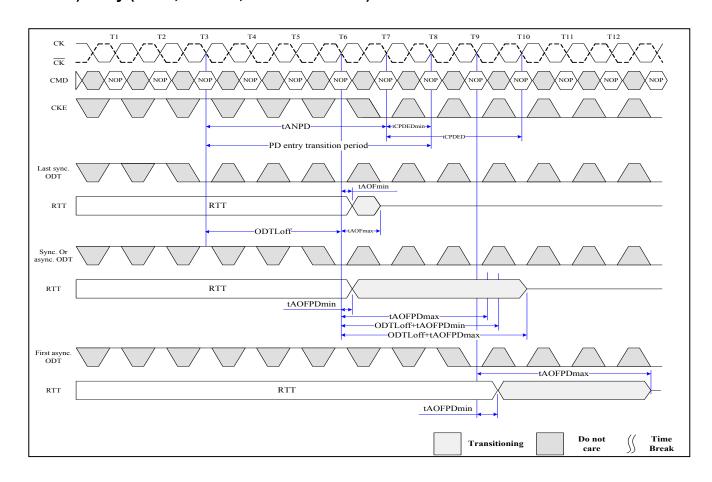




### Asynchronous to Synchronous ODT Mode transition during Power-Down Exit

If DLL is selected to be frozen in Precharge Power Down Mode by the setting of bit A12 in MR0 to "0", there is also a transition period around power down exit, where either synchronous or asynchronous response to a change in ODT must be expected from the DDR3(L) SDRAM.

This transition period starts tANPD before CKE is first registered high, and ends tXPDLL after CKE is first registered high. t<sub>ANPD</sub> is equal to (WL -1) and is counted (backwards) from the clock cycle where CKE is first registered high.

ODT assertion during the transition period may result in an RTT change as early as the smaller of  $t_{AONPD}$ min and (ODT-Lon\*tCK+ $t_{AON}$ min) and as late as the larger of  $t_{AONPD}$ max and (ODTLon\*tCK+ $t_{AON}$ max). ODT de-assertion during the transition period may result in an RTT change as early as the smaller of  $t_{AOFPD}$ min and (ODTLoff\*tCK+ $t_{AOF}$ min) and as late as the larger of  $t_{AOFPD}$ max and (ODToff\*tCK+ $t_{AOF}$ max). Note that if AL has a large value, the range where RTT is uncertain becomes quite large. The following figure shows the three different cases: ODT\_C, asynchronous response before  $t_{ANPD}$ ; ODT\_B has a state change of ODT during the transition period; ODT\_A shows a state change of ODT after the transition period with synchronous response.

## Asynchronous to synchronous transition during Precharge Power Down (with DLL frozen) exit (CL=6; AL=CL-1; CWL=5; tANPD=WL-1=9)

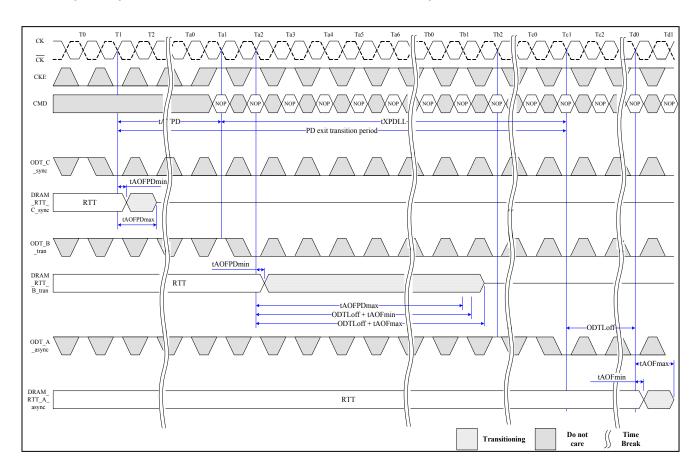




## Asynchronous to Synchronous ODT Mode during short CKE high and short CKE low periods

If the total time in Precharge Power Down state or Idle state is very short, the transition periods for PD entry and PD exit may overlap. In this case, the response of the DDR3(L) SDRAMs RTT to a change in ODT state at the input may be synchronous or asynchronous from the state of the PD entry transition period to the end of the PD exit transition period (even if the entry ends later than the exit period).

If the total time in Idle state is very short, the transition periods for PD exit and PD entry may overlap. In this case, the response of the DDR3(L) SDRAMs RTT to a change in ODT state at the input may be synchronous or asynchronous from the state of the PD exit transition period to the end of the PD entry transition period. Note that in the following figure, it is assumed that there was no Refresh command in progress when Idle state was entered.

## Transition period for short CKE cycles with entry and exit period overlapping (AL=0; WL=5; tANPD=WL-1=4)

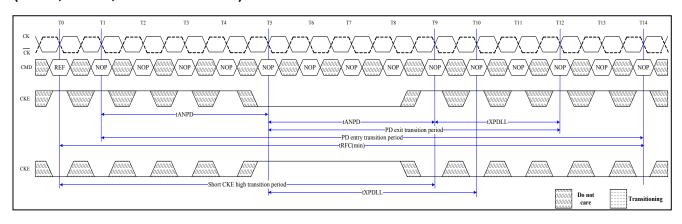

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### **ZQ** Calibration Commands

### **ZQ** Calibration Description

ZQ Calibration command is used to calibrate DRAM Ron and ODT values. DDR3(L) SDRAM needs longer time to calibrate output driver and on-die termination circuits at initialization and relatively smaller time to perform periodic calibrations.

ZQCL command is used to perform the initial calibration during power-up initialization sequence. This command may be issued at any time by the controller depending on the system environment. ZQCL command triggers the calibration engine inside the DRAM and once calibration is achieved the calibrated values are transferred from calibration engine to DRAM IO which gets reflected as updated output driver and on-die termination values.

The first ZQCL command issued after reset is allowed a timing period of tZQinit to perform the full calibration and the transfer of values. All other ZQCL commands except the first ZQCL command issued after RESET is allowed a timing period of tZQoper.

ZQCS command is used to perform periodic calibrations to account for voltage and temperature variations. A shorter timing window is provided to perform the calibration and transfer of values as defined by timing parameter tZQCS.

No other activities should be performed on the DRAM channel by the controller for the duration of tZQinit, tZQoper, or tZQCS. The quiet time on the DRAM channel allows calibration of output driver and on-die termination values. Once DRAM calibration is achieved, the DRAM should disable ZQ current consumption path to reduce power.

All banks must be precharged and tRP met before ZQCL or ZQCS commands are issued by the controller.


ZQ calibration commands can also be issued in parallel to DLL lock time when coming out of self refresh. Upon self-refresh exit, DDR3(L) SDRAM will not perform an IO calibration without an explicit ZQ calibration command. The earliest possible time for ZQ Calibration command (short or long) after self refresh exit is tXS.

In systems that share the ZQ resistor between devices, the controller must not allow any overlap of tZQoper, tZQinit, or tZQCS between ranks.

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP



### **ZQ** Calibration Timing

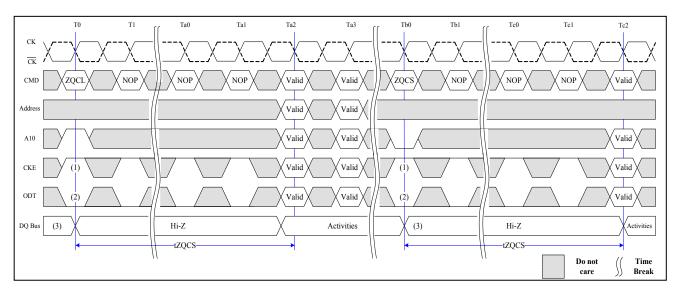

#### Note:

- 1. CKE must be continuously registered high during the calibration procedure.
- 2. On-die termination must be disabled via the ODT signal or MRS during the calibration procedure.
- 3. All devices connected to the DQ bus should be high impedance during the calibration procedure.

### ZQ External Resistor Value, Tolerance, and Capacitive loading

In order to use the ZQ calibration function, a 240 ohm +/- 1% tolerance external resistor connected between the ZQ pin and ground. The single resistor can be used for each SDRAM or one resistor can be shared between two SDRAMs if the ZQ calibration timings for each SDRAM do not overlap. The total capacitive loading on the ZQ pin must be limited.





## Absolute Maximum Ratings Absolute Maximum DC Ratings

Symbol	Parameter	Rating	Unit	Note
VDD	Voltage on VDD pin relative to Vss	-0.4 V ~ 1.80 V	V	1,3
VDDQ	Voltage on VDDQ pin relative to Vss	-0.4 V ~ 1.80 V	V	1,3
Vin, Vout	Voltage on any pin relative to Vss	-0.4 V ~ 1.80 V	V	1
Tstg	Storage Temperature	-55 ~ 100	°C	1,2

#### Note:

- 1. Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
- 2. Storage Temperature is the case surface temperature on the center/top side of the DRAM.
- 3. VDD and VDDQ must be within 300mV of each other at all times; and Vref must be not greater than 0.6VDDQ, when VDD and VDDQ are less than 500MV; Vref may be equal to or less than 300mV.

### Refresh parameters by device density

	Parameter	Symbol	1Gb	2Gb	4Gb	8Gb	Unit
REF c	command to ACT or REF command time	tRFC	110	160	260	350	ns





#### **Temperature Range**

Condition	Parameter	Value	Unit	Notes
Campanaial	Normal Operating Temperature Range	0 ≤Toper ≤ 85	°C	1
Commercial	Extended Temperature Range	85 < Toper ≤ 95	°C	1,2
Industrial	Normal Operating Temperature Range	-40 ≤ Toper ≤ 85	°C	1
Industrial	Extended Temperature Range	85 < Toper ≤ 95	°C	1,2
Automotive Grade 2	Normal Operating Temperature Range	-40 ≤ Toper ≤ 85	°C	1
Automotive Grade 2	Extended Temperature Range	85 < Toper ≤ 105	°C	1,2
Automotive Grade 3	Normal Operating Temperature Range	-40 ≤ Toper ≤ 85	°C	1
Automotive Grade 3	Extended Temperature Range	Extended Temperature Range $85 < \text{Toper} \le 95$ mal Operating Temperature Range $-40 \le \text{Toper} \le 85$ Extended Temperature Range $85 < \text{Toper} \le 95$ mal Operating Temperature Range $-40 \le \text{Toper} \le 85$ Extended Temperature Range $85 < \text{Toper} \le 85$ Extended Temperature Range $85 < \text{Toper} \le 105$ mal Operating Temperature Range $-40 \le \text{Toper} \le 85$	°C	1,2

#### Note:

- 1. Operating Temperature Toper is the case surface temperature on the center/top side of the DRAM.
- 2. Some applications require operation of the DRAM in the Extended Temperature Range.

Full specifications are guaranteed in this range, but the following additional apply.

- a) Refresh commands must be doubled in frequency, therefore, reducing the Refresh interval tREFI to 3.9us. It is also possible to specify a component with 1x refresh (tREFI to 7.8us) in the Extended Temperature Range.
- b) If Self-Refresh operation is required in the Extended Temperature Range, then it is mandatory to either use the Manual Self-Refresh mode with Extended Temperature Range capability (MR2 A6=0 and MR2 A7=1) or enable the optional Auto Self-Refresh mode (MR2 A6=1 and MR2 A7=0).

### NT5CB(C)256M8FN / NT5CB(C)128M16FP



### AC & DC Operating Conditions

### Recommended DC Operating Conditions

Symbol	Symbol Parameter			Rating	Unit	Note	
Cymbol			Min.	Тур.	Max.	Ot	11010
VDD	Supply Voltage	DDR3	1.425	1.5	1.575	V	1,2
VDD	Supply Voltage	DDR3L	1.283	1.35	1.45	] ,	3,4,5,6
VDDQ	Supply Voltage for Output	DDR3	1.425	1.5	1.575	V	1,2
	Supply Voltage for Output	DDR3L	1.283	1.35	1.45		3,4,5,6

#### Note:

- 1. Under all conditions VDDQ must be less than or equal to VDD.
- 2. VDDQ tracks with VDD. AC parameters are measured with VDD and VDDQ tied together.
- 3. Maximun DC value may not be great than 1.425V. The DC value is the linear average of VDD/ VDDQ(t) over a very long period of time (e.g., 1 sec).
- 4. If maximum limit is exceeded, input levels shall be governed by DDR3 specifications.
- 5. Under these supply voltages, the device operates to this DDR3L specification.
- **6**. Once initialized for DDR3 operation, DDR3L operation may only be used if the device is in reset while VDD and VDDQ are changed for DDR3L operation.
- 7. VDD= VDDQ= 1.35V (1.283 1.45V)

Backward compatible to VDD= VDDQ= 1.5V  $\pm 0.075$ V

Supports DDR3L devices to be backward com-patible in 1.5V applications



#### **AC & DC Input Measurement Levels**

### DDR3 AC and DC Logic Input Levels for Command and Address

			DDR3				
Symbol	Parameter	800,1066,	800,1066,1333,1600		,2133	Unit	Notes
		Min	Max	Min	Max		
VIH.CA(DC100)	DC input logic high	Vref + 0.1	VDD	Vref + 0.1	VDD	V	1, 5
VIL.CA(DC100)	DC input logic low	VSS	Vref - 0.1	VSS	Vref - 0.1	V	1, 6
VIH.CA(AC175)	AC input logic high	Vref + 0.175	Note 2	-	-	V	1, 2, 7
VIL.CA(AC175)	AC input logic low	Note 2	Vref - 0.175	-	-	V	1, 2, 8
VIH.CA(AC150)	AC input logic high	Vref + 0.150	Note 2	-	-	V	1, 2, 7
VIL.CA(AC150)	AC input logic low	Note 2	Vref - 0.150	-	-	V	1, 2, 8
VIH.CA(AC135)	AC input logic high	-	-	Vref + 0.135	Note 2	V	1, 2, 7
VIL.CA(AC135)	AC input logic low	-	-	Note 2	Vref - 0.135	V	1, 2, 8
VIH.CA(AC125)	AC input logic high	-	-	-	Note 2	V	1, 2, 7
VIL.CA(AC125)	AC input logic low	-	-	Note 2	Vref - 0.125	V	1, 2, 8
VRefCA(DC)	Reference Voltage for ADD, CMD inputs	0.49 * VDD	0.51 * VDD	0.49 * VDD	0.51 * VDD	V	3, 4, 9

- NOTE 1. For input only pins except RESET. Vref = VrefCA(DC).
- NOTE 2. See "Overshoot and Undershoot Specifications" .
- NOTE 3. The ac peak noise on VRef may not allow VRef to deviate from VRefCA(DC) by more than +/-1% VDD (for reference: approx. +/- 15 mV).
- NOTE 4. For reference: approx. VDD/2 +/- 15 mV.
- NOTE 5. VIH(dc) is used as a simplified symbol for VIH.CA(DC100)
- NOTE 6. VIL(dc) is used as a simplified symbol for VIL.CA(DC100)
- NOTE 7. VIH(ac) is used as a simplified symbol for VIH.CA(AC175), VIH.CA(AC150), VIH.CA(AC135), and VIH.CA(AC125); VIH.CA(AC175) value is used when Vref + 0.175V is referenced, VIH.CA(AC150) value is used when Vref + 0.150V is referenced, VIH.CA(AC135) value is used when Vref + 0.125V is referenced.
- NOTE 8. VIL(ac) is used as a simplified symbol for VIL.CA(AC175), VIL.CA(AC150), VIL.CA(AC135) and VIL.CA(AC125); VIL.CA(AC175) value is used when Vref 0.175V is referenced, VIL.CA(AC150) value is used when Vref 0.150V is referenced, VIL.CA(AC135) value is used when Vref 0.125V is referenced, and VIL.CA(AC125) value is used when Vref 0.125V is referenced.
- NOTE 9. VrefCA(DC) is measured relative to VDD at the same point in time on the same device





### DDR3L AC and DC Logic Input Levels for Command and Address

			DDR3L						
Symbol	Parameter	800,	1066	1333	,1600	18	66	Unit	Notes
		Min	Max	Min	Max	Min	Max		
VIH.CA(DC90)	DC input logic high	Vref + 0.09	VDD	Vref + 0.09	VDD	Vref + 0.09	VDD	V	1
VIL.CA(DC90)	DC input logic low	Vss	Vref - 0.09	Vss	Vref - 0.09	Vss	Vref - 0.09	V	1
VIH.CA(AC160)	AC input logic high	Vref + 0.16	Note 2	Vref + 0.16	Note 2	-	-	V	1,2
VIL.CA(AC160)	AC input logic low	Note 2	Vref - 0.16	Note 2	Vref - 0.16	-	-	V	1,2
VIH.CA(AC135)	AC input logic high	Vref + 0.135	Note 2	Vref + 0.135	Note 2	Vref + 0.135	Note 2	V	1,2
VIL.CA(AC135)	AC input logic low	Note 2	Vref - 0.135	Note 2	Vref - 0.135	Note 2	Vref - 0.135	V	1,2
VIH.CA(AC125)	AC input logic high	-	-	-	-	Vref + 0.125	Note 2	V	1,2
VIL.CA(AC125)	AC input logic low	-	-	-	-	Note 2	Vref - 0.125	V	1,2
VRefCA(DC)	Reference Voltage for ADD, CMD inputs	0.49 * VDD	0.51 * VDD	0.49 * VDD	0.51 * VDD	0.49 * VDD	0.51 * VDD	V	3,4

NOTE 1 For input only pins except  $\overline{\text{RESET}}$ . Vref = VrefCA(DC).

NOTE 2 See "Overshoot and Undershoot Specifications"

NOTE 3 The AC peak noise on VRef may not allow VRef to deviate from VRefDQ(DC) by more than +/-1% VDD (for reference: approx. +/- 13.5 mV).

NOTE 4 For reference: approx. VDD/2 +/- 13.5 mV





#### DDR3 AC and DC Logic Input Levels for DQ and DM

				DD	R3				
Symbol	Parameter	800,	1066	1333	,1600	1866	,2133	Unit	Notes
		Min	Max	Min	Max	Min	Max		
VIH.DQ(DC100)	DC input logic high	Vref + 0.1	VDD	Vref + 0.1	VDD	Vref + 0.1	VDD	V	1, 5
VIL.DQ(DC100)	DC input logic low	VSS	Vref - 0.1	VSS	Vref - 0.1	VSS	Vref - 0.1	V	1, 6
VIH.DQ(AC175)	AC input logic high	Vref + 0.175	Note 2	-	-	-	-	V	1, 2, 7
VIL.DQ(AC175)	AC input logic low	Note 2	Vref - 0.175	-	-	-	-	V	1, 2, 8
VIH.DQ(AC150)	AC input logic high	Vref + 0.150	Note 2	Vref + 0.150	Note 2	-	-	V	1, 2, 7
VIL.DQ(AC150)	AC input logic low	Note 2	Vref - 0.150	Note 2	Vref - 0.150	-	-	V	1, 2, 8
VIH.DQ(AC135)	AC input logic high	Vref + 0.135	Note 2	Vref + 0.135	Note 2	Vref + 0.135	Note 2	V	1, 2, 7
VIL.DQ(AC135)	AC input logic low	Note 2	Vref - 0.135	Note 2	Vref - 0.135	Note 2	Vref - 0.135	V	1, 2, 8
VRefDQ(DC)	Reference Voltage for DQ, DM inputs	0.49 * VDD	0.51 * VDD	0.49 * VDD	0.51 * VDD	0.49 * VDD	0.51 * VDD	V	3, 4, 9

NOTE 1. Vref = VrefDQ(DC).

NOTE 2. See "Overshoot and Undershoot Specifications" .

NOTE 3. The ac peak noise on VRef may not allow VRef to deviate from VRefDQ(DC) by more than +/-1% VDD (for reference:approx. +/- 15 mV).

NOTE 4. For reference: approx. VDD/2 +/- 15 mV.

NOTE 5. VIH(dc) is used as a simplified symbol for VIH.DQ(DC100)

NOTE 6. VIL(dc) is used as a simplified symbol for VIL.DQ(DC100)

NOTE 7. VIH(ac) is used as a simplified symbol for VIH.DQ(AC175), VIH.DQ(AC150), and VIH.DQ(AC135);VIH.DQ(AC175) value is used when Vref + 0.175V is referenced, VIH.DQ(AC150) value is used when Vref + 0.150V is referenced, and VIH.DQ(AC135) value is used when Vref + 0.135V is referenced.

NOTE 8. VIL(ac) is used as a simplified symbol for VIL.DQ(AC175), VIL.DQ(AC150), and VIL.DQ(AC135); VIL.DQ(AC175) value is used when Vref - 0.175V is referenced, VIL.DQ(AC150) value is used when Vref - 0.150V is referenced, and VIL.DQ(AC135) value is used when Vref - 0.135V is referenced.

NOTE 9. VrefCA(DC) is measured relative to VDD at the same point in time on the same device





### DDR3L AC and DC Logic Input Levels for DQ and DM

		-		DDF	231				
Symbol	Parameter	800,1066		1333,1600		1866		Unit	Notes
		Min	Max	Min	Max	Min	Max		
VIH.DQ(DC90)	DC input logic high	Vref + 0.09	VDD	Vref + 0.09	VDD	Vref + 0.09	VDD	V	1
VIL.DQ(DC90)	DC input logic low	Vss	Vref - 0.09	Vss	Vref - 0.09	Vss	Vref - 0.09	V	1
VIH.DQ(AC160)	AC input logic high	Vref + 0.16	Note 2	Vref + 0.16	Note 2	-	-	V	1,2
VIL.DQ(AC160)	AC input logic low	Note 2	Vref - 0.16	Note 2	Vref - 0.16	-	-	V	1,2
VIH.DQ(AC135)	AC input logic high	Vref + 0.135	Note 2	Vref + 0.135	Note 2	Vref + 0.135	Note 2	V	1,2
VIL.DQ(AC135)	AC input logic low	Note 2	Vref - 0.135	Note 2	Vref - 0.135	Note 2	Vref - 0.135	V	1,2
VIH.DQ(AC130)	AC input logic high	-	-	-	-	Vref + 0.13	Note 2	V	1,2
VIL.DQ(AC130)	AC input logic low	-	-	-	-	Note 2	Vref - 0.13	V	1,2
VRefDQ(DC)	Reference Voltage for DQ, DM inputs	0.49 * VDD	0.51 * VDD	0.49 * VDD	0.51 * VDD	0.49 * VDD	0.51 * VDD	V	3,4

NOTE 1 For input only pins except  $\overline{\text{RESET}}$ . Vref = VrefDQ(DC).

NOTE 2 See "Overshoot and Undershoot Specifications".

NOTE 3 The AC peak noise on VRef may not allow VRef to deviate from VRefDQ(DC) by more than +/-1% VDD (for reference: approx. +/- 13.5 mV).

NOTE 4 For reference: approx. VDD/2 +/- 13.5 mV.

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### **Vref Tolerances**

The dc-tolerance limits and ac-moist limits for the reference voltages VrefCA and VrefDQ are illustrated in the following figure. It shows a valid reference voltage Vref(t) as a function of time. (Vref stands for VrefCA and VrefDQ likewise).


Vref(DC) is the linear average of Vref(t) over a very long period of time (e.g.,1 sec). This average has to meet the min/max requirement in previous page. Furthermore Vref(t) may temporarily deviate from Vref(DC) by no more than  $\pm 1\%$  VDD.

The voltage levels for setup and hold time measurements VIH(AC), VIH(DC), VIL(AC), and VIL(DC) are dependent on Vref. "Vref" shall be understood as Vref(DC).

The clarifies that dc-variations of Vref affect the absolute voltage a signal has to reach to achieve a valid high or low level and therefore the time to which setup and hold is measured. System timing and voltage budgets need to account for Vref(DC) deviations from the optimum position within the data-eye of the input signals.

This also clarifies that the DRAM setup/hold specification and de-rating values need to include time and voltage associated with Vref ac-noise. Timing and voltage effects due to ac-noise on Vref up to the specified limit (±1% of VDD) are included in DRAM timing and their associated de-ratings.

### Illustration of V<sub>ref(DC)</sub> tolerance and V<sub>ref</sub>ac-noise limits

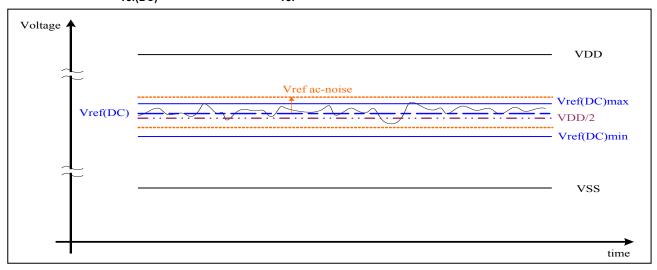

### NT5CB(C)256M8FN / NT5CB(C)128M16FP



### DDR3 Differential AC and DC Input Levels for clock (CK - CK) and strobe (DQS - DQS)

Symbol	Parameter	DDR3-800, 106	Unit	Notes	
Symbol	Parameter	Min	Max	Unit	Notes
VIHdiff	Differential input high	+ 0.200	Note 3	V	1
VILdiff	Differential input logic low	Note 3	- 0.200	V	1
VIHdiff(ac)	Differential input high ac	2 x (VIH(ac) - Vref)	Note 3	V	2
VILdiff(ac)	Differential input low ac	Note 3	2 x (VIL(ac) - Vref)	V	2

NOTE 1. Used to define a differential signal slew-rate.

NOTE 2. For CK -  $\overline{CK}$  use VIH/VIL(ac) of ADD/CMD and VREFCA; for DQS -  $\overline{DQS}$ , DQSL,  $\overline{DQSL}$ , DQSU , $\overline{DQSU}$  use VIH/VIL(ac) of DQs and VREFDQ; if a reduced ac-high or ac-low level is used for a signal group, then the reduced level applies also here.

NOTE 3. These values are not defined; however, the single-ended signals CK,  $\overline{CK}$ , DQS,  $\overline{DQS}$ , DQSL,  $\overline{DQSL}$ , DQSU,  $\overline{DQSU}$  need to be within the respective limits (VIH(dc) max, VIL(dc)min) for single-ended signals as well as the limitations for overshoot and undershoot. Refer to "Overshoot and Undershoot Specifications"

### DDR3L Differential AC and DC Input Levels for clock (CK - CK) and strobe (DQS - DQS)

Symbol	Doromotor	DDR3L-800, 1066,	DDR3L-800, 1066, 1333, 1600 & 1866						
Symbol	Parameter	Min	Max	Unit	Notes				
VIHdiff	Differential input high	+ 0.180	Note 3	V	1				
VILdiff	Differential input logic low	Note 3	- 0.180	V	1				
VIHdiff(ac)	Differential input high ac	2 x (VIH(ac) - Vref)	Note 3	V	2				
VILdiff(ac)	Differential input low ac	Note 3	2 x (VIL(ac) - Vref)	V	2				


NOTE 1 Used to define a differential signal slew-rate.

NOTE 2 For CK -  $\overline{CK}$  use VIH/VIL(AC) of ADD/CMD and VREFCA; for DQS -  $\overline{DQS}$ , DQSL,  $\overline{DQSL}$ , DQSU ,  $\overline{DQSU}$  use VIH/VIL(AC) of DQs and VREFDQ; if a reduced AC-high or AC-low level is used for a signal group, then the reduced level applies also here.

NOTE 3 These values are not defined, however the single-ended signals CK,  $\overline{CK}$ , DQS,  $\overline{DQS}$ , DQSL,  $\overline{DQSL}$ , DQSU,  $\overline{DQSU}$  need to be within the respective limits (VIH(DC) max, VIL(DC)min) for single-ended signals as well as the limitations for overshoot and undershoot. Refer to "Overshoot and Undershoot Specifications".



### Definition of differential ac-swing and "time above ac-level"

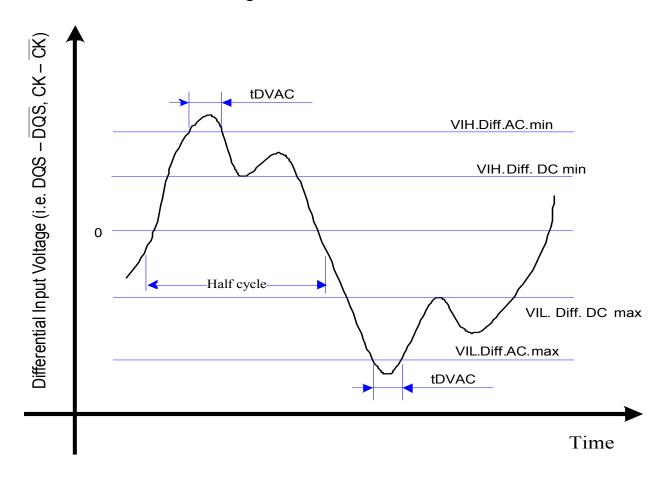





### DDR3 Allowed time before ringback (tDVAC) for CK - CK and DQS - DQS

		DDR:	3-800 / 100	66 / 1333	/ 1600			<b>DDR3-18</b>	66 / 2133		
Slew Rate [V/ns]	tDVAC @  VIH/Ldi 350r	ff(AC)  =	tDVAC @  VIH/Ldi 300r	iff(AC)  =	tDVAC [ ps ] @  VIH/Ldiff(AC)  = (DQS - <del>DQS</del> ) only		tDVAC @  VIH/Lc	liff(AC)  =	tDVAC [ ps ] @  VIH/Ldiff(AC)  = (CK - <del>CK</del> ) only		
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
> 4.0	75	-	175	-	214	-	134	-	139	-	
4.0	57	-	170	-	214	-	134	-	139	-	
3.0	50	-	167	-	191	-	112	-	118	-	
2.0	38	-	119	-	146	-	67	-	77	-	
1.8	34	-	102	-	131	-	52	-	63	-	
1.6	29	-	81	-	113	-	33	-	45	-	
1.4	22	-	54	-	88	-	9	-	23	-	
1.2	note	-	19	-	56	-	note	-	note	-	
1.0	note	-	note	-	11	-	note	-	note	-	
< 1.0	note	-	note	-	note	-	note	-	note	-	

NOTE 1. Rising input differential signal shall become equal to or greater than VIHdiff(ac) level and Falling input differential signal shall become equal to or less than VILdiff(ac) level.






### DDR3L Allowed time before ringback (tDVAC) for CK - CK and DQS - DQS

	DDR	3L-800/1	066/1333/ <sup>,</sup>	1600			DDR3L	1866		
Slew Rate [V/ns]	tDVAC @ VIH/Ldi 320	iff(AC)  =	@ VIH/Ld	tDVAC [ps] @ VIH/Ldiff(AC)  = 270 mV		C [ps] iff(AC)  = mV	tDVAC @ VIH/Ldi 250	iff(AC)  =	tDVAC [ps] @ VIH/Ldiff(AC)  : 260 mV	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
> 4.0	189	-	201	-	163	-	168	-	176	-
4.0	189	-	201	-	163	-	168	-	176	-
3.0	162	-	179	-	140	-	147	-	154	-
2.0	109	-	134	-	95	-	105	-	111	-
1.8	91	-	119	-	80	-	91	-	97	-
1.6	69	-	100	-	62	-	74	-	78	-
1.4	40	-	76	-	37	-	52	-	56	-
1.2	note	-	44	-	5	-	22	-	24	-
1.0	note	-	note	-	note	-	note	-	note	-
< 1.0	note	-	note	-	note	-	note	-	note	-

NOTE 1. Rising input differential signal shall become equal to or greater than VIHdiff(ac) level and Falling input differential signal shall become equal to or less than VILdiff(ac) level.



#### Single-ended requirements for differential signals

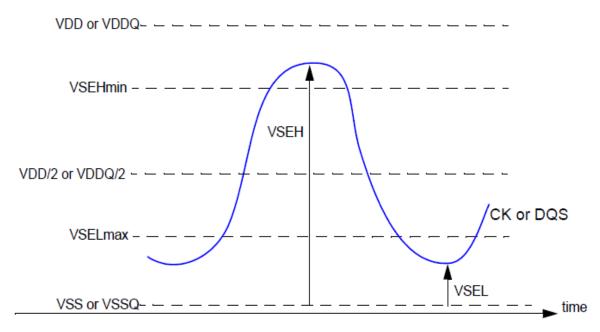

Single-ended requirement for differential signals.

Each individual component of a differential signal (CK, DQS, DQSL, DQSU,  $\overline{CK}$ ,  $\overline{DQS}$ ,  $\overline{DQSL}$ , or  $\overline{DQSU}$ ) has also to comply with certain requirements for single-ended signals.

CK and  $\overline{\text{CK}}$  have to approximately reach VSEHmin / VSELmax (approximately equal to the ac-levels (VIH (ac) / VIL (ac)) for ADD/CMD signals) in every half-cycle. DQS, DQSL, DQSU,  $\overline{\text{DQS}}$ ,  $\overline{\text{DQSL}}$  have to reach VSEHmin / VSELmax (approximately the ac-levels (VIH (ac) / VIL (ac)) for DQ signals) in every half-cycle proceeding and following a valid transition. Note that the applicable ac-levels for ADD/CMD and DQ's might be different per speed-bin etc. E.g., if VIH150 (ac)/VIL150(ac) is used for ADD/CMD signals, then these ac-levels apply also for the singleended signals CK and  $\overline{\text{CK}}$ .





### Single-ended levels for CK, DQS, DQSL, DQSU, CK, DQS, DQSL, or DQSU

Symbol	Parameter	DDR3(L)-800,	Unit	Notes		
Symbol	Parameter	Min. Max.				
VSEH	Single-ended high-level for strobes	(VDDQ/2) + 0.175	note3	V	1, 2	
VSER	Single-ended high-level for CK, CK	(VDDQ/2) + 0.175	note3	V	1, 2	
VSEL	Single-ended low-level for strobes	note3	(VDDQ/2) - 0.175	V	1, 2	
VSEL	Single-ended Low-level for CK, CK	note3	(VDDQ/2) - 0.175	V	1, 2	

#### Note:


- 1. For CK, CK use VIH/VIL(ac) of ADD/CMD; for strobes (DQS, DQSL, DQSU, CK, DQS, DQSL, or DQSU) use VIH/VIL(ac) of DQs.
- 2. VIH(ac)/VIL(ac) for DQs is based on VREFDQ; VIH(ac)/VIL(ac) for ADD/CMD is based on VREFCA; if a reduced ac-high or ac-low level is used for a signal group, then the reduced level applies also there.
- 3. These values are not defined, however the single-ended signals CK,  $\overline{CK}$ , DQS,  $\overline{DQS}$ , DQSL,  $\overline{DQSL}$ , DQSU,  $\overline{DQSU}$  need to be within the respective limits (VIH(dc)max, VIL(dc)min) for single-ended signals as well as limitations for overshoot and undershoot.



#### **Differential Input Cross Point Voltage**

To guarantee tight setup and hold times as well as output skew parameters with respect to clock and strobe, each cross point voltage of differential input signals (CK,  $\overline{CK}$  and DQS,  $\overline{DQS}$ ) must meet the requirements in the following table. The differential input cross point voltage Vix is measured from the actual cross point of true and complete signal to the midlevel between of VDD and VSS.

#### **Vix Definition**

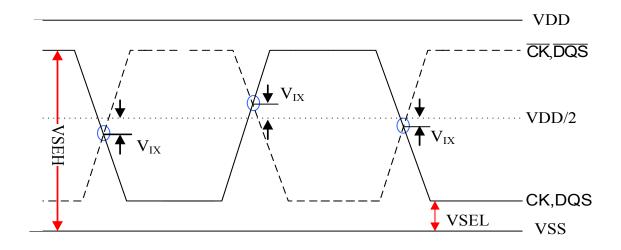

### Cross point voltage for differential input signals (CK, DQS)

Symbol	Parameter	800/1066/	PR3 1333/1600/ /2133	DDI 800/1066/ <sup>-</sup> 18	Unit	Notes	
		Min	Max	Min	Max		
MX(CK)	Differential Input Cross Point	- 150	+ 150	150	+ 150	mV	1
VIX(CK)	Voltage relative to VDD/2 for CK, CK	- 175	- 175	- 150	+ 150	mV	2
VIX(DQS)	Differential Input Cross Point Voltage relative to VDD/2 for DQS, DQS	- 150	+ 150	- 150	+ 150	mV	1

Note 1 The relation between Vix Min/Max and VSEL/VSEH should satisfy following:

(VDD/2) + VIX (min) - VSEL >= 25 mV;

VSEH - ((VDD/2) + VIX (max)) >= 25 mV;

Note 2 Extended range for Vix is only allowed for clock and if single-ended clock input signals CK and  $\overline{CK}$  are monotonic with a single-ended swing VSEL / VSEH of at least VDD/2 +/-250 mV, and when the differential slew rate of CK -  $\overline{CK}$  is larger than 3 V/ns.




### **Slew Rate Definition for Differential Input Signals**

Input slew rate for differential signals (CK,  $\overline{\text{CK}}$  and DQS,  $\overline{\text{DQS}}$ ) are defined and measured as shown below.

### **Differential Input Slew Rate Definition**

Description	Meas	ured	Defined by
Description	From	То	Defined by
Differential input slew rate for rising edge (CK-CK & DQS-DQS)	VILdiffmax	VIHdiffmin	[VIHdiffmin-VILdiffmax] / DeltaTRdiff
Differential input slew rate for falling edge (CK-CK & DQS-DQS)	VIHdiffmin	VILdiffmax	[VIHdiffmin-VILdiffmax] / DeltaTFdiff

The differential signal (i.e., CK- $\overline{\text{CK}}$  & DQS- $\overline{\text{DQS}}$ ) must be linear between these thresholds.

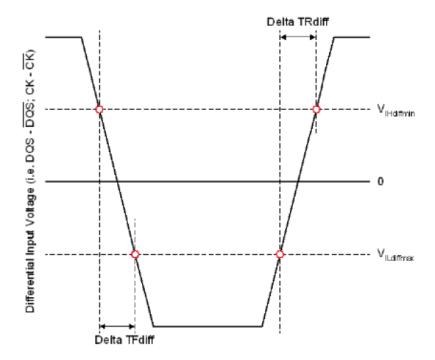


Differential Input Slew Rate Definition for DQS, DQS# and CK, CK#

102



### Input Nominal Slew Rate Definition for single ended signals

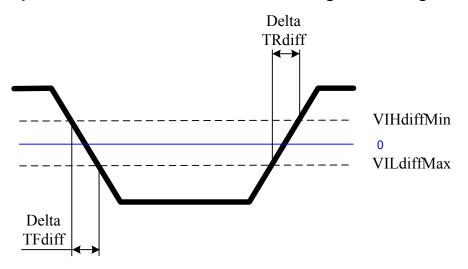

**AC and DC Output Measurement Levels** 

### Single Ended AC and DC Output Levels

Symbol	Parameter	DDR3(L)	Unit	Notes
VOH(DC)	DC output high measurement level (for IV curve linearity)	0.8xVDDQ	V	
VOM(DC)	DC output mid measurement level (for IV curve linearity)	0.5xVDDQ	V	
VOL(DC)	DC output low measurement level (fro IV curve linearity)	0.2xVDDQ	V	
VOH(AC)	AC output high measurement level (for output SR)	VTT+0.1xVDDQ	V	1
VOL(AC)	AC output low measurement level (for output SR)	VTT-0.1xVDDQ	V	1

#### Note:

#### **Differential AC and DC Output Levels**

Symbol	Parameter	DDR3(L)	Unit	Notes
VOHdiff(AC)	AC differential output high measurement level (for output SR)	+0.2 x VDDQ	V	1
VOLdiff(AC)	AC differential output low measurement level (for output SR)	-0.2 x VDDQ	V	1

#### Note:

1. The swing of  $\pm$  0.2 x VDDQ is based on approximately 50% of the static differential output high or low swing with a driver impedance of 40  $\Omega$  and an effective test load of 25  $\Omega$  to VTT=VDDQ/2 at each of the differential outputs.

<sup>1.</sup> The swing of  $\pm 0.1$  x VDDQ is based on approximately 50% of the static single ended output high or low swing with a driver impedance of 40  $\Omega$  and an effective test load of 25  $\Omega$  to VTT = VDDQ/2.




### **Single Ended Output Slew Rate**

Description	Mea	sured	Defined by
Description	From	То	Defined by
Single ended output slew rate for rising edge	VOL(AC)	VOH(AC)	[VOH(AC)-VOL(AC)] / DeltaTRse
Single ended output slew rate for falling edge	VOH(AC)	VOL(AC)	[VOH(AC)-VOL(AC)] / DeltaTFse

Note: Output slew rate is verified by design and characterization, and may not be subject to production test.

### **Single Ended Output Slew Rate Definition**

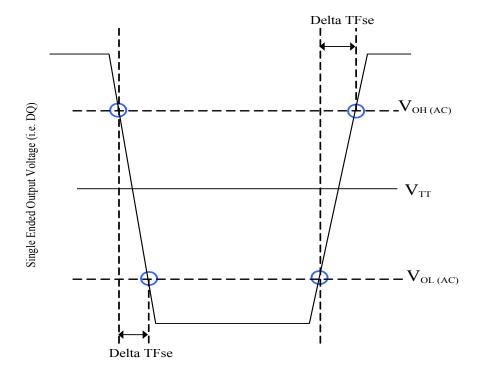





### **Output Slew Rate (Single-ended)**

NT5CB(C)256M8FN / NT5CB(C)128M16FP

Parameter Symbol	Or made al	Symbol		80	00	10	66	13	33	16	00	18	66	21	33	11!4
	-	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Unit		
Single-ended	DDR3	2.5	5	2.5	5	2.5	5	2.5	5	2.5	5	2.5	5	V/ns		
Output Slew Rate	SRQse	DDR3L	1.75	5	1.75	5	1.75	5	1.75	5	1.75	5	1.75	5	V/ns	

Description: SR: Slew Rate

Q: Query Output (like in DQ, which stands for Data-in, Query-Output)

se: Single-ended Signals

For Ron = RZQ/7 setting

Note 1): In two cases, a maximum slew rate of 6V/ns applies for a single DQ signal within a byte lane.

Case 1 is defined for a single DQ signal within a byte lane which is switching into a certain direction (either from high to low or low to high) while all remaining DQ signals in the same byte lane are static (i.e. they stay at either high or low).

Case 2 is defined for a single DQ signal within a byte lane which is switching into a certain direction (either from high to low or low to high) while all remaining DQ signals in the same byte lane are switching into the opposite direction (i.e. from low to high or high to low respectively). For the remaining DQ signal switching into the opposite direction, the regular maximum limit of 5 V/ns applies.






### **Differential Output Slew Rate**

Description	Meas	sured	Defined by
Description	From	То	Defined by
Differential output slew rate for rising edge	VOLdiff(AC)	VOHdiff(AC)	[VOHdiff(AC)-VOLdiff(AC)] / DeltaTRdiff
Differential output slew rate for falling edge	VOHdiff(AC)	VOLdiff(AC)	[VOHdiff(AC)-VOLdiff(AC)] / DeltaTFdiff

Note: Output slew rate is verified by design and characterization, and may not be subject to production test.

### **Differential Output Slew Rate Definition**

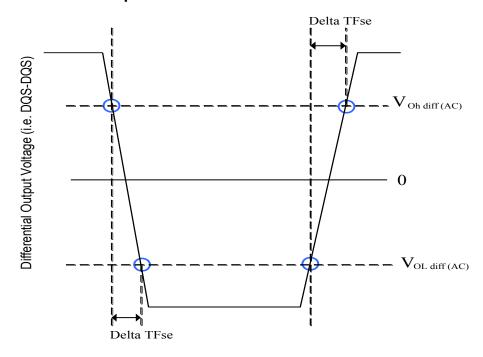

#### **Output Slew Rate (Differential)**

Parameter	Sumb al		8	00	10	66	13	33	16	00	18	66	21	33	11-4:4
Parameter	rameter Symbol -	-	Min	Max	Unit										
Differential		DDR3	5	10	5	10	5	10	5	10	5	10	5	10	V/ns
Output Slew Rate	SRQdiff	DDR3L	3.5	12	3.5	12	3.5	12	3.5	12	3.5	12	3.5	12	V/ns

Description:

SR: Slew Rate

Q: Query Output (like in DQ, which stands for Data-in, Query-Output)

diff: Differential Signals

For Ron = RZQ/7 setting






### Reference Load for AC Timing and Output Slew Rate

The following figure represents the effective reference load of 25 ohms used in defining the relevant AC timing parameters of the device as well as output slew rate measurements.

It is not intended as a precise representation of any particular system environment or a depiction of the actual load presented by a production tester. System designers should use IBIS or other simulation tools to correlate the timing reference load to a system environment. Manufacturers correlate to their production test conditions, generally one or more coaxial transmission lines terminated at the tester electronics.

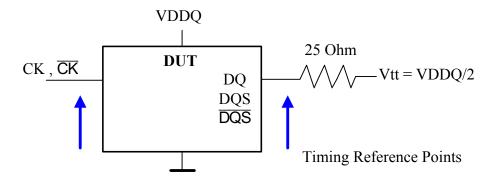




### **Overshoot and Undershoot Specifications**

### AC Overshoot/Undershoot Specification for Address and Control Pins

<del>-</del>	800	1066	1333	1600	1866	2133	Unit
Maximum peak amplitude allowed for overshoot area	0.4	0.4	0.4	0.4	0.4	0.4	V
Maximum peak amplitude allowed for undershoot area.	0.4	0.4	0.4	0.4	0.4	0.4	V
Maximum overshoot area above VDD	0.67	0.5	0.4	0.33	0.28	0.25	V-ns
Maximum undershoot area below VSS	0.67	0.5	0.4	0.33	0.28	0.25	V-ns

NOTE 1. The sum of the applied voltage (VDD) and peak amplitude overshoot voltage is not to exceed absolute maximum DC ratings

NOTE 2. The sum of applied voltage (VDD) and the peak amplitude undershoot voltage is not to exceed absolute maximum DC ratings

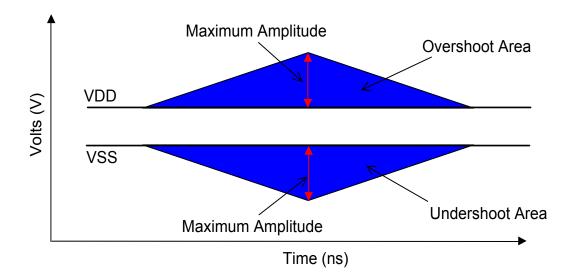




### **Overshoot and Undershoot Specifications**

### AC Overshoot/Undershoot Specification for Clock, Data, Strobe and Mask

	800	1066	1333	1600	1866	2133	Unit
Maximum peak amplitude allowed for overshoot area	0.4	0.4	0.4	0.4	0.4	0.4	V
Maximum peak amplitude allowed for undershoot area.	0.4	0.4	0.4	0.4	0.4	0.4	V
Maximum overshoot area above VDD	0.25	0.19	0.15	0.13	0.11	0.10	V-ns
Maximum undershoot area below VSS	0.25	0.19	0.15	0.13	0.11	0.10	V-ns

NOTE 1. The sum of the applied voltage (VDD) and peak amplitude overshoot voltage is not to exceed absolute maximum DC ratings

NOTE 2. The sum of applied voltage (VDD) and the peak amplitude undershoot voltage is not to exceed absolute maximum DC ratings

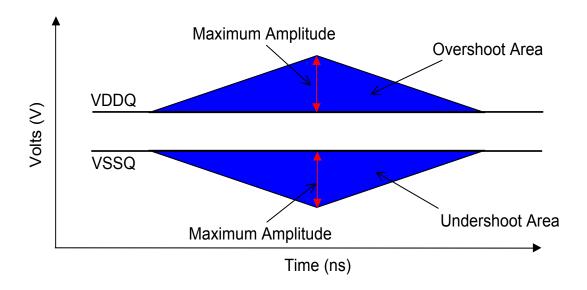





#### 34 Ohm Output Driver DC Electrical Characteristics

A Functional representation of the output buffer is shown as below. Output driver impedance RON is defined by the value of the external reference resistor RZQ as follows:


 $RON_{34} = R_{ZQ} / 7$  (nominal 34.4ohms +/-10% with nominal  $R_{ZQ}$ =240ohms)

The individual pull-up and pull-down resistors (RON<sub>Pu</sub> and RON<sub>Pd</sub>) are defined as follows:

$$RON_{Pu} = \frac{VDDQ - V_{Out}}{|I_{Out}|}$$
 under the condition that  $RON_{Pd}$  is turned off (1)

$$RON_{Pd} = \frac{V_{Out}}{|I_{Out}|}$$
 under the condition that  $RON_{Pu}$  is turned off (2)

#### **Output Driver: Definition of Voltages and Currents**

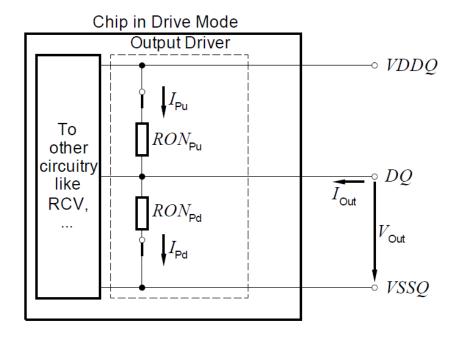





## Output Driver DC Electrical Characteristics, assuming $R_{ZQ}$ = 240ohms; entire operating temperature range; after proper ZQ calibration

RON <sub>Nom</sub>	Resistor	Vout	Min.	Nom.	Max.	Unit	Notes
		DDR3L					
		VOLdc = 0.2 x VDDQ	0.6	1.0	1.15	R <sub>ZQ</sub> / 7	1,2,3
	RON34 <sub>Pd</sub>	VOMdc = 0.5 x VDDQ	0.9	1.0	1.15	R <sub>ZQ</sub> / 7	1,2,3
34 ohms		VOHdc = 0.8 x VDDQ	0.9	1.0	1.45	R <sub>ZQ</sub> / 7	1,2,3
34 0111115		VOLdc = 0.2 x VDDQ	0.9	1.0	1.45	R <sub>ZQ</sub> / 7	1,2,3
	RON34 <sub>Pu</sub>	VOMdc = 0.5 x VDDQ	0.9	1.0	1.15	R <sub>ZQ</sub> / 7	1,2,3
		VOHdc = 0.8 x VDDQ	0.6	1.0	1.15	R <sub>ZQ</sub> / 7	1,2,3
		VOLdc = 0.2 × VDDQ	0.6	1.0	1.15	R <sub>ZQ</sub> / 6	1,2,3
	RON40 <sub>Pd</sub>	VOMdc = 0.5 × VDDQ	0.9	1.0	1.15	R <sub>ZQ</sub> / 6	1,2,3
40 ohms		VOHdc = 0.8 × VDDQ	0.9	1.0	1.45	R <sub>ZQ</sub> / 6	1,2,3
		VOLdc = 0.2 × VDDQ	0.9	1.0	1.45	R <sub>ZQ</sub> / 6	1,2,3
	RON40Pu	VOMdc = $0.5 \times VDDQ$	0.9	1.0	1.15	R <sub>ZQ</sub> / 6	1,2,3
		VOHdc = $0.8 \times VDDQ$	0.6	1.0	1.15	R <sub>ZQ</sub> / 6	1,2,3
Mismatch betv	veen pull-up and pull-down, $MM_{PuPd}$	VOMdc = 0.5 x VDDQ	-10		+10	%	1,2,4
		DDR3					
		VOLdc = 0.2 x VDDQ	0.6	1.0	1.1	R <sub>zQ</sub> / 7	1,2,3
	RON34 <sub>Pd</sub>	VOMdc = 0.5 x VDDQ	0.9	1.0	1.1	R <sub>ZQ</sub> / 7	1,2,3
34 ohms		VOHdc = 0.8 x VDDQ	0.9	1.0	1.4	R <sub>ZQ</sub> / 7	1,2,3
34 0111115		VOLdc = 0.2 x VDDQ	0.9	1.0	1.4	R <sub>ZQ</sub> / 7	1,2,3
	RON34 <sub>Pu</sub>	VOMdc = 0.5 x VDDQ	0.9	1.0	1.1	R <sub>ZQ</sub> / 7	1,2,3
		VOHdc = 0.8 x VDDQ	0.6	1.0	1.1	R <sub>ZQ</sub> / 7	1,2,3
		VOLdc = 0.2 × VDDQ	0.6	1.0	1.1	R <sub>ZQ</sub> / 6	1,2,3
	RON40 <sub>Pd</sub>	VOMdc = 0.5 × VDDQ	0.9	1.0	1.1	R <sub>ZQ</sub> / 6	1,2,3
40. alama		VOHdc = 0.8 × VDDQ	0.9	1.0	1.4	R <sub>ZQ</sub> / 6	1,2,3
40 ohms		VOLdc = 0.2 × VDDQ	0.9	1.0	1.4	R <sub>ZQ</sub> / 6	1,2,3
	RON40 <sub>Pu</sub>	VOMdc = 0.5 × VDDQ	0.9	1.0	1.1	R <sub>ZQ</sub> / 6	1,2,3
		VOHdc = 0.8 × VDDQ	0.6	1.0	1.1	R <sub>ZQ</sub> / 6	1,2,3
Mismatch between pull-up and pull-down,		VOMdc = 0.5 x VDDQ	-10		+10	%	1,2,4



#### NT5CB(C)256M8FN / NT5CB(C)128M16FP

- NOTE 1. The tolerance limits are specified after calibration with stable voltage and temperature. For the behavior of the tolerance limits if temperature or voltage changes after calibration, see following section on voltage and temperature sensitivity.
- NOTE 2. The tolerance limits are specified under the condition that VDDQ = VDD and that VSSQ = VSS.
- NOTE 3. Pull-down and pull-up output driver impedances are recommended to be calibrated at 0.5 x VDDQ. Other calibration schemes may be used to achieve the linearity spec shown above, e.g. calibration at 0.2 x VDDQ and 0.8 x VDDQ.
- ${\tt NOTE~4.~Measurement~definition~for~mismatch~between~pull-up~and~pull-down,~MMPuPd:}\\$

Measure RONPu and RONPd, both at 0.5 \* VDDQ:

$$MM_{PuPd} = \frac{Ron_{Pu} - Ron_{Pd}}{Ron_{Nom}} \times 100$$





#### **Output Driver Temperature and Voltage sensitivity**

If temperature and/or voltage after calibration, the tolerance limits widen according to the following table.

Delta T = T - T(@calibration); Delta V = VDDQ - VDDQ(@calibration); VDD = VDDQ

Note: dRondT and dRondV are not subject to production test but are verified by design and characterization.

#### **Output Driver Sensitivity Definition**

Items	Min.	Max.	Unit
RONPU@VOHdc	0.6 - dR <sub>ON</sub> dTH*IDelta TI - dR <sub>ON</sub> dVH*IDelta VI	1.1 + dR <sub>oN</sub> dTH*IDelta TI - dR <sub>oN</sub> dVH*IDelta VI	R <sub>ZQ</sub> /7
RON@VOMdc	0.9 - dR <sub>on</sub> dTM*IDelta TI - dR <sub>on</sub> dVM*IDelta VI	1.1 + dR <sub>oN</sub> dTM*IDelta TI - dR <sub>oN</sub> dVM*IDelta VI	R <sub>ZQ</sub> /7
RONPD@VOLdc	0.6 - dR <sub>on</sub> dTL*lDelta TI - dR <sub>on</sub> dVL*lDelta VI	1.1 + dR <sub>ON</sub> dTL*IDelta TI - dR <sub>ON</sub> dVL*IDelta VI	R <sub>zq</sub> /7

#### **Output Driver Voltage and Temperature Sensitivity**

Speed Bin	d Bin DDR3(L)-800/1066/1333		DDR3(I	Unit	
Items	Min.	Max.	Min.	Max.	Offic
dRONdTM	0	1.5	0	1.5	%/°C
dRONdVM	0	0.15	0	0.13	%/mV
dRONdTL	0	1.5	0	1.5	%/°C
dRONdVL	0	0.15	0	0.13	%/mV
dRONdTH	0	1.5	0	1.5	%/°C
dRONdVH	0	0.15	0	0.13	%/mV

Note: These parameters may not be subject to production test. They are verified by design and characterization.





#### On-Die Termination (ODT) Levels and I-V Characteristics

On-Die Termination effective resistance RTT is defined by bits A9, A6, and A2 of the MR1 Register.

ODT is applied to the DQ, DM, DQS/DQS, and TDQS/TDQS (x8 devices only) pins.


A functional representation of the on-die termination is shown in the following figure. The individual pull-up and pull-down resistors ( $RTT_{Pu}$  and  $RTT_{Pd}$ ) are defined as follows:

$$RTT_{Pu} = \frac{VDDQ - V_{Out}}{|I_{Out}|}$$
 under the condition that  $RTTPd$  is turned off (3)

$$RTT_{Pd} = \frac{V_{Out}}{|I_{Out}|}$$
 under the condition that  $RTT_{Pu}$  is turned off (4)

#### **On-Die Termination: Definition of Voltages and Currents**

Chip in Termination Mode ODT

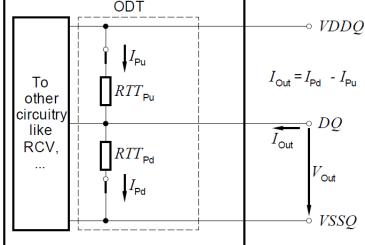





#### **ODT DC Electrical Characteristics**

The following table provides an overview of the ODT DC electrical characteristics. The values for RTT<sub>60Pd120</sub>, RTT<sub>60Pu120</sub>, RTT<sub>120Pd240</sub>, RTT<sub>120Pu240</sub>, RTT<sub>40Pd80</sub>, RTT<sub>40Pu80</sub>, RTT<sub>30Pd60</sub>, RTT<sub>30Pd60</sub>, RTT<sub>20Pd40</sub>, RTT<sub>20Pu40</sub> are not specification requirements, but can be used as design guide lines:

## ODT DC Electrical Characteristics, assuming $R_{ZQ} = 240$ ohms +/- 1% entire operating temperature range; after proper ZQ calibration(DDR3L)

MR1 A9,A6,A2	RTT	Resistor	Vout	Min.	Nom.	Max.	Unit	Notes
			DDR3L					
			VOLdc = 0.2 x VDDQ	0.6	1	1.15	$R_{ZQ}$	1,2,3,4
		RTT120Pd240	0.5 x VDDQ	0.9	1	1.15	R <sub>ZQ</sub>	1,2,3,4
			VOHdc = 0.8 x VDDQ	0.9	1	1.45	R <sub>ZQ</sub>	1,2,3,4
0,1,0	120Ω		VOLdc = 0.2 x VDDQ	0.9	1	1.45	$R_{ZQ}$	1,2,3,4
		RTT120Pu240	0.5 x VDDQ	0.9	1	1.15	$R_{ZQ}$	1,2,3,4
			VOHdc = 0.8 x VDDQ	0.6	1	1.15	$R_{ZQ}$	1,2,3,4
		RTT120	VIL(ac) to VIH(ac)	0.9	1	1.65	R <sub>ZQ</sub> /2	1,2,5
			VOLdc = 0.2 x VDDQ	0.6	1	1.15	R <sub>ZQ</sub> /2	1,2,3,4
		RTT60Pd120	0.5 x VDDQ	0.9	1	1.15	R <sub>ZQ</sub> /2	1,2,3,4
			VOHdc = 0.8 x VDDQ	0.9	1	1.45	R <sub>ZQ</sub> /2	1,2,3,4
0, 0, 1	60Ω		VOLdc = 0.2 x VDDQ	0.9	1	1.45	R <sub>ZQ</sub> /2	1,2,3,4
		RTT60Pu120	0.5 x VDDQ	0.9	1	1.15	R <sub>ZQ</sub> /2	1,2,3,4
			VOHdc = 0.8 x VDDQ	0.6	1	1.15	$R_{ZQ}/2$	1,2,3,4
		RTT60	VIL(ac) to VIH(ac)	0.9	1	1.65	R <sub>ZQ</sub> /4	1,2,5
			VOLdc = 0.2 x VDDQ	0.6	1	1.15	R <sub>ZQ</sub> /3	1,2,3,4
		RTT40Pd80	0.5 x VDDQ	0.9	1	1.15	R <sub>ZQ</sub> /3	1,2,3,4
			VOHdc = 0.8 x VDDQ	0.9	1	1.45	R <sub>ZQ</sub> /3	1,2,3,4
0, 1, 1	40Ω		VOLdc = 0.2 x VDDQ	0.9	1	1.45	R <sub>ZQ</sub> /3	1,2,3,4
		RTT40Pu80	0.5 x VDDQ	0.9	1	1.15	R <sub>ZQ</sub> /3	1,2,3,4
			VOHdc = 0.8 x VDDQ	0.6	1	1.15	R <sub>ZQ</sub> /3	1,2,3,4
		RTT40	VIL(ac) to VIH(ac)	0.9	1	1.65	R <sub>ZQ</sub> /6	1,2,5
			VOLdc = 0.2 x VDDQ	0.6	1	1.15	R <sub>ZQ</sub> /4	1,2,3,4
		RTT30Pd60	0.5 x VDDQ	0.9	1	1.15	R <sub>ZQ</sub> /4	1,2,3,4
			VOHdc = 0.8 x VDDQ	0.9	1	1.45	R <sub>ZQ</sub> /4	1,2,3,4
1, 0, 1	30Ω		VOLdc = 0.2 x VDDQ	0.9	1	1.45	R <sub>ZQ</sub> /4	1,2,3,4
		RTT30Pu60	0.5 x VDDQ	0.9	1	1.15	R <sub>ZQ</sub> /4	1,2,3,4
			VOHdc = 0.8 x VDDQ	0.6	1	1.15	R <sub>ZQ</sub> /4	1,2,3,4
		RTT30	VIL(ac) to VIH(ac)	0.9	1	1.65	R <sub>ZQ</sub> /8	1,2,5
			VOLdc = 0.2 x VDDQ	0.6	1	1.15	R <sub>ZQ</sub> /6	1,2,3,4
		RTT20Pd40	0.5 x VDDQ	0.9	1	1.15	R <sub>ZQ</sub> /6	1,2,3,4
			VOHdc = 0.8 x VDDQ	0.9	1	1.45	R <sub>ZQ</sub> /6	1,2,3,4
1, 0, 0	20Ω		VOLdc = 0.2 x VDDQ	0.9	1	1.45	R <sub>ZQ</sub> /6	1,2,3,4
		RTT20Pu40	0.5 x VDDQ	0.9	1	1.15	R <sub>ZQ</sub> /6	1,2,3,4
			VOHdc = 0.8 x VDDQ	0.6	1	1.15	R <sub>ZQ</sub> /6	1,2,3,4
		RTT20	VIL(ac) to VIH(ac)	0.9	1	1.65	R <sub>ZQ</sub> /12	1,2,5
	Devia	tion of VM w.r.t. V	DDQ/2, DVM	-5		+5	%	1,2,5,6





## ODT DC Electrical Characteristics, assuming $R_{ZQ}$ = 240ohms +/- 1% entire operating temperature range; after proper ZQ calibration (DDR3)

MR1 A9,A6,A2	RTT	Resistor	Vout	Min.	Nom.	Max.	Unit	Notes
			DDR3					
			VOLdc = 0.2 x VDDQ	0.6	1	1.1	$R_{ZQ}$	1,2,3,4
		RTT120Pd240	0.5 x VDDQ	0.9	1	1.1	R <sub>ZQ</sub>	1,2,3,4
			VOHdc = 0.8 x VDDQ	0.9	1	1.4	$R_{ZQ}$	1,2,3,4
0,1,0	120Ω		VOLdc = 0.2 x VDDQ	0.9	1	1.4	$R_{ZQ}$	1,2,3,4
		RTT120Pu240	0.5 x VDDQ	0.9	1	1,1	$R_{ZQ}$	1,2,3,4
			VOHdc = 0.8 x VDDQ	0.6	1	1.1	R <sub>ZQ</sub>	1,2,3,4
		RTT120	VIL(ac) to VIH(ac)	0.9	1	1.6	R <sub>ZQ</sub> /2	1,2,5
			VOLdc = 0.2 x VDDQ	0.6	1	1.1	R <sub>ZQ</sub> /2	1,2,3,4
		RTT60Pd120	0.5 x VDDQ	0.9	1	1.1	R <sub>ZQ</sub> /2	1,2,3,4
			VOHdc = 0.8 x VDDQ	0.9	1	1.4	R <sub>ZQ</sub> /2	1,2,3,4
0, 0, 1	60Ω		VOLdc = 0.2 x VDDQ	0.9	1	1.4	R <sub>ZQ</sub> /2	1,2,3,4
		RTT60Pu120	0.5 x VDDQ	0.9	1	1.1	R <sub>ZQ</sub> /2	1,2,3,4
			VOHdc = 0.8 x VDDQ	0.6	1	1.1	R <sub>ZQ</sub> /2	1,2,3,4
		RTT60	VIL(ac) to VIH(ac)	0.9	1	1.6	R <sub>ZQ</sub> /4	1,2,5
			VOLdc = 0.2 x VDDQ	0.6	1	1.1	R <sub>ZQ</sub> /3	1,2,3,4
		RTT40Pd80	0.5 x VDDQ	0.9	1	1.1	R <sub>ZQ</sub> /3	1,2,3,4
			VOHdc = 0.8 x VDDQ	0.9	1	1.4	R <sub>ZQ</sub> /3	1,2,3,4
0, 1, 1	40Ω		VOLdc = 0.2 x VDDQ	0.9	1	1.4	R <sub>ZQ</sub> /3	1,2,3,4
		RTT40Pu80	0.5 x VDDQ	0.9	1	1.1	R <sub>ZQ</sub> /3	1,2,3,4
			VOHdc = 0.8 x VDDQ	0.6	1	1.1	R <sub>ZQ</sub> /3	1,2,3,4
		RTT40	VIL(ac) to VIH(ac)	0.9	1	1.6	R <sub>ZQ</sub> /6	1,2,5
			VOLdc = 0.2 x VDDQ	0.6	1	1.1	R <sub>ZQ</sub> /4	1,2,3,4
		RTT30Pd60	0.5 x VDDQ	0.9	1	1.1	R <sub>ZQ</sub> /4	1,2,3,4
			VOHdc = 0.8 x VDDQ	0.9	1	1.4	R <sub>ZQ</sub> /4	1,2,3,4
1, 0, 1	30Ω		VOLdc = 0.2 x VDDQ	0.9	1	1.4	R <sub>ZQ</sub> /4	1,2,3,4
		RTT30Pu60	0.5 x VDDQ	0.9	1	1.1	R <sub>ZQ</sub> /4	1,2,3,4
			VOHdc = 0.8 x VDDQ	0.6	1	1.1	R <sub>ZQ</sub> /4	1,2,3,4
		RTT30	VIL(ac) to VIH(ac)	0.9	1	1.6	R <sub>ZQ</sub> /8	1,2,5
			VOLdc = 0.2 x VDDQ	0.6	1	1.1	R <sub>ZQ</sub> /6	1,2,3,4
		RTT20Pd40	0.5 x VDDQ	0.9	1	1.1	R <sub>ZQ</sub> /6	1,2,3,4
			VOHdc = 0.8 x VDDQ	0.9	1	1.4	R <sub>ZQ</sub> /6	1,2,3,4
1, 0, 0	20Ω		VOLdc = 0.2 x VDDQ	0.9	1	1.4	R <sub>ZQ</sub> /6	1,2,3,4
		RTT20Pu40	0.5 x VDDQ	0.9	1	1.1	R <sub>ZQ</sub> /6	1,2,3,4
			VOHdc = 0.8 x VDDQ	0.6	1	1.1	R <sub>ZQ</sub> /6	1,2,3,4
		RTT20	VIL(ac) to VIH(ac)	0.9	1	1.6	R <sub>ZQ</sub> /12	1,2,5
	Devi	ation of VM w.r.t.	/DDQ/2, DVM	-5		+5	%	1,2,5,6



#### NT5CB(C)256M8FN / NT5CB(C)128M16FP

- NOTE 1. The tolerance limits are specified after calibration with stable voltage and temperature. For the behavior of the tolerance limits if temperature or voltage changes after calibration, see following section on voltage and temperature sensitivity.
- NOTE 2. The tolerance limits are specified under the condition that VDDQ = VDD and that VSSQ = VSS.
- NOTE 3. Pull-down and pull-up ODT resistors are recommended to be calibrated at 0.5 x VDDQ. Other calibration schemes may be used to achieve the linearity spec shown above, e.g. calibration at 0.2 x VDDQ and 0.8 x VDDQ.
- NOTE 4. Not a specification requirement, but a design guide line.
- NOTE 5. Measurement definition for RTT:

Apply VIH(ac) to pin under test and measure current I(VIH(ac)), then apply VIL(ac) to pin under test and measure current I(VIL(ac)) respectively.

$$RTT = \frac{VIH(ac) - VIL(ac)}{I(VIH(ac)) - I(VIL(ac))}$$

NOTE 6. Measurement definition for VM and DVM:

Measure voltage (VM) at test pin (midpoint) with no load:

$$\triangle VM = \left( \begin{array}{cc} \frac{2 \times VM}{VDDQ} - 1 \right) \times 100$$

### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### **ODT Temperature and Voltage sensitivity**

If temperature and/or voltage after calibration, the tolerance limits widen according to the following table.

Delta T = T - T(@calibration); Delta V = VDDQ - VDDQ(@calibration); VDD = VDDQ

#### **ODT Sensitivity Definition**

	Min.	Max.	Unit
RTT	0.9 – dR⊤⊤dT * l△Tl – dR⊤⊤dV * l△Vl	1.6 + dR⊤⊤dT * l△Tl + dR⊤⊤dV * l△Vl	RZQ/2,4,6,8,12


#### **ODT Voltage and Temperature Sensitivity**

	Min.	Max.	Unit
dRTTdT	0	1.5	%/°C
dRTTdV	0	0.15	%/mV

Note: These parameters may not be subject to production test. They are verified by design and characterization.

#### **Test Load for ODT Timings**

Different than for timing measurements, the reference load for ODT timings is defined in the following figure.

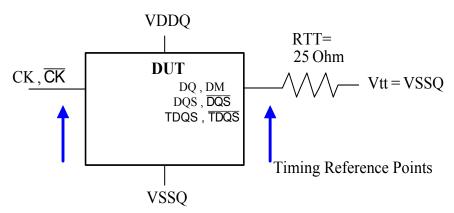

**ODT Timing Reference Load** 



#### **ODT Timing Definitions**


Definitions for  $t_{AON}$ ,  $t_{AONPD}$ ,  $t_{AOFPD}$ , and  $t_{ADC}$  are provided in the following table and subsequent figures.

Symbol	Begin Point Definition	End Point Definition
tAON	Rising edge of CK - CK defined by the end point of ODTLon	Extrapolated point at VSSQ
tAONPD	Rising edge of CK - CK with ODT being first registered high	Extrapolated point at VSSQ
tAOF	Rising edge of CK - CK defined by the end point of ODTLoff	End point: Extrapolated point at VRTT_Nom
tAOFPD	Rising edge of CK - CK with ODT being first registered low	End point: Extrapolated point at VRTT_Nom
tADC	Rising edge of CK - CK defined by the end point of ODTLcnw,	End point: Extrapolated point at VRTT_Wr and
IADC	ODTLcwn4, or ODTLcwn8	VRTT_Nom respectively

#### **Reference Settings for ODT Timing Measurements**

Donomotor	DTT Nom	DTT Wr	DD	R3	DDR3L		
Parameter	RTT_Nom	RTT_Wr	VSW1[V]	VSW2[V]	VSW1[V]	VSW2[V]	
tAON	RZQ/4	NA	0.05	0.10	0.05	0.10	
IAON	RZQ/12	NA	0.10	0.20	0.10	0.20	
tAONPD	RZQ/4	NA	0.05	0.10	0.05	0.10	
IAONPD	RZQ/12	NA	0.10	0.20	0.10	0.20	
tAOF	RZQ/4	NA	0.05	0.10	0.05	0.10	
IAOF	RZQ/12	NA	0.10	0.20	0.10	0.20	
tAOFPD	RZQ/4	NA	0.05	0.10	0.05	0.10	
IAOPPD	RZQ/12	NA	0.10	0.20	0.10	0.20	
tADC	RZQ/12	RZQ/2	0.20	0.30	0.20	0.25	


#### **Definition of taon**

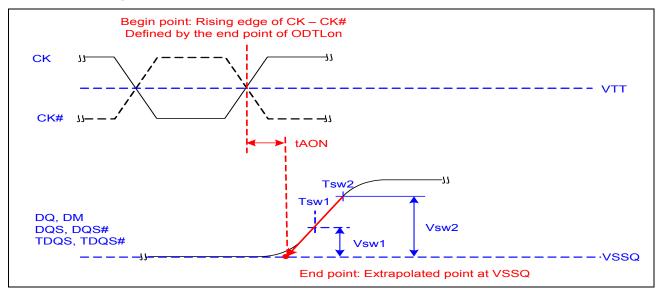


### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### **Definition of taoned**

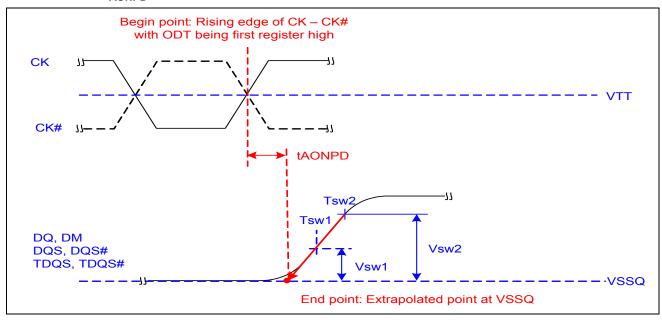


### **Definition of tags**

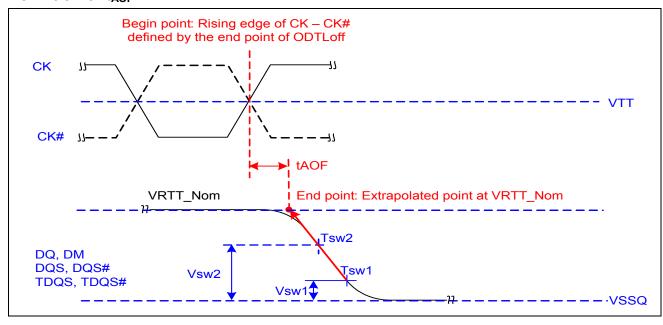




#### **Definition of taoffd**

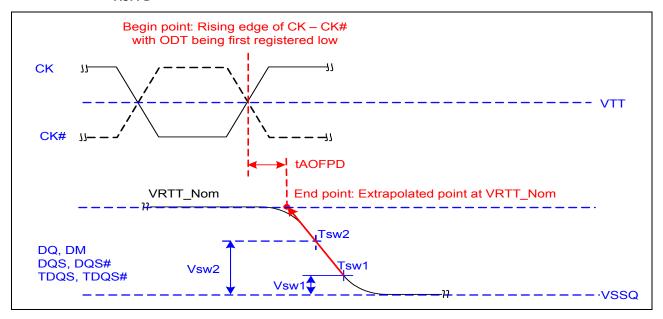

#### **Definition of tabc**

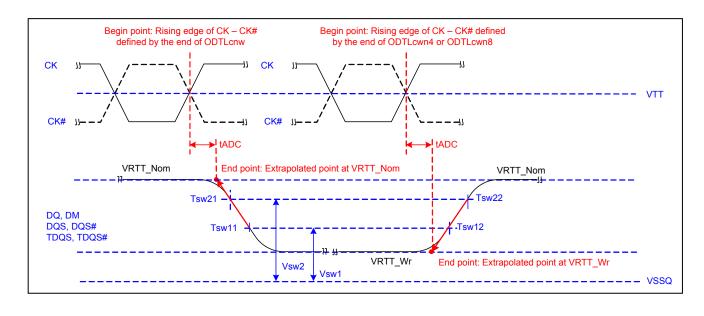

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### **Input/Output Capacitance**

Parameter	Cumbal	800 1066 1333		1600		1866		866 2133		Unit	Natas				
Parameter	Symbol	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Unit	Notes
Input/output capacitance	CIO (DDR3)	1.4	3.0	1.4	2.7	1.4	2.5	1.4	2.3	1.4	2.2	1.4	2.1	pF	1,2,3
(DQ, DM, DQS, <del>DQS</del> , TDQS, <del>TDQS</del> )	CIO (DDR3L)	1.4	2.5	1.4	2.5	1.4	2.3	1.4	2.2	1.4	2.1	ı	ı	pF	1,2,3
Input capacitance, CK and CK	CCK	0.8	1.6	0.8	1.6	0.8	1.4	0.8	1.4	0.8	1.3	0.8	1.3	pF	2,3
Input capacitance delta, CK and CK	CDCK	0	0.15	0	0.15	0	0.15	0	0.15	0	0.15	0	0.15	pF	2,3,4
Input/output capacitance delta  DQS and DQS	CDDQS	0	0.15	0	0.15	0	0.15	0	0.15	0	0.15	0	0.15	pF	2,3,5
Input capacitance,	CI (DDR3)	0.75	1.4	0.75	1.35	0.75	1.3	0.75	1.3	0.75	1.2	0.75	1.2	pF	2,3,6
(CTRL, ADD,CMD input-only pins)	CI (DDR3L)	0.75	1.3	0.75	1.3	0.75	1.3	0.75	1.2	0.75	1.2	ı	ı	pF	2,3,6
Input capacitance delta, (All CTRL input-only pins	CDI_CTRL	-0.5	0.3	-0.5	0.3	-0.4	0.2	-0.4	0.2	-0.4	0.2	-0.4	0.2	pF	2,3,7,8
Input capacitance delta, (All ADD/CMD input-only pins)	CDI_ADD_ CMD	-0.5	0.5	-0.5	0.5	-0.4	0.4	-0.4	0.4	-0.4	0.4	-0.4	0.4	pF	2,3,9, 10
Input/output capacitance delta, DQ,  DM, DQS, DQS, TDQS, TDQS	CDIO	-0.5	0.3	-0.5	0.3	-0.5	0.3	-0.5	0.3	-0.5	0.3	-0.5	0.3	pF	2,3,11
Input/output capacitance of ZQ pin	CZQ	-	3	-	3	-	3	-	3	-	3	-	3	pF	2,3,12

NOTE 1. Although the DM, TDQS and TDQS pins have different functions, the loading matches DQ and DQS

NOTE 2. This parameter is not subject to production test. It is verified by design and characterization. The capacitance is measured according to JEP147("PROCEDURE FOR MEASURING INPUT CAPACITANCE USING A VECTOR NETWORK ANALYZER(VNA)") with VDD, VDDQ, VSS, VSSQ applied and all other pins floating (except the pin under test, CKE, RESET and ODT as necessary). VDD=VDDQ=1.5V, VBIAS=VDD/2 and ondie termination off.

NOTE 3. This parameter applies to monolithic devices only; stacked/dual-die devices are not covered here

NOTE 4. Absolute value of CCK-CCK

NOTE 5. Absolute value of CIO(DQS)-CIO(DQS)

NOTE 6. CI applies to ODT,  $\overline{\text{CS}}$ , CKE, A0-A14, BA0-BA2,  $\overline{\text{RAS}}$ ,  $\overline{\text{CAS}}$ ,  $\overline{\text{WE}}$ .

NOTE 7. CDI\_CTRL applies to ODT,  $\overline{\text{CS}}$  and CKE

NOTE 8. CDI\_CTRL=CI(CTRL)-0.5\*(CI(CLK)+CI(\overline{CLK}))

NOTE 9. CDI\_ADD\_CMD applies to A0-A14, BA0-BA2,  $\overline{RAS}$ ,  $\overline{CAS}$  and  $\overline{WE}$ 

NOTE 10. CDI\_ADD\_CMD=CI(ADD\_CMD) -  $0.5*(CI(CLK)+CI(\overline{CLK}))$ 

NOTE 11. CDIO=CIO(DQ,DM) -  $0.5*(CIO(DQS)+CIO(\overline{DQS}))$ 

NOTE 12. Maximum external load capacitance on ZQ pin: 5 pF.

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### **DDR3L IDD Currents**

Symbol	Parameter/Condition		L-1600 1-11)		L-1866 3-13)	- Unit	
Symbol	r arameter/condition	X8	X16	X8	X16	Oiiit	
IDD0	Operating Current 0 One Bank Activate-> Precharge	62	67	67	72	mA	
IDD1	Operating Current 1 One Bank Activate-> Read-> Precharge	71	76	76	81	mA	
IDD2P0	Precharge Power-Down Current Slow Exit - MR0 bit A12 = 0	1	1	1	1	mA	
IDD2P1	Precharge Power-Down Current Fast Exit - MR0 bit A12 = 1	2	0	2	3	mA	
IDD2Q	Precharge Quiet Standby Current	3	2	3	37		
IDD2N	Precharge Standby Current	3	2	3	mA		
IDD2NT	Precharge Standby ODT Current	37	40	42	45	mA	
IDD3P	Active Power-Down Current Always Fast Exit	3	2	37		mA	
IDD3N	Active Standby Current	42	45	47	50	mA	
IDD4R	Operating Current Burst Read	140	150	150	160	mA	
IDD4W	Operating Current Burst Write	145	155	155	165	mA	
IDD5B	Burst Refresh Current	13	35	1.	40	mA	
IDD6TC <sup>1</sup> (RS -DIB)	Self-Refresh Current: Room Temperature Range	;	3	:	3	mA	
IDD6 <sup>2</sup>	Self-Refresh Current Normal	1	1	1	1	mA	
IDD6ET <sup>3</sup>	Self-Refresh Current: Extended	14 14		4	mA		
IDD7	All Bank Interleave Read Current	210	220	220	230	mA	
IDD8	Reset Low Current	1	3	1	3	mA	

NOTE 1 IDD6TC (RS-**DIB**): $T_C \le Room$  Temperature; SRT is disabled, ASR is enabled. Value is maximum.

NOTE 2 IDD6: SRT is 'Normal', ASR is disabled. Value is maximum.

- Commercial Grade = 0°C ~85°C
- Industrial Grade (-I) = -40°C ~85°C
- Automotive Grade 2 (-**H**) = -40 $^{\circ}$ C ~85 $^{\circ}$ C
- Automotive Grade 3 (-**A**) = -40 $^{\circ}$ C ~85 $^{\circ}$ C

NOTE 3 IDD6ET: SRT is 'Extended', ASR is disabled. Value is maximum.

- Commercial Grade = 0°C~95°C
- Industrial Grade (-I) = -40 $^{\circ}$ C ~95 $^{\circ}$ C
- Automotive Grade 2 (-**H**) = -40 $^{\circ}$ C ~105 $^{\circ}$ C
- Automotive Grade 3 (-**A**) = -40 $^{\circ}$ C ~95 $^{\circ}$ C





#### **DDR3 IDD Currents**

Symbol	Parameter/Condition		-1600 1-11)	DDR3-1866 (12-12-12)		DDR3-1866 (13-13-13)		DDR3-2133 (14-14-14)		Unit
Syllibol	Parameter/Condition	X8	X16	X8	X16	X8	X16	X8	X16	Oilit
IDD0	Operating Current 0 One Bank Activate -> Precharge	65	70	70	75	70	75	75	80	mA
IDD1	Operating Current 1 One Bank Activate-> Read-> Precharge	75	80	80	85	80	85	85	90	mA
IDD2P0	Precharge Power-Down Current Slow Exit - MR0 bit A12 = 0	1	2	1	2	1	2	1	2	mA
IDD2P1	Precharge Power-Down Current Fast Exit - MR0 bit A12 = 1	2	2	2	:5	2	25	2	28	
IDD2Q	Precharge Quiet Standby Current	3	5	4	.0	4	0	45		mA
IDD2N	Precharge Standby Current	3	5	40		4	40		45	
IDD2NT	Precharge Standby ODT Current	40	43	45	48	45	48	50	53	mA
IDD3P	Active Power-Down Current Always Fast Exit	3	5	40		40		45		mA
IDD3N	Active Standby Current	45	48	50	53	50	53	55	58	mA
IDD4R	Operating Current Burst Read	145	155	155	165	155	165	165	175	mA
IDD4W	Operating Current Burst Write	150	160	160	170	160	170	170	180	mA
IDD5B	Burst Refresh Current	14	<b>1</b> 5	1	50	1:	50	1	55	mA
IDD6 <sup>1</sup>	Self-Refresh Current Normal			1	1	2		1		mA
IDD6ET <sup>2</sup>	Self-Refresh Current Extended	15					mA			
IDD7	All Bank Interleave Read Current	230	240	240	250	240	250	250	260	mA
IDD8	Reset Low Current				1	4				mA

NOTE 1 IDD6: SRT is 'Normal', ASR is disabled. Value is maximum.

- Industrial Grade (-I) = -40 $^{\circ}$ C ~85 $^{\circ}$ C
- Automotive Grade 2 (-**H**) = -40 $^{\circ}$ C ~85 $^{\circ}$ C
- Automotive Grade 3 (-**A**) = -40 $^{\circ}$ C ~85 $^{\circ}$ C

NOTE 2 IDD6ET: SRT is 'Extended', ASR is disabled. Value is maximum.

- Commercial Grade = 0°C ~95°C
- Industrial Grade (-I) = -40 $^{\circ}$ C ~95 $^{\circ}$ C
- Automotive Grade 2 (-**H**) = -40 $^{\circ}$ C ~105 $^{\circ}$ C
- Automotive Grade 3 (-**A**) = -40  $^{\circ}\text{C} \sim 95 \,^{\circ}\text{C}$





#### **IDD Measurement Conditions**

Symbol	Parameter/Condition
	Operating One Bank Active-Precharge Current
	CKE: High; External clock: On;
	tCK, nRC, nRAS, CL: see the table of Timings used for IDD and IDDQ;
	<b>BL</b> : 8(1); <b>AL</b> : 0;
	<b>CS</b> :High between ACT and PRE;
IDD0	Command, Address, Bank Address Inputs: partially toggling;
	Data IO: MID-LEVEL;
	<b>DM</b> :stable at 0;
	Bank Activity: Cycling with one bank active at a time: 0,0,1,1,2,2,;
	Output Buffer and RTT: Enabled in Mode Registers(2);
	ODT Signal: stable at 0;
	Operating One Bank Active-Read-Precharge Current
	CKE: High; External clock: On;
	tCK, nRC, nRAS, nRCD, CL: see see the table of Timings used for IDD and IDDQ;
	<b>BL:</b> 8(1,7); <b>AL:</b> 0;
IDD1	CS: High between ACT, RD and PRE;
	Command, Address, Bank Address Inputs, Data IO: partially toggling;
	Bank Activity: Cycling with one bank active at a time: 0,0,1,1,2,2,;
	Output Buffer and RTT: Enabled in Mode Registers(2);
	ODT Signal: stable at 0;
	Precharge Standby Current
	CKE: High; External clock: On;
	tCK, CL: see the table of Timings used for IDD and IDDQ;
	<b>BL:</b> 8(1); <b>AL:</b> 0; <b>CS</b> : stable at 1;
IDD2N	Command, Address, Bank Address Inputs: partially toggling;
IDDZIN	Data IO: MID-LEVEL;
	<b>DM</b> :stable at 0;
	Bank Activity: all banks closed;
	Output Buffer and RTT: Enabled in Mode Registers(2);
	ODT Signal: stable at 0;
	Precharge Power-Down Current Slow Exit
	CKE: Low; External clock: On;
IDD2P(0)	tCK, CL: see the table of Timings used for IDD and IDDQ;
	<b>BL</b> : 8(1); <b>AL</b> : 0;
	CS: stable at 1;





	Command, Address, Bank Address Inputs: stable at 0;
	Data IO: MID-LEVEL;
	<b>DM</b> :stable at 0;
	Bank Activity: all banks closed;
	Output Buffer and RTT: Enabled in Mode Registers(2);
	ODT Signal: stable at 0;
	Pecharge Power Down Mode: Slow Exit(3)
	Precharge Power-Down Current Fast Exit
	CKE: Low; External clock: On;
	tCK, CL: see the table of Timings used for IDD and IDDQ;
	<b>BL:</b> 8(1); <b>AL:</b> 0;
	CS: stable at 1;
	Command, Address, Bank Address Inputs: stable at 0;
IDD2P(1)	Data IO: MID-LEVEL;
	<b>DM</b> :stable at 0;
	Bank Activity: all banks closed;
	Output Buffer and RTT: Enabled in Mode Registers(2);
	ODT Signal: stable at 0;
	Pecharge Power Down Mode: Fast Exit(3)
	Precharge Quiet Standby Current
	CKE: High; External clock: On;
	tCK, CL: see the table of Timings used for IDD and IDDQ;
	<b>BL:</b> 8(1); <b>AL:</b> 0;
	<b>CS</b> : stable at 1;
IDD2Q	Command, Address, Bank Address Inputs: stable at 0;
	Data IO: MID-LEVEL;
	<b>DM</b> :stable at 0;
	Bank Activity: all banks closed;
	Output Buffer and RTT: Enabled in Mode Registers(2);
	ODT Signal: stable at 0
	Active Standby Current
	CKE: High; External clock: On;
	tCK, CL: see the table of Timings used for IDD and IDDQ;
IDDON	<b>BL:</b> 8(1); <b>AL:</b> 0;
IDD3N	<b>CS</b> : stable at 1;
	Command, Address, Bank Address Inputs: partially toggling;
	Data IO: MID-LEVEL;
	<b>DM</b> :stable at 0;



#### NT5CB(C)256M8FN / NT5CB(C)128M16FP

	Bank Activity: all banks open;
	Output Buffer and RTT: Enabled in Mode Registers(2);
	ODT Signal: stable at 0;
	Active Power-Down Current
	CKE: Low; External clock: On;
	tCK, CL: see the table of Timings used for IDD and IDDQ;
	<b>BL</b> : 8(1); <b>AL</b> : 0;
	CS: stable at 1;
IDD3P	Command, Address, Bank Address Inputs: stable at 0;
	Data IO: MID-LEVEL;
	<b>DM</b> :stable at 0;
	Bank Activity: all banks open;
	Output Buffer and RTT: Enabled in Mode Registers(2);
	ODT Signal: stable at 0
	Operating Burst Read Current
	CKE: High; External clock: On;
	tCK, CL: see the table of Timings used for IDD and IDDQ;
	<b>BL:</b> 8(1,7); <b>AL:</b> 0;
	CS: High between RD;
IDD4R	Command, Address, Bank Address Inputs: partially toggling;
	Data IO: seamless read data burst with different data between one burst and the next one;
	<b>DM</b> :stable at 0;
	Bank Activity: all banks open, RD commands cycling through banks: 0,0,1,1,2,2,;
	Output Buffer and RTT: Enabled in Mode Registers(2);
	ODT Signal: stable at 0;
	Operating Burst Write Current
	CKE: High; External clock: On;
	tCK, CL: see the table of Timings used for IDD and IDDQ;
	<b>BL</b> : 8(1); <b>AL</b> : 0;
	CS: High between WR;
IDD4W	Command, Address, Bank Address Inputs: partially toggling;
100411	Data IO: seamless write data burst with different data between one burst and the next one;
	DM: stable at 0;
	Bank Activity: all banks open, WR commands cycling through banks: 0,0,1,1,2,2,;
	Output Buffer and RTT: Enabled in Mode Registers(2);
	ODT Signal: stable at HIGH;
	Obi Olyman Stable at Filori,





CKE: High; External clock: On; tCK, CL, nRFC: see the table of Timings used for IDD and IDDQ; BL: 8(t), AL: 0; CS: High between REF:  Command, Address, Bank Address Inputs: partially toggling; Data IO: MID-LEVEL; DM:stable at 0; Bank Activity: REF command every nRFC; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: stable at 0; Self Refresh Current: Normal Temperature Range TCASE: 0 - 85°C; Auto Self-Refresh (ASR): Disabled(4); Self-Refresh Temperature Range (SRT):Normal(5); CKE: Low; External clock: Off; CK and CK LOW; CL: see the table of Timings used for IDD and IDDQ; BL: 8(t); AL: 0; CS, Command, Address, Bank Address, Data IO: MID-LEVEL; DM:stable at 0; Bank Activity:Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Self-Refresh Current: Extended Temperature Range (optional)(6) TCASE: 0 - 95°C; Auto Self-Refresh (ASR): Disabled(4); Self-Refresh Temperature Range (SRT):Extended(s); CKE: Low; External clock: Off; CK and CK: LOW; CL: see the table of Timings used for IDD and IDDQ; IDD6ET  BL: 8(t); AL: 0; CS, Command, Address, Bank Address, Data IO: MID-LEVEL; DM:stable at 0; Bank Activity:Extended Temperature Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(6) TCASE: 0 - 95°C; Auto Self-Refresh Current (optional)(6)		Burst Refresh Current
BL: 8(f); AL: 0; CS: High between REF; Command, Address, Bank Address Inputs: partially toggling; Data IO: MID-LEVEL; DM:stable at 0; Bank Activity: REF command every nRFC; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: stable at 0; Self Refresh Current: Normal Temperature Range Tcase: 0 - 85°C; Auto Self-Refresh (ASR): Disabled(a); Self-Refresh Temperature Range (SRT):Normal(s); CKE: Low; External clock: Off; CK and CR: LoW; CL: see the table of Timings used for IDD and IDDQ; BL: 8(f);AL: 0; CS, Command, Address, Bank Address, Data IO: MID-LEVEL; DM:stable at 0; Bank Activity:Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Self-Refresh Current: Extended Temperature Range (optional)(e) Tcase: 0 - 95°C; Auto Self-Refresh (ASR): Disabled(a); Self-Refresh Temperature Range (SRT):Extended(5); CKE: Low; External clock: Off; CK and CK: LoW; CL: see the table of Timings used for IDD and IDDQ; BL: 8(f);AL: 0; CS, Command, Address, Bank Address, Data IO: MID-LEVEL; DM:stable at 0; Bank Activity:Extended Temperature Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(e) Tcase: 0 - 95°C;		CKE: High; External clock: On;
CS: High between REF; Command, Address, Bank Address Inputs: partially toggling; Data IO: MID-LEVEL; DM:stable at 0; Bank Activity: REF command every nRFC; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: stable at 0; Self Refresh Current: Normal Temperature Range TcASE: 0 - 85°C; Auto Self-Refresh (ASR): Disabled(4); Self-Refresh Temperature Range (SRT):Normal(5); CKE: Low; External clock: Off; CK and CR: Low; CL: see the table of Timings used for IDD and IDDQ; BL: 8(1):AL: 0; CS, Command, Address, Bank Address, Data IO: MID-LEVEL; DM:stable at 0; Bank Activity:Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Self-Refresh Current: Extended Temperature Range (optional)(6) TcASE: 0 - 95°C; Auto Self-Refresh (ASR): Disabled(4); Self-Refresh Temperature Range (SRT):Extended(6); CKE: Low; External clock: Off; CK and CR: Low; CL: see the table of Timings used for IDD and IDDQ; BL: 8(1):AL: 0; CS, Command, Address, Bank Address, Data IO: MID-LEVEL; DM:stable at 0; Bank Activity:Extended Temperature Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(6) TcASE: 0 - 95°C;		tCK, CL, nRFC: see the table of Timings used for IDD and IDDQ;
Command, Address, Bank Address Inputs: partially toggling; Data IO: MID-LEVEL; DM:stable at 0; Bank Activity: REF command every nRFC; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: stable at 0;  Self Refresh Current: Normal Temperature Range  TCASE: 0 - 85°C; Auto Self-Refresh (ASR): Disabled(4);  Self-Refresh Temperature Range (SRT):Normal(5); CKE: Low; External clock: Off; CK and CK: LOW; CL: see the table of Timings used for IDD and IDDQ; BL: 8(1);AL: 0; CS, Command, Address, Bank Address, Data IO: MID-LEVEL; DM:stable at 0; Bank Activity: Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Self-Refresh Current: Extended Temperature Range (optional)(6) TCASE: 0 - 95°C; Auto Self-Refresh (ASR): Disabled(4); Self-Refresh Temperature Range (SRT):Extended(5); CKE: Low; External clock: Off; CK and CK: LOW; CL: see the table of Timings used for IDD and IDDQ; BL: 8(1);AL: 0; CS, Command, Address, Bank Address, Data IO: MID-LEVEL; DM:stable at 0; Bank Activity:Extended Temperature Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(6)  TCASE: 0 - 95°C;		<b>BL</b> : 8(1); <b>AL</b> : 0;
Data IO: MID-LEVEL; DM:stable at 0; Bank Activity: REF command every nRFC; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: stable at 0;  Self Refresh Current: Normal Temperature Range TCASE: 0 - 85°C; Auto Self-Refresh (ASR): Disabled(4); Self-Refresh Temperature Range (SRT):Normal(5); CKE: Low; External clock: Off; CK and CK: LoW; CL: see the table of Timings used for IDD and IDDQ; BL: 8(1);AL: 0; CS, Command, Address, Bank Address, Data IO: MID-LEVEL; DM:stable at 0; Bank Activity:Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Self-Refresh Current: Extended Temperature Range (optional)(6) TCASE: 0 - 95°C; Auto Self-Refresh (ASR): Disabled(4); Self-Refresh Temperature Range (SRT):Extended(5); CKE: Low; External clock: Off; CK and CK: LOW; CL: see the table of Timings used for IDD and IDDQ; BL: 8(1);AL: 0; CS, Command, Address, Bank Address, Data IO: MID-LEVEL; DM:stable at 0; Bank Activity:Extended Temperature Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(6)  TCASE: 0 - 95°C;		CS: High between REF;
DM:stable at 0; Bank Activity: REF command every nRFC; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: stable at 0;  Self Refresh Current: Normal Temperature Range Tcase: 0 - 85°C; Auto Self-Refresh (ASR): Disabled(a); Self-Refresh Temperature Range (SRT):Normal(a); CKE: Low; External clock: Off; CK and CR: Low; CL: see the table of Timings used for IDD and IDDQ; BL: 8(1);AL: 0; CS, Command, Address, Bank Address, Data IO: MID-LEVEL; DM:stable at 0; Bank Activity:Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Self-Refresh Current: Extended Temperature Range (optional)(a) Tcase: 0 - 95°C; Auto Self-Refresh (ASR): Disabled(4); Self-Refresh Temperature Range (SRT):Extended(a); CKE: Low; External clock: Off; CK and CR: LOW; CL: see the table of Timings used for IDD and IDDQ; BL: 8(1);AL: 0; CS, Command, Address, Bank Address, Data IO: MID-LEVEL; DM:stable at 0; Bank Activity:Extended Temperature Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(a)  Tcase: 0 - 95°C;	IDD5B	Command, Address, Bank Address Inputs: partially toggling;
Bank Activity: REF command every nRFC; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: stable at 0;  Self Refresh Current: Normal Temperature Range TcASE: 0 - 85°C; Auto Self-Refresh (ASR): Disabled(4); Self-Refresh Temperature Range (SRT):Normal(5); CKE: Low; External clock: Off; CK and OR: LoW; CL: see the table of Timings used for IDD and IDDQ; BL: 8(1);AL: 0; CS, Command, Address, Bank Address, Data IO: MID-LEVEL; DM:stable at 0; Bank Activity:Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Self-Refresh Current: Extended Temperature Range (optional)(6) TcASE: 0 - 95°C; Auto Self-Refresh (ASR): Disabled(4); Self-Refresh Temperature Range (SRT):Extended(5); CKE: Low; External clock: Off; CK and CR: LoW; CL: see the table of Timings used for IDD and IDDQ; BL: 8(1);AL: 0; CS, Command, Address, Bank Address, Data IO: MID-LEVEL; DM:stable at 0; Bank Activity:Extended Temperature Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(6) TcASE: 0 - 95°C;		Data IO: MID-LEVEL;
Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: stable at 0;  Self Refresh Current: Normal Temperature Range  Tcase: 0 - 85°C;  Auto Self-Refresh (ASR): Disabled(4);  Self-Refresh Temperature Range (SRT):Normal(5);  CKE: Low; External clock: Off;  CK and CR: LoW; CL: see the table of Timings used for IDD and IDDQ;  BL: 8(1):AL: 0;  CS, Command, Address, Bank Address, Data IO: MID-LEVEL;  DM:stable at 0;  Bank Activity:Self-Refresh operation;  Output Buffer and RTT: Enabled in Mode Registers(2);  ODT Signal: MID-LEVEL  Self-Refresh Current: Extended Temperature Range (optional)(6)  Tcase: 0 - 95°C;  Auto Self-Refresh (ASR): Disabled(4);  Self-Refresh Temperature Range (SRT):Extended(5);  CKE: Low; External clock: Off; CK and CR: LoW; CL: see the table of Timings used for IDD and IDDQ;  BL: 8(1):AL: 0;  CS, Command, Address, Bank Address, Data IO: MID-LEVEL;  DM:stable at 0;  Bank Activity:Extended Temperature Self-Refresh operation;  Output Buffer and RTT: Enabled in Mode Registers(2);  ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(6)  Tcase: 0 - 95°C;		<b>DM</b> :stable at 0;
ODT Signal: stable at 0;  Self Refresh Current: Normal Temperature Range  Tcase: 0 - 85°C;  Auto Self-Refresh (ASR): Disabled(4);  Self-Refresh Temperature Range (SRT):Normal(5);  CKE: Low; External clock: Off;  CK and CR: LOW; CL: see the table of Timings used for IDD and IDDQ;  BL: 8(1);AL: 0;  CS, Command, Address, Bank Address, Data IO: MID-LEVEL;  DM:stable at 0;  Bank Activity:Self-Refresh operation;  Output Buffer and RTT: Enabled in Mode Registers(2);  ODT Signal: MID-LEVEL  Self-Refresh Current: Extended Temperature Range (optional)(6)  Tcase: 0 - 95°C;  Auto Self-Refresh (ASR): Disabled(4);  Self-Refresh Temperature Range (SRT):Extended(5);  CKE: Low; External clock: Off; CK and CK: LOW; CL: see the table of Timings used for IDD and IDDQ;  BL: 8(1);AL: 0;  CS, Command, Address, Bank Address, Data IO: MID-LEVEL;  DM:stable at 0;  Bank Activity:Extended Temperature Self-Refresh operation;  Output Buffer and RTT: Enabled in Mode Registers(2);  ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(6)  Tcase: 0 - 95°C;		Bank Activity: REF command every nRFC;
Self Refresh Current: Normal Temperature Range  Tcase: 0 - 85°C;  Auto Self-Refresh (ASR): Disabled(4);  Self-Refresh Temperature Range (SRT):Normal(6);  CKE: Low; External clock: Off;  CK and CK: LOW; CL: see the table of Timings used for IDD and IDDQ;  BL: 8(1);AL: 0;  CS, Command, Address, Bank Address, Data IO: MID-LEVEL;  DM:stable at 0;  Bank Activity:Self-Refresh operation;  Output Buffer and RTT: Enabled in Mode Registers(2);  ODT Signal: MID-LEVEL  Self-Refresh Current: Extended Temperature Range (optional)(6)  Tcase: 0 - 95°C;  Auto Self-Refresh (ASR): Disabled(4);  Self-Refresh Temperature Range (SRT):Extended(6);  CKE: Low; External clock: Off; CK and CK: LOW; CL: see the table of Timings used for IDD and IDDQ;  BL: 8(1);AL: 0;  CS, Command, Address, Bank Address, Data IO: MID-LEVEL;  DM:stable at 0;  Bank Activity:Extended Temperature Self-Refresh operation;  Output Buffer and RTT: Enabled in Mode Registers(2);  ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(6)  Tcase: 0 - 95°C;		Output Buffer and RTT: Enabled in Mode Registers(2);
Tcase: 0 - 85°C; Auto Self-Refresh (ASR): Disabled(4); Self-Refresh Temperature Range (SRT):Normal(5); CKE: Low; External clock: Off; CK and CK: LOW; CL: see the table of Timings used for IDD and IDDQ; BL: 8(1);AL: 0; CS, Command, Address, Bank Address, Data IO: MID-LEVEL; DM:stable at 0; Bank Activity:Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Self-Refresh Current: Extended Temperature Range (optional)(6) Tcase: 0 - 95°C; Auto Self-Refresh (ASR): Disabled(4); Self-Refresh Temperature Range (SRT):Extended(5); CKE: Low; External clock: Off; CK and CK: LOW; CL: see the table of Timings used for IDD and IDDQ; IDD6ET  BL: 8(1);AL: 0; CS, Command, Address, Bank Address, Data IO: MID-LEVEL; DM:stable at 0; Bank Activity:Extended Temperature Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(6) Tcase: 0 - 95°C;		ODT Signal: stable at 0;
Auto Self-Refresh (ASR): Disabled(4); Self-Refresh Temperature Range (SRT):Normal(6); CKE: Low; External clock: Off; CK and CK: LOW; CL: see the table of Timings used for IDD and IDDQ; BL: 8(1);AL: 0; CS, Command, Address, Bank Address, Data IO: MID-LEVEL; DM:stable at 0; Bank Activity:Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Self-Refresh Current: Extended Temperature Range (optional)(6) TCASE: 0 - 95°C; Auto Self-Refresh (ASR): Disabled(4); Self-Refresh Temperature Range (SRT):Extended(5); CKE: Low; External clock: Off; CK and CK: LOW; CL: see the table of Timings used for IDD and IDDQ; IDD6ET  BL: 8(1);AL: 0; CS, Command, Address, Bank Address, Data IO: MID-LEVEL; DM:stable at 0; Bank Activity:Extended Temperature Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(6) TCASE: 0 - 95°C;		Self Refresh Current: Normal Temperature Range
Self-Refresh Temperature Range (SRT):Normal(5); CKE: Low; External clock: Off; CK and TK: LOW; CL: see the table of Timings used for IDD and IDDQ; BL: 8(1);AL: 0; TS, Command, Address, Bank Address, Data IO: MID-LEVEL; DM:stable at 0; Bank Activity:Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Self-Refresh Current: Extended Temperature Range (optional)(6) TCASE: 0 - 95°C; Auto Self-Refresh (ASR): Disabled(4); Self-Refresh Temperature Range (SRT):Extended(5); CKE: Low; External clock: Off; CK and TK: LOW; CL: see the table of Timings used for IDD and IDDQ; BL: 8(1);AL: 0; TS, Command, Address, Bank Address, Data IO: MID-LEVEL; DM:stable at 0; Bank Activity:Extended Temperature Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(6) IDD6TC TCASE: 0 - 95°C;		TCASE: 0 - 85°C;
CKE: Low; External clock: Off; CK and CK: LOW; CL: see the table of Timings used for IDD and IDDQ; BL: 8(1);AL: 0; CS, Command, Address, Bank Address, Data IO: MID-LEVEL; DM:stable at 0; Bank Activity:Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Self-Refresh Current: Extended Temperature Range (optional)(6)  TCASE: 0 - 95°C; Auto Self-Refresh (ASR): Disabled(4); Self-Refresh Temperature Range (SRT):Extended(5); CKE: Low; External clock: Off; CK and CK: LOW; CL: see the table of Timings used for IDD and IDDQ; BL: 8(1);AL: 0; CS, Command, Address, Bank Address, Data IO: MID-LEVEL; DM:stable at 0; Bank Activity:Extended Temperature Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(6) TCASE: 0 - 95°C;		Auto Self-Refresh (ASR): Disabled(4);
CK and CK: LOW; CL: see the table of Timings used for IDD and IDDQ; BL: 8(1);AL: 0; CS, Command, Address, Bank Address, Data IO: MID-LEVEL; DM:stable at 0; Bank Activity:Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Self-Refresh Current: Extended Temperature Range (optional)(6)  TCASE: 0 - 95°C; Auto Self-Refresh (ASR): Disabled(4); Self-Refresh Temperature Range (SRT):Extended(5); CKE: Low; External clock: Off; CK and CK: LOW; CL: see the table of Timings used for IDD and IDDQ; BL: 8(1):AL: 0; CS, Command, Address, Bank Address, Data IO: MID-LEVEL; DM:stable at 0; Bank Activity:Extended Temperature Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(6)  TCASE: 0 - 95°C;		Self-Refresh Temperature Range (SRT):Normal(5);
BL: 8(1);AL: 0;  CS, Command, Address, Bank Address, Data IO: MID-LEVEL;  DM:stable at 0;  Bank Activity:Self-Refresh operation;  Output Buffer and RTT: Enabled in Mode Registers(2);  ODT Signal: MID-LEVEL  Self-Refresh Current: Extended Temperature Range (optional)(6)  Tcase: 0 - 95°C;  Auto Self-Refresh (ASR): Disabled(4);  Self-Refresh Temperature Range (SRT):Extended(5);  CKE: Low; External clock: Off; CK and CK: LOW; CL: see the table of Timings used for IDD and IDDQ;  BL: 8(1);AL: 0;  CS, Command, Address, Bank Address, Data IO: MID-LEVEL;  DM:stable at 0;  Bank Activity:Extended Temperature Self-Refresh operation;  Output Buffer and RTT: Enabled in Mode Registers(2);  ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(6)  Tcase: 0 - 95°C;		CKE: Low; External clock: Off;
BL: 8(1);AL: 0;  CS, Command, Address, Bank Address, Data IO: MID-LEVEL;  DM:stable at 0;  Bank Activity:Self-Refresh operation;  Output Buffer and RTT: Enabled in Mode Registers(2);  ODT Signal: MID-LEVEL  Self-Refresh Current: Extended Temperature Range (optional)(6)  TCASE: 0 - 95°C;  Auto Self-Refresh (ASR): Disabled(4);  Self-Refresh Temperature Range (SRT):Extended(5);  CKE: Low; External clock: Off; CK and CK: LOW; CL: see the table of Timings used for IDD and IDDQ;  BL: 8(1);AL: 0;  CS, Command, Address, Bank Address, Data IO: MID-LEVEL;  DM:stable at 0;  Bank Activity:Extended Temperature Self-Refresh operation;  Output Buffer and RTT: Enabled in Mode Registers(2);  ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(6)  TCASE: 0 - 95°C;	IDDA	CK and $\overline{\text{CK}}$ : LOW; <b>CL</b> : see the table of Timings used for IDD and IDDQ;
DM:stable at 0; Bank Activity:Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Self-Refresh Current: Extended Temperature Range (optional)(6)  Tcase: 0 - 95°C; Auto Self-Refresh (ASR): Disabled(4); Self-Refresh Temperature Range (SRT):Extended(5); CKE: Low; External clock: Off; CK and CK: LOW; CL: see the table of Timings used for IDD and IDDQ; BL: 8(1);AL: 0; CS, Command, Address, Bank Address, Data IO: MID-LEVEL; DM:stable at 0; Bank Activity:Extended Temperature Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(6)  Tcase: 0 - 95°C;	IDD6	<b>BL:</b> 8(1); <b>AL:</b> 0;
Bank Activity:Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Self-Refresh Current: Extended Temperature Range (optional)(6)  Tcase: 0 - 95°C; Auto Self-Refresh (ASR): Disabled(4); Self-Refresh Temperature Range (SRT):Extended(5); CKE: Low; External clock: Off; CK and CK: LOW; CL: see the table of Timings used for IDD and IDDQ; BL: 8(1);AL: 0; CS, Command, Address, Bank Address, Data IO: MID-LEVEL; DM:stable at 0; Bank Activity:Extended Temperature Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(6)  Tcase: 0 - 95°C;		CS, Command, Address, Bank Address, Data IO: MID-LEVEL;
Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Self-Refresh Current: Extended Temperature Range (optional)(6)  TCASE: 0 - 95°C; Auto Self-Refresh (ASR): Disabled(4); Self-Refresh Temperature Range (SRT):Extended(5); CKE: Low; External clock: Off; CK and CK: LOW; CL: see the table of Timings used for IDD and IDDQ; BL: 8(1);AL: 0; CS, Command, Address, Bank Address, Data IO: MID-LEVEL; DM:stable at 0; Bank Activity:Extended Temperature Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(6)  IDD6TC  TCASE: 0 - 95°C;		<b>DM</b> :stable at 0;
ODT Signal: MID-LEVEL  Self-Refresh Current: Extended Temperature Range (optional)(6)  Tcase: 0 - 95°C;  Auto Self-Refresh (ASR): Disabled(4);  Self-Refresh Temperature Range (SRT):Extended(5);  CKE: Low; External clock: Off; CK and CK: LOW; CL: see the table of Timings used for IDD and IDDQ;  BL: 8(1);AL: 0;  CS, Command, Address, Bank Address, Data IO: MID-LEVEL;  DM:stable at 0;  Bank Activity:Extended Temperature Self-Refresh operation;  Output Buffer and RTT: Enabled in Mode Registers(2);  ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(6)  Tcase: 0 - 95°C;		Bank Activity: Self-Refresh operation;
Self-Refresh Current: Extended Temperature Range (optional) <sub>(6)</sub> Tcase: 0 - 95°C;  Auto Self-Refresh (ASR): Disabled <sub>(4)</sub> ;  Self-Refresh Temperature Range (SRT):Extended <sub>(5)</sub> ;  CKE: Low; External clock: Off; CK and CK: LOW; CL: see the table of Timings used for IDD and IDDQ;  BL: 8 <sub>(1)</sub> ;AL: 0;  CS, Command, Address, Bank Address, Data IO: MID-LEVEL;  DM:stable at 0;  Bank Activity:Extended Temperature Self-Refresh operation;  Output Buffer and RTT: Enabled in Mode Registers <sub>(2)</sub> ;  ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional) <sub>(6)</sub> IDD6TC  Tcase: 0 - 95°C;		Output Buffer and RTT: Enabled in Mode Registers(2);
TCASE: 0 - 95°C;  Auto Self-Refresh (ASR): Disabled(4);  Self-Refresh Temperature Range (SRT):Extended(5);  CKE: Low; External clock: Off; CK and CK: LOW; CL: see the table of Timings used for IDD and IDDQ;  BL: 8(1);AL: 0;  CS, Command, Address, Bank Address, Data IO: MID-LEVEL;  DM:stable at 0;  Bank Activity:Extended Temperature Self-Refresh operation;  Output Buffer and RTT: Enabled in Mode Registers(2);  ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(6)  IDD6TC  TCASE: 0 - 95°C;		ODT Signal: MID-LEVEL
Auto Self-Refresh (ASR): Disabled(4);  Self-Refresh Temperature Range (SRT):Extended(5);  CKE: Low; External clock: Off; CK and CK: LOW; CL: see the table of Timings used for IDD and IDDQ;  BL: 8(1);AL: 0;  CS, Command, Address, Bank Address, Data IO: MID-LEVEL;  DM:stable at 0;  Bank Activity:Extended Temperature Self-Refresh operation;  Output Buffer and RTT: Enabled in Mode Registers(2);  ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(6)  IDD6TC  TCASE: 0 - 95°C;		Self-Refresh Current: Extended Temperature Range (optional)(6)
Self-Refresh Temperature Range (SRT):Extended(5);  CKE: Low; External clock: Off; CK and CK: LOW; CL: see the table of Timings used for IDD and IDDQ;  BL: 8(1);AL: 0;  CS, Command, Address, Bank Address, Data IO: MID-LEVEL;  DM:stable at 0;  Bank Activity:Extended Temperature Self-Refresh operation;  Output Buffer and RTT: Enabled in Mode Registers(2);  ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(6)  IDD6TC  TCASE: 0 - 95°C;		Tcase: 0 - 95°C;
CKE: Low; External clock: Off; CK and CK: LOW; CL: see the table of Timings used for IDD and IDDQ;  BL: 8(1);AL: 0;  CS, Command, Address, Bank Address, Data IO: MID-LEVEL;  DM:stable at 0;  Bank Activity:Extended Temperature Self-Refresh operation;  Output Buffer and RTT: Enabled in Mode Registers(2);  ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(6)  IDD6TC  TCASE: 0 - 95°C;		Auto Self-Refresh (ASR): Disabled(4);
IDD6ET  BL: 8(1);AL: 0;  CS, Command, Address, Bank Address, Data IO: MID-LEVEL;  DM:stable at 0;  Bank Activity:Extended Temperature Self-Refresh operation;  Output Buffer and RTT: Enabled in Mode Registers(2);  ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(6)  IDD6TC  TCASE: 0 - 95°C;		Self-Refresh Temperature Range (SRT):Extended(5);
CS, Command, Address, Bank Address, Data IO: MID-LEVEL;  DM:stable at 0;  Bank Activity:Extended Temperature Self-Refresh operation;  Output Buffer and RTT: Enabled in Mode Registers(2);  ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(6)  IDD6TC  TCASE: 0 - 95°C;		<b>CKE:</b> Low; <b>External clock:</b> Off; CK and $\overline{\text{CK}}$ : LOW; <b>CL</b> : see the table of Timings used for IDD and IDDQ;
DM:stable at 0; Bank Activity:Extended Temperature Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL Auto Self-Refresh Current (optional)(6) IDD6TC TCASE: 0 - 95°C;	IDD6ET	<b>BL</b> : 8(1); <b>AL</b> : 0;
Bank Activity:Extended Temperature Self-Refresh operation; Output Buffer and RTT: Enabled in Mode Registers(2); ODT Signal: MID-LEVEL Auto Self-Refresh Current (optional)(6) IDD6TC  TCASE: 0 - 95°C;		CS, Command, Address, Bank Address, Data IO: MID-LEVEL;
Output Buffer and RTT: Enabled in Mode Registers(2);  ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(6)  IDD6TC  Tcase: 0 - 95°C;		<b>DM</b> :stable at 0;
ODT Signal: MID-LEVEL  Auto Self-Refresh Current (optional)(6)  IDD6TC TCASE: 0 - 95°C;		Bank Activity: Extended Temperature Self-Refresh operation;
Auto Self-Refresh Current (optional)(6)  IDD6TC Tcase: 0 - 95°C;		Output Buffer and RTT: Enabled in Mode Registers(2);
IDD6TC		ODT Signal: MID-LEVEL
		Auto Self-Refresh Current (optional)(6)
Auto Self-Refresh (ASR): Enabled(4);	IDD6TC	TCASE: 0 - 95°C;
		Auto Self-Refresh (ASR): Enabled(4);



#### NT5CB(C)256M8FN / NT5CB(C)128M16FP

	Self-Refresh Temperature Range (SRT):Normal(5);
	<b>CKE:</b> Low; <b>External clock:</b> Off; CK and $\overline{\text{CK}}$ : LOW; <b>CL</b> : see the table of Timings used for IDD and IDDQ;
	<b>BL</b> : 8(1); <b>AL</b> : 0;
	CS, Command, Address, Bank Address, Data IO: MID-LEVEL;
	<b>DM</b> :stable at 0;
	Bank Activity: Auto Self-Refresh operation;
	Output Buffer and RTT: Enabled in Mode Registers(2);
	ODT Signal: MIDLEVEL
	Operating Bank Interleave Read Current
	CKE: High; External clock: On;
	tCK, nRC, nRAS, nRCD, nRRD, nFAW, CL: see the table of Timings used for IDD and IDDQ;
	<b>BL:</b> 8(1,7); <b>AL:</b> CL-1;
	CS: High between ACT and RDA;
IDD7	Command, Address, Bank Address Inputs:partially toggling;
	Data IO: read data bursts with different data between one burst and the next one;
	DM:stable at 0;
	Bank Activity: two times interleaved cycling through banks (0, 1,7) with different addressing;
	Output Buffer and RTT: Enabled in Mode Registers(2);
	ODT Signal: stable at 0;
	RESET Low Current
	RESET: LOW; External clock: Off;
	CK and CK: LOW; CKE: FLOATING;
IDD8	CS, Command, Address, Bank Address, Data IO: FLOATING;
	ODT Signal: FLOATING
	RESET Low current reading is valid once power is stable and RESET has been LOW for at least 1ms.
NOTE 1. B	urst Length: BL8 fixed by MRS: set MR0 A[1.0]=00B

- NOTE 1. Burst Length: BL8 fixed by MRS: set MR0 A[1,0]=00B
- NOTE 2. Output Buffer Enable: set MR1 A[12] = 0B; set MR1 A[5,1] = 01B; RTT\_Nom enable: set MR1 A[9,6,2] = 011B; RTT\_Wr enable: set MR2 A[10,9] = 10B
- NOTE 3. Pecharge Power Down Mode: set MR0 A12=0B for Slow Exit or MR0 A12=1B for Fast Exit
- NOTE 4. Auto Self-Refresh (ASR): set MR2 A6 = 0B to disable or 1B to enable feature
- NOTE 5. Self-Refresh Temperature Range (SRT): set MR2 A7=0B for normal or 1B for extended temperature range
- NOTE 6. Refer to DRAM supplier data sheet and/or DIMM SPD to determine if optional features or requirements are supported by DDR3 SDRAM device

129

NOTE 7. Read Burst Type: Nibble Sequential, set MR0 A[3] = 0B





#### **IDD0 Measurement-Loop Pattern**

CK, CK#	CKE	Sub-Loop	Cycle Number	Command	#SO	RAS#	CAS#	WE#	ODT	BA[2:0]	A[15:11]	A[10]	A[9:7]	A[6:3]	A[2:0]	Data <sup>2</sup>
		0	0	ACT	0	0	1	1	0	0	00	0	0	0	0	-
			1, 2	D, D	1	0	0	0	0	0	00	0	0	0	0	-
			3, 4	D#, D#	1	1	1	1	0	0	00	0	0	0	0	-
					ſ	epea	t pat	tern	14 un	til nRA	S - 1	, trui	ıcate	if n	eces	sary
			nRAS	PRE	0	0	1	0	0	0	00	0	0	0	0	-
						гере	at pa	tterr	14 u	ntil nRC	- 1,	trun	cate	if ne	cess	ary
			1*nRC + 0													
			1*nRC+1,2 D,D 1 0 0 0 0 0 0 0 F 0										-			
60	High		1*nRC + 3, 4	D#, D#	1	1	1	1	0	0	00	0	0	F	0	-
toggling	ic F			repea	t pat	tern	nRC	+ 1,	,,4 unt	il 1*nR	C+1	ıRA	S - 1	, tru	ncate	e if necessary
to	Static		1*nRC + nRAS	PRE	0	0	1	0	0	0	00	0	0	F	0	-
					re	peat	nRC	+ 1	.,,4 un	til 2*nR	.C - 1	l, tru	ıncat	e if 1	nece	ssary
		1	2*nRC				repe	at S	ub-Loop	o 0, use	BA[	2:0]	= 1 i	inste	ad	
		2	4*nRC				repe	at S	ub-Loop	o 0, use	BA[	2:0]	= 2	inste	ad	
		3	6*nRC	6*nRC repeat Sub-Loop 0, use BA[2:0] = 3 instead												
		4	8*nRC	8*nRC repeat Sub-Loop 0, use BA[2:0] = 4 instead												
		5	10*nRC				repe	at S	ub-Loo <sub>j</sub>	o 0, use	BA[	2:0]	= 5 i	inste	ad	
		6	12*nRC				repe	at S	ub-Loo <sub>j</sub>	p 0, use	BA[	2:0]	= 6	inste	ad	
NOT		7	14*nRC				гере	at S	ub-Loop	o 0, use	BA[	2:0]	= 7 i	inste	ad	_

#### NOTE:

<sup>1.</sup>DM must be driven LOW all the time. DQS, DQS# are MID-LEVEL.

<sup>2.</sup>DQ signals are MID-LEVEL.





#### **IDD1 Measurement-Loop Pattern**

CK, CK#	CKE	Sub-Loop	Oycle Number	Command	#SO	RAS#	CAS#	WE#	ODT	BA[2:0]	A[15:11]	A[10]	A[9:7]	A[6:3]	A[2:0]	Data <sup>2</sup>
		0	0	ACT	0	0	1	1	0	0	00	0	0	0	0	Data -
		Ĭ.	1, 2	D. D	1	0	0	0	0	0	00	0	0	_	0	-
		'	3,4	D#. D#	1	1	1	1	0	0	00	0	0	_	0	-
		'		repeat pat	tem	14	unti	nR	CD - 1,1	runcate	if no	ecess		-		
		'	nRCD	RD	0	1	0	1	0	0	_	_	0	0	0	00000000
		'		repeat pat	tem	14	unti	nR.	AS - 1, t	runcate	if ne	cess	ary			
		'	nRAS	PRE	0	0	1	0	0	0	00	0	0	0	0	-
		'		repeat pat	tem	14	unti	nR	C - 1, tn	ıncate i	fnec	essa	ry			
		'	1*nRC + 0	ACT	0	0	1	1	0	0	00	0	0	F	0	-
			1*nRC + 1, 2	D, D	1	0	0	0	0	0	00	0	0	F	0	-
ge Be	ligh		1*nRC + 3, 4	D#, D#	1	1	1	1	0	0	00	0	0	_	0	-
toggling	Static High			repeat pat	tem:	nRC	+1,	, 4	until nl	C + nR	CD	- 1, t	runc	ate i	fnec	essary
9	Sta		1*nRC + nRCD	RD	0	1	0	1	0	0	00	0	0	F	0	00110011
		Ι.		repeat pat	tem:	nRC	+1,	, 4	until nI	C+nR	AS -	l, tr	unea	te if	nece	essary
			1*nRC + nRAS	PRE	0	0	1	0	0	0	00	0	0	F	0	-
				repeat pat	tem:	nRC	+1,	, 4	until 2	* nRC -	l, tr	unca	te if	nece	essar	у
		1	2*nRC	repeat Sul	-Lo	ор 0	use	BA	[2:0] = ]	instead	l					
		2	4*nRC	repeat Sul	-Lo	ор 0	use	BA	[2:0] = 2	instead	1					
		3	6*nRC	repeat Sul	-Lo	ор 0	use	BA	[2:0] = 3	instead	l					
		4	8*nRC	repeat Sul	-Lo	ор 0	use	BA	[2:0] = 4	instead	l					
		5	10*nRC	repeat Sul	-Lo	ор 0	use	BA	[2:0] = 5	instead	1					
		6	12*nRC	repeat Sul	-Lo	ор 0	use	BA	[2:0] = 6	instead	1					
		7	14*nRC	repeat Sub-Loop 0, use BA[2:0] = 7 instead												

#### NOTE:

DM must be driven LOW all the time. DQS, DQS# are used according to RD Commands, otherwise MID-LEVEL.
 Burst Sequence driven on each DQ signal by Read Command. Outside burst operation, DQ signals are MID-LEVEL.





#### **IDD2N and IDD3N Measurement-Loop Pattern**

CK, CK#	CKE	Sub-Loop	Cycle Number	Command	tSO	RAS#	CAS#	WE#	ODT	BA[2:0]	A[15:11]	A[10]	A[9:7]	A[6:3]	A[2:0]	Data <sup>2</sup>
		0	0	D	1	0	0	0	0	0	0	0	0	0	0	-
			1	D	1	0	0	0	0	0	0	0	0	0	0	-
			2	D#	1	1	1	1	0	0	0	0	0	F	0	-
		'	3	D#	1	1	1	1	0	0	0	0	0	F	0	-
60	High	1	4-7	repeat Sul	b-Lo	op 0,	use	BA	[2:0] = 1	instead	1					
toggling		2	8-11	repeat Sul	b-Lo	op 0,	use	BA[	[2:0] = 2	instead	1					
toi	Static	3	12-15	repeat Sul	b-Lo	op 0,	use	BA[	[2:0] = 3	instead	1					
		4	16-19	repeat Sul	b-Lo	op 0,	use	BA[	[2:0] = 4	instead	1					
		5	20-23	repeat Sul	b-Lo	op 0,	use	BA[	[2:0] = 5	instead	1					
		6	24-27	repeat Sub-Loop 0, use BA[2:0] = 6 instead												
		7	28-31	repeat Sub-Loop 0, use BA[2:0] = 7 instead												

NOTE:

All Rights Reserved.

132

<sup>1.</sup>DM must be driven LOW all the time. DQS, DQS# are MID-LEVEL.

<sup>2.</sup>DQ signals are MID-LEVEL.



#### **IDD4R and IDDQ4R Measurement-Loop Pattern**

CK, CK#	CKE	Sub-Loop	Cycle Number	Command	#SO	RAS#	CAS#	WE#	TGO	BA[2:0]	A[15:11]	A[10]	A[9:7]	A[6:3]	A[2:0]	Data <sup>2</sup>
		0	0	RD	0	1	0	1	0	0	00	0	0	0	0	00000000
			1	D	1	0	0	0	0	0	00	0	0	0	0	-
			2, 3	D#,D#	1	1	1	1	0	0	00	0	0	0	0	-
			4	RD	0	1	0	1	0	0	00	0	0	F	0	00110011
			5	D	1	0	0	0	0	0	00	0	0	F	0	-
60	ligh		6, 7	D#,D#	1	1	1	1	0	0	00	0	0	F	0	-
toggling	Static High	1	8-15	repeat Sub	-Loc	рO,	but l	BA[2	2:0] = 1							
ţò	Stat	2	16-23	repeat Sub	-Loc	рO,	but l	BA[2	2:0] = 2							
		3	24-31	repeat Sub	-Loc	p 0,	but l	BA[2	2:0] = 3							
		4	32-39	repeat Sub	-Loc	p 0,	but l	BA[2	2:0] = 4							
		5	40-47	repeat Sub	-Loc	p 0,	but l	BA[2	2:0] = 5							
		6	48-55	repeat Sub	-Loc	p 0,	but l	BA[2	2:0] = 6							
		7	56-63	repeat Sub	-Loc	рO,	but l	BA[2	2:0] = 7							

#### **IDD4W Measurement-Loop Pattern**

CK, CK#	CKE	Sub-Loop	Cycle Number	Command	tSO	RAS#	CAS#	WE#	ODT	BA[2:0]	A[15:11]	A[10]	A[9:7]	A[6:3]	A[2:0]	Data <sup>2</sup>
		0	0	WR	0	1	0	0	1	0	00	0	0	0	0	00000000
			1	D	1	0	0	0	1	0	00	0	0	0	0	-
			2, 3	D#,D#	1	1	1	1	1	0	00	0	0	0	0	-
			4	WR	0	1	0	0	1	0	00	0	0	F	0	00110011
			5	D	1	0	0	0	1	0	00	0	0	F	0	-
60	ligh		6, 7	D#,D#	1	1	1	1	1	0	00	0	0	F	0	-
toggling	Static High	1	8-15	repeat Sub	-Loc	рO,	but l	BA[2	2:0] = 1							
to	Stat	2	16-23	repeat Sub	-Loc	рO,	but l	BA[	2:0] = 2							
		3	24-31	repeat Sub	-Loc	рO,	but l	BA[2	2:0] = 3							
		4	32-39	repeat Sub	-Loc	рO,	but l	BA[2	2:0] = 4							
		5	40-47	repeat Sub	-Loc	р0,	but l	BA[	2:0] = 5							
		6	48-55	repeat Sub	-Loc	p 0,	but l	BA[	2:0] = 6							_
NOT		7	56-63	repeat Sub	-Loc	p 0,	but l	BA[	2:0] = 7							

<sup>1.</sup>DM must be driven LOW all the time. DQS, DQS# are used according to RD Commands, otherwise MID-LEVEL.

<sup>2.</sup>Burst Sequence driven on each DQ signal by Read Command. Outside burst operation, DQ signals are MID-LEVEL.

<sup>1.</sup>DM must be driven LOW all the time. DQS, DQS# are used according to WR Commands, otherwise MID-LEVEL.

<sup>2.</sup>Burst Sequence driven on each DQ signal by Write Command. Outside burst operation, DQ signals are MID-LEVEL.





#### **IDD5B Measurement-Loop Pattern**

CK, CK#	CKE	Sub-Loop	Cycle Number	Command	#SO	RAS#	CAS#	WE#	ODT	BA[2:0]	A[15:11]	A[10]	A[9:7]	A[6:3]	A[2:0]	Data <sup>2</sup>
		0	0	REF	0	0	0	1	0	0	0	0	0	0	0	-
		1	1, 2	D, D	1	0	0	0	0	0	00	0	0	0	0	-
			3, 4	D#, D#	1	1	1	1	0	0	00	0	0	F	0	-
			58	repeat cycles 14, but BA[2:0] = 1												
66	High		912		repeat cycles 14, but BA[2:0] = 2											
toggling	ic H		1316					гере	at cycle	s 14, 1	but <b>I</b>	3A[2	:0] =	= 3		
to	Static		1720					гере	at cycle	s 14, 1	but <b>I</b>	3A[2	:0] =	<b>= 4</b>		
			2124		repeat cycles 14, but BA[2:0] = 5											
			2528	repeat cycles 14, but BA[2:0] = 6												
			2932					гере	at cycle	s 14, 1	but <b>I</b>	3A[2	:0] =	<del>-</del> 7		
		2	33 nRFC - 1		rep	eat	Sub	-Loo	p 1, un	til nRF	C - 1	. Tn	ıncat	e, if	nece	essary.

#### NOTE:

<sup>1.</sup>DM must be driven Low all the time. DQS, DQS# are MID-LEVEL.

<sup>2.</sup>DQ signals are MID-LEVEL.

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### **IDD7 Measurement-Loop Pattern**

ATTENTION: Sub-Loops 10-19 have inverse A[6:3] Pattern and Data Pattern than Sub-Loops 0-9

CK, CK#	CKE	Sub-Loop	Cycle Number	Command	tSO	RAS#	CAS#	WE#	ODT	BA[2:0]	A[15:11]	A[10]	A[9:7]	A[6:3]	A[2:0]	Data <sup>2</sup>
		0	0	ACT	0	0	1	1	0	0	00	0	0	0	0	-
		٠.	1	RDA	0	1	0	1	0	0	00	1	0	0	0	0000000
			2	D	1	0	0	0	0	0	00	0	0	0	0	-
			-	repeat abo		_	_		-	-	00	_	•	•	•	
	ł	1	nRRD	ACT	0	0	1	1	0	1	00	0	0	F	0	-
		-	nRRD+1	RDA	0	1	0	1	0	1	00	1	0	F	0	00110011
			nRRD + 2	D	1	0	0	0	0	1	00	0	0	F	0	-
				repeat abo	ve D	) Cor	mma	nd u	ntil 2 *	nRRD -	1				<u> </u>	
	t	2	2 * nRRD	repeat Sub												
	t	3	3 * nRRD	repeat Sub				_								
	t	4	4 * nRRD	D	1	0	0	0	0	3	00	0	0	F	0	-
				Assert and	l rep	eat a	bove	DO	Commar	nd until:	nFA'	W - 1	l, if 1	nece	ssary	Į.
	1	5	nFAW	repeat Sub	-Lo	op 0,	but	BA[	2:0] = 4	ı						
	1	6	nFAW+nRRD	repeat Sub	-Lo	op 1,	but	BA[	2:0] = 5	,						
	1	7	nFAW+2*nRRD	repeat Sub	-Lo	op 0,	but	BA[	2:0] = (	í						
		8	nFAW+3*nRRD	repeat Sul	-Lo	op 1,	, but	BA[	2:0] = 7	7						
		9	nFAW+4*nRRD	D	1	0	0	0	0	7	00	0	0	F	0	-
ling	Static High			Assert and	l rep	eat a	bove	DO	Commar	nd until	2 * n	FAV	V - 1,	, if n	eces	sary
toggling	atic	10	2*nFAW+0	ACT	0	0	1	1	0	0	00	0	0	F	0	-
	S		2*nFAW+1	RDA	0	1	0	1	0	0	00	1	0	F	0	00110011
			2*nFAW+2	D	1	0	0	0	0	0	00	0	0	F	0	-
				Repeat ab	ove l	D Co	mm	and 1	ıntil 2 *	nFAW	+ nF	RD	- 1			
		11	2*nFAW+nRRD	ACT	0	0	1	1	0	1	00	0	0	0	0	-
			2*nFAW+nRRD+1	RDA	0	1	0	1	0	1	00	1	0	0	0	00000000
			2*nFAW+nRRD+2	D	1	0	0	0	0	1	00	0	0	0	0	-
				repeat abo							+2*	nRI	I- Œ	1		
		12	2*nFAW+2*nRRD	repeat Sul		_										
		13	2*nFAW+3*nRRD	repeat Sub	-Lo	op 11	l, bu	t BA	[2:0] =	3						
		14	2*nFAW+4 * nRRD	D	1	0	0	0	0	3		0	0	0	0	-
				Assert and	_						3 * n	FAV	V - 1,	, if n	eces	sary
			3*nFAW	repeat Sub		_										
			3*nFAW+nRRD	repeat Sub												
			3*nFAW+2*nRRD	repeat Sub												
			3*nFAW+3*nRRD	repeat Sub		_	_	_			-	_		_	_	
		19	3*nFAW+4*nRRD	D	1	0		0	0	7	00		0	0	0	-
NOT	г.			Assert and	l rep	eat a	bove	DC	Commar	id until	4 * n	FAV	V - 1,	, if n	eces	sary

<sup>1.</sup>DM must be driven LOW all the time. DQS, DQS# are used according to RD Commands, otherwise MID-LEVEL

<sup>2.</sup>Burst Sequence driven on each DQ signal by Read Command. Outside burst operation, DQ signals are MID-LEVEL.

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP



## Fundamental AC Specifications – Operating Frequency DDR3-2133

	Speed	Bins	_	3-2133 4-14	Unit		
	Paran	neter	Min	Max			
	CL5	CWL5	Rese	erved	ns		
	OLU	CWL6/7/8/9/10	Rese	erved	ns		
		CWL5	2.5	3.3	ns		
	CL6	CWL6	Rese	erved	ns		
		CWL7/8/9/10	Rese	Reserved			
		CWL5	Rese	erved	ns		
	CL7	CWL6	1.875	< 2.5	ns		
	OL7	CWL7	Rese	erved	ns		
		CWL8/9/10	Rese	erved	ns		
		CWL5	Rese	erved	ns		
	CL8	CWL6	1.875	< 2.5	ns		
	CLO	CWL7	Rese	erved	ns		
tCK		CWL8/9/10	Rese	erved	ns		
(Avg)	CL9	CWL5/6	Rese	erved	ns		
		CWL7	1.5	< 1.875	ns		
	CLS	CWL8	Rese	erved	ns		
		CWL9/10	Rese	Reserved			
		CWL5/6	Rese	erved	ns		
		CWL7	1.5	< 1.875	ns		
	CL10	CWL8	Rese	erved	ns		
		CWL9	Rese	erved	ns		
		CWL10	Rese	erved	ns		
		CWL5/6/7	Rese	erved	ns		
	01.44	CWL8	1.25	< 1.5	ns		
	CL11	CWL9	Rese	erved	ns		
		CWL10	Rese	erved	ns		
		CWL5/6/7/8	Rese	erved	ns		
	CL12	CWL9	Rese	erved	ns		
		CWL10	Rese	erved	ns		
tCK		CWL5/6/7/8	Rese	erved	ns		
(Avg)	CL13	CWL9	1.07	< 1.25	ns		
		CWL10	Reserved		ns		
	0144	CWL5/6/7/8/9	Rese	erved	ns		
	CL14	CWL10	0.938	< 1.07	ns		
	Suppor	ted CL	5,6,7,8,9,10	nCK			
S	upport	ed CWL	5,6,7,	8,9,10	nCK		



# Fundamental AC Specifications – Operating Frequency DDR3-1866 and DDR3L-1866

;	Speed	Bins	DDR3(I		66			L)-1866	
	D	-4		2-12	N4		13-1	3-13	Unit
	<u>Param</u>		Min	_	Max	Min		Max	
	CL5	CWL5		erved		Reserved			ns
		CWL6/7/8/9	Rese	erved		Reserved			ns
		CWL5	2.5		3.3	2.5		3.3	ns
	CL6	CWL6	Reserved				Rese	erved	ns
		CWL7/8/9	Rese	erved			Rese	erved	ns
		CWL5	Rese	erved			Rese	erved	ns
	CL7	CWL6	1.875		< 2.5	1.875		< 2.5	ns
		CWL7/8/9	Rese	erved			Rese	erved	ns
		CWL5	Rese	erved			Rese	erved	ns
	CL8	CWL6	1.875		< 2.5	1.875		< 2.5	ns
	CLO	CWL7	Reserved			Reserved			ns
		CWL8/9	Reserved				Reserved		
tCK	tCK	CWL5/6	Reserved				Rese	erved	ns
(Avg)	CL9	CWL7	1.5		< 1.875	1.5		< 1.875	ns
	OLS	CWL8	Reserved				Rese	erved	ns
		CWL9	Reserved		Reserved			ns	
		CWL5/6	Rese	erved		Reserved			ns
	CL10	CWL7	1.5	•	< 1.875	1.5		< 1.875	ns
		CWL8	Rese	erved			Reserved		
		CWL5/6/7	Rese	erved			Rese	erved	ns
	CL11	CWL8	1.25		< 1.5	1.25		< 1.5	ns
		CWL9	Rese	erved			Rese	erved	ns
	CL12	CWL5/6/7/8	Rese	erved			Rese	erved	ns
	GL 12	CWL9	1.07		< ′	1.25		Reserved	ns
	CL13	CWL5/6/7/8	Rese	erved			Rese	erved	ns
	CLIS	CWL9	1.07	1.07 < 1.25		1.07 < 1.25		ns	
5	Support	ed CL	6,7,8,9,10,11,12,13			6,7,8,9,10,11,13			nCK
Sı	upporte	d CWL	5, 6, 7	7, 8, 9		,	5, 6, 7	7, 8, 9	nCK





# Fundamental AC Specifications – Operating Frequency DDR3-1600 and DDR3L-1600

	Speed	Bins	DDR3(I	L)-1600 1-11	Unit			
	Param	eter	Min	Max				
	CL5	CWL5	3.0	3.3	ns			
	CLS	CWL6/7/8	Rese	Reserved				
		CWL5	2.5	3.3	ns			
	CL6	CWL6	Rese	Reserved				
		CWL7/8	Rese	ns				
		CWL5	Rese	erved	ns			
	CL7	CWL6	1.875	< 2.5	ns			
	CL7	CWL7	Rese	erved	ns			
		CWL8	Rese	erved	ns			
		CWL5	Rese	ns				
tCK	C1 0	CWL6	1.875	< 2.5	ns			
(Avg)	CL8	CWL7	Rese	erved	ns			
		CWL8	Rese	erved	ns			
		CWL5/6	Rese	erved	ns			
	CL9	CWL7	1.5	<1.875	ns			
		CWL8	Rese	erved	ns			
		CWL5/6	Rese	erved	ns			
	CL10	CWL7	1.5	< 1.875	ns			
		CWL8	Rese	erved	ns			
	CI 44	CWL5/6/7	Rese	erved	ns			
	CL11	CWL8	1.25	<1.5	ns			
	Support	ed CL	5, 6, 7, 8,	nCK				
S	Supporte	d CWL	5, 6,	7, 8	nCK			





# Fundamental AC Specifications – Operating Frequency DDR3-1333 and DDR3L-1333

;	Speed Bins		DDR3(I	L)-1333 9-9	DDR3(	Unit		
	Parame	eter	Min	Max	Min	Max		
	01.5	CWL5	3.0	3.3	3.0	3.0 3.3		
	CL5	CWL6/7	Rese	erved	Res	erved	ns	
		CWL5	2.5	3.3	2.5	3.3	ns	
	CL6	CWL6	Rese	erved	Res	erved	ns	
		CWL7	Rese	erved	Res	erved	ns	
		CWL5	Rese	erved	Res	ns		
	CL7	CWL6	1.875	< 2.5	Reserved		ns	
tCK		CWL7	Rese	erved	Res	erved	ns	
(Avg)		CWL5	Rese	erved	Res	ns		
	CL8	CWL6	1.875	< 2.5	1.875	< 2.5	ns	
		CWL7	Rese	erved	Res	erved	ns	
	01.0	CWL5/6	Rese	erved	Res	erved	ns	
	CL9	CWL7	1.5	< 1.875	Res	erved	ns	
	01.46	CWL5/6	Rese	erved	Res	erved	ns	
	CL10	CWL7	1.5	< 1.875	1.5	< 1.875	ns	
	Supporte	d CL	5, 6, 7,	8, 9, 10	5, 6,	nCK		
S	upported	CWL	5, 6	6, 7	5,	5, 6, 7		

## NT5CB(C)256M8FN / NT5CB(C)128M16FP



## Fundamental AC Specifications – Operating Frequency DDR3-1066 and DDR3L-1066

Speed Bins		·	L)-1066 7-7	DDR3(	Unit		
P	Parameter		Min	Max	Min	Max	
	01.5	CWL5	3.0	3.3	3.0	3.3	ns
	CL5	CWL6	Rese	erved	Res	erved	ns
	01.0	CWL5	2.5	3.3	2.5	3.3	ns
tCK	CL6	CWL6	Rese	erved	Res	ns	
(Avg)	01.7	CWL5	Rese	erved	Res	ns	
	CL7	CWL6	1.875	< 2.5	Res	erved	ns
	01.0	CWL5	Rese	erved	Res	erved	ns
	CL8	CWL6	1.875	< 2.5	1.875	< 2.5	ns
Sı	ipported	I CL	5, 6,	7, 8	5,	nCK	
Su	Supported CWL		5,	6	5	nCK	

#### **DDR3-800 and DDR3L-800**

	Speed Bins Parameter			(L)-800 5-5	DDR3(	Unit	
				Max	Min	Max	
tCK	CL5	CWL5	2.5	3.3	3.0	3.3	ns
(Avg)	CL6	CWL5	2.5	3.3	2.5	3.3	ns
	Supported CL		5,	6	5,	nCK	
S	Supported CWL			5		nCK	

#### **Fundamental AC Specifications Notes**

- NOTE 1. The CL setting and CWL setting result in tCK(AVG).MIN and tCK(AVG).MAX requirements. When making a selection of tCK(AVG), both need to be fulfilled: Requirements from CL setting as well as requirements from CWL setting.
- NOTE 2. tCK(AVG).MIN limits: Since CAS Latency is not purely analog data and strobe output are synchronized by the DLL all possible intermediate frequencies may not be guaranteed. An application should use the next smaller JEDEC standard tCK(AVG) value (3.0, 2.5, 1.875, 1.5, 1.25, 1.07, or 0.938 ns) when calculating CL [nCK] = tAA [ns] / tCK(AVG) [ns], rounding up to the next 'Supported CL', where tCK(AVG) = 3.0 ns should only be used for CL = 5 calculation.
- NOTE 3. tCK(AVG).MAX limits: Calculate tCK(AVG) = tAA.MAX / CL SELECTED and round the resulting tCK(AVG) down to the next valid speed bin (i.e. 3.3ns or 2.5ns or 1.875 ns or 1.5 ns or 1.25 ns or 1.07 ns or 0.938 ns). This result is tCK(AVG).MAX corresponding to CL SELECTED.
- NOTE 4. 'Reserved' settings are not allowed. User must program a different value.
- NOTE 5. 'Optional' settings allow certain devices in the industry to support this setting, however, it is not a mandatory feature. Refer to





- supplier's data sheet and/or the DIMM SPD information if and how this setting is supported.
- NOTE 6. Any DDR3-1066 speed bin also supports functional operation at lower frequencies as shown in the table which are not subject to Production Tests but verified by Design/Characterization.
- NOTE 7. Any DDR3-1333 speed bin also supports functional operation at lower frequencies as shown in the table which are not subject to Production Tests but verified by Design/Characterization.
- NOTE 8. Any DDR3-1600 speed bin also supports functional operation at lower frequencies as shown in the table which are not subject to Production Tests but verified by Design/Characterization.
- NOTE 9. Any DDR3-1866 speed bin also supports functional operation at lower frequencies as shown in the table which are not subject to Production Tests but verified by Design/Characterization.
- NOTE 10.Any DDR3-2133 speed bin also supports functional operation at lower frequencies as shown in the table which are not subject to Production Tests but verified by Design/Characterization.
- NOTE 11.For devices supporting optional down binning to CL=7 and CL=9, tAA/tRCD/tRPmin must be 13.125 ns. SPD settings must be programmed to match. For example, DDR3-1333(9-9-9) devices supporting down binning to DDR3-1066(7-7-7) should program 13.125 ns in SPD bytes for tAAmin (Byte 16), tRCDmin (Byte 18), and tRPmin (Byte 20). DDR3-1600(11-11-11) devices supporting down binning to DDR3-1333(9-9-9) or DDR3-1066(7-7-7) should program 13.125 ns in SPD bytes for tAAmin (Byte16), tRCDmin (Byte 18), and tRPmin (Byte 20). Once tRP (Byte 20) is programmed to 13.125ns, tRCmin (Byte 21,23) also should be programmed accodingly. For example, 49.125ns (tRASmin + tRPmin = 36 ns + 13.125 ns) for DDR3-1333(9-9-9) and 48.125ns (tRASmin + tRPmin = 35 ns + 13.125 ns) for DDR3-1600(11-11-11).
- NOTE 12.DDR3 800 AC timing apply if DRAM operates at lower than 800 MT/s data rate.
- NOTE 13. For CL5 support, refer to DIMM SPD information. DRAM is required to support CL5. CL5 is not mandatory in SPD coding.
- NOTE 14.For devices supporting optional down binning to CL=11, CL=9 and CL=7, tAA/tRCD/tRPmin must be 13.125ns. SPD setting must be programed to match. For example, DDR3-1866(13-13-13) devices supporting down binning to DDR3-1600(11-11-11) or DDR3-1333(9-9-9) or 1066(7-7-7) should program 13.125ns in SPD bytes for tAAmin(byte16), tRCDmin(Byte18) and tRPmin (byte20). Once tRP (Byte 20) is programmed to 13.125ns, tRCmin (Byte 21,23) also should be programmed accordingly. For example, 47.125ns (tRASmin + tRPmin = 34 ns+ 13.125 ns)

### NT5CB(C)256M8FN / NT5CB(C)128M16FP



#### **Electrical Characteristics & AC Timing**

### Timing Parameters for DDR3(L)-800, DDR3(L)-1066, and DDR3(L)-1333

Parameter	Symbol	DDR3(L	.)-800	DDR3(	DDR3(L)-1066		DDR3(L)-1333	
Parameter	Symbol	Min.	Max.	Min.	Max.	Min.	Max.	Unit
Clock Timing	1	I .	<u> </u>	I .	II.		I .	
Minimum Clock Cycle Time (DLL off mode)	tCK (DLL off)	8	-	8	-	8	-	ns
Average Clock Period	tCK(avg)	F	Refer to "Fu	undament	al AC Spe	cifications"		ps
Average high pulse width	tCH(avg)	0.47	0.53	0.47	0.53	0.47	0.53	tCK(avg
Average low pulse width	tCL(avg)	0.47	0.53	0.47	0.53	0.47	0.53	tCK(avg
Absolute Clock Period	tCK(abs)				in + tJIT(p ax + tJIT (p			ps
Absolute clock HIGH pulse width	tCH(abs)	0.43	-	0.43	-	0.43	-	tCK(avg
Absolute clock LOW pulse width	tCL(abs)	0.43	-	0.43	-	0.43	-	tCK(avg
Clock Period Jitter	JIT(per)	-100	100	-90	90	-80	80	ps
Clock Period Jitter during DLL locking period	JIT(per, lck)	-90	90	-80	80	-70	70	ps
Cycle to Cycle Period Jitter	tJIT(cc)	200	)	1	80	1	60	ps
Cycle to Cycle Period Jitter during DLL locking period	JIT(cc, lck)	180	)	1	60	1-	40	ps
Duty Cycle Jitter	tJIT(duty)	-	-	-	-	-	-	ps
Cumulative error across n = 2, 14 49, 50		tERR(nper) r	nin = (1 + 0	0.68ln(n))	* tJIT(per	min	I.	
cycles	tERR(nper)	tERR (nper)						ps
Data Timing	1	- (   - /			// (I	- / -		
DQS, DQS to DQ skew, per group, per access	tDQSQ	-	200	-	150	-	125	ps
DQ output hold time from DQS, DQS	tQH	0.38	_	0.38	_	0.38	_	tCK(avg
DQ low-impedance time from CK, CK	tLZ(DQ)	-800	400	-600	300	-500	250	ps
DQ high impedance time from CK, CK	tHZ(DQ)	-	400	-	300	-	250	ps
De riigir impodando timo nom ort, ere	tDS(base) DDR3-AC175	75	-	25	-	-	-	ps
Pata setup time to DQS, DQS referenced to rih(ac) / Vil(ac) levels	tDS(base)	125	-	75	-	30	-	ps
	DDR3-AC150 tDS(base)	90	_	40	_	-	-	ps
	DDR3L-AC160 tDS(base)	140	_	90	_	45	_	ps
Data hold time from DQS, DQS referenced	DDR3L-AC135 tDH(base)	150	_	100	_	65		
to	DDR3-DC100 tDH(base)						-	ps
Vih(dc) / Vil(dc) levels  DQ and DM Input pulse width for each input	DDR3L-DC90	160 600	-	110 490	-	75 400	-	ps
Data Strobe Timing	IDIF W	000	-	490	-	400	-	ps
	*DDDE	0.0	N. 1 40	0.0	N. 1 40	0.0	N. 4 40	10144
DQS,DQS differential READ Preamble	tRPRE	0.9	Note 19	0.9	Note 19	0.9	Note 19	tCK(avg
DQS, DQS differential READ Postamble	tRPST	0.3	Note 11	0.3	Note 11	0.3	Note 11	tCK(avg
DQS, DQS differential output high time	tQSH tQSL	0.38	-	0.38	-	0.4	-	tCK(avg
DQS, DQS differential output low time		0.38	-	0.38	-	0.4	-	tCK(avg
DQS, DQS differential WRITE Preamble	tWPRE	0.9	-	0.9	-	0.9	-	tCK(avg
DQS, DQS differential WRITE Postamble DQS, DQS rising edge output access time	tWPST tDQSCK	0.3 -400	400	0.3 -300	300	0.3 -255	- 255	tCK(avg
from rising CK, CK DQS and DQS low-impedance time (Deferenced from DL 1)	tLZ(DQS)	-800	400	-600	300	-500	250	ps
(Referenced from RL – 1) DQS and DQS high-impedance time	tHZ(DQS)	_	400	_	300	_	250	ps
(Referenced from RL + BL/2)	` ′							·
	tDQSL	0.45	0.55	0.45	0.55	0.45	0.55	tCK(avg
DQS, DQS differential input high pulse width		0.45	0.55	0.45	0.55	0.45	0.55	tCK(avg
DQS, DQS rising edge to CK, CK rising edge	こしくろう	-0.25	0.25	-0.25	0.25	-0.25	0.25	tCK(avg
DQS, <del>DQS</del> falling edge setup time to CK, <del>CK</del> rising edge	tDSS	0.2	-	0.2	-	0.2	-	tCK(avg
DQS, DQS falling edge hold time from CK, CK rising edge	tDSH	0.2	-	0.2	-	0.2	-	tCK(avg



### NT5CB(C)256M8FN / NT5CB(C)128M16FP

Command and Address Timing	tDLLK	510		E10		F10		2014
DLL locking time	IDLLK	512	-	512	-	512	-	nCK
nternal READ Command to PRECHARGE Command delay	tRTP	tRTPmin.: ma tRTPmax.: -	ax(4tCK, 7	7.5ns)				
Delay from start of internal write ransaction to internal read command	tWTR	tWTRmin.: m tWTRmax.: -	ax(4tCK,	7.5ns)				
WRITE recovery time	tWR	15	-	15	-	15	-	ns
Mode Register Set command cycle time	tMRD	4	-	4	-	4	-	nCK
Mode Register Set command update delay	tMOD	tMODmin.: max(12tCK, 15ns) tMODmax.:						
ACT to internal read or write delay time	tRCD							
PRE command period	tRP	Refer to "F	undamen	tal AC Spe	cification	s"		
ACT to ACT or REF command period	tRC	-						
ACTIVE to PRECHARGE command period CAS to CAS command delay	tRAS tCCD	4	_	4	_	4		nCK
Auto precharge write recovery + precharge time	tDAL(MIN)	WR + roundu		-		7		nCK
Multi-Purpose Register Recovery Time	tMPRR	1	-	1	-	1	_	nCK
ACTIVE to ACTIVE command period (1KB page size)	tRRD	max(4tCK,1 0ns)	-	max(4t CK,7.5n s)	-	max(4tCK ,6ns)	-	
ACTIVE to ACTIVE command period (2KB page size)	tRRD	max(4tCK,1 0ns)	-	max(4t CK,10n s)	-	max(4tCK ,7.5ns)	-	
Four activate window (1KB page size)	tFAW	40	-	37.5	-	30	-	ns
Four activate window (2KB page size)	tFAW	50	-	50	-	45	-	ns
	tIS(BASE) DDR3-AC175	200	-	125	-	65	-	ps
Command and Address setup time to CK, CK referenced to Vih(ac) / Vil(ac) levels	tIS(BASE) DDR3-AC150	350	-	275	-	190	-	ps
	tIS(BASE) DDR3L-AC160	215	-	140	-	80	-	ps
	tIS(BASE) DDR3L-AC135 tIH(BASE)	365	-	290	-	205	-	ps
Command and Address hold time from CK, CK referenced to Vih(dc) / Vil(dc) levels	DDR3-DC100 tIH(BASE)	275	-	200	-	140	-	ps
Control and Address Input pulse width for	DDR3L-DC90	285	-	210	-	150	-	ps
each input	tIPW	900	-	780	-	620	-	ps
Calibration Timing								<u>'</u>
Power-up and RESET calibration time	tZQINIT	tZQINITmin: tZQINITmax:		CK, 640ns	)			
Normal operation Full calibration time	tZQOPER	tZQOPERmir tZQOPERma	n: max(25	6tCK, 320r	ns)			
Normal operation Short calibration time	tZQCS	tZQCSmin: mtZQCSmax: -		K, 80ns)				
Reset Timing								
Exit Reset from CKE HIGH to a valid command	tXPR	tXPRmin.: matxPRmax.: -	ax(5 tCK,	tRFC(min)	+ 10ns)			
Self Refresh Timings	·							'
Exit Self Refresh to commands not requiring a locked DLL	tXS	tXSmin.: max	(5 tCK, tF	RFC (min)	+ 10ns)			
Exit Self Refresh to commands requiring a ocked DLL	tXSDLL	tXSDLLmin.: tXSDLLmax.:	•	in)				nCK
Minimum CKE low width for Self Refresh entry to exit timing	tCKESR	tCKESRmin.: tCKESRmax.	tCKE(mi	n) + 1 tCK				
Valid Clock Requirement after Self Refresh Entry (SRE) or Power-Down Entry (PDE) Valid Clock Requirement before Self	tCKSRE	tCKSREmin.: tCKSREmax.		CK, 10 ns)				
Refresh Exit (SRX) or Power-Down Exit (PDX) or Reset Exit	tCKSRX	tCKSRXmin.: tCKSRXmax.		CK, 10 ns)				



### NT5CB(C)256M8FN / NT5CB(C)128M16FP

Power Down Timings									
Exit Power Down with DLL on to any valid command; Exit Precharge Power Down with DLL frozen to commands not requiring a	tXP	max(3tCK,7.	-	max(3t CK,7.5n	-	max(3tCK	-		
locked DLL		5ns)		s)		,6ns)			
CKE minimum pulse width	tCKE	max(3tCK7. 5ns)	-	max(3t CK,5.62	-	max(3tCK ,5.625ns)	-		
		3115)		5ns)		,5.025(15)			
Exit Precharge Power Down with DLL frozen to commands requiring a locked DLL	tXPDLL	tXPDLLmin.: max(10tCK, 24ns) tXPDLLmax.: -							
Command pass disable delay	tCPDED	tCPDEDmin. tCPDEDmin.	-					nCK	
Power Down Entry to Exit Timing	tPD	tPDmin.: tCK tPDmax.: 9*t	REFI						
Timing of ACT command to Power Down entry	tACTPDEN	tACTPDENm tACTPDENm						nCK	
Timing of PRE or PREA command to Power Down entry	tPRPDEN	tPRPDENmin tPRPDENma						nCK	
Timing of RD/RDA command to Power Down entry	tRDPDEN	tRDPDENmin		·1				nCK	
Timing of WR command to Power Down entry (BL8OTF, BL8MRS, BC4OTF)	tWRPDEN	tWRPDENmi tWRPDENma		4 + (tWR /t	:CK(avg))			nCK	
Timing of WRA command to Power Down entry (BL8OTF, BL8MRS, BC4OTF)	tWRAPDEN	RAPDEN tWRAPDENmin.: WL+4+WR+1 tWRAPDENmax.: -							
Timing of WR command to Power Down entry (BC4MRS)	tWRPDEN	tM/PPDENmin : WI + 2 + (tM/P /tCK/avg))							
Timing of WRA command to Power Down entry (BC4MRS)	tWRAPDEN	tWRAPDENr tWRAPDENr		+ 2 +WR +	1			nCK	
Timing of REF command to Power Down entry	tREFPDEN	PDEN tREFPDENmin.: 1 trefpdenmax.: -							
Timing of MRS command to Power Down entry	tMRSPDEN	tMRSPDENn tMRSPDENn		D(min)					
ODT Timings									
ODT turn on Latency	ODTLon	WL-2=CWL+	AL-2					nCK	
ODT turn off Latency	ODTLoff	WL-2=CWL+	AL-2					nCK	
ODT high time without write command or with write command and BC4	ODTH4	ODTH4min.: ODTH4max.:						nCK	
ODT high time with Write command and BL8	ODTH8	ODTH8min.: ODTH8max.:						nCK	
Asynchronous RTT turn-on delay (Power-Down with DLL frozen)	taonpd	2	8.5	2	8.5	2	8.5	ns	
Asynchronous RTT turn-off delay (Power-Down with DLL frozen)	tAOFPD	2	8.5	2	8.5	2	8.5	ns	
RTT turn-on	tAON	-400	400	-300	300	-250	250	ps	
RTT_Nom and RTT_WR turn-off time from ODTLoff reference	tAOF	0.3	0.7	0.3	0.7	0.3	0.7	tCK(avg)	
RTT dynamic change skew	tADC	0.3	0.7	0.3	0.7	0.3	0.7	tCK(avg)	
Write Leveling Timings									
First DQS/DQS rising edge after write leveling mode is programmed	tWLMRD	40	-	40	-	40	-	nCK	
DQS/DQS delay after write leveling mode is programmed	tWLDQSEN	25	-	25	-	25	-	nCK	
Write leveling setup time from rising CK, $\overline{\text{CK}}$ crossing to rising DQS, $\overline{\text{DQS}}$ crossing	tWLS	325	-	245	-	195	-	ps	
Write leveling hold time from rising DQS, DQS crossing to rising CK, CK crossing	tWLH	325	-	245	-	195	-	ps	
Write leveling output delay	tWLO	0	9	0	9	0	9	ns	
Write leveling output error	tWLOE	0	2	0	2	0	2	ns	





#### Timing Parameters for DDR3(L)-1600, DDR3(L)-1866, and DDR3(L)-2133

Tilling Parameters for DDR3(L)-1600, DDR3(L)-1660, and DDR3(L)-2133								
Parameter	Symbol	DDR3(L)-1600		DDR3(L)-1866		6 DDR3(L)-2133		Unit
		Min.	Max.	Min.	Max.	Min.	Max.	
Clock Timing								
Minimum Clock Cycle Time (DLL off mode)	tCK (DLL_off)	8	-	8	-	8	-	ns
Average Clock Period	tCK(avg)		Refer to "			cifications"		
Average high pulse width	tCH(avg)	0.47	0.53	0.47	0.53	0.47	0.53	tCK(avg)
Average low pulse width	tCL(avg)	0.47	0.53	0.47	0.53	0.47	0.53	tCK(avg)
Absolute Clock Period	tCK(abs)			: Tck(avg)m Tck(avg)m				
Absolute clock HIGH pulse width	tCH(abs)	0.43	-	0.43	-	0.43	-	tCK(avg)
Absolute clock LOW pulse width	tCL(abs)	0.43	-	0.43	-	0.43	-	tCK(avg)
Clock Period Jitter	JIT(per)	-70	70	-60	60	-50	50	ps
Clock Period Jitter during DLL locking period		-60	60	-50	50	-40	40	ps
Cycle to Cycle Period Jitter	tJIT(cc)	14	.0	12	20	1	00	
Cycle to Cycle Period Jitter during DLL locking period	JIT(cc, lck)	12	.0	10	00	8	30	
Duty Cycle Jitter	tJIT(duty)	-	-	-	-	-	-	ps
Cumulative error across n = 2, 14 49, 50 cycles	tERR(nper)	tERR(nper tERR (nper						ps
Data Timing								
DQS, DQS to DQ skew, per group, per access	tDQSQ	-	100	-	85	-	75	ps
DQ output hold time from DQS, DQS	tQH	0.38	-	0.38	-	0.38	-	tCK(avg)
DQ low-impedance time from CK, CK	tLZ(DQ)	-450	225	-390	195	-360	180	ps
DQ high impedance time from CK, CK	tHZ(DQ)	-	225	-	195	-	180	ps
	tDS(base) DDR3-1600(AC 175) DDR3-1866/21 33(AC150)	-	-	-	-	-	-	ps
Data setup time to DQS, DQS referenced to Vih(ac) / Vil(ac) levels	tDS(base) DDR3-1600(AC 150) DDR3-1866/21 33(AC135)	10	-	68	-	53	-	ps
	tDS(base) DDR3L-1600(AC1 35) ,SR=1V/ns DDR3L-1866(AC1 30),SR=2V/ns	25	-	70	-	-	-	ps
	tDH(base) DC100	45	-	-	-	-	-	ps
Data hold time from DQS, DQS referenced to Vih(dc) / Vil(dc) levels	tDH(base) DC90 DDR3L-1600(SR =1V/ns) DDR3L-1866(SR =2V/ns)	55	-	75	-	-	-	ps
DQ and DM Input pulse width for each input	tDIPW	360	-	320	-	280	-	ps
Data Strobe Timing	<u></u>		1	,	1		<u> </u>	, , , ,
DQS,DQS differential READ Preamble	tRPRE	0.9	Note 19	0.9	Note 19	0.9	Note 19	tCK(avg)
DQS, DQS differential READ Postamble	tRPST	0.3	Note 11	0.3	Note 11	0.3	Note 11	tCK(avg)
DQS, DQS differential output high time	tQSH	0.4	-	0.4	-	0.4	-	tCK(avg)
DQS, DQS differential output low time	tQSL	0.4	-	0.4	-	0.4	-	tCK(avg)
DQS, DQS differential WRITE Preamble	tWPRE	0.9	-	0.9	-	0.9	-	tCK(avg)
DQS, DQS differential WRITE Postamble	tWPST	0.3	-	0.3	-	0.3	-	tCK(avg)
DQS, DQS rising edge output access time			005		405		400	
from rising CK, CK DQS and DQS low-impedance time	tDQSCK	-225	225	-195	195	-180	180	ps
(Referenced from RL – 1)	tLZ(DQS)	-450	225	-390	195	-360	180	ps
DQS and DQS high-impedance time	tHZ(DQS)	-	225	-	195	-	180	ps



## NT5CB(C)256M8FN / NT5CB(C)128M16FP

(Referenced from RL + BL/2)								
	tDQSL	0.45	0.55	0.45	0.55	0.45	0.55	tCK(avg)
DQS, DQS differential input high pulse width		0.45	0.55	0.45	0.55	0.45	0.55	tCK(avg)
DQS, DQS rising edge to CK, CK rising edge		-0.27	0.27	-0.27	0.27	-0.27	0.27	tCK(avg)
DQS, DQS falling edge setup time to	tDSS	0.40		0.40				
CK, CK rising edge	เบรร	0.18	-	0.18	-	0.18	-	tCK(avg)
DQS, DQS falling edge hold time from	tDSH	0.18	_	0.18	_	0.18	-	tCK(avg)
CK, CK rising edge	IDSIT	0.10	_	0.10		0.10		ick(avg)
Command and Address Timing								
DLL locking time	tDLLK	512	-	512	-	512	-	nCK
Internal READ Command to PRECHARGE Command delay	tRTP	tRTPmin.: r tRTPmax.:	, ,	7.5ns)				
Delay from start of internal write transaction to internal read command	tWTR	tWTRmin.: tWTRmax.:		, 7.5ns)				
WRITE recovery time	tWR	15	-	15	-	15	-	ns
Mode Register Set command cycle time	tMRD	4	-	4	-	4		nCK
Mode Register Set command update delay	tMOD	tMODmin.: tMODmax.:		K, 15ns)				
ACT to internal read or write delay time	tRCD							
PRE command period	tRP		Refer to "	Fundament	al AC Spe	ecifications"		
ACT to ACT or REF command period	tRC	-			٠ - ١٩٠			
ACTIVE to PRECHARGE command period	tRAS		I	,		ا ہر ا		014
CAS to CAS command delay Auto precharge write recovery + precharge	tCCD	4	-	4	-	4	-	nCK
time	tDAL(MIN)	WR + round	dup(tRP /					nCK
Multi-Purpose Register Recovery Time	tMPRR	1	-	1	-	1	-	nCK
ACTIVE to ACTIVE command period (1KB	tRRD	max(4tCK,	_	max(4tCK	_	max(4tCK		
page size)		6ns)		,5ns)		,5ns)		
ACTIVE to ACTIVE command period (2KB	tRRD	max(4tCK,		max(4tCK		max(4tCK		
page size)	IKKU	7.5ns)	-	.6ns)	-	,6ns)	-	
Four activate window (1KB page size)	tFAW	30	-	27	-	25	-	ns
Four activate window (2KB page size)	tFAW	40	-	35	-	35	-	ns
	tIS(BASE) DDR3-1600(AC 175) DDR3-1866/21	45	-	-	-	-	-	ps
	33(AC150)							
Command and Address setup time to CK,	33(AC150) tIS(BASE) DDR3-1600(AC 150) DDR3-1866/21 33(AC125)	170	-	150	-	135	-	ps
Command and Address setup time to CK, CK referenced to Vih(ac) / Vil(ac) levels	33(AC150) tIS(BASE) DDR3-1600(AC 150) DDR3-1866/21 33(AC125) tIS(BASE) DDR3L (AC160)	170	-	150	-	135	-	ps ps
	33(AC150) tIS(BASE) DDR3-1600(AC 150) DDR3-1866/21 33(AC125) tIS(BASE) DDR3L (AC160) tIS(BASE) DDR3L (AC135)		-	150	-	135	-	
	33(AC150) tIS(BASE) DDR3-1600(AC 150) DDR3-1866/21 33(AC125) tIS(BASE) DDR3L (AC160) tIS(BASE) DDR3L (AC135) tIS(BASE) DDR3L (AC135)	60	-		-	135 - -	-	ps
CK referenced to Vih(ac) / Vil(ac) levels  Command and Address hold time from CK,	33(AC150) tIS(BASE) DDR3-1600(AC 150) DDR3-1866/21 33(AC125) tIS(BASE) DDR3L (AC160) tIS(BASE) DDR3L (AC135) tIS(BASE) DDR3L (AC125) tIH(BASE) DDR3L (AC125)	60		65		135 - - - 95		ps ps
CK referenced to Vih(ac) / Vil(ac) levels  Command and Address hold time from CK, CK referenced to Vih(dc) / Vil(dc) levels	33(AC150) tIS(BASE) DDR3-1600(AC 150) DDR3-1866/21 33(AC125) tIS(BASE) DDR3L (AC160) tIS(BASE) DDR3L (AC135) tIS(BASE) DDR3L (AC125) tIH(BASE)	60 185	-	65	-	-		ps ps ps
CK referenced to Vih(ac) / Vil(ac) levels  Command and Address hold time from CK,	33(AC150) tIS(BASE) DDR3-1600(AC 150) DDR3-1866/21 33(AC125) tIS(BASE) DDR3L (AC160) tIS(BASE) DDR3L (AC135) tIS(BASE) DDR3L (AC125) tIH(BASE) DDR3 (AC125)	60 185 - 120	-	65 150 100	-	-	-	ps ps ps ps
Command and Address hold time from CK, CK referenced to Vih(dc) / Vil(dc) levels  Control and Address Input pulse width for	33(AC150) tIS(BASE) DDR3-1600(AC 150) DDR3-1866/21 33(AC125) tIS(BASE) DDR3L (AC160) tIS(BASE) DDR3L (AC135) tIS(BASE) DDR3L (AC125) tIH(BASE) DDR3 (AC125) tIH(BASE) DDR3 DC100 tIH(BASE)	60 185 - 120 130	-	65 150 100	-	- - 95	-	ps ps ps ps
Command and Address hold time from CK, CK referenced to Vih(dc) / Vil(dc) levels  Control and Address Input pulse width for each input	33(AC150) tIS(BASE) DDR3-1600(AC 150) DDR3-1866/21 33(AC125) tIS(BASE) DDR3L (AC160) tIS(BASE) DDR3L (AC135) tIS(BASE) DDR3L (AC125) tIH(BASE) DDR3 (AC125) tIH(BASE) DDR3 DC100 tIH(BASE)	60 185 - 120 130 560	- - - - : max(512	65 150 100	- - -	- - 95	-	ps ps ps ps



## NT5CB(C)256M8FN / NT5CB(C)128M16FP

Normal operation Short calibration time	tZQCS	tZQCSmin		CK, 80ns)						
•	الدلالال	tZQCSmax	C: -							
Reset Timing Exit Reset from CKE HIGH to a valid		AVDD:	/F tCl	/ ADEC/min	\			1		
command	tXPR	tXPRmin.:	•	K, tRFC(min)	) + 10NS)					
Self Refresh Timings										
Exit Self Refresh to commands not requiring	tXS			tRFC (min)	+ 10ns)					
a locked DLL  Exit Self Refresh to commands requiring a		tXSmax.: - tXSDLLmir		min)						
locked DLL	tXSDLL	tXSDLLma						nCK		
Minimum CKE low width for Self Refresh entry to	tCKESR		`	min) + 1 tCK						
exit timing		tCKESRm								
Valid Clock Requirement after Self Refresh Entry (SRE) or Power-Down Entry (PDE)	tCKSRE	tCKSREmi tCKSREmi		tCK, 10 ns)						
Valid Clock Requirement before Self Refresh Exit (SRX) or Power-Down Exit (PDX) or Reset Exit	tCKSRX	tCKSRXmi tCKSRXmi	,	tCK, 10 ns)						
Power Down Timings										
Exit Power Down with DLL on to any valid command; Exit Precharge Power Down with	4VD	max(3tCK,		max(3tCK		max(3tCK				
DLL frozen to commands not requiring a locked DLL										
CKE minimum pulse width	tCKE	max(3tCK 5ns)	-	max(3tCK ,5ns)	-	max(3tCK ,5ns)	-			
Exit Precharge Power Down with DLL frozen to commands requiring a locked DLL	tXPDLL	tXPDLLmii tXPDLLma	,	tCK, 24ns)		, ,				
Command pass disable delay	tCPDED	tCPDEDm tCPDEDm						nCK		
Power Down Entry to Exit Timing	tPD	tPDmin.: t0 tPDmax.: 9	9*tRÈFI (							
Timing of ACT command to Power Down entry	tACTPDEN	tACTPDEN tACTPDEN						nCK		
Timing of PRE or PREA command to Power Down entry	tPRPDEN	tPRPDENr tPRPDENr	max.: -					nCK		
Timing of RD/RDA command to Power Down entry	tRDPDEN	tRDPDENi tRDPDENi		l+1 				nCK		
Timing of WR command to Power Down entry (BL8OTF, BL8MRS, BC4OTF)	tWRPDEN	tWRPDEN tWRPDEN		+ 4 + (tWR /t	tCK(avg))			nCK		
Timing of WRA command to Power Down entry (BL8OTF, BL8MRS, BC4OTF)	tWRAPDEN	tWRAPDE tWRAPDE	Nmax.: -					nCK		
Timing of WR command to Power Down entry (BC4MRS)	tWRPDEN	tWRPDEN	max.: -	+ 2 + (tWR /t				nCK		
Timing of WRA command to Power Down entry (BC4MRS)	tWRAPDEN	tWRAPDE tWRAPDE		_ + 2 +WR +	1			nCK		
Timing of REF command to Power Down entry	tREFPDEN	tREFPDEN tREFPDEN	lmax.: -					nCK		
Timing of MRS command to Power Down entry	tMRSPDEN	tMRSPDE tMRSPDE		OD(min)						
ODT Timings										
ODT turn on Latency	ODTLon	WL-2=CW						nCK		
ODT turn off Latency	ODTLoff	WL-2=CW	L+AL-2					nCK		
ODT high time without write command or with write command and BC4	ODTH4	ODTH4mir ODTH4ma	X.: -					nCK		
ODT high time with Write command and BL8	ODTH8	ODTH8mir ODTH8ma						nCK		
Asynchronous RTT turn-on delay (Power-Down with DLL frozen)	taonpd	2	8.5	2	8.5	2	8.5	ns		
Asynchronous RTT turn-off delay (Power-Down with DLL frozen)	tAOFPD	2	8.5	2	8.5	2	8.5	ns		
RTT turn-on	tAON	-225	225	-195	195	-180	180	ps		



#### NT5CB(C)256M8FN / NT5CB(C)128M16FP

RTT_Nom and RTT_WR turn-off time from ODTLoff reference	tAOF	0.3	0.7	0.3	0.7	0.3	0.7	tCK(avg)
RTT dynamic change skew	tADC	0.3	0.7	0.3	0.7	0.3	0.7	tCK(avg)
Write Leveling Timings								
First DQS/DQS rising edge after write leveling mode is programmed	tWLMRD	40	-	40	-	40	-	nCK
DQS/DQS delay after write leveling mode is programmed	tWLDQSEN	25	-	25	-	25	-	nCK
Write leveling setup time from rising CK, $\overline{\text{CK}}$ crossing to rising DQS, $\overline{\text{DQS}}$ crossing	tWLS	165	-	140	-	125	-	ps
Write leveling hold time from rising DQS, DQS crossing to rising CK, CK crossing	tWLH	165	1	140	-	125	-	ps
Write leveling output delay	tWLO	0	7.5	0	7.5	0	7.5	ns
Write leveling output error	tWLOE	0	2	0	2	0	2	ns

#### **Jitter Notes**

#### Note 1

Unit "Tck(avg)" represents the actual Tck(avg) of the input clock under operation. Unit "Nck" represents one clock cycle of the input clock, counting the actual clock edges. Ex) Tmrd=4 [Nck] means; if one Mode Register Set command is registered at Tm, anther Mode Register Set command may be registered at Tm+4, even if (Tm+4-Tm) is 4 x Tck(avg) + Terr(4per), min.

#### Note 2

These parameters are measured from a command/address signal (CKE,  $\overline{CS}$ ,  $\overline{RAS}$ ,  $\overline{CAS}$ ,  $\overline{WE}$ , ODT, BA0, A0, A1, etc) transition edge to its respective clock signal (CK/ $\overline{CK}$ ) crossing. The spec values are not affected by the amount of clock jitter applied (i.e. Tjit(per), Tjit(cc), etc.), as the setup and hold are relative to the clock signal crossing that latches the command/address. That is, these parameters should be met whether clock jitter is present or not.

#### Note 3

These parameters are measured from a data strobe signal (DQS(L/U),  $\overline{DQS(L/U)}$ ) crossing to its respective clock signal (CK,  $\overline{CK}$ ) crossing. The spec values are not affected by the amount of clock jitter applied (i.e. Tjit(per), Tjit(cc), etc), as these are relative to the clock signal crossing. That is, these parameters should be met whether clock jitter is present or not.

#### Note 4

These parameters are measured from a data signal (DM(L/U), DQ(L/U)0, DQ(L/U)1, etc.) transition edge to its respective data strobe signal (DQS(L/U),  $\overline{DQS(L/U)}$ ) crossing.

#### Note 5


For these parameters, the DDR3(L) SDRAM device supports tnPARAM [Nck] = RU{Tparam[ns] / tCK(avg)[ns]}, which is in clock cycles, assuming all input clock jitter specifications are satisfied.

#### Note 6

When the device is operated with input clock jitter, this parameter needs to be derated by the actual Terr(mper), act of the input clock, where  $2 \le m \le 12$ . (Output derating is relative to the SDRAM input clock.)

#### Note 7

When the device is operated with input clock jitter, this parameter needs to be derated by the actual Tjit(per),act of the input clock. (Output deratings are relative to the SDRAM input clock.)





### **Timing Parameter Notes**

- 1. Actual value dependent upon measurement level definitions which are TBD.
- 2. Commands requiring a locked DLL are: READ ( and RAP) are synchronous ODT commands.
- 3. The max values are system dependent.
- 4. WR as programmed in mode register.
- 5. Value must be rouned-up to next higher integer value.
- 6. There is no maximum cycle time limit besides the need to satisfy the refresh interval, t<sub>REFi</sub>.
- 7. For definition of RTT-on time  $t_{AON}$  See "Timing Parameters".
- 8. For definition of RTT-off time t<sub>AOF</sub> See "Timing Parameters".
- 9. twR is defined in ns, for calculation of twRPDEN it is necessary to round up twR/tck to the next integer.
- 10. WR in clock cycles are programmed in MR0.
- 11. The maximum read postamble is bounded by t<sub>DQSCK</sub>(min) plus t<sub>QSH</sub>(min) on the left side and t<sub>HZ</sub>(DQS)max on the right side.
- **12.** Output timing deratings are relative to the SDRAM input clock. When the device is operated with input clock jitter, this parameter needs to be derated by TBD.
- 13. Value is only valid for RON34.
- 14. Single ended signal parameter.
- **15.** t<sub>REFi</sub> depends on T<sub>OPER</sub>.
- **16.** t<sub>IS</sub>(base) and t<sub>IH</sub>(base) values are for 1V/ns CMD/ADD single-ended slew rate and 2V/ns CK, CK differential slew rate. Note for DQ and DM signals, V<sub>REF</sub>(DC)=Vref<sub>DQ</sub>(DC). For input only pins except RESET, Vref(DC)=Vref<sub>CA</sub>(DC).
- 17. t<sub>DS</sub>(base) and t<sub>DH</sub>(base) values are for 1V/ns DQ single-ended slew rate and 2V/ns DQS, DQS differential slew rate. Note for DQ and DM signals, V<sub>RE</sub>F(DC)=Vref<sub>DQ</sub>(DC). For input only pins except RESET, Vref(DC)=Vref<sub>CA</sub>(DC).
- 18. Start of internal write transaction is defined as follows:

For BL8 (fixed by MRS and on-the-fly): Rising clock edge 4 clock cycles after WL.

For BC4 (on-the-fly): Rising clock edge 4 clock cycles after WL.

For BC4 (fixed by MRS): Rising clock edge 2 clock cycles after WL.

- 19. The maximum preamble is bound by t<sub>LZ</sub> (DQS) max on the left side and t<sub>DQSCK</sub>(max) on the right side.
- **20.** CKE is allowed to be registered low while operations such as row activation, precharge, autoprecharge or refresh are in progress, but power-down IDD spec will not be applied until finishing those operations.
- 21. Although CKE is allowed to be registered LOW after a REFRESH command once t<sub>REFPDEN</sub>(min) is satisfied, there are cases where additional time such as t<sub>XPDLL</sub>(min) is also required.
- 22. Defined between end of MPR read burst and MRS which reloads MPR or disables MPR function.



#### NT5CB(C)256M8FN / NT5CB(C)128M16FP

23. One ZQCS command can effectively correct a minimum of 0.5% (ZQCorrection) of RON and RTT impedance error within 64 Nck for all speed bins assuming the maximum sensitivities specified in the "Output Driver Voltage and Temperature Sensitivity" and "ODT Voltage and Temperature Sensitivity" tables. The appropriate interval between ZQCS commands can be determined from these tables and other application-specific parameters.

One method for calculating the interval between ZQCS commands, given the temperature (Tdriftrate) and voltage (Vdriftrate) drift rates that the SDRAM is subject to in the application, is illustrated. The interval could be defined by the following formula: ZQCorrection / [(Tsens x Tdriftrate) + (Vsens x Vdriftrate)] where Tsens = max(dRTTdT, dRONdTM) and Vsens = max(dRTTdV, dRONdVM) define the SDRAM temperature and voltage sensitivities.

For example, if Tsens = 1.5%/C, Vsens = 0.15%/Mv, Tdriftrate = 1 C/sec and Vdriftrate = 15Mv/sec, then the interval between ZQCS commands is calculated as  $0.5 / [(1.5x1)+(0.15x15)] = 0.133 \sim 128ms$ 

- **24.** n = from 13 cycles to 50 cycles. This row defines 38 parameters.
- 25. t<sub>CH</sub>(abs) is the absolute instantaneous clock high pulse width, as measured from one rising edge to the following falling edge.
- 26. t<sub>CL</sub>(abs) is the absolute instantaneous clock low pulse width, as measured from one falling edge to the following rising edge.
- 27. The t<sub>IS</sub>(base) AC150 specifications are adjusted from the t<sub>IS</sub>(base) specification by adding an additional 100ps of derating to accommodate for the lower alternate threshold of 150Mv and another 25ps to account for the earlier reference point [(175Mv 150Mv) / 1V/ns].

#### NT5CB(C)256M8FN / NT5CB(C)128M16FP



### Address / Command Setup, Hold, and Derating

For all input signals the total tIS (setup time) and tIH (hold time) required is calculated by adding the data sheet tIS(base) and tIH(base) and tIH(base) value to the delta tIS and delta tIH derating value respectively.

Example: tIS (total setup time) = tIS(base) + delta tIS

Setup (tIS) nominal slew rate for a rising signal is defined as the slew rate between the last crossing of Vref(dc) and the first crossing of VIH(ac)min. Setup (tIS) nominal slew rate for a falling signal is defined as the slew rate between the last crossing of Vref(dc) and the first crossing of VIL(ac)max. If the actual signal is always earlier than the nominal slew rate line between shaded 'Vref(dc) to ac region', use nominal slew rate for derating value. If the actual signal is later than the nominal slew rate line anywhere between shaded 'Vref(dc) to ac region', the slew rate of the tangent line to the actual signal from the ac level to dc level is used for derating value.

Hold (tIH) nominal slew rate for a rising signal is defined as the slew rate between the last crossing of VIL(dc)max and the first crossing of Vref(dc). Hold (tIH) nominal slew rate for a falling signal is defined as the slew rate between the last crossing of VIH(dc)min and the first crossing of Vref(dc). If the actual signal is always later than the nominal slew rate line between shaded 'dc to Vref(dc) region', use nominal slew rate for derating value. If the actual signal is earlier than the nominal slew rate line anywhere between shaded 'dc to Vref(dc) region', the slew rate of a tangent line to the actual signal from the dc level to Vref(dc) level is used for derating value. For a valid transition the input signal has to remain above/below VIH/IL(ac) for some time tVAC. Although for slow slew rates the total setup time might be negative (i.e. a valid input signal will not have reached VIH/IL(ac) at the time of the rising clock transition) a valid input signal is still required to complete the transition and reach VIH/IL(ac).

#### ADD/CMD Setup and Hold Base-Values for 1V/ns

Grade	Symbol	Reference	800	1066	1333	1600	1866	2133	Unit	Notes
	tIS(base) AC175	VIH/L(ac)	200	125	65	45	-	-	ps	1
	tIS(base) AC150	VIH/L(ac)	350	275	190	170	-	-	ps	1
DDR3	tIS(base) AC135	VIH/L(ac)	-	-	-	-	65	60	ps	1
	tIS(base) AC125	VIH/L(ac)	-	-	-	-	150	135	ps	1
	tlH(base) DC100	VIH/L(dc)	275	200	140	120	100	95	ps	1
	tIS(base) AC160	VIH/L(ac)	215	140	80	60	-	-	ps	1
DDD31	tIS(base) AC135	VIH/L(ac)	365	290	205	185	65	-	ps	1,2
DDR3L	tIS(base) AC125	VIH/L(ac)	-	-	-	-	150	-	ps	1,3
	tIH(base) DC90	VIH/L(ac)	285	210	150	130	110	-	ps	1

NOTE 1 (AC/DC referenced for 1 V/ns Address/Command slew rate and 2 V/ns differential CK-CK slew rate)

NOTE 2 The tIS(base) AC135 specifications are adjusted from the tIS(base) AC160 specification by adding an additional 125 ps for DDR3L-800/1066 or 100 ps for DDR3L-1333/1600 of derating to accommodate for the lower alternate threshold of 135 mV and another 25 ps to account for the earlier reference point [(160 mV - 135 mV) / 1 V/ns].

NOTE 3 The tIS(base) AC125 specifications are adjusted from the tIS(base) AC135 specification by adding an additional 75 ps for DDR3L-1866 of derating to accommodate for the lower alternate threshold of 135 mV and another 10 ps to account for the earlier reference point [(135 mV - 125 mV) / 1 V/ns].





### Derating values DDR3L-800/1066/1333/1600 tlS/tlH - AC/DC based AC160 Threshold

	DDR3L	AC16	0 Thre	sholo	l -> VI	H(AC	AC)=V	REF(C	)C)+16	60 mV	, VIL(A	AC)=VI	REF(D	C)-160	mV		
							CK, C	K Diff	erenti	al Sle	w Rat	:e					
		4.0 '	V/ns	3.0	V/ns	2.0	V/ns	1.8	V/ns	1.6	V/ns	1.4 \	V/ns	1.2 \	//ns	1.0 \	//ns
		∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH
	2	80	45	80	45	80	45	88	53	96	61	104	69	112	79	120	95
	1.5	53	30	53	30	53	30	61	38	69	46	77	54	85	64	93	80
	1	0	0	0	0	0	0	8	8	16	16	24	24	32	34	40	50
CMD/ADD	0.9	-1	-3	-1	-3	-1	-3	7	5	15	13	23	21	31	31	39	47
Slew rate	0.8	-3	-8	-3	-8	-3	-8	5	1	13	9	21	17	29	27	37	43
V/ns	0.7	-5	-13	-5	-13	-5	-13	3	-5	11	3	19	11	27	21	35	37
	0.6	-8	-20	-8	-20	-8	-20	0	-12	8	-4	16	4	24	14	32	30
	0.5	-20	-30	-20	-30	-20	-30	-12	-22	-4	-14	4	-6	12	4	20	20
	0.4	-40	-45	-40	-45	-40	-45	-32	-37	-24	-29	-16	-21	-8	-11	0	5

## Derating values DDR3L-800/1066/1333/1600 tlS/tlH - AC/DC based AC135 Threshold

DI	DR3L Alte	ernate	AC13	5 Thr	eshol	d -> V	TH(AC	)=VRI	EF(DC	)+135	mV, \	/IL(A	C)=VR	EF(DC)	)-135 n	nV	
							CK, (	CK Dit	fferen	tial SI	lew Ra	ate					
		4.0	V/ns	3.0	V/ns	2.0	V/ns	1.8	V/ns	1.6	V/ns	1.4	V/ns	1.2 \	//ns	1.0 V	//ns
		∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tIH	∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH
	2	68	45	68	45	68	45	76	53	84	61	92	69	100	79	108	95
	1.5	45	30	45	30	45	30	53	38	61	46	69	54	77	64	85	80
	1	0	0	0	0	0	0	8	8	16	16	24	24	32	34	40	50
CMD/ADD	0.9	2	-3	2	-3	2	-3	10	5	18	13	26	21	34	31	42	47
Slew rate	0.8	3	-8	3	-8	3	-8	11	1	19	9	27	17	35	27	43	43
V/ns	0.7	6	-13	6	-13	6	-13	14	-5	22	3	30	11	38	21	46	37
	0.6	9	-20	9	-20	9	-20	17	-12	25	-4	33	4	41	14	49	30
	0.5	5	-30	5	-30	5	-30	13	-22	21	-14	29	-6	37	4	45	20
	0.4	-3	-45	-3	-45	-3	-45	6	-37	14	-29	22	-21	30	-11	38	5

# NT5CB(C)256M8FN / NT5CB(C)128M16FP



### Derating values DDR3L-1866 tlS/tlH - AC/DC based AC125 Threshold

DI	DR3L Alte	rnate	AC12	5 Thre	esholo	l -> VI	H(AC)	=VRE	F(DC)	+125	mV, V	IL(AC	)=VRE	F(DC)	)-125 ı	nV	
							CK, C	K Dif	ferent	ial Sle	ew Ra	te					
		4.0	V/ns	3.0	V/ns	2.0	V/ns	1.8	V/ns	1.6	V/ns	1.4	V/ns	1.2	V/ns	1.0 V	//ns
		∆tIS	∆tlH											∆tlH			
	2	63	45	63	45	63	45	71	53	79	61	87	69	95	79	103	95
	1.5	42	30	42	30	42	30	50	38	58	46	66	54	74	64	82	80
	1	0	0	0	0	0	0	8	8	16	16	24	24	32	34	40	50
CMD/ADD	0.9	3	-3	3	-3	3	-3	11	5	19	13	27	21	35	31	43	47
Slew rate	0.8	6	-8	6	-8	6	-8	14	1	22	9	30	17	38	27	46	43
V/ns	0.7	10	-13	10	-13	10	-13	18	-5	26	3	34	11	42	21	50	37
	0.6	16	-20	16	-20	16	-20	24	-12	32	4	40	-4	48	14	56	30
	0.5	15	-30	15	-30	15	-30	23	-22	31	-14	39	-6	47	4	55	20
	0.4	13	-45	13	-45	13	-45	21	-37	29	-29	37	-21	45	-11	53	5

## Derating values DDR3-800/1066/1333/1600 tlS/tlH - AC/DC based AC175 Threshold

	DD	R3 AG	2175 1	Threst	nold ->	> VIH(	ac)=V	REF(d	lc)+17	5mV, \	VIL(ac	)=VRE	F(dc)	-175m\	<b>v</b>		
							CK, C	K Dif	ferent	ial Sle	w Ra	te					
		4.0 \	V/ns	3.0	V/ns	2.0	V/ns	1.8 \	V/ns	1.6 \	//ns	1.4 \	//ns	1.2 \	//ns	1.0 ՝	V/ns
		∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tIH
	2	88	50	88	50	88	50	96	58	104	66	112	74	120	84	128	100
	1.5	59	34	59	34	59	34	67	42	75	50	83	58	91	68	99	84
	1	0	0	0	0	0	0	8	8	16	16	24	24	32	34	40	50
CMD/ADD	0.9	-2	-4	-2	-4	-2	-4	6	4	14	12	22	20	30	30	38	46
Slew rate	8.0	-6	-10	-6	-10	-6	-10	2	-2	10	6	18	14	26	24	34	40
V/ns	0.7	-11	-16	-11	-16	-11	-16	-3	-8	5	0	13	8	21	18	29	34
	0.6	-17	-26	-17	-26	-17	-26	-9	-18	-1	-10	7	-2	15	8	23	24
	0.5	-35	-40	-35	-40	-35	-40	-27	-32	-19	-24	-11	-16	-2	-6	5	10
	0.4	-62	-60	-62	-60	-62	-60	-54	-52	-46	-44	-38	-36	-30	-26	-22	-10





## Derating values DDR3-800/1066/1333/1600 tlS/tlH - AC/DC based AC150 Threshold

	DDR3 A	Iternat	te AC1	150 Th	resho	old -> \	/IH(ac	:)=VRE	EF(dc)	+150	mV, V	IL(ac)	=VRE	F(dc)-	150mV	,	
						(	CK, C	K Diff	erenti	al Sle	w Ra	te					
		4.0	V/ns	3.0 \	V/ns	2.0	V/ns	1.8 '	V/ns	1.6	V/ns	1.4	V/ns	1.2 \	V/ns	1.0	V/ns
		∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tIH	∆tIS	∆tlH
	2	75	50	75	50	75	50	83	58	91	66	99	74	107	84	115	100
	1.5	50	34	50	34	50	34	58	42	66	50	74	58	82	68	90	84
	1	0	0	0	0	0	0	8	8	16	16	24	24	32	34	40	50
CMD/ADD	0.9	0	-4	0	-4	0	-4	8	4	16	12	24	20	32	30	40	46
Slew rate	0.8	0	-10	0	-10	0	-10	8	-2	16	6	24	14	32	24	40	40
V/ns	0.7	0	-16	0	-16	0	-16	8	-8	16	0	24	8	32	18	40	34
	0.6	-1	-26	-1	-26	-1	-26	7	-18	15	-10	23	-2	31	8	39	24
	0.5	-10	-40	-10	-40	-10	-40	-2	-32	6	-24	14	-16	22	-6	30	10
	0.4	-25	-60	-25	-60	-25	-60	-17	-52	-9	-44	-1	-36	7	-26	15	-10

## Derating values DDR3-1866/2133 tIS/tIH - AC/DC based AC135 Threshold

	DDR3 AI	ternat	te AC1	35 Th	resho	old ->	VIH(a	c)=VR	EF(do	:)+13	5mV, \	/IL(ac	)=VRE	F(dc)-	135m\	/	
							CK,	CK Di	fferer	itial S	lew R	ate					
		4.0	V/ns	3.0	V/ns	2.0	V/ns	1.8	V/ns	1.6	V/ns	1.4	V/ns	1.2 \	//ns	1.0	V/ns
		∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH
	2	68	50	68	50	68	50	76	58	84	66	92	74	100	84	108	100
	1.5	45	34	45	34	45	34	53	42	61	50	69	58	77	68	85	84
	1	0	0	0	0	0	0	8	8	16	16	24	24	32	34	40	50
CMD/ADD	0.9	2	-4	2	-4	2	-4	10	4	18	12	26	20	34	30	42	46
Slew rate	0.8	3	-10	3	-10	3	-10	11	-2	19	6	27	14	35	24	43	40
V/ns	0.7	6	-16	6	-16	6	-16	14	-8	22	0	30	8	38	18	46	34
	0.6	9	-26	9	-26	9	-26	17	-18	25	-10	33	-2	41	8	49	24
	0.5	5	-40	5	-40	5	-40	13	-32	21	-24	29	-16	37	-6	45	10
	0.4	-3	-60	-3	-60	-3	-60	6	-52	14	-44	22	-36	30	-26	38	-10





### Derating values DDR3-1866/2133 tIS/tIH - AC/DC based AC125 Threshold

	DDR3 AI	ternat	te AC1	25 Th	resho	old ->	VIH(ad	c)=VR	EF(dc	)+125	mV, V	IL(ac)	=VRE	F(dc)	-125m	v	
							CK, (	CK Di	fferen	tial S	lew Ra	ate					
		4.0	V/ns	3.0	V/ns	2.0	V/ns	1.8	V/ns	1.6	V/ns	1.4	V/ns	1.2	V/ns	1.0 '	V/ns
		∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tlH	∆tIS	∆tIH
	2	63	50	63	50	63	50	71	58	79	66	87	74	95	84	103	100
	1.5	42	34	42	34	42	34	50	42	58	50	66	58	74	68	82	84
	1	0	0	0	0	0	0	8	8	16	16	24	24	32	34	40	50
CMD/ADD	0.9	4	-4	4	-4	4	-4	12	4	20	12	28	20	36	30	44	46
Slew rate	0.8	6	-10	6	-10	6	-10	14	-2	22	6	30	14	38	24	46	40
V/ns	0.7	11	-16	11	-16	11	-16	19	-8	27	0	35	8	43	18	51	34
	0.6	16	-26	16	-26	16	-26	24	-18	32	-10	40	-2	48	8	56	24
	0.5	15	-40	15	-40	15	-40	23	-32	31	-24	39	-16	47	-6	55	10
	0.4	13	-60	13	-60	13	-60	21	-52	29	-44	37	-36	45	-26	53	-10





### Required time t<sub>VAC</sub> above VIH(AC) {below VIL(AC)} for ADD/CMD transition

Slew		DD	R3			DDI	R3L		
Rate	800/1066/	1333/1600	1866	/2133	800/1066/	1333/1600	18	66	Unit
[V/ns]	175mV [ps]	150mV[ps]	135mV [ps]	125mV [ps]	160 mV [ps]	135 mV [ps]	135 mV [ps]	125 mV [ps]	
> 2.0	75	175	168	173	200	213	200	205	ps
2.0	57	170	168	173	200	213	200	205	ps
1.5	50	167	145	152	173	190	178	184	ps
1.0	38	130	100	110	120	145	133	143	ps
0.9	34	113	85	96	102	130	118	129	ps
0.8	29	93	66	79	80	111	99	111	ps
0.7	22	66	42	56	51	87	75	89	ps
0.6	note	30	10	27	13	55	43	59	ps
0.5	note	note	note	note	Note	10	Note	18	ps
<0.5	note	note	note	note	Note	10	Note	18	ps

NOTE Rising input signal shall become equal to or greater than VIH(ac) level and falling input signal shall become equal to or less than VIL(ac) level.





### Data Setup, Hold, and Slew Rate De-rating

For all input signals the total tDS (setup time) and tDH (hold time) required is calculated by adding the data sheet tDS(base) and tDH(base) value to the delta tDS and delta tDH derating value respectively.

Example: tDS (total setup time) = tDS(base) + delta tDS

Setup (tDS) nominal slew rate for a rising signal is defined as the slew rate between the last crossing of Vref(dc) and the first crossing of VIH(ac)min. Setup (tDS) nominal slew rate for a falling signal is defined as the slew rate between the last crossing of Vref(dc) and the first crossing of VIL(ac)max. If the actual signal is always earlier than the nominal slew rate line between shaded 'Vref(dc) to ac region', use nominal slew rate for derating value. If the actual signal is later than the nominal slew rate line anywhere between shaded 'Vref(dc) to ac region', the slew rate of the tangent line to the actual signal from the ac level to dc level is used for derating value.

Hold (tDH) nominal slew rate for a rising signal is defined as the slew rate between the last crossing of VIL(dc)max and the first crossing of Vref(dc). Hold (tDH) nominal slew rate for a falling signal is defined as the slew rate between the last crossing of VIH(dc)min and the first crossing of Vref(dc). If the actual signal is always later than the nominal slew rate line between shaded 'dc level to Vref(dc) region', use nominal slew rate for derating value. If the actual signal is earlier than the nominal slew rate line anywhere between shaded 'dc to Vref(dc) region', the slew rate of a tangent line to the actual signal from the dc level to Vref(dc) level is used for derating value.

For a valid transition the input signal has to remain above/below VIH/IL(ac) for some time tVAC.

Although for slow slew rates the total setup time might be negative (i.e. a valid input signal will not have reached VIH/IL(ac) at the time of the rising clock transition) a valid input signal is still required to complete the transition and reach VIH/IL(ac). For slew rates in between the values listed in the following tables, the derating values may be obtained by linear interpolation. These values are typically not subject to production test. They are verified by design and characterization.

### Derating values DDR3L-800/1066 tDS/tDH - AC/DC based AC160 Threshold

	DDF	R3L A	C160 T	hresh	old ->	VIH(A	AC)=VI	REF(D	C)+16	0mV, \	VIL(AC	C)=VRI	EF(DC	)-160r	nV		
						Е	OQS, Ī	DQS C	iffere	ntial S	Slew R	ate					
		4.0 \	V/ns	3.0	V/ns	2.0	V/ns	1.8 '	V/ns	1.6 \	V/ns	1.4 \	V/ns	1.2	V/ns	1.0	V/ns
		∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH
	2	80	45	80	45	80	45	-	-	-	-	-	-	-	-	-	-
	1.5	53	30	53	30	53	30	61	38	-	-	-	-	-	-	-	-
	1	0	0	0	0	0	0	8	8	16	16	-	-	-	-	-	-
DQ	0.9	-	-	-1	-3	-1	-3	7	5	15	13	23	21	-	-	-	-
Slew rate	0.8	-	-	-	-	-3	-8	5	1	13	9	21	17	29	27	-	-
V/ns	0.7	-	-	-	-	-	-	3	-5	11	3	19	11	27	21	35	37
	0.6	-	-	-	-	-	-	-	-	8	-4	16	4	24	14	32	30
	0.5	-	-	-	-	-	-	-	-	-	-	4	-6	12	4	20	20
	0.4	-	-	-	-	-	-	-	-	-	-	-	-	-8	-11	0	5





### Derating values DDR3L-800/1066/1333/1600 tDS/tDH - AC/DC based AC135/ Threshold

DD	R3L A	Alterna	ite AC	135 TI	hresho	old -> '	VIH(A	C)=VR	EF(DC	)+135	mV, V	IL(AC)	=VRE	F(DC)	-135m	V	
							OQS, Ī	DQS C	iffere	ntial S	lew R	ate					
		4.0 \	V/ns	3.0	V/ns	2.0	V/ns	1.8 \	V/ns	1.6 \	V/ns	1.4 '	V/ns	1.2	V/ns	1.0 '	V/ns
		∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH
	2	45	68	45	68	45	-	-	-	-	-	-	-	-	-	-	
	1.5	45	30	45	30	45	30	53	38	-	-	-	-	-	-	-	-
	1	0	0	0	0	0	0	8	8	16	16	-	-	-	-	-	-
DQ	0.9	-	-	2	-3	2	-3	10	5	18	13	26	21	-	-	-	-
Slew rate	8.0	-	-	-	-	3	-8	11	1	19	9	27	17	35	27	-	-
V/ns	0.7	-	-	-	-	-	-	14	-5	22	3	30	11	38	21	46	37
	0.6	-	-	-	-	-	-	-	-	25	-4	33	4	41	14	49	30
	0.5	-	-	-	-	-	-	-	-	-	-	29	-6	37	4	45	20
	0.4	-	-	-	-	-	-	-	-	-	-	-	-	30	-11	38	5

NOTE1: Cell contents shaded in gray are defined as 'not supported'.

### Derating values DDR3L-1866 tDS/tDH - AC/DC based AC130 Threshold

		DDI	₹3L	Alte	rnat	e AC	130	Thre	sho	ld ->	VIH(	AC)=	-VRE	F(D	C)+1	30m\	/, VII	_(AC	)=VR	REF(I	DC)-1	130m	V		
										[	oqs	, <del>D</del> Q	S Di	ffere	ntial	Slev	v Ra	ite							
		8.0	V/ns	7.0	V/ns	6.0	V/ns	5.0	V/ns	4.0	V/ns	3.0	V/ns	2.0	V/ns	1.8 \	V/ns	1.6	V/ns	1.4	V/ns	1.2	V/ns	1.0 '	V/ns
		∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH
	4	33	23	33	23	33	23	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	3.5	28	19	28	19	28	19	28	19	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	3	22	15	22	15	22	15	22	15	22	15	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	2.5	-	-	13	9	13	9	13	9	13	9	13	9	-	-	-	-	-	-	-	-	-	-	-	-
DQ	2	-	-	-	-	0	0	0	0	0	0	0	0	0	0	-	-	-	-	-	-	-	-	-	-
Slew	1.5	-	-	-	-	-	-	-22	-15	-22	-15	-22	-15	-22	-15	-14	-7	-	-	-	-	-	-	-	-
rate	1	-	-	-	-	-	-	-	-	-65	-45	-65	-45	-65	-45	-57	-37	-49	-29	-	-	-	-	-	-
	0.9	-	-	-	-	-	-	-	-	-	-	-62	-48	-62	-48	-54	-40	-46	-32	-38	-24	-	-	-	-
V/ns	8.0	-	-	-	-	-	-	-	-	-	-	-	-	-61	-53	-53	-45	-45	-37	-37	-29	-29	-19	-	-
	0.7	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-49	-50	-41	-42	-33	-34	-25	-24	-17	-8
	0.6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-37	-49	-29	-41	-21	-31	-13	-15
	0.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-31	-51	-23	-41	-15	-25
	0.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-28	-56	-20	-40

## NT5CB(C)256M8FN / NT5CB(C)128M16FP



### Derating values DDR3-800/1066 tDS/tDH - AC/DC based AC175 Threshold

						DDR	3 AC1	175 Th	resh	old							
					I	DQS,	DQS I	Differe	ential S	Slew F	Rate						
		4.0 \	V/ns	3.0	V/ns	2.0	V/ns	1.8 \	V/ns	1.6 \	V/ns	1.4 \	V/ns	1.2 \	V/ns	1.0 \	V/ns
		∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH
	2	50	88	50	88	50	-	-	-	-	-	-	-	-	-	-	
	1.5	59	34	59	34	59	34	67	42	-	-	-	-	-	-	-	-
	1	0	0	0	0	0	0	8	8	16	16	-	-	-	-	-	-
DQ	0.9	-	-	-2	-4	-2	-4	6	4	14	12	22	20	-	-	-	-
Slew rate	8.0	-	-	-	-	-6	-10	2	-2	10	6	18	14	26	24	-	-
V/ns	0.7	-	-	-	-	-	-	-3	-8	5	0	13	8	21	18	29	34
	0.6	-	-	-	-	-	-	-	-	-1	-10	7	-2	15	8	23	24
	0.5	-	-	-	-	-	-	-	-	-	-	-11	-16	-2	-6	5	10
	0.4	-	-	-	-	-	-	-	-	-	-	-	-	-30	-26	-22	-10

NOTE1: Cell contents shaded in gray are defined as 'not supported'.

### Derating values DDR3-800/1066/1333/1600 tDS/tDH - AC/DC based AC150 Threshold

						DDR	3 AC1	150 TI	resh	old							
					ı	DQS,	DQS I	Differe	ential	Slew F	Rate						
		4.0 \	V/ns	3.0	V/ns	2.0	V/ns	1.8 '	V/ns	1.6 \	V/ns	1.4 \	V/ns	1.2	V/ns	1.0	V/ns
		∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH
	2	50	75	50	75	50	-	-	-	-	-	-	-	-	-	-	
	1.5	50	34	50	34	50	34	58	42	-	-	-	-	-	-	-	-
	1	0	0	0	0	0	0	8	8	16	16	-	-	-	-	-	-
DQ	0.9	-	-	0	-4	0	-4	8	4	16	12	24	20	-	-	-	-
Slew rate	8.0	-	-	-	-	0	-10	8	-2	16	6	24	14	32	24	-	-
V/ns	0.7	-	-	-	-	-	-	8	-8	16	0	24	8	32	18	40	34
	0.6	-	-	-	-	-	-	-	-	15	-10	23	-2	31	8	39	24
	0.5	-	-	-	-	-	-	-	-	-	-	14	-16	22	-6	30	10
	0.4	-	-	-	-	-	-	-	-	-	-	-	-	7	-26	15	-10

## NT5CB(C)256M8FN / NT5CB(C)128M16FP



### Derating values DDR3-1866/2133 tDS/tDH - AC/DC based AC135 Threshold

												DDF	23												
		Α	lterr	ate	AC'	135	Thre	sho	ld ->	VIH	(ac)=	=VRE	EF(do	c)+13	35m\	V, VII	L(ac	)=VR	EF(c	dc)-1	35m	V			
		Α	ltern	ate	DC1	100	Thre	sho	ld ->	VIH	(dc)=	-VRE	EF(de	c)+1(	00m\	V, VII	L(dc	)=VR	REF(c	dc)-1	00m	V			
											D	QS,	DQS	Diff	erer	ntial	Slev	/ Ra	te						
		8.0	V/ns	7.0	V/ns	6.0 \	V/ns	5.0 \	//ns	4.0 '	V/ns	3.0	V/ns	2.0	V/ns	1.8 '	V/ns	1.6	V/ns	1.4	V/ns	1.2	V/ns	1.0 \	V/ns
		∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	△tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tD⊦
	4	34	25	34	25	34	25	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	3.5	29	21	29	21	29	21	29	21	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	3	23	17	23	17	23	17	23	17	23	17	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	2.5	-	-	14	10	14	10	14	10	14	10	14	10	-	-	-	-	-	-	-	-	-	-	-	-
DQ	2	-	-	-	-	0	0	0	0	0	0	0	0	0	0	-	-	-	-	-	-	-	-	-	-
Slew	1.5	-	-	-	-	-	-	-23	-17	-23	-17	-23	-17	-23	-17	-15	-9	-	-	-	-	-	-	-	-
	1	-	-	-	-	-	-	-	-	-68	-50	-68	-50	-68	-50	-60	-42	-52	-34	-	-	-	-	-	-
rate	0.9	-	-	-	-	-	-	-	-	-	-	-66	-54	-66	-54	-58	-46	-50	-38	-42	-30	-	-	-	-
V/ns	0.8	-	-	-	-	-	-	-	-	-	-	-	-	-64	-60	-56	-52	-48	-44	-40	-36	-32	-26	-	-
	0.7	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-53	-59	-45	-51	-37	-43	-29	-33	-21	-17
	0.6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-43	-61	-35	-53	-27	-43	-19	-27
	0.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-39	-66	-31	-56	-23	-40
	0.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-38	-76	-30	-60

NOTE1: Cell contents shaded in gray are defined as 'not supported'.

### Derating values DDR3-800/1066/1333/1600 tDS/tDH - AC/DC based AC135 Threshold

Derating v								• •=									
								DR3									
	Alte	rnate	AC135	Thre	shold	-> VIH	l(ac)=\	/REF(	dc)+13	85mV,	VIL(ad	c)=VRI	EF(dc)	-135m	ı۷		
	Alte	rnate	DC100	Thre	shold	-> VIH	(dc)=\	/REF(	dc)+10	00mV,	VIL(de	c)=VR	EF(dc)	-100m	ı۷		
							DQS,	DQS	Differ	ential	Slew	Rate					
		4.0 \	V/ns	3.0	V/ns	2.0	V/ns	1.8 \	V/ns	1.6 \	V/ns	1.4 \	V/ns	1.2 \	V/ns	1.0 ՝	V/ns
		∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH	∆tDS	∆tDH
	2	68	50	68	50	68	50	-	-	-	-	-	-	-	-	-	-
	1.5	45	34	45	34	45	34	53	42	-	-	-	-	-	-	-	-
DO	1	0	0	0	0	0	0	8	8	16	16	-	-	-	-	-	-
DQ	0.9	-	-	2	-4	2	-4	10	4	18	12	26	20	-	-	-	-
Slew rate	8.0	-	-	-	-	3	-10	11	-2	19	6	27	14	35	24	-	-
V/ns	0.7	-	-	-	-	-	-	14	-8	22	0	30	8	38	18	46	34
	0.6	-	-	-	-	-	-	-	-	25	-10	33	-2	41	8	49	24
	0.5	-	-	-	-	-	-	-	-	-	-	29	-16	37	-6	45	10
	0.4	-	-	-	-	-	-	-	-	-	-	-	-	30	-26	38	-10





### Required time t<sub>VAC</sub> above VIH(AC) {below VIL(AC)} for DQ transition

Slew			DDR3				DDR3L		
Rate	800/1066	800/1066/ 1333/1600	800/1066/ 1333/1600	1866	2133	800/1066	800/1066/ 1333/1600	1866	Unit
[V/ns]	175mV [ps]	150mV[ps]	135mV [ps]	135mV [ps]	135 mV [ps]	160 mV [ps]	135 mV [ps]	130 mV [ps]	
> 2.0	75	105	113	93	73	165	113	95	ps
2.0	57	105	113	93	73	165	113	95	ps
1.5	50	80	90	70	50	138	90	73	ps
1.0	38	30	45	25	5	85	45	30	ps
0.9	34	13	30	Note	Note	67	30	16	ps
0.8	29	Note	11	Note	Note	45	11	Note	ps
0.7	Note	Note	Note	-	-	16	Note	-	ps
0.6	Note	Note	Note	-	-	Note	Note	-	ps
0.5	Note	Note	Note	-	-	Note	Note	-	ps
<0.5	Note	Note	Note	-	-	Note	Note	-	ps

NOTE Rising input signal shall become equal to or greater than VIH(ac) level and falling input signal shall become equal to or less than VIL(ac) level.

### NT5CB(C)256M8FN / NT5CB(C)128M16FP



### **Revision History**

Version	Page	Modified	Description	Released
1.0	-	-	Draft Release	12/2011
1.0	-	-	Revised Table 1 and Ordering Information	05/2012
1.0	-	-	Revised x8/78 balls Package Size	06/2012
1.0	-	-	Added Idd Specification at 1.5V to the page 108 and 109 Tables	07/2012
1.0	-	-	Added 13 and 14 to MR0 CAS Latency Table	08/2012
1.0	-	-	Revised Table 3 and Ordering Information	09/2012
1.0	-	-	Updated 2133 AC timing SPEC	10/2012
1.0	-	-	Re-move speed 1066 and 1333 SPEC	12/2012
1.0	-	-	Added speed 1866 SPEC information	01/2013
1.0	-	-	Modified MR2 Function	02/2013
1.0	-	-	Modified IDD SPEC	02/2013
1.0	-	-	Added RS (Reduced Standaby) Part Numbers	02/2013
1.0	-	-	Modified Part Numbers	03/2013
1.0	-	-	Added Automotive garde 3 part number	04/2013
1.0	-	-	Added tRFC SPEC	05/2013
	P1		Renew the first page.	
			Remove 'on page xxx'	1
	All	-	2. Follow NTC's data center to change the Revision Rule	
	P3	Ordering Information	Add Part Number 'NT5CB128M16FP-DIH'.	
		Part Number Naming	Special Type Option	
	P4	Rule	1. Add H = Automotive Grade 2 2. Modify A = Automotive 3 (was: A = Automotive)	
		Fundamental AC	Modify A = Automotive 3 (was: A = Automotive)     Make all options follow JEDEC standards.	-
	P5-11	Specifications	2. Add 800, 1066 and 1333 specifications.	
	P13-14	Package Outline	Add side view of package to POD	
	D04 07 00 00	Drawing	2. Redraw the ballout	-
1.1	P24,27,30,32	MR0,1,2,3	Redraw the MR functions Follow JEDEC specifications	06/2013
	500	Absolute Maximum	● VDD: -0.4V ~ 1.8V (was: -0.4V ~ 1.975V)	
	P89	DC Ratings	<ul> <li>VDDQ: -0.4V ~ 1.8V (was: -0.4V ~ 1.975V)</li> </ul>	
			• Vin,Vout: -0.4V ~ 1.8V (was: -0.4V ~ 1.975V)	
	P90	Temperature Spec	Automatic Grade 3: -40 to 85 (was: -40 to 95)	
	P92-123	All	Make all specifications follow JEDEC specifications     Add DDR3(L) 800, 1066 and 1333 specifications	
	D101 100	1DD '5' 1'	Add IDD test conditions	-
	P124-136	IDD specifications	Add IDDQ2NT specifications	
	P137-143	Timing specifications	Make all specifications follow JEDEC specifications	
		0 1	Add DDR3(L) 800, 1066 and 1333 specifications     Make all specifications follow JEDEC specifications	-
	P146-156	Derating table	2. Add DDR3(L) 800, 1066 and 1333 specifications	
	P14	96 ballout	Update POD spec to 12mm (was: 11.2mm caused by typo)	
	P24,27,30,32	MR	Add notes below the MR tables	
	P1,P90	Temperature spec	1. Automotive Grade 3: -40 ~ 95 (was: -40~85)	
1.2		· ·	Add Automotive Grade 2 Spec on page 90.	06/2013
	P147-150, 152-155	tIS/tIH/tDS/tDH Derating table	Add DC conditions	
			Correct the typo in 1 <sup>st</sup> paragraph: tDS(base) and tDH(base), was: tDH(base) and	-
	P152	Data Setup,Hold	tDH(base)	
1.3	P3	Ordering Info	Add Part Number: NT5CC128M16FP-DIA NT5CC128M16FP-DIH	07/2013
1.4	All	-	Renew the format.	09/2013
1.5	P2,4,124,125,1 38	DDR3L-1866	Add DDR3L-1866 part number and specifications.     Update IDD spec.	12/2013
	D4.4	Voltage backward	Temperature Range: Add part number's code     NOTE 4: Enhance the statement of vallage headquard competible.	
	P1,4	compatible	NOTE 4: Enhance the statement of voltage backward compatible.     Commercial Grade (was: Standard Grade)	0.4/22.1 :
4.5				04/2014
1.6	P10	CAS Latency	Correct the description: bit A2_A4~A6 (was: bit A9~A11)	
1.6	P19	CAS Latency	Correct the description: bit A2, A4~A6 (was: bit A9~A11)	-
1.6	P19 P45, P123, 124 P5	Self refresh	Correct the description: bit A2, A4~A6 (was: bit A9~A11)  Emphasize the difference among the grades about Self refresh temperature range  Simplify part numbering guide.	



http://www.nanya.com/