

BR3500 - BR3512

PRV : 50 - 1200 Volts

Io : 35 Amperes

FEATURES :


- * High current capability
- * High surge current capability
- * High reliability
- * Low reverse current
- * Low forward voltage drop
- * Rated isolation-voltage 2000 V_{AC}
- * Pb / RoHS Free

MECHANICAL DATA :

- * Case : Molded plastic with heatsink integrally mounted in the bridge encapsulation
- * Epoxy : UL94V-0 rate flame retardant
- * Terminals : plated .25" (6.35 mm). Faston
- * Polarity : Polarity symbols marked on case
- * Mounting position : Bolt down on heat-sink with silicone thermal compound between bridge and mounting surface for maximum heat transfer efficiency.
- * Weight : 17.1 grams

SILICON BRIDGE RECTIFIERS

BR50

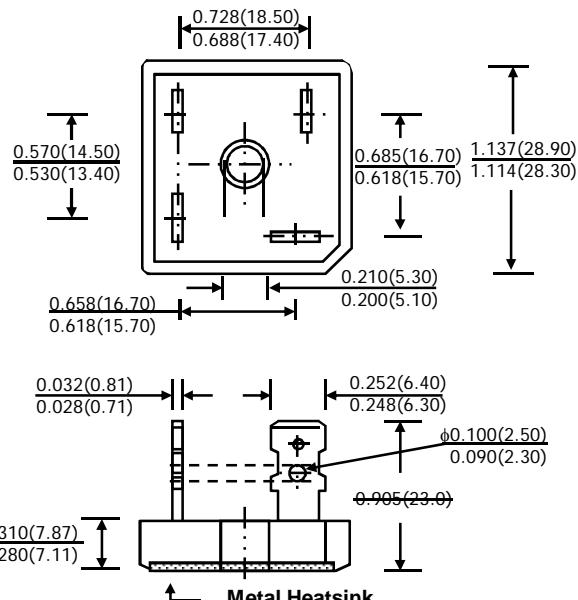

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

RATING	SYMBOL	BR 3500	BR 3501	BR 3502	BR 3504	BR 3506	BR 3508	BR 3510	BR 3512	UNIT
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	1200	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	840	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	1200	V
Maximum Average Forward Current T _c = 55°C	I _{F(AV)}						35			A
Peak Forward Surge Current Single half sine wave Superimposed on rated load (JEDEC Method)	I _{FSM}						400			A
Current Squared Time at t < 8.3 ms.	I ² t					660				A ² S
Maximum Forward Voltage per Diode at I _F = 17.5 A	V _F				1.1					V
Maximum DC Reverse Current Ta = 25 °C at Rated DC Blocking Voltage Ta = 100 °C	I _R				10					µA
	I _{R(H)}				200					µA
Typical Thermal Resistance (Note 1)	R _{θJC}				1.5					°C/W
Typical Thermal Resistance at Junction to Ambient	R _{θJA}				10					°C
Operating Junction Temperature Range	T _J				- 40 to + 150					°C
Storage Temperature Range	T _{STG}				- 40 to + 150					°C

Note :

- Thermal Resistance from junction to case with units mounted on a 7.5" x 3.5" x 4.6" (19cm.x 9cm.x 11.8cm.) Al.-Finned Plate