


| Symbol       | Test Conditions                                                                                         | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |      |        |
|--------------|---------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------|--------|
|              |                                                                                                         | min.                                                                              | typ. | max.   |
| $g_{fs}$     | $V_{DS} = 10\text{ V}; I_D = 0.5 \cdot I_{D25}$ , pulse test                                            | 11                                                                                | 21   | S      |
| $C_{iss}$    | $V_{GS} = 0\text{ V}, V_{DS} = 25\text{ V}, f = 1\text{ MHz}$                                           |                                                                                   | 4200 | pF     |
| $C_{oss}$    |                                                                                                         |                                                                                   | 450  | pF     |
| $C_{rss}$    |                                                                                                         |                                                                                   | 135  | pF     |
| $t_{d(on)}$  | $V_{GS} = 10\text{ V}, V_{DS} = 0.5 \cdot V_{DSS}, I_D = 0.5 I_{D25}$<br>$R_G = 2\ \Omega$ , (External) |                                                                                   | 24   | 30 ns  |
| $t_r$        |                                                                                                         |                                                                                   | 33   | 45 ns  |
| $t_{d(off)}$ |                                                                                                         |                                                                                   | 65   | 80 ns  |
| $t_f$        |                                                                                                         |                                                                                   | 30   | 40 ns  |
| $Q_{g(on)}$  | $V_{GS} = 10\text{ V}, V_{DS} = 0.5 \cdot V_{DSS}, I_D = 0.5 I_{D25}$                                   |                                                                                   | 160  | 190 nC |
| $Q_{gs}$     |                                                                                                         |                                                                                   | 28   | 40 nC  |
| $Q_{gd}$     |                                                                                                         |                                                                                   | 75   | 85 nC  |
| $R_{thJC}$   |                                                                                                         |                                                                                   | 0.42 | K/W    |
| $R_{thCK}$   |                                                                                                         |                                                                                   | 0.25 | K/W    |

#### Source-Drain Diode

| Symbol   | Test Conditions                                                                                       | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |      |            |
|----------|-------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------|------------|
|          |                                                                                                       | min.                                                                              | typ. | max.       |
| $I_S$    | $V_{GS} = 0$                                                                                          | 21N50<br>24N50                                                                    |      | 21<br>24 A |
| $I_{SM}$ | Repetitive;<br>pulse width limited by $T_{JM}$                                                        | 21N50<br>24N50                                                                    |      | 84<br>96 A |
| $V_{SD}$ | $I_F = I_S, V_{GS} = 0\text{ V}$ ,<br>Pulse test, $t \leq 300\ \mu\text{s}$ , duty cycle $d \leq 2\%$ |                                                                                   |      | 1.5 V      |
| $t_{rr}$ | $I_F = I_S, -di/dt = 100\text{ A}/\mu\text{s}, V_R = 100\text{ V}$                                    |                                                                                   | 600  | ns         |


#### TO-247 AD (IXTH) Outline



Terminals: 1 - Gate 2 - Drain  
3 - Source Tab - Drain

| Dim.           | Millimeter<br>Min. Max. | Inches<br>Min. Max. |
|----------------|-------------------------|---------------------|
| A              | 4.7 5.3                 | .185 .209           |
| A <sub>1</sub> | 2.2 2.54                | .087 .102           |
| A <sub>2</sub> | 2.2 2.6                 | .059 .098           |
| b              | 1.0 1.4                 | .040 .055           |
| b <sub>1</sub> | 1.65 2.13               | .065 .084           |
| b <sub>2</sub> | 2.87 3.12               | .113 .123           |
| C              | .4 .8                   | .016 .031           |
| D              | 20.80 21.46             | .819 .845           |
| E              | 15.75 16.26             | .610 .640           |
| e              | 5.20 5.72               | 0.205 0.225         |
| L              | 19.81 20.32             | .780 .800           |
| L1             | 4.50                    | .177                |
| ØP             | 3.55 3.65               | .140 .144           |
| Q              | 5.89 6.40               | 0.232 0.252         |
| R              | 4.32 5.49               | .170 .216           |
| S              | 6.15 BSC                | .242 BSC            |

#### TO-204 AE(IXTM) Outline



Pins 1 - Gate Case - Drain 2 - Source

| Dim.            | Millimeter<br>Min. Max. | Inches<br>Min. Max. |
|-----------------|-------------------------|---------------------|
| A               | 6.4 11.4                | .250 .450           |
| A <sub>1</sub>  | 1.53 3.42               | .060 .135           |
| Øb              | 1.45 1.60               | .057 .063           |
| ØD              | 22.22                   | .875                |
| e               | 10.67 11.17             | .420 .440           |
| e <sub>1</sub>  | 5.21 5.71               | .205 .225           |
| L               | 11.18 12.19             | .440 .480           |
| Øp              | 3.84 4.19               | .151 .165           |
| Øp <sub>1</sub> | 3.84 4.19               | .151 .165           |
| q               | 30.15 BSC               | 1.187 BSC           |
| R               | 12.58 13.33             | .495 .525           |
| R <sub>1</sub>  | 3.33 4.77               | .131 .188           |
| s               | 16.64 17.14             | .655 .675           |

Fig. 1 Output Characteristics

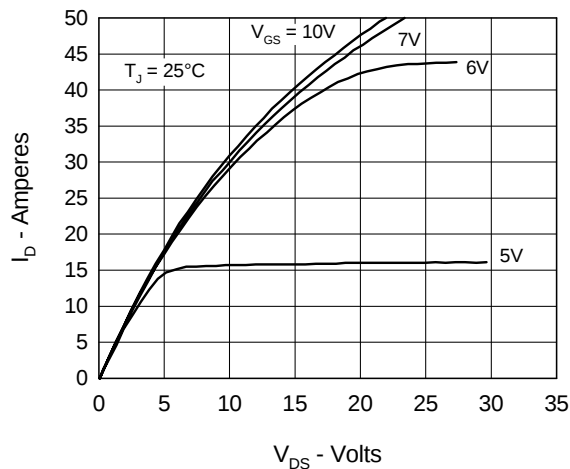


Fig. 2 Input Admittance

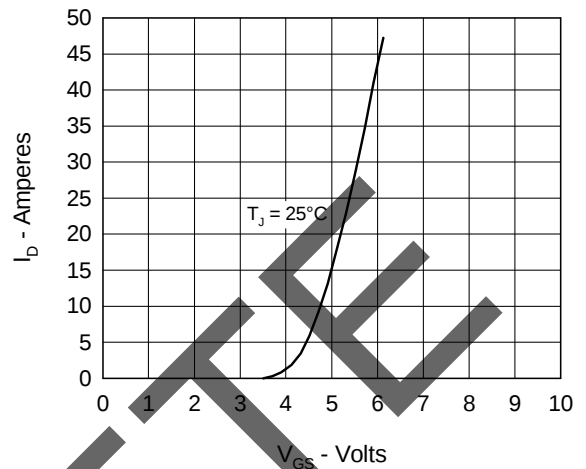
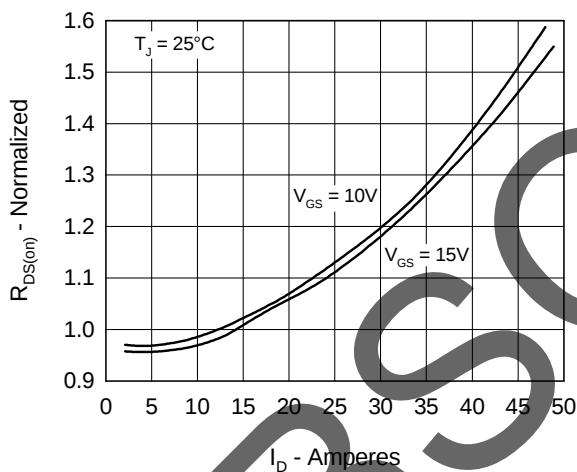

Fig. 3  $R_{DS(on)}$  vs. Drain Current


Fig. 4 Temperature Dependence of Drain to Source Resistance

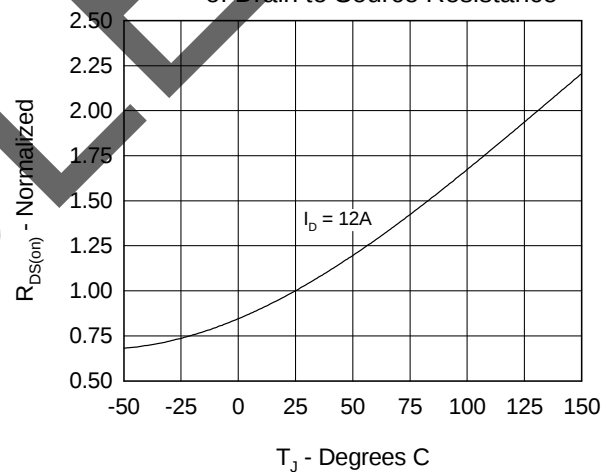


Fig. 5 Drain Current vs. Case Temperature

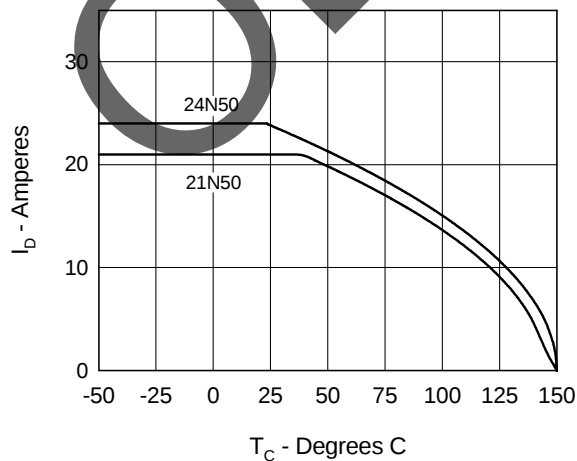


Fig. 6 Temperature Dependence of Breakdown and Threshold Voltage

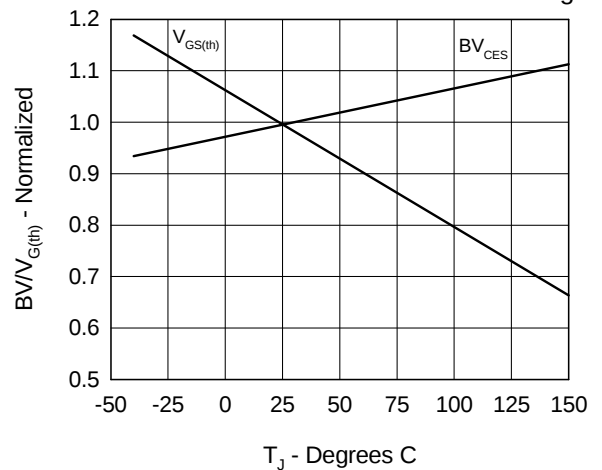


Fig.7 Gate Charge Characteristic Curve

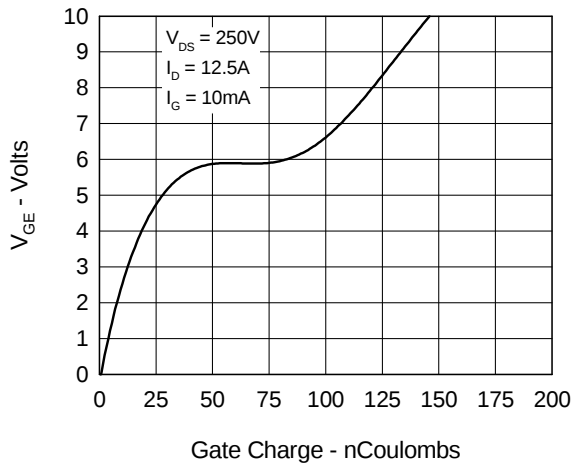


Fig.8 Forward Bias Safe Operating Area

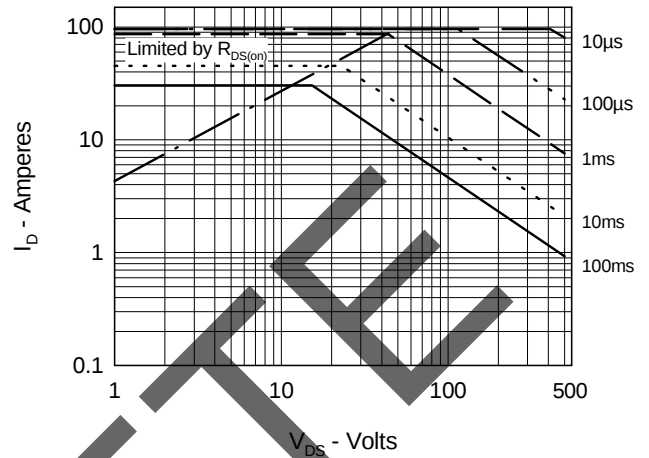


Fig.9 Capacitance Curves

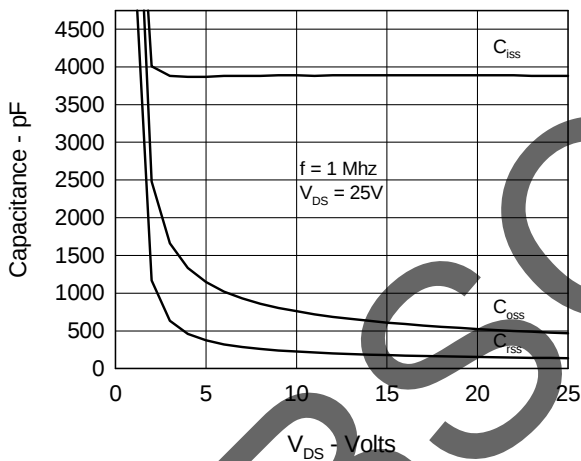


Fig.10 Source Current vs. Source to Drain Voltage


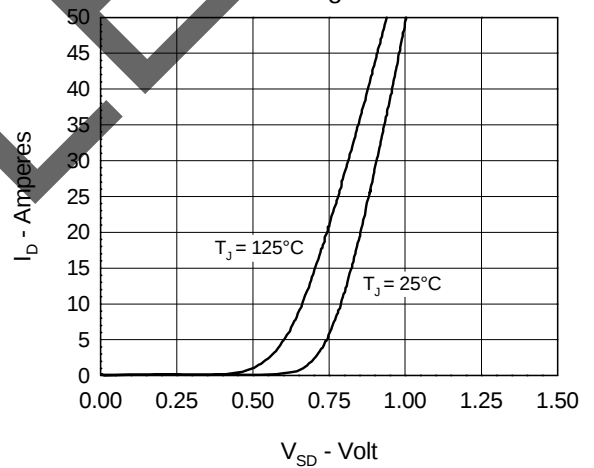


Fig.11 Transient Thermal Impedance



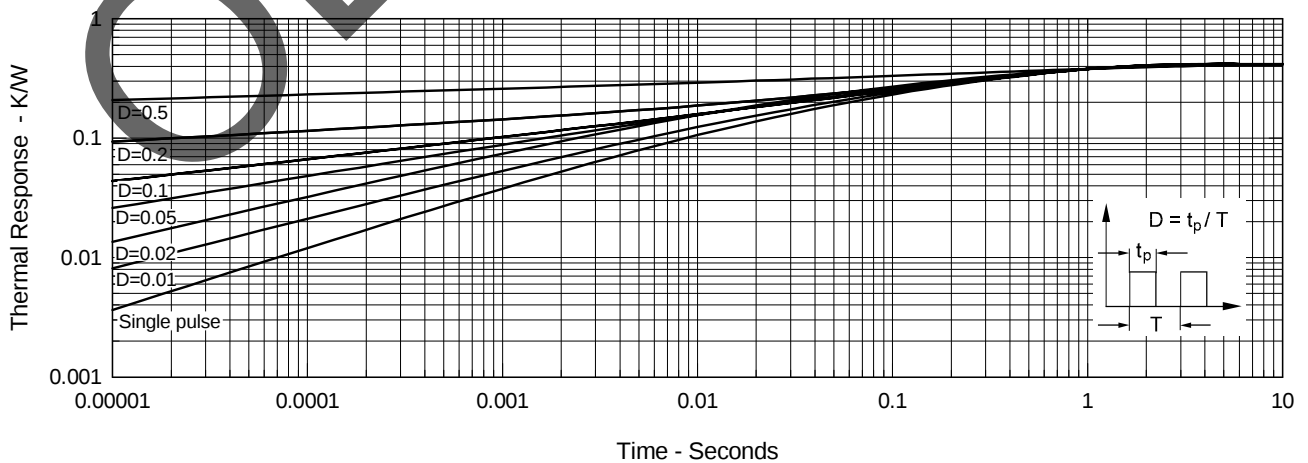

---

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).