

# Ultra-Low-Power Series Voltage Reference

## ABSOLUTE MAXIMUM RATINGS

IN to GND .....-0.3V to +13V  
 OUT to GND .....-0.3V to the lower of +6V and ( $V_{IN} + 0.3V$ )  
 Output to GND Short-Circuit Duration.....Continuous  
 Continuous Power Dissipation ( $T_A = +70^\circ\text{C}$ )  
 5-Pin SOT23 (derate 7.1mW/ $^\circ\text{C}$  above  $+70^\circ\text{C}$ ).....571mW

Operating Temperature Range .....-40 $^\circ\text{C}$  to +85 $^\circ\text{C}$   
 Storage Temperature Range .....-65 $^\circ\text{C}$  to +150 $^\circ\text{C}$   
 Lead Temperature (soldering, 10s) .....+300 $^\circ\text{C}$

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS—MAX6129\_21 ( $V_{OUT} = 2.048V$ )

( $V_{IN} = 2.5V$ ,  $I_{OUT} = 0$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ\text{C}$ .) (Note 1)

| PARAMETER                                           | SYMBOL                               | CONDITIONS                                |                  | MIN    | TYP    | MAX    | UNITS  |                   |
|-----------------------------------------------------|--------------------------------------|-------------------------------------------|------------------|--------|--------|--------|--------|-------------------|
| OUTPUT                                              |                                      |                                           |                  |        |        |        |        |                   |
| Output Voltage                                      | V <sub>OUT</sub>                     | T <sub>A</sub> = +25°C                    | MAX6129A (±0.4%) | 2.0398 | 2.0480 | 2.0562 | V      |                   |
|                                                     |                                      |                                           | MAX6129B (±1%)   | 2.0275 | 2.0480 | 2.0685 |        |                   |
| Output Voltage Temperature Coefficient (Notes 2, 3) | TCV <sub>OUT</sub>                   | MAX6129A                                  |                  | 40     |        |        | ppm/°C |                   |
|                                                     |                                      | MAX6129B                                  |                  | 100    |        |        |        |                   |
| Line Regulation (Note 4)                            | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | V <sub>IN</sub> = 2.5V to 12.6V           |                  | 27     |        |        | 200    | μV/V              |
| Load Regulation (Note 4)                            | ΔV <sub>OUT</sub> /ΔI <sub>OUT</sub> | I <sub>OUT</sub> = 0 to 4mA               |                  | 0.22   |        |        | 0.7    | μV/μA             |
|                                                     |                                      | I <sub>OUT</sub> = 0 to -1mA              |                  | 2.4    |        |        | 5.5    |                   |
| Output Short-Circuit Current                        | I <sub>SC</sub>                      |                                           |                  | 60     |        |        |        | mA                |
| Long-Term Stability                                 | ΔV <sub>OUT</sub> /time              | 1000 hours at +25°C                       |                  | 150    |        |        |        | ppm               |
| Thermal Hysteresis                                  |                                      | (Note 5)                                  |                  | 140    |        |        |        | ppm               |
| DYNAMIC CHARACTERISTICS                             |                                      |                                           |                  |        |        |        |        |                   |
| Noise Voltage                                       | e <sub>OUT</sub>                     | f = 0.1Hz to 10Hz                         |                  | 30     |        |        |        | μV <sub>P-P</sub> |
|                                                     |                                      | f = 10Hz to 1kHz                          |                  | 115    |        |        |        | μV <sub>RMS</sub> |
| Ripple Rejection                                    | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | V <sub>IN</sub> = 2.5V ±200mV, f = 120Hz  |                  | 43     |        |        |        | dB                |
| Turn-On Settling Time                               | t <sub>R</sub>                       | To V <sub>OUT</sub> = 0.1% of final value |                  | 450    |        |        |        | μs                |
| INPUT                                               |                                      |                                           |                  |        |        |        |        |                   |
| Supply Voltage Range                                | V <sub>IN</sub>                      |                                           |                  | 2.5    |        | 12.6   |        | V                 |
| Supply Current                                      | I <sub>IN</sub>                      |                                           |                  | 5.25   |        |        |        | μA                |
| Change in Supply Current (Note 4)                   | I <sub>IN</sub> /V <sub>IN</sub>     | V <sub>IN</sub> = 2.5V to 12.6V           |                  | 1.0    |        | 1.5    |        | μA/V              |

# Ultra-Low-Power Series Voltage Reference

MAX6129

## ELECTRICAL CHARACTERISTICS—MAX6129\_25 (V<sub>OUT</sub> = 2.500V)

(V<sub>IN</sub> = 2.7V, I<sub>OUT</sub> = 0, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER                                           | SYMBOL                               | CONDITIONS                                |                  | MIN    | TYP    | MAX    | UNITS             |
|-----------------------------------------------------|--------------------------------------|-------------------------------------------|------------------|--------|--------|--------|-------------------|
| OUTPUT                                              |                                      |                                           |                  |        |        |        |                   |
| Output Voltage                                      | V <sub>OUT</sub>                     | T <sub>A</sub> = +25°C                    | MAX6129A (±0.4%) | 2.4900 | 2.5000 | 2.5100 | V                 |
|                                                     |                                      |                                           | MAX6129B (±1%)   | 2.4750 | 2.5000 | 2.5250 |                   |
| Output Voltage Temperature Coefficient (Notes 2, 3) | TCV <sub>OUT</sub>                   | MAX6129A                                  |                  | 40     |        |        | ppm/°C            |
|                                                     |                                      | MAX6129B                                  |                  | 100    |        |        |                   |
| Line Regulation (Note 4)                            | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | V <sub>IN</sub> = 2.7V to 12.6V           |                  | 30     |        | 230    | μV/V              |
| Load Regulation (Note 4)                            | ΔV <sub>OUT</sub> /ΔI <sub>OUT</sub> | I <sub>OUT</sub> = 0 to 4mA               |                  | 0.1    |        | 0.6    | μV/μA             |
|                                                     |                                      | I <sub>OUT</sub> = 0 to -1mA              |                  | 2.5    |        | 6.2    |                   |
| Dropout Voltage (Notes 4, 6)                        | V <sub>IN</sub> - V <sub>OUT</sub>   | I <sub>OUT</sub> = 0                      |                  | 0.3    |        | 100    | mV                |
|                                                     |                                      | I <sub>OUT</sub> = 4mA                    |                  | 140    |        | 200    |                   |
| Output Short-Circuit Current                        | I <sub>SC</sub>                      |                                           |                  | 60     |        |        | mA                |
| Long-Term Stability                                 | ΔV <sub>OUT</sub> /time              | 1000 hours at +25°C                       |                  | 150    |        |        | ppm               |
| Thermal Hysteresis                                  |                                      | (Note 5)                                  |                  | 140    |        |        | ppm               |
| DYNAMIC CHARACTERISTICS                             |                                      |                                           |                  |        |        |        |                   |
| Noise Voltage                                       | e <sub>OUT</sub>                     | f = 0.1Hz to 10Hz                         |                  | 39     |        |        | μV <sub>P-P</sub> |
|                                                     |                                      | f = 10Hz to 1kHz                          |                  | 137    |        |        | μV <sub>RMS</sub> |
| Ripple Rejection                                    | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | V <sub>IN</sub> = 2.7V ±200mV, f = 120Hz  |                  | 34     |        |        | dB                |
| Turn-On Settling Time                               | t <sub>R</sub>                       | To V <sub>OUT</sub> = 0.1% of final value |                  | 700    |        |        | ms                |
| INPUT                                               |                                      |                                           |                  |        |        |        |                   |
| Supply Voltage Range                                | V <sub>IN</sub>                      |                                           |                  | 2.7    |        | 12.6   | V                 |
| Supply Current                                      | I <sub>IN</sub>                      |                                           |                  |        |        | 5.75   | μA                |
| Change in Supply Current (Note 4)                   | I <sub>IN</sub> /V <sub>IN</sub>     | V <sub>IN</sub> = 2.7V to 12.6V           |                  | 1.0    |        | 1.5    | μA/V              |

# Ultra-Low-Power Series Voltage Reference

## ELECTRICAL CHARACTERISTICS—MAX6129\_30 (V<sub>OUT</sub> = 3.000V)

(V<sub>IN</sub> = 3.2V, I<sub>OUT</sub> = 0, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER                                           | SYMBOL                               | CONDITIONS                                |                  | MIN    | TYP    | MAX    | UNITS             |
|-----------------------------------------------------|--------------------------------------|-------------------------------------------|------------------|--------|--------|--------|-------------------|
| OUTPUT                                              |                                      |                                           |                  |        |        |        |                   |
| Output Voltage                                      | V <sub>OUT</sub>                     | T <sub>A</sub> = +25°C                    | MAX6129A (±0.4%) | 2.9880 | 3.0000 | 3.0120 | V                 |
|                                                     |                                      |                                           | MAX6129B (±1%)   | 2.9700 | 3.0000 | 3.0300 |                   |
| Output Voltage Temperature Coefficient (Notes 2, 3) | TCV <sub>OUT</sub>                   | MAX6129A                                  |                  |        |        | 40     | ppm/°C            |
|                                                     |                                      | MAX6129B                                  |                  |        |        | 100    |                   |
| Line Regulation (Note 4)                            | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | V <sub>IN</sub> = 3.2V to 12.6V           |                  |        | 15     | 250    | μV/V              |
| Load Regulation (Note 4)                            | ΔV <sub>OUT</sub> /ΔI <sub>OUT</sub> | I <sub>OUT</sub> = 0 to 4mA               |                  |        | 0.1    | 0.6    | μV/μA             |
|                                                     |                                      | I <sub>OUT</sub> = 0 to -1mA              |                  |        | 2.4    | 6.5    |                   |
| Dropout Voltage (Notes 4, 6)                        | V <sub>IN</sub> - V <sub>OUT</sub>   | I <sub>OUT</sub> = 0                      |                  |        | 0.2    | 100    | mV                |
|                                                     |                                      | I <sub>OUT</sub> = 4mA                    |                  |        | 140    | 200    |                   |
| Output Short-Circuit Current                        | I <sub>SC</sub>                      |                                           |                  |        | 25     |        | mA                |
| Long-Term Stability                                 | ΔV <sub>OUT</sub> /time              | 1000 hours at +25°C                       |                  |        | 150    |        | ppm               |
| Thermal Hysteresis                                  |                                      | (Note 5)                                  |                  |        | 140    |        | ppm               |
| DYNAMIC CHARACTERISTICS                             |                                      |                                           |                  |        |        |        |                   |
| Noise Voltage                                       | e <sub>OUT</sub>                     | f = 0.1Hz to 10Hz                         |                  |        | 50     |        | μV <sub>P-P</sub> |
|                                                     |                                      | f = 10Hz to 1kHz                          |                  |        | 161    |        | μV <sub>RMS</sub> |
| Ripple Rejection                                    | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | V <sub>IN</sub> = 3.2V ±200mV, f = 120Hz  |                  |        | 37     |        | dB                |
| Turn-On Settling Time                               | t <sub>R</sub>                       | To V <sub>OUT</sub> = 0.1% of final value |                  |        | 775    |        | μs                |
| INPUT                                               |                                      |                                           |                  |        |        |        |                   |
| Supply Voltage Range                                | V <sub>IN</sub>                      |                                           |                  | 3.2    |        | 12.6   | V                 |
| Supply Current                                      | I <sub>IN</sub>                      |                                           |                  |        |        | 6.75   | μA                |
| Change in Supply Current (Note 4)                   | I <sub>IN</sub> /V <sub>IN</sub>     | V <sub>IN</sub> = 3.2V to 12.6V           |                  |        | 1.0    | 1.5    | μA/V              |

# Ultra-Low-Power Series Voltage Reference

MAX6129

## ELECTRICAL CHARACTERISTICS—MAX6129\_33 (V<sub>OUT</sub> = 3.300V)

(V<sub>IN</sub> = 3.5V, I<sub>OUT</sub> = 0, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER                                           | SYMBOL                               | CONDITIONS                                |                  | MIN    | TYP    | MAX    | UNITS  |                   |
|-----------------------------------------------------|--------------------------------------|-------------------------------------------|------------------|--------|--------|--------|--------|-------------------|
| OUTPUT                                              |                                      |                                           |                  |        |        |        |        |                   |
| Output Voltage                                      | V <sub>OUT</sub>                     | T <sub>A</sub> = +25°C                    | MAX6129A (±0.4%) | 3.2868 | 3.3000 | 3.3132 | V      |                   |
|                                                     |                                      |                                           | MAX6129B (±1%)   | 3.2670 | 3.3000 | 3.3330 |        |                   |
| Output Voltage Temperature Coefficient (Notes 2, 3) | TCV <sub>OUT</sub>                   | MAX6129A                                  |                  | 40     |        |        | ppm/°C |                   |
|                                                     |                                      | MAX6129B                                  |                  | 100    |        |        |        |                   |
| Line Regulation (Note 4)                            | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | V <sub>IN</sub> = 3.5V to 12.6V           |                  | 30     |        |        | 270    | μV/V              |
| Load Regulation (Note 4)                            | ΔV <sub>OUT</sub> /ΔI <sub>OUT</sub> | I <sub>OUT</sub> = 0 to 4mA               |                  | 0.1    |        |        | 0.6    | μV/μA             |
|                                                     |                                      | I <sub>OUT</sub> = 0 to -1mA              |                  | 2.4    |        |        | 7      |                   |
| Dropout Voltage (Notes 4, 6)                        | V <sub>IN</sub> - V <sub>OUT</sub>   | I <sub>OUT</sub> = 0                      |                  | 0.2    |        |        | 100    | mV                |
|                                                     |                                      | I <sub>OUT</sub> = 4mA                    |                  | 140    |        |        | 200    |                   |
| Output Short-Circuit Current                        | I <sub>SC</sub>                      |                                           |                  | 25     |        |        |        | mA                |
| Long-Term Stability                                 | ΔV <sub>OUT</sub> /time              | 1000 hours at +25°C                       |                  | 150    |        |        |        | ppm               |
| Thermal Hysteresis                                  |                                      | (Note 5)                                  |                  | 140    |        |        |        | ppm               |
| DYNAMIC CHARACTERISTICS                             |                                      |                                           |                  |        |        |        |        |                   |
| Noise Voltage                                       | e <sub>OUT</sub>                     | f = 0.1Hz to 10Hz                         |                  | 56     |        |        |        | μV <sub>P-P</sub> |
|                                                     |                                      | f = 10Hz to 1kHz                          |                  | 174    |        |        |        | μV <sub>RMS</sub> |
| Ripple Rejection                                    | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | V <sub>IN</sub> = 3.5V ±200mV, f = 120Hz  |                  | 38     |        |        |        | dB                |
| Turn-On Settling Time                               | t <sub>R</sub>                       | To V <sub>OUT</sub> = 0.1% of final value |                  | 1      |        |        |        | ms                |
| INPUT                                               |                                      |                                           |                  |        |        |        |        |                   |
| Supply Voltage Range                                | V <sub>IN</sub>                      |                                           |                  | 3.5    |        |        | 12.6   | V                 |
| Supply Current                                      | I <sub>IN</sub>                      |                                           |                  |        |        |        | 7.25   | μA                |
| Change in Supply Current (Note 4)                   | I <sub>IN</sub> /V <sub>IN</sub>     | V <sub>IN</sub> = 3.5V to 12.6V           |                  | 1.0    |        |        | 1.5    | μA/V              |

# Ultra-Low-Power Series Voltage Reference

## ELECTRICAL CHARACTERISTICS—MAX6129\_41 (V<sub>OUT</sub> = 4.096V)

(V<sub>IN</sub> = 4.3V, I<sub>OUT</sub> = 0, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER                                           | SYMBOL                               | CONDITIONS                                |                  | MIN    | TYP    | MAX    | UNITS             |       |
|-----------------------------------------------------|--------------------------------------|-------------------------------------------|------------------|--------|--------|--------|-------------------|-------|
| OUTPUT                                              |                                      |                                           |                  |        |        |        |                   |       |
| Output Voltage                                      | V <sub>OUT</sub>                     | T <sub>A</sub> = +25°C                    | MAX6129A (±0.4%) | 4.0796 | 4.0960 | 4.1124 | V                 |       |
|                                                     |                                      |                                           | MAX6129B (±1%)   | 4.0550 | 4.0960 | 4.1370 |                   |       |
| Output Voltage Temperature Coefficient (Notes 2, 3) | TCV <sub>OUT</sub>                   | MAX6129A                                  | 40               |        |        |        | ppm/°C            |       |
|                                                     |                                      | MAX6129B                                  | 100              |        |        |        |                   |       |
| Line Regulation (Note 4)                            | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | V <sub>IN</sub> = 4.3V to 12.6V           | 30               |        |        |        | 310               | μV/V  |
| Load Regulation (Note 4)                            | ΔV <sub>OUT</sub> /ΔI <sub>OUT</sub> | I <sub>OUT</sub> = 0 to 4mA               | 0.1              |        |        |        | 0.6               | μV/μA |
|                                                     |                                      | I <sub>OUT</sub> = 0 to -1mA              | 2.5              |        |        |        | 8.5               |       |
| Dropout Voltage (Notes 4, 6)                        | V <sub>IN</sub> - V <sub>OUT</sub>   | I <sub>OUT</sub> = 0                      | 0.18             |        |        |        | 100               | mV    |
|                                                     |                                      | I <sub>OUT</sub> = 4mA                    | 140              |        |        |        | 200               |       |
| Output Short-Circuit Current                        | I <sub>SC</sub>                      |                                           |                  |        | 25     |        | mA                |       |
| Long-Term Stability                                 | ΔV <sub>OUT</sub> /time              | 1000 hours at +25°C                       |                  |        | 150    |        | ppm               |       |
| Thermal Hysteresis                                  |                                      | (Note 5)                                  |                  |        | 140    |        | ppm               |       |
| DYNAMIC CHARACTERISTICS                             |                                      |                                           |                  |        |        |        |                   |       |
| Noise Voltage                                       | e <sub>OUT</sub>                     | f = 0.1Hz to 10Hz                         | 72               |        |        |        | μV <sub>P-P</sub> |       |
|                                                     |                                      | f = 10Hz to 1kHz                          | 210              |        |        |        | μV <sub>RMS</sub> |       |
| Ripple Rejection                                    | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | V <sub>IN</sub> = 4.3V ±200mV, f = 120Hz  |                  |        | 36     |        | dB                |       |
| Turn-On Settling Time                               | t <sub>R</sub>                       | To V <sub>OUT</sub> = 0.1% of final value |                  |        | 1.2    |        | ms                |       |
| INPUT                                               |                                      |                                           |                  |        |        |        |                   |       |
| Supply Voltage Range                                | V <sub>IN</sub>                      |                                           |                  |        | 4.3    | 12.6   | V                 |       |
| Supply Current                                      | I <sub>IN</sub>                      |                                           |                  |        | 8.75   |        | μA                |       |
| Change in Supply Current (Note 4)                   | I <sub>IN</sub> /V <sub>IN</sub>     | V <sub>IN</sub> = 4.3V to 12.6V           |                  |        | 1.0    | 1.5    | μA/V              |       |

# Ultra-Low-Power Series Voltage Reference

MAX6129

## ELECTRICAL CHARACTERISTICS—MAX6129\_50 (V<sub>OUT</sub> = 5.000V)

(V<sub>IN</sub> = 5.2V, I<sub>OUT</sub> = 0, T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub>, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 1)

| PARAMETER                                           | SYMBOL                               | CONDITIONS                                |                  | MIN    | TYP    | MAX    | UNITS             |
|-----------------------------------------------------|--------------------------------------|-------------------------------------------|------------------|--------|--------|--------|-------------------|
| OUTPUT                                              |                                      |                                           |                  |        |        |        |                   |
| Output Voltage                                      | V <sub>OUT</sub>                     | T <sub>A</sub> = +25°C                    | MAX6129A (±0.4%) | 4.9800 | 5.0000 | 5.0200 | V                 |
|                                                     |                                      |                                           | MAX6129B (±1%)   | 4.9500 | 5.0000 | 5.0500 |                   |
| Output Voltage Temperature Coefficient (Notes 2, 3) | TCV <sub>OUT</sub>                   | MAX6129A                                  |                  | 40     |        |        | ppm/°C            |
|                                                     |                                      | MAX6129B                                  |                  | 100    |        |        |                   |
| Line Regulation (Note 4)                            | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | V <sub>IN</sub> = 5.2V to 12.6V           |                  | 34     |        | 375    | μV/V              |
| Load Regulation (Note 4)                            | ΔV <sub>OUT</sub> /ΔI <sub>OUT</sub> | I <sub>OUT</sub> = 0 to 4mA               |                  | 0.3    |        | 0.8    | μV/μA             |
|                                                     |                                      | I <sub>OUT</sub> = 0 to -1mA              |                  | 3.3    |        | 9      |                   |
| Dropout Voltage (Notes 4, 6)                        | V <sub>IN</sub> - V <sub>OUT</sub>   | I <sub>OUT</sub> = 0                      |                  | 0.175  |        | 100    | mV                |
|                                                     |                                      | I <sub>OUT</sub> = 4mA                    |                  | 140    |        | 200    |                   |
| Output Short-Circuit Current                        | I <sub>SC</sub>                      |                                           |                  | 25     |        |        | mA                |
| Long-Term Stability                                 | ΔV <sub>OUT</sub> /time              | 1000 hours at +25°C                       |                  | 150    |        |        | ppm               |
| Thermal Hysteresis                                  |                                      | (Note 5)                                  |                  | 140    |        |        | ppm               |
| DYNAMIC CHARACTERISTICS                             |                                      |                                           |                  |        |        |        |                   |
| Noise Voltage                                       | e <sub>OUT</sub>                     | f = 0.1Hz to 10Hz                         |                  | 90     |        |        | μV <sub>P-P</sub> |
|                                                     |                                      | f = 10Hz to 1kHz                          |                  | 245    |        |        | μV <sub>RMS</sub> |
| Ripple Rejection                                    | ΔV <sub>OUT</sub> /ΔV <sub>IN</sub>  | V <sub>IN</sub> = 5.2V ±200mV, f = 120Hz  |                  | 38     |        |        | dB                |
| Turn-On Settling Time                               | t <sub>R</sub>                       | To V <sub>OUT</sub> = 0.1% of final value |                  | 1.4    |        |        | ms                |
| INPUT                                               |                                      |                                           |                  |        |        |        |                   |
| Supply Voltage Range                                | V <sub>IN</sub>                      |                                           |                  | 5.2    |        | 12.6   | V                 |
| Supply Current                                      | I <sub>IN</sub>                      |                                           |                  |        |        | 10.5   | μA                |
| Change in Supply Current (Note 4)                   | I <sub>IN</sub> /V <sub>IN</sub>     | V <sub>IN</sub> = 5.2V to 12.6V           |                  | 1.0    |        | 1.5    | μA/V              |

**Note 1:** MAX6129 is 100% production tested at T<sub>A</sub> = +25°C and is guaranteed by design for T<sub>A</sub> = T<sub>MIN</sub> to T<sub>MAX</sub> as specified.

**Note 2:** Temperature coefficient is defined by box method: (V<sub>MAX</sub> - V<sub>MIN</sub>)/(ΔT × V<sub>+25°C</sub>).

**Note 3:** Not production tested. Guaranteed by design for both SOT23 and dice.

**Note 4:** Only the typical values apply to MAX6129A sold in die form (max values apply to packaged parts).










**Note 5:** Thermal hysteresis is defined as the change in output voltage at T<sub>A</sub> = +25°C before and after cycling the device from T<sub>MAX</sub> to T<sub>MIN</sub>.

**Note 6:** Dropout voltage is the minimum input voltage at which V<sub>OUT</sub> changes by 0.1% from V<sub>OUT</sub> at rated V<sub>IN</sub> and is guaranteed by Load Regulation Test.

# Ultra-Low-Power Series Voltage Reference

## Typical Operating Characteristics

( $V_{IN} = 2.5V$  for MAX\_EUK21,  $V_{IN} = 3.2V$  for MAX\_EUK30, and  $V_{IN} = 5.2V$  for MAX\_EUK50,  $I_{OUT} = 0$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

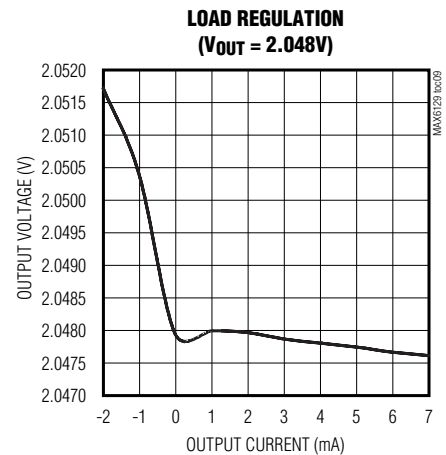
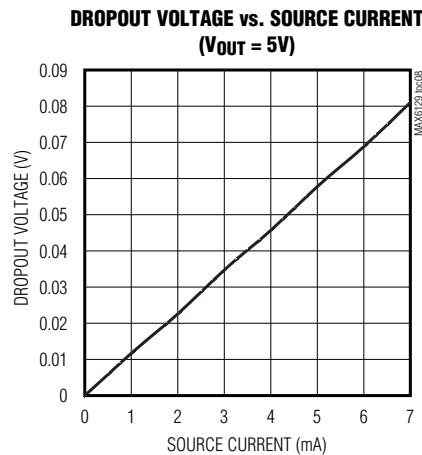
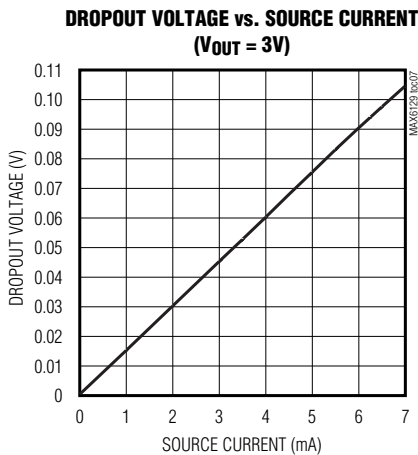
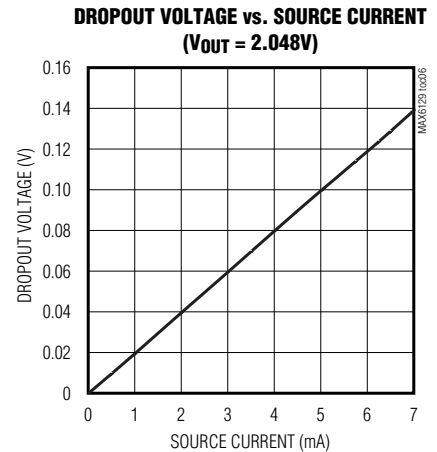
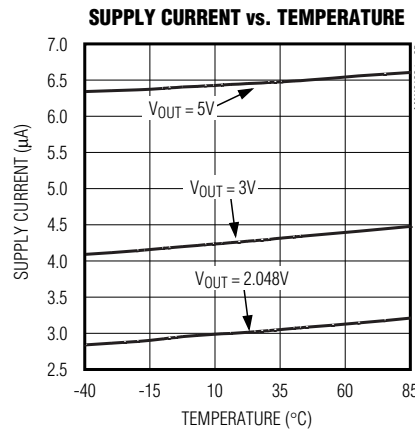
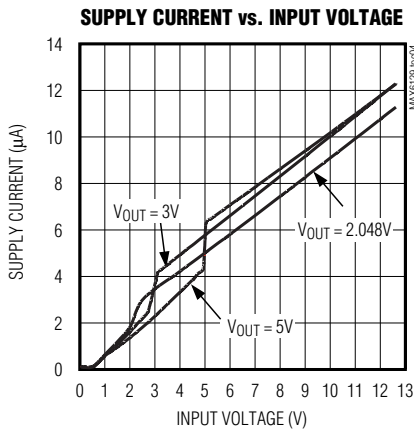
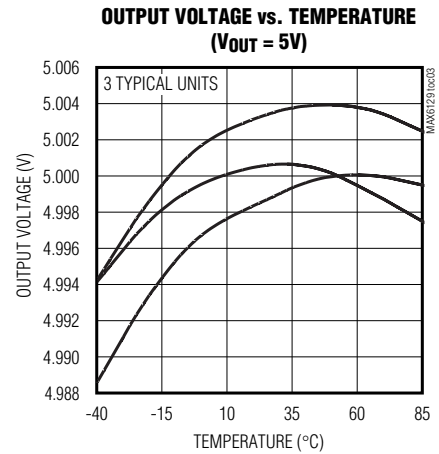
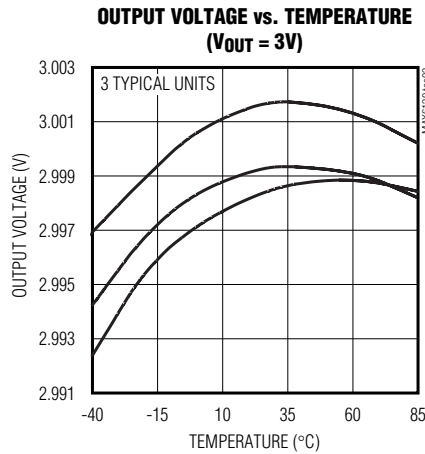
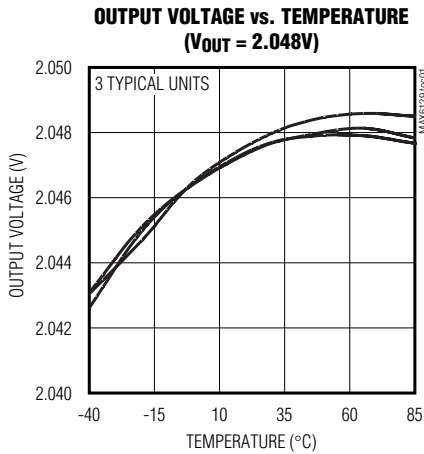


# Ultra-Low-Power Series Voltage Reference

## Typical Operating Characteristics (continued)

( $V_{IN} = 2.5V$  for MAX\_EUK21,  $V_{IN} = 3.2V$  for MAX\_EUK30, and  $V_{IN} = 5.2V$  for MAX\_EUK50,  $I_{OUT} = 0$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

MAX6129

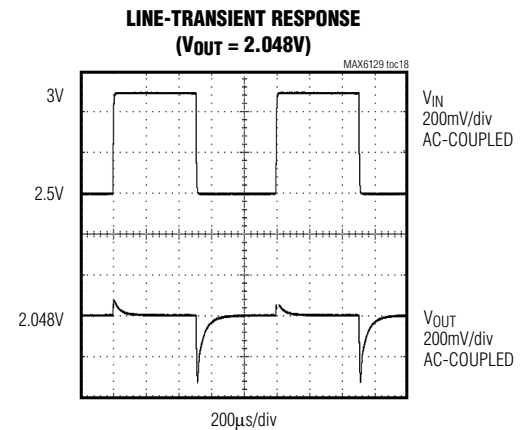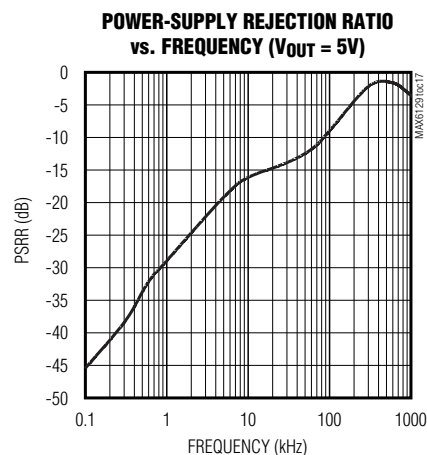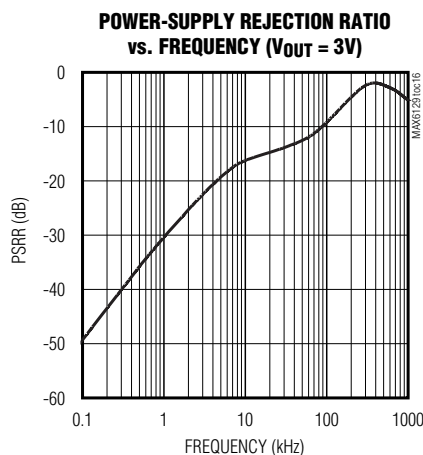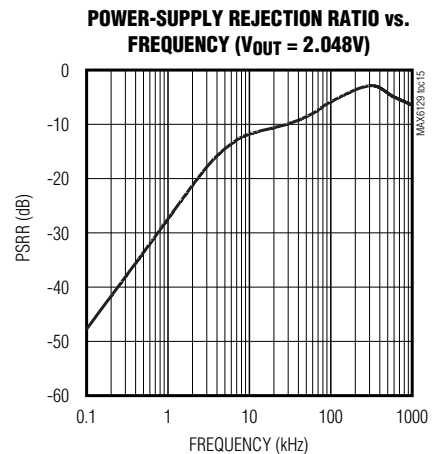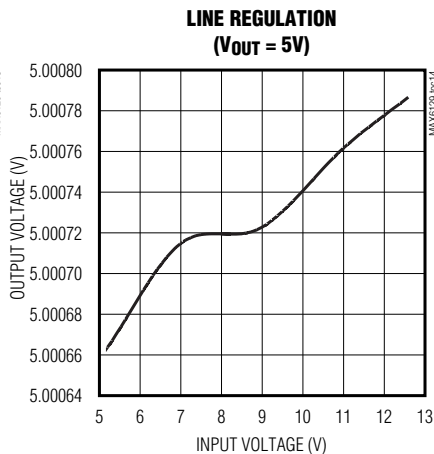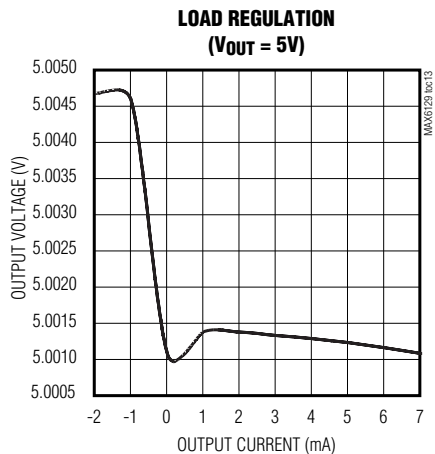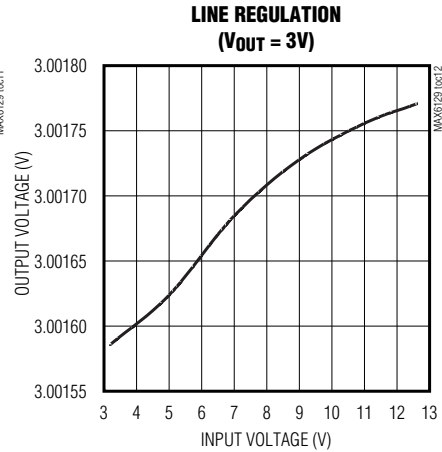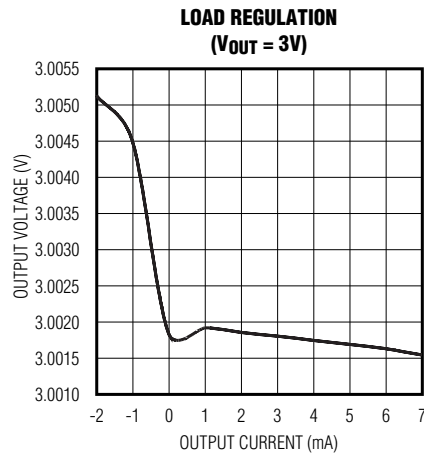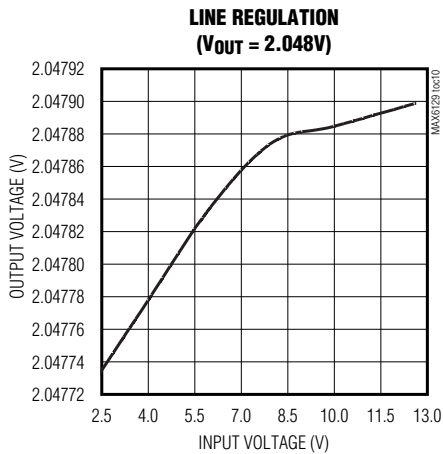




# Ultra-Low-Power Series Voltage Reference


## Typical Operating Characteristics (continued)

( $V_{IN} = 2.5V$  for MAX\_EUK21,  $V_{IN} = 3.2V$  for MAX\_EUK30, and  $V_{IN} = 5.2V$  for MAX\_EUK50,  $I_{OUT} = 0$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)


**LINE-TRANSIENT RESPONSE  
( $V_{OUT} = 3V$ )**

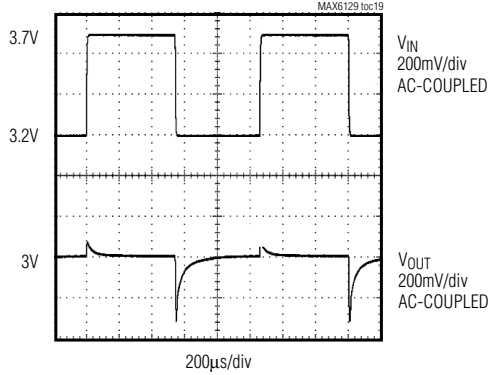


**LINE-TRANSIENT RESPONSE  
( $V_{OUT} = 5V$ )**

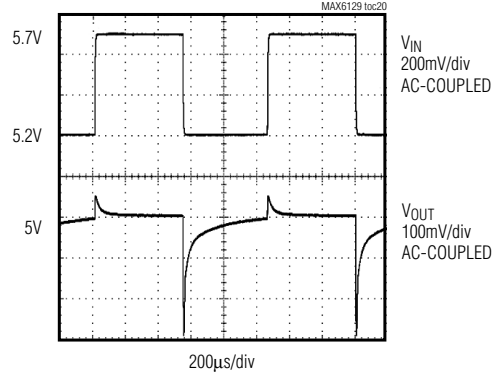


**LOAD-TRANSIENT RESPONSE  
(SOURCING,  $V_{OUT} = 2.048V$ )**

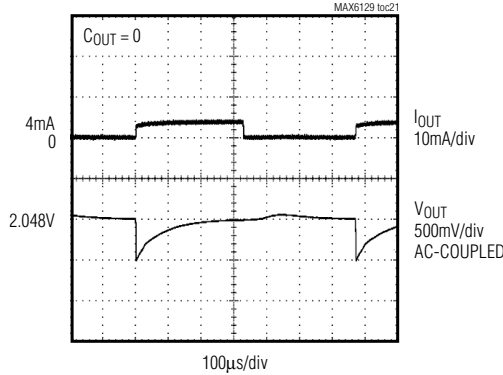


**LOAD-TRANSIENT RESPONSE  
(SINKING,  $V_{OUT} = 2.048V$ )**

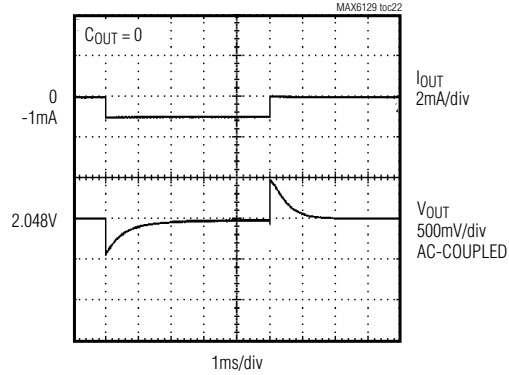

**LOAD-TRANSIENT RESPONSE  
(SOURCING,  $V_{OUT} = 2.048V$ )**

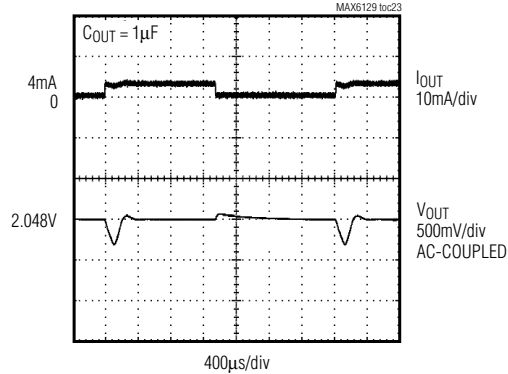

**LOAD-TRANSIENT RESPONSE  
(SINKING,  $V_{OUT} = 2.048V$ )**

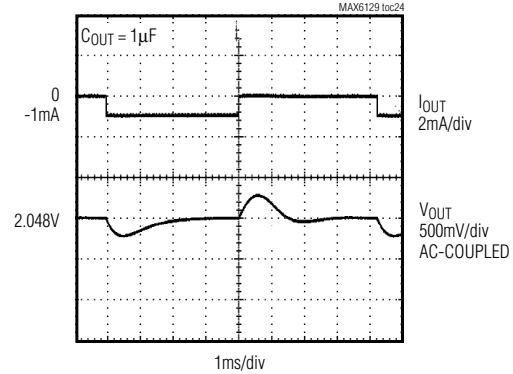


# Ultra-Low-Power Series Voltage Reference

MAX6129


## Typical Operating Characteristics (continued)

( $V_{IN} = 2.5V$  for MAX\_EUK21,  $V_{IN} = 3.2V$  for MAX\_EUK30, and  $V_{IN} = 5.2V$  for MAX\_EUK50,  $I_{OUT} = 0$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)


**LOAD-TRANSIENT RESPONSE  
(SOURCING,  $V_{OUT} = 5V$ )**

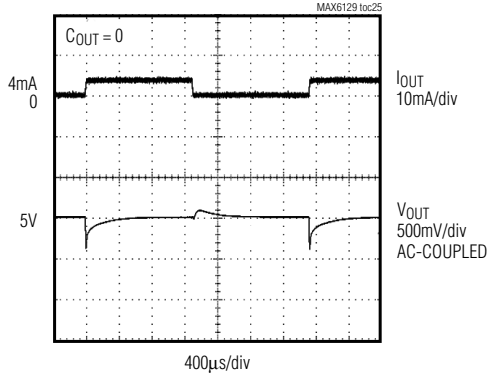


**LOAD-TRANSIENT RESPONSE  
(SINKING,  $V_{OUT} = 5V$ )**

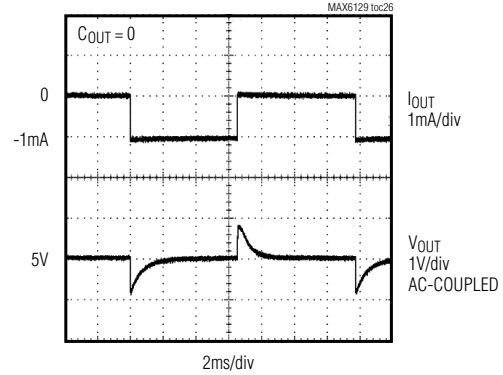


**LOAD-TRANSIENT RESPONSE  
(SOURCING,  $V_{OUT} = 5V$ )**

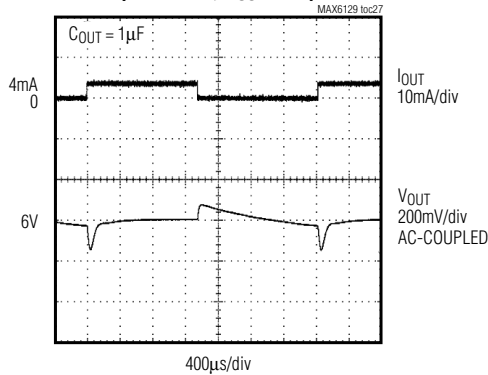


**LOAD-TRANSIENT RESPONSE  
(SINKING,  $V_{OUT} = 5V$ )**

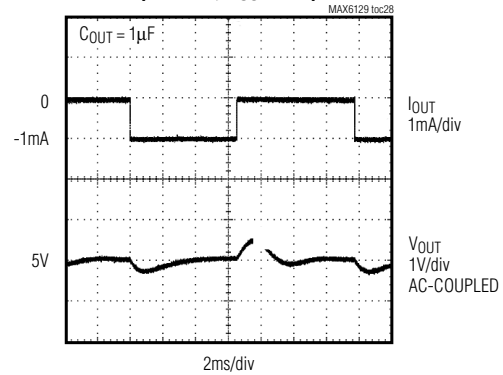

**TURN-ON TRANSIENT  
( $V_{OUT} = 2.048V$ )**

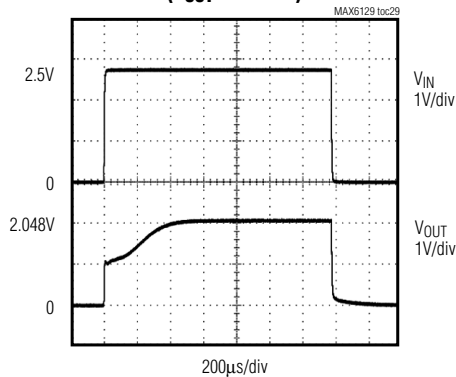

**TURN-ON TRANSIENT  
( $V_{OUT} = 3V$ )**

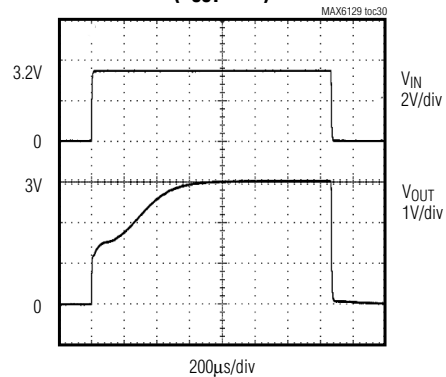


# Ultra-Low-Power Series Voltage Reference


## Typical Operating Characteristics (continued)

( $V_{IN} = 2.5V$  for MAX\_EUK21,  $V_{IN} = 3.2V$  for MAX\_EUK30, and  $V_{IN} = 5.2V$  for MAX\_EUK50,  $I_{OUT} = 0$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)


**TURN-ON TRANSIENT**  
( $V_{OUT} = 5V$ )

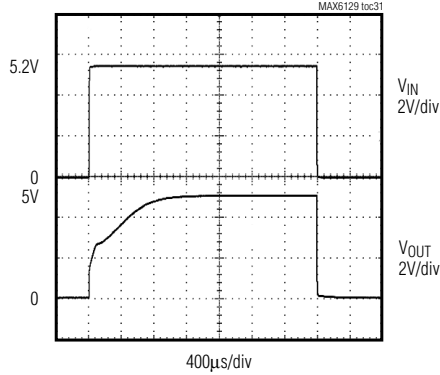


**0.1Hz TO 10Hz OUTPUT NOISE**  
( $V_{OUT} = 2.048V$ )

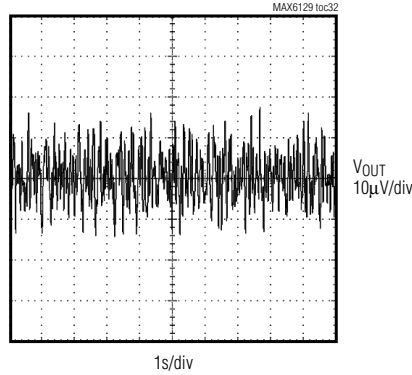


**0.1Hz TO 10Hz OUTPUT NOISE**  
( $V_{OUT} = 3V$ )

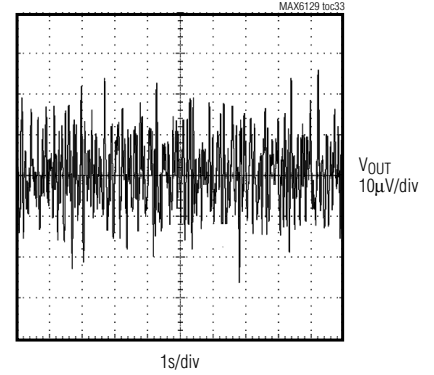


**0.1Hz TO 10Hz OUTPUT NOISE**  
( $V_{OUT} = 5V$ )

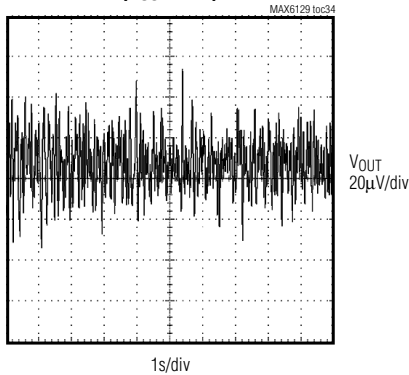


**NOISE vs. FREQUENCY**  
( $V_{OUT} = 2.048V$ )

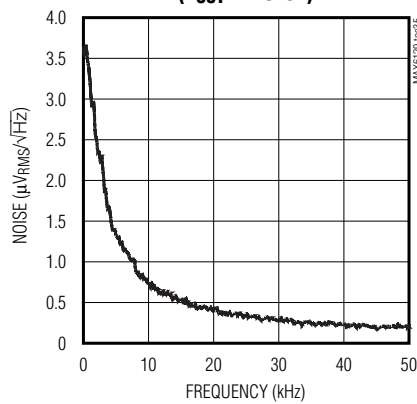

**NOISE vs. FREQUENCY**  
( $V_{OUT} = 3V$ )

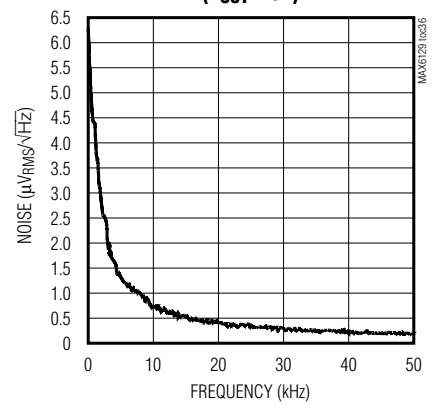

**NOISE vs. FREQUENCY**  
( $V_{OUT} = 5V$ )

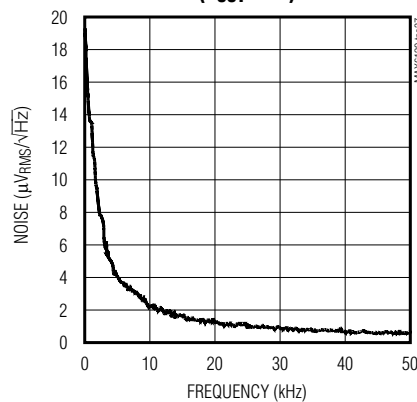

# Ultra-Low-Power Series Voltage Reference

## Pin Description

| PIN  | NAME | FUNCTION                                                      |
|------|------|---------------------------------------------------------------|
| 1    | IN   | Positive Voltage Supply                                       |
| 2    | GND  | Ground                                                        |
| 3, 4 | N.C. | Internally connected. Leave unconnected or connect to ground. |
| 5    | OUT  | Reference Output                                              |

## Applications Information

### Input Bypassing

The MAX6129 does not require an input bypass capacitor. For improved transient performance, bypass the input to ground with a 0.1 $\mu$ F ceramic capacitor. Place the capacitor as close to IN as possible.

### Load Capacitance

The MAX6129 does not require an output capacitor for stability. The MAX6129 is stable driving capacitive loads from 0 to 100pF and 0.1 $\mu$ F to 10 $\mu$ F when sourcing current and from 0 to 0.4 $\mu$ F when sinking current. In applications where the load or the supply can experience step changes, an output capacitor reduces the amount of overshoot (undershoot) and improves the circuit's transient response. Many applications do not require an external capacitor, and the MAX6129 offers a significant advantage in applications where board space is critical.

## Supply Current

The quiescent supply current of the series-mode MAX6129 is very small, 5.25 $\mu$ A (max), and is very stable against changes in the supply voltage with only 1.5 $\mu$ A/V (max) variation with supply voltage. The MAX6129 family draws load current from the input voltage source only when required, so supply current is not wasted and efficiency is maximized at all input voltages. This improved efficiency reduces power dissipation and extends battery life.

## Output Thermal Hysteresis

Output thermal hysteresis is the change of output voltage at  $T_A = +25^\circ\text{C}$  before and after the device is cycled over its entire operating temperature range. Hysteresis is caused by differential package stress appearing across the device.

## Temperature Coefficient vs. Operating Temperature Range for a 1LSB Maximum Error

In a data converter application, the reference voltage of the converter must stay within a certain limit to keep the error in the data converter smaller than the resolution limit through the operating temperature range. Figure 1 shows the maximum allowable reference voltage temperature coefficient to keep the conversion error to less than 1LSB, as a function of the operating temperature range ( $T_{MAX} - T_{MIN}$ ) with the converter resolution as a parameter. The graph assumes the reference-voltage temperature coefficient as the only parameter affecting accuracy.

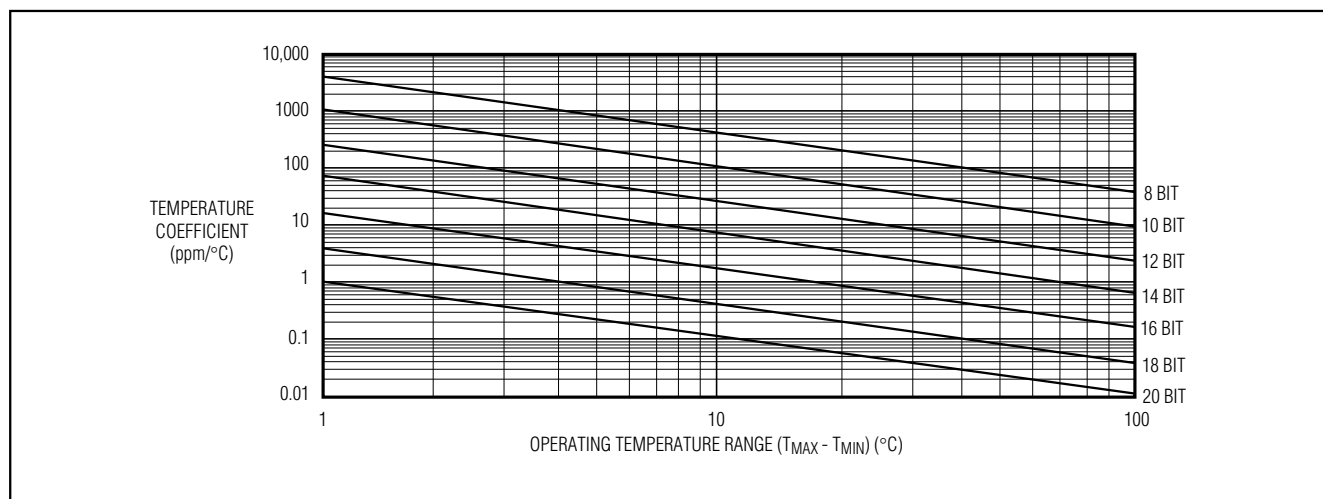


Figure 1. Temperature Coefficient vs. Operating Temperature Range for a 1LSB Maximum Error

# Ultra-Low-Power Series Voltage Reference

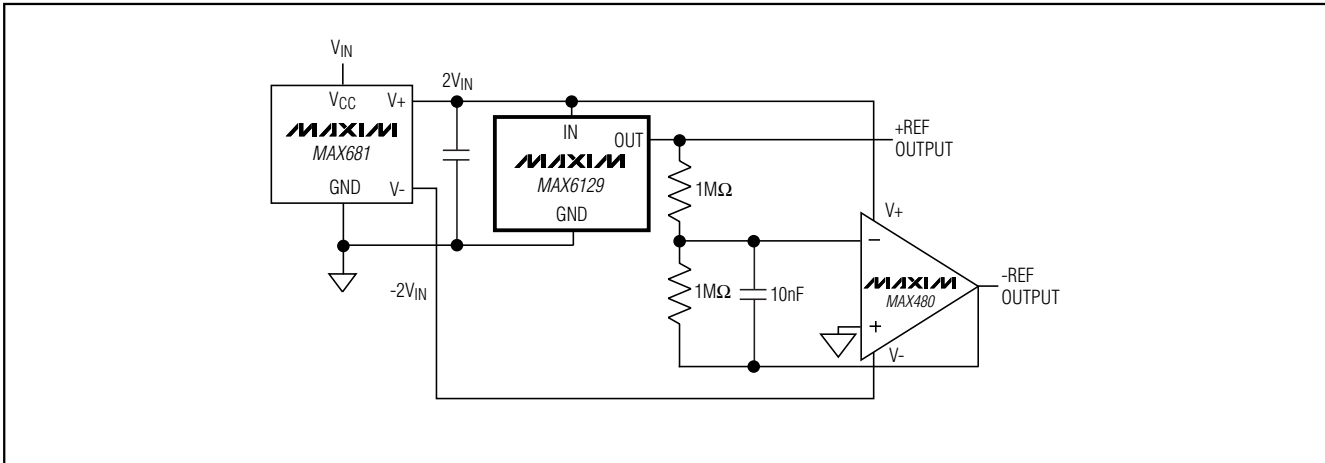


Figure 2. Positive and Negative References from a Single 3V/5V Supply

In reality, the absolute static accuracy of a data converter is dependent on the combination of many parameters such as integral nonlinearity, differential nonlinearity, offset error, gain error, as well as voltage reference changes.

## Turn-On Time

These devices typically turn on and settle to within 0.1% of their final value in less than 1.4ms. The turn-on time increases when heavily loaded and operating close to dropout.

## Positive and Negative Low-Power Voltage Reference

Figure 2 shows a typical method for developing a bipolar reference. The circuit uses a MAX681 voltage doubler/inverter charge-pump converter to power a MAX480, creating a positive as well as a negative reference voltage.

# Ultra-Low-Power Series Voltage Reference


## Selector Guide

**MAX6129**

| PART             | PIN-PACKAGE | OUTPUT VOLTAGE (V) | INITIAL ACCURACY (%) | TEMPERATURE COEFFICIENT (ppm/°C) | TOP MARK |
|------------------|-------------|--------------------|----------------------|----------------------------------|----------|
| MAX6129AEUK21-T  | 5 SOT23-5   | 2.048              | 0.4                  | 40                               | ADRM     |
| MAX6129AC/D21    | Dice        | 2.048              | 0.4                  | 40                               | —        |
| MAX6129BEUK21-T  | 5 SOT23-5   | 2.048              | 1                    | 100                              | ADRN     |
| MAX6129AEUK25-T  | 5 SOT23-5   | 2.500              | 0.4                  | 40                               | ADRO     |
| MAX6129AC/D25    | Dice        | 2.500              | 0.4                  | 40                               | —        |
| MAX6129BEUK25-T* | 5 SOT23-5   | 2.500              | 1                    | 100                              | ADRP     |
| MAX6129AEUK30-T  | 5 SOT23-5   | 3.000              | 0.4                  | 40                               | ADRQ     |
| MAX6129AC/D30    | Dice        | 3.000              | 0.4                  | 40                               | —        |
| MAX6129BEUK30-T  | 5 SOT23-5   | 3.000              | 1                    | 100                              | ADRR     |
| MAX6129AEUK33-T  | 5 SOT23-5   | 3.300              | 0.4                  | 40                               | ADRW     |
| MAX6129AC/D33    | Dice        | 3.300              | 0.4                  | 40                               | —        |
| MAX6129BEUK33-T  | 5 SOT23-5   | 3.300              | 1                    | 100                              | ADRX     |
| MAX6129AEUK41-T  | 5 SOT23-5   | 4.096              | 0.4                  | 40                               | ADRS     |
| MAX6129AC/D41    | Dice        | 4.096              | 0.4                  | 100                              | —        |
| MAX6129BEUK41-T  | 5 SOT23-5   | 4.096              | 1                    | 100                              | ADRT     |
| MAX6129AEUK50-T  | 5 SOT23-5   | 5.000              | 0.4                  | 40                               | ADRU     |
| MAX6129AC/D50    | Dice        | 5.000              | 0.4                  | 40                               | —        |
| MAX6129BEUK50-T  | 5 SOT23-5   | 5.000              | 1                    | 100                              | ADRV     |

\*Future product—contact factory for availability.

## Chip Topography

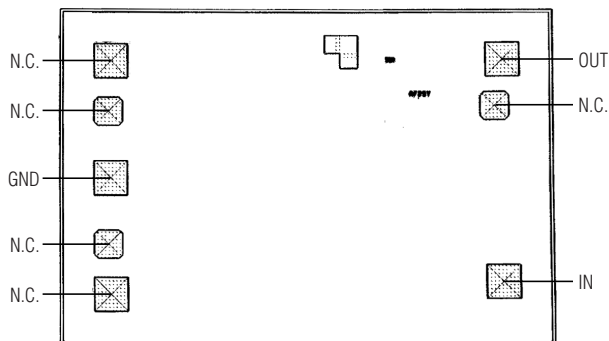




## Chip Information

TRANSISTOR COUNT: 30  
PROCESS: BiCMOS  
SUBSTRATE CONNECTED TO GND

# Ultra-Low-Power Series Voltage Reference

## Package Information

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages).)

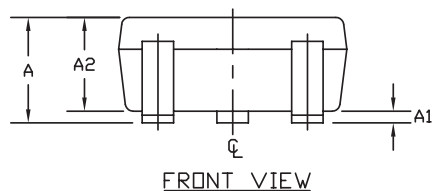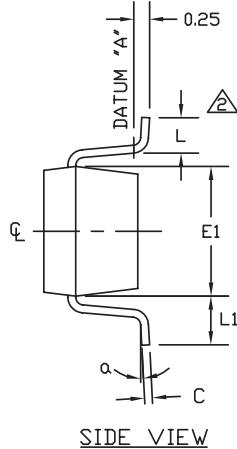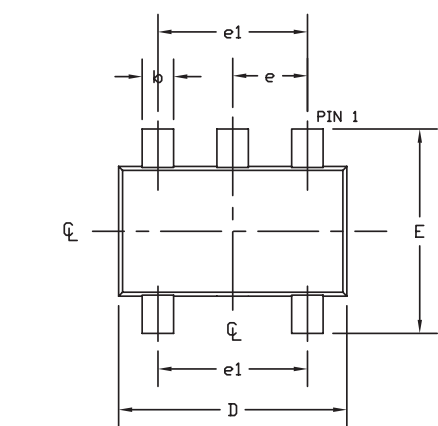

| SYMBOL | MIN  | MAX  |
|--------|------|------|
| A      | 0.90 | 1.45 |
| A1     | 0.00 | 0.15 |
| A2     | 0.90 | 1.30 |
| b      | 0.35 | 0.50 |
| C      | 0.08 | 0.20 |
| D      | 2.80 | 3.00 |
| E      | 2.60 | 3.00 |
| E1     | 1.50 | 1.75 |
| L      | 0.35 | 0.60 |
| L1     | 0.60 | REF  |
| e      | 0.95 | BSC. |
| e1     | 1.90 | BSC. |
| a      | 0°   | 8°   |

- NOTES:
1. ALL DIMENSIONS ARE IN MILLIMETERS.
  2. FOOT LENGTH MEASURED AT INTERCEPT POINT BETWEEN DATUM A & LEAD SURFACE.
  3. PACKAGE OUTLINE EXCLUSIVE OF MOLD FLASH & METAL BURR. MOLD FLASH, PROTRUSION OR METAL BURR SHOULD NOT EXCEED 0.25 MM.
  4. PACKAGE OUTLINE INCLUSIVE OF SOLDER PLATING.
  5. MEETS JEDEC MO178, VARIATION AA.
  6. LEADS TO BE COPLANAR WITHIN 0.10 mm.
  7. SOLDER THICKNESS MEASURED AT FLAT SECTION OF LEAD BETWEEN 0.08mm AND 0.15mm FROM LEAD TIP.

|                                          |                                 |               |
|------------------------------------------|---------------------------------|---------------|
| <b>DALLAS SEMICONDUCTOR</b> <b>MAXIM</b> |                                 |               |
| PROPRIETARY INFORMATION                  |                                 |               |
| TITLE:<br>PACKAGE OUTLINE, SOT-23, 5L    |                                 |               |
| APPROVAL                                 | DOCUMENT CONTROL NO.<br>21-0057 | REV.<br>E 1/1 |

SOT-23 5L EPS

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

16 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**

© 2005 Maxim Integrated Products Printed USA **MAXIM** is a registered trademark of Maxim Integrated Products, Inc.