

CAPACITANCE AND RATED VOLTAGE RANGE (LETTER DENOTES CASE SIZE)

Capacitance		Rated Voltage DC to 85°C / 0.66DC to 105°C							
µF	Code	4V (G)	6.3V (J)	10V (A)	16V (C)	20V (D)	25V (E)	35V (V)	50V (T)
1.0	105								N(1500)
4.7	475						N(500)	L(300)/T(200)	
6.8	685				O(500)				
10	106			O(500)	O(500)		K(350)/S(350)	T(200)	
15	156		O(500)	O(500)					
22	226	O(500)	O(500)				T(200)		
33	336				L(200)/T(200)		T(250)		
47	476		M(500)		L(250)/T(150,200)		X(100)	X(100,150)	
68	686								
100	107		K(200,250) L(200)/S(250)				3(70)/4(100)	3(200)/4(100)	
150	157		L(200) S(250)/T(200)		X(100)		4(70)		
220	227		H(170) T(200)		4(70)	4(100)	4(100)		
330	337				4(70)	4(100)			
470	477		X(50)		4(100)				
1000	108		X(200)/3(100) 4(55)						
1500	158		4(55)						

Released ratings, (ESR ratings in mOhms in parentheses)

Engineering samples - please contact AVX

Note: Voltage ratings are minimum values. AVX reserves the right to supply higher voltage ratings in the same case size, to the same reliability standards.

RATINGS & PART NUMBER REFERENCE

AVX Part No.	Case Size	Cap (µF)	Rated Voltage (V)	Maximum Operating Temperature (°C)	DCL Max. (µA)	DF Max. (%)	ESR Max. @ 100kHz (mΩ)	100kHz RMS Current (mA)			Product Category	MSL
								45°C	85°C	105°C		
4 Volt @ 85°C												
TCNO226M004#0500	O	22	4	105	8.8	10	500	400	300	200	3	3
6.3 Volt @ 85°C												
TCNO156M006#0500	O	15	6.3	105	9	10	500	400	300	200	3	3
TCNO226M006#0500	O	22	6.3	105	13.2	10	500	400	300	200	3	3
TCNM476M006#0500	M	47	6.3	105	28.2	10	500	400	300	200	3	3
TCNK107M006#0200	K	100	6.3	105	60	10	200	700	500	300	3	5
TCNK107M006#0250	K	100	6.3	105	60	10	250	600	400	300	3	5
TCNL107M006#0200	L	100	6.3	105	60	10	200	700	500	300	3	5
TCNS107M006#0250	S	100	6.3	105	60	10	250	600	400	300	3	3
TCNL157M006#0200	L	150	6.3	105	90	10	200	700	500	300	3	5
TCNS157M006#0250	S	150	6.3	85	90	10	250	600	400	—	5	3
TCNT157M006#0200	T	150	6.3	105	90	10	200	700	500	300	3	4
TCNH227M006#0170	H	220	6.3	105	132	10	170	800	600	400	3	4
TCNT227M006#0200	T	220	6.3	85	132	10	200	700	500	—	5	4
TCNX477M006#0050	X	470	6.3	85	282	10	50	1900	1300	—	5	5
TCNX108M006#0200	X	1000	6.3	85	600	30	200	900	600	—	5	5
TCN3108M006#0100	3	1000	6.3	105	600	20	100	1200	840	480	3	5
TCN4108M006#0055	4	1000	6.3	85	600	20	55	1860	1302	—	5	4
TCN4158M006#0055	4	1500	6.3	85	900	20	55	1860	1302	—	5	4
10 Volt @ 85°C												
TCNO106M010#0500	O	10	10	105	10	10	500	400	300	200	3	3
TCNO156M010#0500	O	15	10	105	15	10	500	400	300	200	3	3
16 Volt @ 85°C												
TCNO685M016#0500	O	6.8	16	105	10.9	10	500	400	300	200	3	3
TCNO106M016#0500	O	10	16	105	16	10	500	400	300	200	3	3
TCNL336M016#0200	L	33	16	85	52.8	6	200	700	500	—	5	5
TCNT336M016#0200	T	33	16	85	52.8	6	200	700	500	300	3	4

RATINGS & PART NUMBER REFERENCE

AVX Part No.	Case Size	Cap (μF)	Rated Voltage (V)	Maximum Operating Temperature (°C)	DCL Max. (μA)	DF Max. (%)	ESR Max. @ 100kHz (mΩ)	100kHz RMS Current (mA)			Product Category	MSL
								45°C	85°C	105°C		
TCNL476M016#0250	L	47	16	85	75.2	6	250	600	400	—	5	5
TCNT476M016#0150	T	47	16	85	75.2	6	150	800	600	400	3	4
TCNT476M016#0200	T	47	16	85	75.2	6	200	700	500	300	3	4
TCNX157M016#0100	X	150	16	85	240	6	100	1300	900	—	5	5
TCN4227M016#0070	4	220	16	105	352	20	70	1650	1155	660	2	4
TCN4337M016#0070	4	330	16	105	528	20	70	1650	1155	660	3	4
TCN4477M016#0100	4	470	16	85	752	20	100	1380	966	—	5	4
20 Volt @ 85°C												
TCN4227M020#0100	4	220	20	85	440	10	100	1380	966	—	5	4
TCN4337M020#0100	4	330	20	85	660	20	100	1380	966	—	5	4
25 Volt @ 85°C												
TCNN475M025#0500	N	4.7	25	105	11.8	10	500	400	300	200	3	3
TCNK106M025#0350	K	10	25	105	25	10	350	500	400	200	3	5
TCNS106M025#0350	S	10	25	105	25	10	350	500	400	200	3	5
TCNT226M025#0200	T	22	25	105	55	6	200	700	500	300	3	4
TCNT336M025#0250	T	33	25	105	82.5	10	250	600	400	300	3	4
TCNX476M025#0100	X	47	25	105	117.5	6	100	1300	900	600	2	5
TCN3107M025#0070	3	100	25	105	250	6	70	1440	1008	576	2	5
TCN4107M025#0100	4	100	25	105	250	6	100	1380	966	552	2	4
TCN4157M025#0070	4	150	25	105	375	6	70	1650	1155	660	2	4
TCN4227M025#0100	4	220	25	105	550	10	100	1380	966	552	3	4
35 Volt @ 85°C												
TCNL475M035#0300	L	4.7	35	105	16.5	6	300	600	400	300	2	5
TCNT475M035#0200	T	4.7	35	105	16.5	10	200	700	500	300	3	4
TCNT106M035#0200	T	10	35	105	35	10	200	700	500	300	3	4
TCNX476M035#0100	X	47	35	105	164.5	10	100	1300	900	600	3	5
TCNX476M035#0150	X	47	35	105	164.5	10	150	1100	800	500	3	5
TCN3107M035#0200	3	100	35	85	350	10	200	850	595	—	5	5
TCN4107M035#0100	4	100	35	105	350	10	100	1380	966	552	3	4
50 Volt @ 85°C												
TCNN105M050#1500	N	1	50	105	5	10	1500	200	100	100	3	3

Moisture Sensitivity Level (MSL) is defined according to J-STD-020.

All technical data relates to an ambient temperature of +25°C. Capacitance and DF are measured at 120Hz, 0.5RMS with DC bias of 2.2 volts. DCL is measured at rated voltage after 5 minutes.

ESR allowed to move up to 1.25 times catalog limit post mounting.


For typical weight and composition see page 273.

NOTE: AVX reserves the right to supply higher voltage ratings in the same case size to the same reliability standards.


RECOMMENDED DERATING FACTOR

Voltage and temperature derating as percentage of Vr


Product Category 2

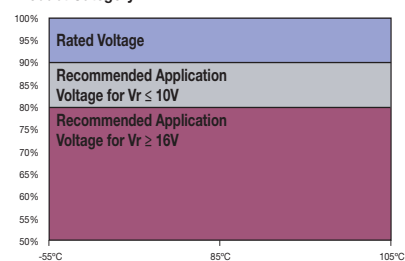

Product Category 3

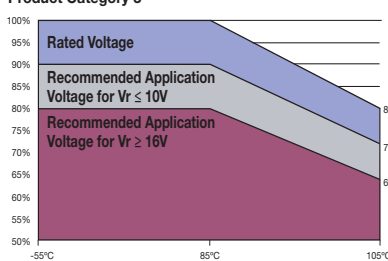

Product Category 5

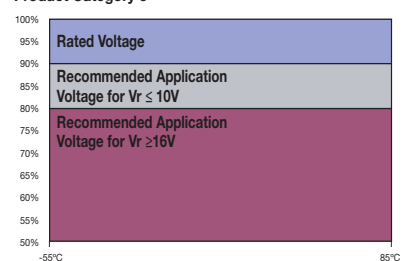

PRODUCT CATEGORY 2, 3 (TEMPERATURE RANGE -55°C TO +105°C)

TEST	Condition			Characteristics							
Endurance	Apply rated voltage (Ur) at 85°C for 2000 hours through a circuit impedance of ≤0.1Ω/V (all CATEGORIES). And / or apply rated voltage (Ur) (CATEGORY 2) or 0.8x rated voltage (CATEGORY 3) at 105°C for 2000 hours through a circuit impedance of ≤0.1Ω/V. Always stabilize at room temperature for 1-2 hours before measuring.			Visual examination	no visible damage						
				DCL	1.25 x initial limit						
				ΔC/C	within ±20% of initial value						
				DF	1.5 x initial limit						
				ESR	2 x initial limit						
Storage Life	Store at 105°C, no voltage applied, for 2000 hours. Stabilize at room temperature for 1-2 hours before measuring.			Visual examination	no visible damage						
				DCL (V _R ≤ 75V)	1.25 x initial limit						
				DCL (V _R > 75V)	2 x initial limit						
				ΔC/C	within ±20% of initial value						
				DF	1.5 x initial limit						
Humidity	Store at 65°C and 95% relative humidity for 500 hours, with no applied voltage. Stabilize at room temperature and humidity for 1-2 hours before measuring.			Visual examination	no visible damage						
				DCL	3 x initial limit						
				ΔC/C	within +30/-20% of initial value						
				DF	1.5 x initial limit						
				ESR	2 x initial limit						
Temperature Stability	Step	Temperature°C	Duration(min)		+20°C	-55°C	+20°C	+85°C	+105°C	+20°C	
	1	+20	15								
	2	-55	15	DCL	IL*	n/a	IL*	10 x IL*	12.5 x IL*	IL*	
	3	+20	15	ΔC/C	n/a	+0/-20%	±5%	+20/-0%	+30/-0%	±5%	
	4	+85	15	DF	IL*	1.5 x IL*	IL*	1.5 x IL*	2 x IL*	IL*	
	5	+105	15								
	6	+20	15								
Surge Voltage	Apply 1.3x rated voltage (Ur) at 105°C for CATEGORY 2, or apply 1.3x 0.8x rated voltage (Ur) at 105°C for CATEGORY 3 for 1000 cycles of duration 6 min (30 sec charge, 5 min 30 sec discharge) through a charge / discharge resistance of 1000Ω			Visual examination	no visible damage						
				DCL	initial limit						
				ΔC/C	within +10/-20% of initial value for Vr ≤ 10V within +20/-30% of initial value for Vr ≥ 16V						
				DF	1.25 x initial limit						
Mechanical Shock	MIL-STD-202, Method 213, Condition C			Visual examination	no visible damage						
				DCL	initial limit						
				ΔC/C	within ±5% of initial value						
				DF	initial limit						
				ESR	initial limit						
Vibration	MIL-STD-202, Method 204, Condition D			Visual examination	no visible damage						
				DCL	initial limit						
				ΔC/C	within ±5% of initial value						
				DF	initial limit						
				ESR	initial limit						

*Initial Limit

Initial measurement max. 1hr after the removal from dry pack or after pretreatment at 85°C for 24 hours.

PRODUCT CATEGORY 5 (TEMPERATURE RANGE -55°C TO +85°C)

TEST	Condition	Characteristics					
Endurance	Apply rated voltage (Ur) at 85°C for 2000 hours through a circuit impedance of $\leq 0.1\Omega/V$. Stabilize at room temperature for 1-2 hours before measuring.	Visual examination	no visible damage				
		DCL	1.25 x initial limit				
		$\Delta C/C$	within $\pm 20\%$ of initial value				
		DF	1.5 x initial limit				
		ESR	2 x initial limit				
Storage Life	Store at 85°C, no voltage applied, for 2000 hours. Stabilize at room temperature for 1-2 hours before measuring.	Visual examination	no visible damage				
		DCL	1.25 x initial limit				
		$\Delta C/C$	within $\pm 20\%$ of initial value				
		DF	1.5 x initial limit				
		ESR	2 x initial limit				
Humidity	Store at 65°C and 95% relative humidity for 500 hours, with no applied voltage. Stabilize at room temperature and humidity for 1-2 hours before measuring.	Visual examination	no visible damage				
		DCL	5 x initial limit				
		$\Delta C/C$	within +40/-20% of initial value				
		DF	1.5 x initial limit				
		ESR	2 x initial limit				
Temperature Stability	Step	Temperature°C	Duration(min)				
	1	+20	15				
	2	-55	15				
	3	+20	15				
	4	+85	15				
	5	+20	15				
Surge Voltage	Apply 1.3x rated voltage (Ur) at 85°C for 1000 cycles of duration 6 min (30 sec charge, 5 min 30 sec discharge) through a charge / discharge resistance of 1000 Ω	Visual examination	no visible damage				
		DCL	initial limit				
		$\Delta C/C$	within +10/-20% of initial value for Vr $\leq$ 10V within +20/-30% of initial value for Vr $\geq$ 16V				
		DF	1.25 x initial limit				
Mechanical Shock	MIL-STD-202, Method 213, Condition C	Visual examination	no visible damage				
		DCL	initial limit				
		$\Delta C/C$	within $\pm 5\%$ of initial value				
		DF	initial limit				
		ESR	initial limit				
Vibration	MIL-STD-202, Method 204, Condition D	Visual examination	no visible damage				
		DCL	initial limit				
		$\Delta C/C$	within $\pm 5\%$ of initial value				
		DF	initial limit				
		ESR	initial limit				

*Initial Limit

Initial measurement max. 1hr after the removal from dry pack or after pretreatment at 85°C for 24 hours.