


Electrical Characteristics

RATING	(Conditions)	SYMBOL	VALUE	UNITS
Maximum Instantaneous Forward Voltage	($I_F = 8$ Amps, $T_C = + 25^\circ\text{C}$)	V_F	0.51	Volts
	($I_F = 8$ Amps, $T_C = +125^\circ\text{C}$)	V_F	0.41	
Maximum Instantaneous Reverse Current	(Rated Vdc, $T_C = + 25^\circ\text{C}$)	I_R	1.40	mA
	(Rated Vdc, $T_C = + 125^\circ\text{C}$)	I_R	35.0	

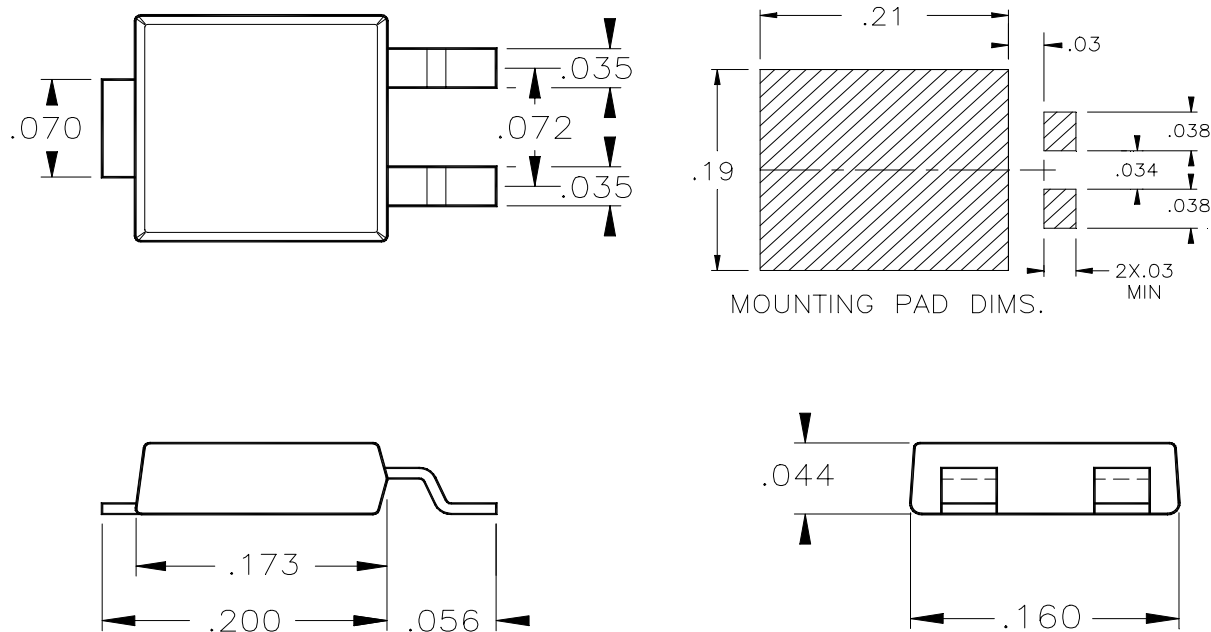

MOUNTING PAD DIMS.

DIMENSIONS ARE NOMINAL INCHES

MECHANICAL SPECIFICATIONS