
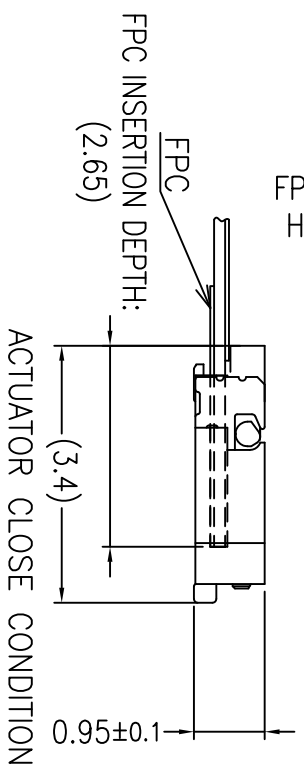
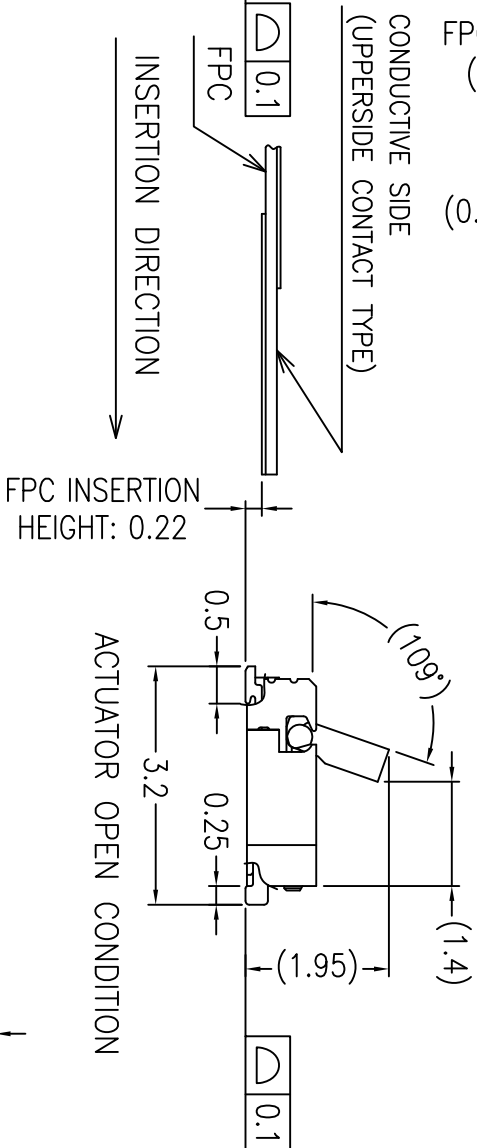
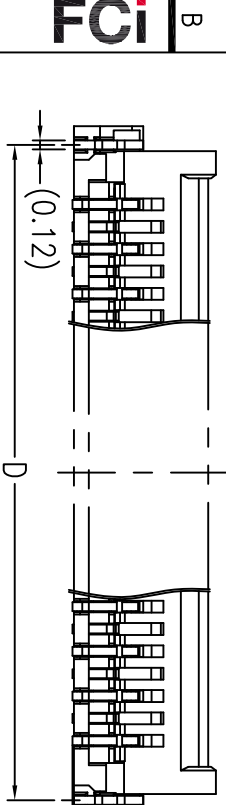
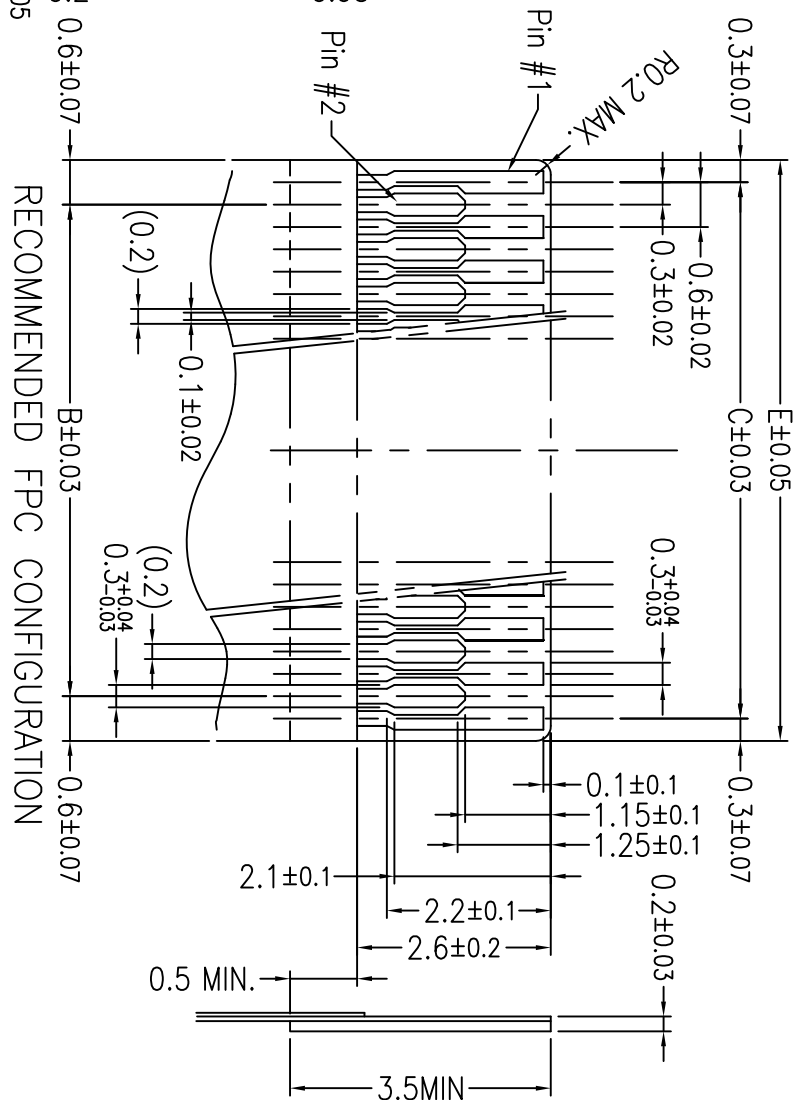
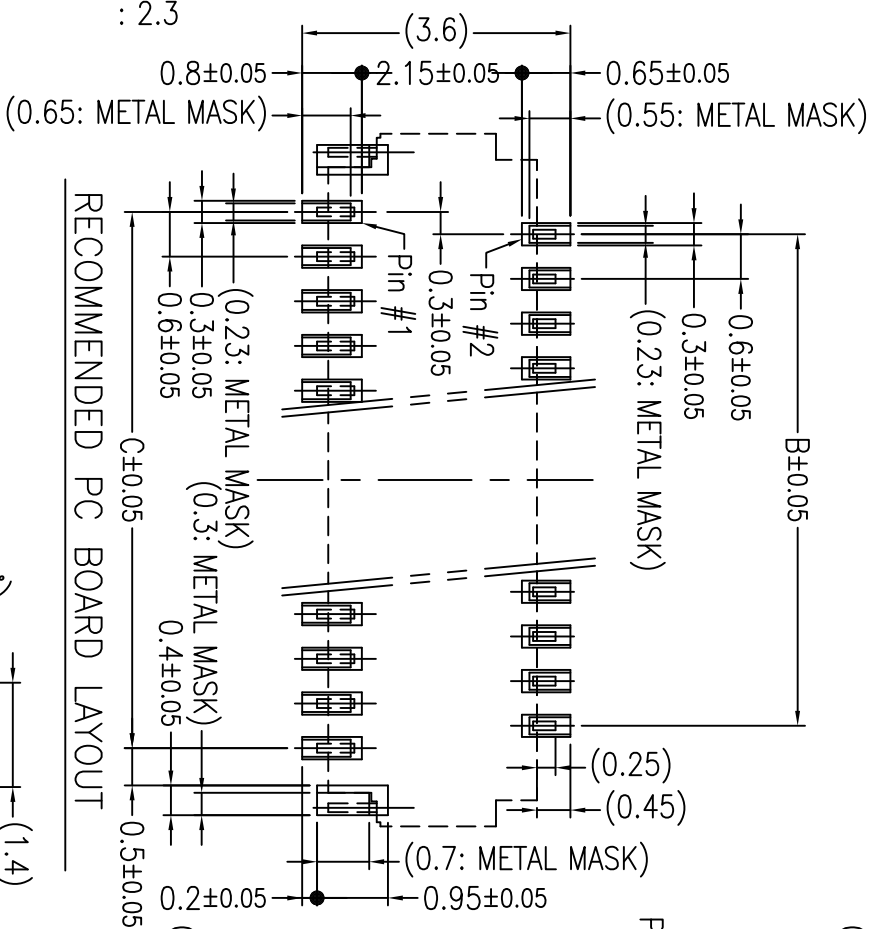


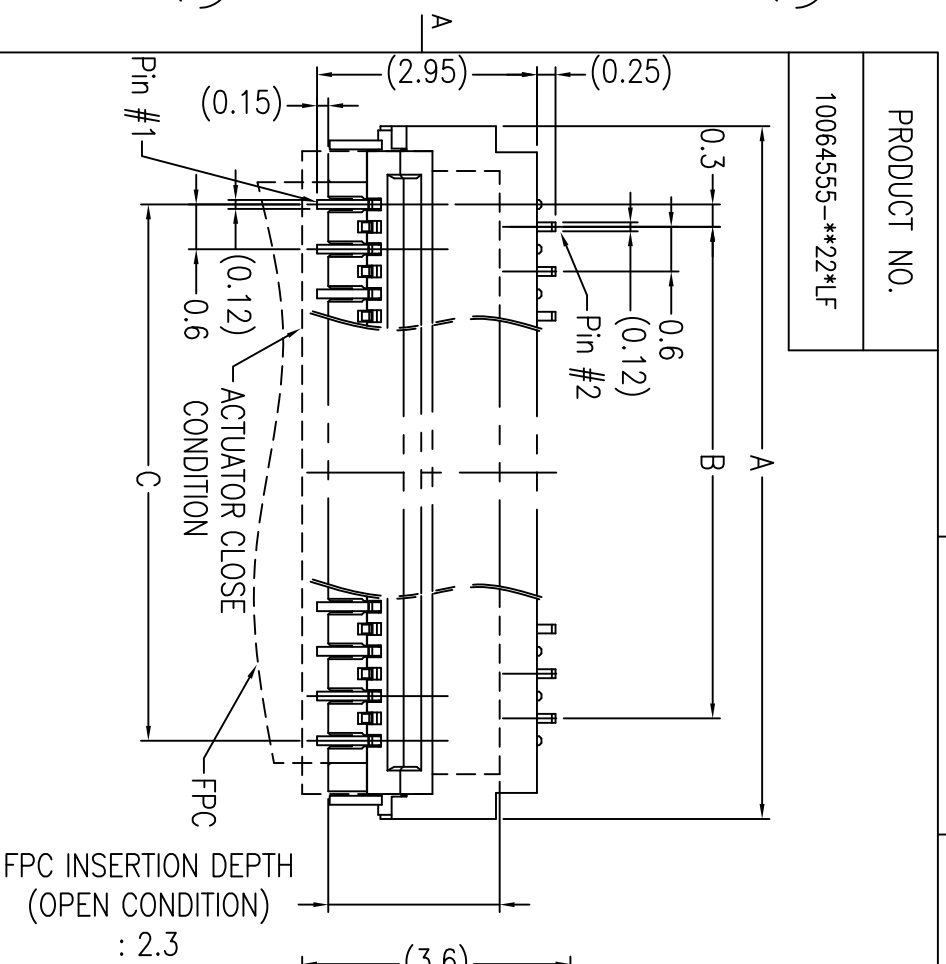

NOTE
1.MATERIAL

- 1)HOUSING:THERMOPLASTIC RESIN,UL94V-0, BLACK
- 2)ACTUATOR:THERMOPLASTIC RESIN,UL94V-0, BEIGE
- 3)CONTACT:COPPER ALLOY
- 4)FIXING TAB: COPPER ALLOY

2. FINISH

- 1) CONTACT: ALL OVER Ni, (CONTACT AREA) Au FLASH, (SOLDER TAIL AREA) Au FLASH.
- 2) FIXING TAB: ALL OVER Ni, Sn PLATING 1.5~3.5 μ m
3. CO-PLANARITY: 0.1 MAX.
4. THICKNESS OF A METAL MASK: 0.1mm

5.FPC

- 1)ADHESIVE METHOD OF SUPPORTING TAPE SHALL BE HEAT CRIMPING METHOD AND THERMOSETTING ADHESIVE MATERIAL SHALL BE USED.

6. PRODUCT

- 1)RECOMMENDED PCB LAYOUT and FPC ARE THE SAME AS 10061122 Series(YLL-DOWN CONTACT TYPE).
2.OTHER

7. OTHER

This product meets European Union Directives and other country regulations as described in GS-47-0004.

10064555-41221LF	14.1	11.4	12.0	13.6	12.6
10064555-39221LF	13.5	10.8	11.4	13.0	12.0
10064555-37221LF	12.9	10.2	10.8	12.4	11.4
10064555-33221LF	11.7	9	9.6	11.2	10.2
10064555-31221LF	11.1	8.4	9	10.6	9.6
10064555-27221LF	9.9	7.2	7.8	9.4	8.4
10064555-25221LF	9.3	6.6	7.2	8.8	7.8
10064555-23221LF	8.7	6	6.6	8.2	7.2
10064555-21221LF	8.1	5.4	6.0	7.6	6.6
10064555-15222HLF	6.3	3.6	4.2	5.8	4.8

mat'l. code			surface			tolerance			projection			product family		
SEE__TABLE			ISO 1302			ISO 406 ISO 1101						FFC-FPC SYSTEMS		
ltr	ecn no	dr	date			tolerances unless otherwise specified						title		
G	ECN-U-33301	Y.K	2019-04-19			angles			MM			0.3mm PITCH CONNECTOR FOR FPC		
						linear			0.XX/±0.3			YLL-U Series		
						0°±3°			0.XXX/±0.3			scale 10:1		
						dr			Y.KAMEDA			dwg no		
						engr			Y.KAMEDA			sheet 3 of 4		
						chr			H.SUZUKI			10064555		
						appd			N.SASAME			A		
sheet			revision									type		
index			sheet									Product Customer Drawing		

