IM - C Relay (Continued)

Coil Data (continued)

Coil versions, bistable 1 coil

Coil code	Rated voltage VDC	Set voltage VDC	Reset Voltage VDC	Coil resistance Ω±10%	Rated coil power mW
41	3	2.25	-2.25	90	100

Coil operating range, bistable 1 coil

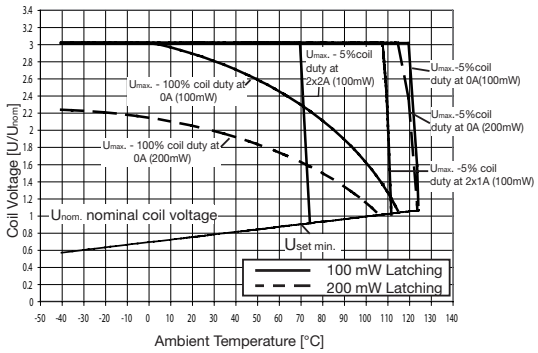

All figures are given for coil without pre-energization, at ambient temperature +23°C

Insulation	standard*	C*
	standard version	high dielectric version
Initial dielectric strength		
between open contacts	1000V_{rms}	1600V_{rms}
between contact and coil	1800V_{rms}	2200V_{rms}
between adjacent contacts		
Initial surge withstand voltage		
between open contacts	1500V	2200V
between contact and coil	2500V	3000V
Initial insulation resistance		
between insulated elements	>10^9Ω	>10^9Ω
Capacitance		
between open contacts	max. 1pF	
between contact and coil	max. 2pF	
between adjacent contacts	max. 2pF	

*this relay contains SF6 (Sulfur hexafluoride, CAS number: 2551-62-4) for dielectric strength enhancement, SF6 is hermetically sealed in relay without leaks to air during normal application as recommended per the applicable product specification. It is clarified that the usage of SF6 in mini signal relay is not prohibited by related regulations. Please contact TE local sales or field engineer for further information and detailed material declaration.

RF Data

Cross talk at 100MHz/900MHz	-37.0dB/-18.8dB
Insertion loss at 100MHz/900MHz	0.03dB/0.33dB
Voltage standing wave ratio (VSWR) at 100MHz/900MHz	1.06/1.49

Other Data

Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customersupport/rohssupportcenter	
Ambient temperature	-40°C to +85°C
Thermal resistance	<150K/W
Category of environmental protection	
IEC 61810	RT V - hermetically sealed
Degree of protection	
IEC 60529	IP 67, immersion cleanable
Vibration resistance (functional)	20g, 10 to 500Hz
Shock resistance (functional), half sinus 11ms	50g
Shock resistance (destructive), half sinus 0.5ms	500g
Weight	max. 0.75g

Other Data (continued)

Resistance to soldering heat THT	Peak Value
IEC 60068-2-20	265°C/10s
Resistance to soldering heat SMT	
IEC 60068-2-58	265°C/10s
Moisture sensitive level, JEDEC J-Std-020D related only to SMT relays packed in orginal dry-packs	MSL3
Ultrasonic cleaning	not recommended
Packaging/unit	
THT version	tube/50pcs., box/1000 pcs.
SMT version	reel/1000 pcs., box/1000 or 5000 pcs.

Terminal assignment

TOP view on relay

Monostable version



Bistable version, 1 coil reset condition



Contacts are shown in reset condition. Contact position might change during transportation and must be reset before use.

Dimensions

THT version

Standard version



SMT version

Gull wings



PCB layout

TOP view on component side of PCB

THT mounting holes



SMT - solder pads



09-2017, Rev. 0917
www.te.com
© 2015 Tyco Electronics Corporation,
a TE Connectivity Ltd. company

Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.

Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at http://relays.te.com/definitions

Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.

Downloaded from Arrow.com.

IM - C Relay (Continued)

Processing

Recommended soldering conditions

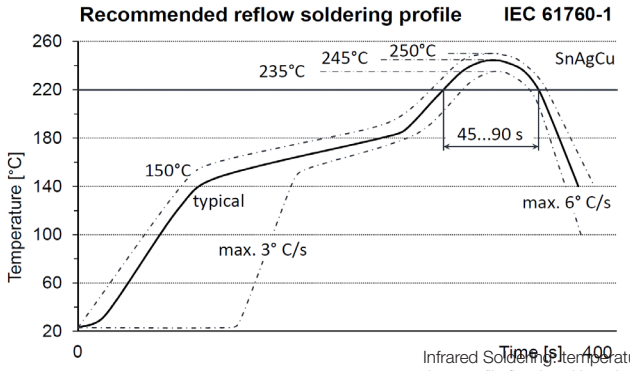

Infrared Soldering: temperature/ time profile (lead and housing peak temperature)

Resistance to soldering heat - Reflow profile

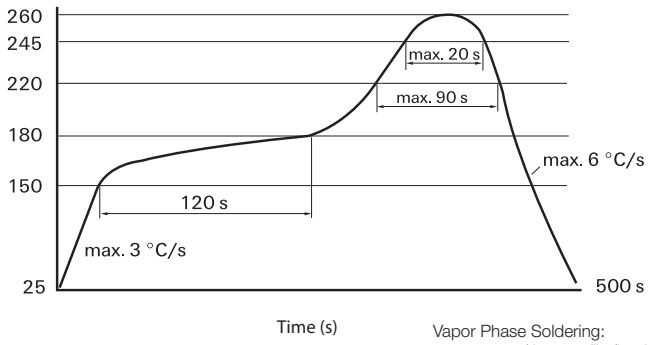

Vapor Phase Soldering: temperature/time profile (lead and housing peak temperature)

Soldering conditions according IEC 60058-2-58 and IPC/JEDEC J-STD-020D

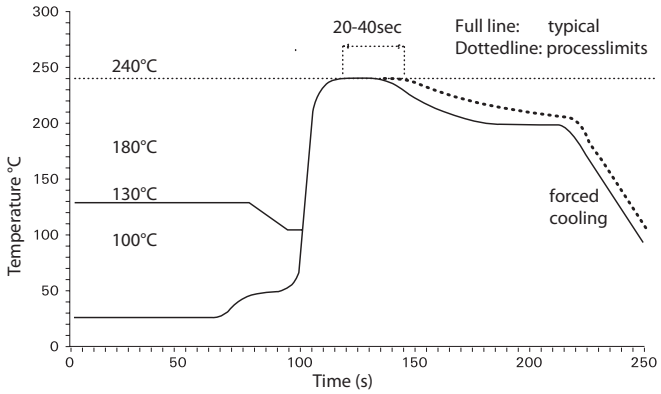

Packing

Tube for THT version
50 relays per tube, 1000 relays per box

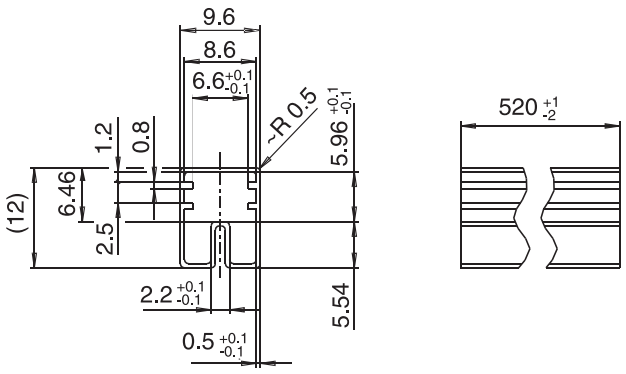

Tape and reel for SMT version
1000 relays per reel, 1000 or 5000 relays per box

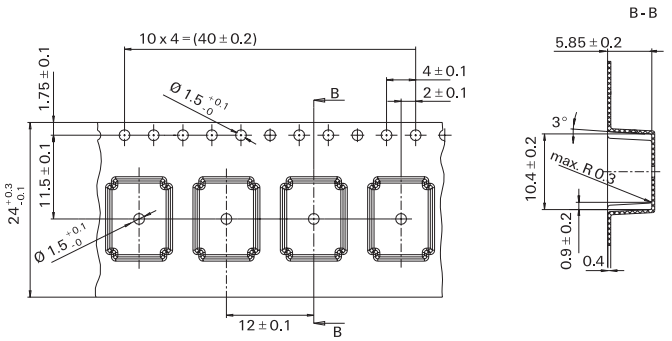

Reel dimensions

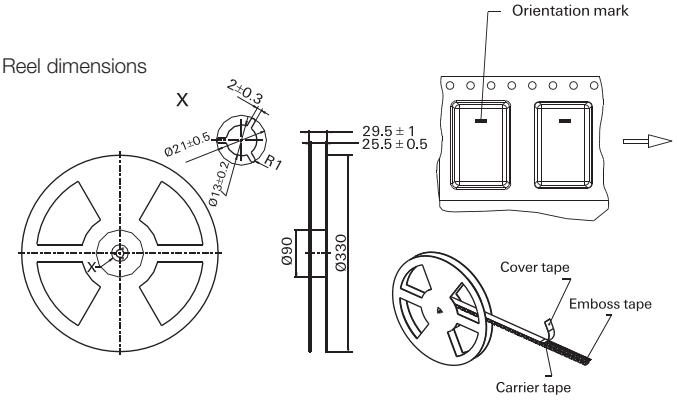

09-2017, Rev. 0917
www.te.com
© 2015 Tyco Electronics Corporation,
a TE Connectivity Ltd. company

Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.

Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at http://relays.te.com/definitions

Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.

Downloaded from Arrow.com.

IM - C Relay (Continued)

Product code structure	Typical product code	IM	C	03		G	R

Type
IM Signal Relays IM Series IMC

Contact arrangement
C 1 form C, 1 CO

Coil
Coil code: please refer to coil versions table

Performance type
Blank Standard version
C High Dielectric Version

Terminals
T THT - standard
G SMT - gull wing

Packing
S Tube
R Reel

Product code	Arrangement	Perf. type	Coil	Coil type	Terminals	Part number
IMC01GR	1 form C,	Standard	3VDC	Monostable	SMT gull wing	1462042-1
IMC01TS	1 CO				THT standard	1462042-4
IMC02GR	contact		4.5VDC		SMT gull wing	1462042-2
IMC02TS					THT standard	1462042-5
IMC03GR			5VDC		SMT gull wing	1462042-8
IMC03TS					THT standard	1462042-7
IMC06GR			12VDC		SMT gull wing	1462042-3
IMC06TS					THT standard	1462042-6
IMC07GR			24VDC		SMT gull wing	1-1462042-1
IMC07TS					THT standard	1-1462042-2
IMC02CGR		High dielectric	4.5VDC		SMT gull wing	1-1462042-0
IMC06CGR			12VDC			1462042-9
IMC06CTS					THT standard	1-1462042-4
IMC41CTS			3VDC	Bistable		1-1462042-3

09-2017, Rev. 0917
www.te.com
© 2015 Tyco Electronics Corporation,
a TE Connectivity Ltd. company

Datasheets and product specification according to IEC 61810-1 and to be used only together with the 'Definitions' section.

Datasheets and product data is subject to the terms of the disclaimer and all chapters of the 'Definitions' section, available at http://relays.te.com/definitions

Datasheets, product data, 'Definitions' section, application notes and all specifications are subject to change.

Downloaded from Arrow.com.