


## Package Dimensions

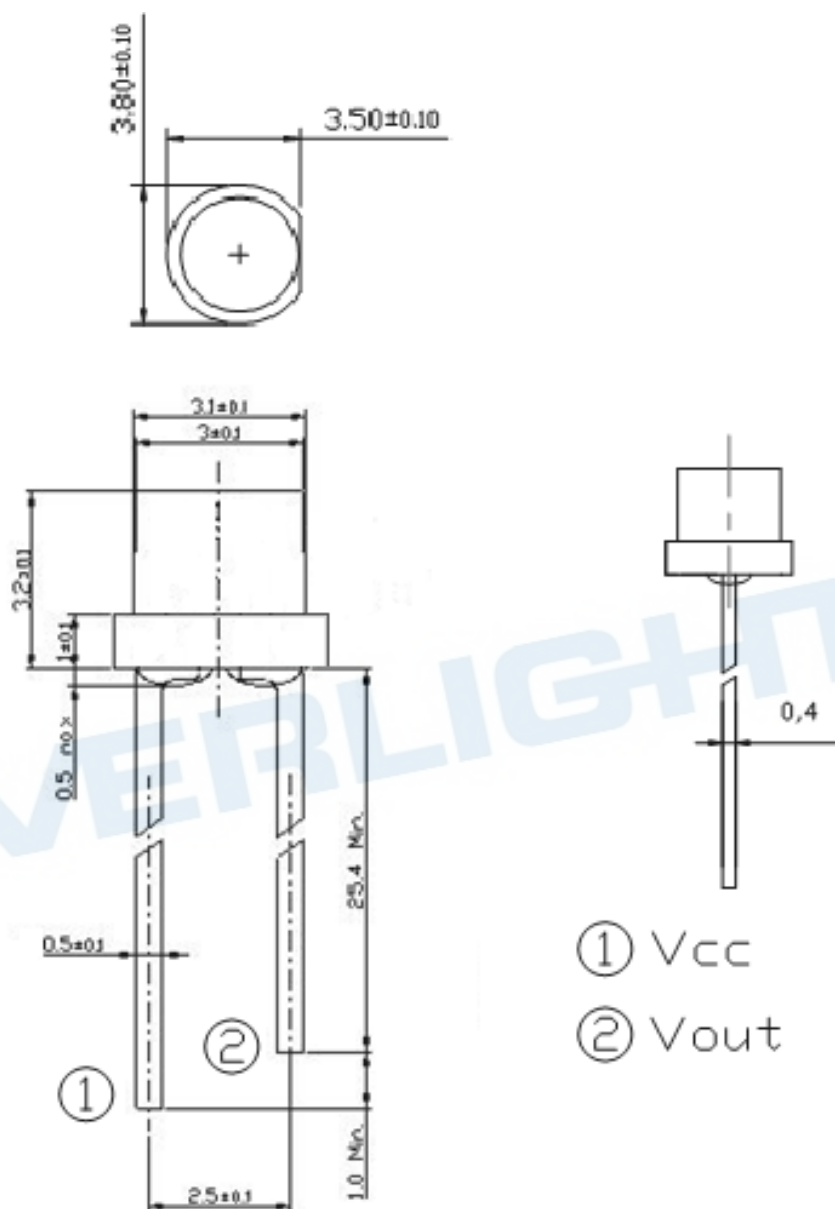

**Notes:** 1.All dimensions are in millimeters  
2.Tolerances unless dimensions  $\pm 0.1$ mm

### Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
Supply Voltage	$V_{CC}$	-0.7 ~ 6.5	V
Operating Temperature Range	$T_{opr}$	-40 ~ +85	°C
Storage Temperature Range	$T_{stg}$	-40 ~ +100	°C
Soldering Temperature Range	$T_{sol}$	260	°C

### Recommended Operating Conditions

Parameter	Symbol	Min.	Max.	Unit
Operating Temperature	$T_{opr}$	-40	+85	°C
Supply Voltage	$V_{CC}$	1.8	5.5	V

EVERLIGHT

Electrical and Optical Characteristics (T<sub>a</sub>=25°C)

Parameter	Symbol	MIN	TYP	MAX.	Unit	Test Condition
Dark Current	I <sub>D</sub>	1	---	100	nA	V <sub>CC</sub> =3V, E <sub>v</sub> = 0Lux
Light Current	I <sub>PH1</sub>	2.2	---	4.4	uA	V <sub>CC</sub> =3V, E <sub>v</sub> = 10Lux
	I <sub>PH2</sub>	22	---	44	uA	V <sub>CC</sub> =3V, E <sub>v</sub> = 100 Lux [Note1]
	I <sub>PH3</sub>	220	---	440	uA	V <sub>CC</sub> =3V, E <sub>v</sub> = 1000Lux [Note1]
	I <sub>PH4</sub>	264	---	528	uA	V <sub>CC</sub> =3V, E <sub>v</sub> = 1000Lux [Note2]
Photocurrent Ratio	I <sub>PH4</sub> / I <sub>PH3</sub>	---	1.2	---	---	V <sub>CC</sub> =3V, E <sub>v</sub> = 1000Lux
Peak Sensitivity Wavelength	λ <sub>p</sub>	---	550	---	nm	---
Sensitivity Wavelength Range	λ	390	---	700	nm	---
Rise time	t <sub>r</sub>	---	0.36	---	ms	V <sub>CC</sub> =3V R <sub>L</sub> = 27KΩ
Fall time	t <sub>f</sub>	---	1.13	---	ms	
Angle of half Sensitivity	2θ <sub>1/2</sub>	---	143	---	Deg.	I <sub>F</sub> = 20 mA

Note:

1. White Fluorescent light (Color Temperature = 6500K) is used as light source. However, White LED is substituted in mass production.
2. Illuminance by CIE standard illuminant-A / 2856K, incandescent lamp.

## Typical Electrical and Optical Characteristics Curves

Fig.1 Light Current vs. illuminance

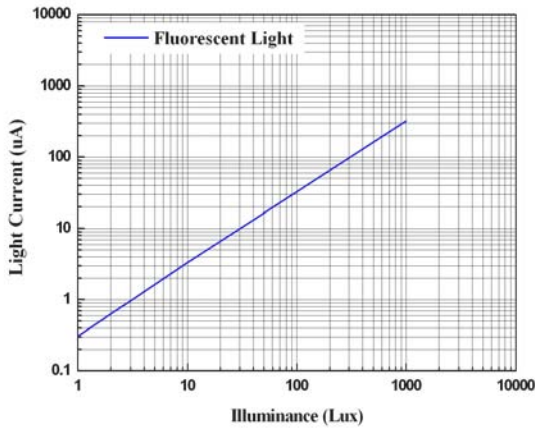


Fig.2 Output Voltage vs. illuminance

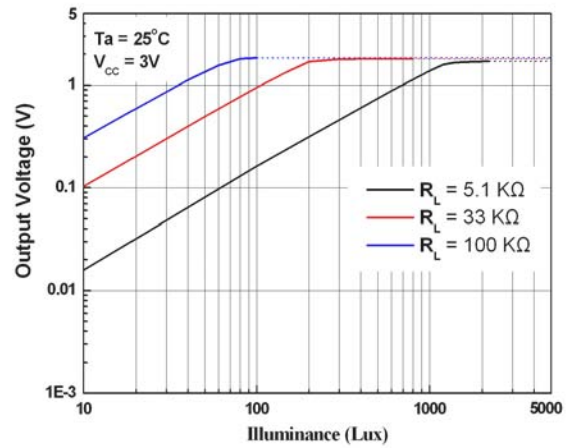


Fig.3 Spectral Response

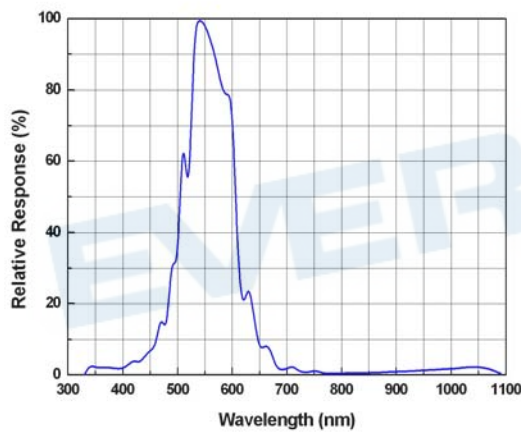


Fig.4 Light current vs. Supply Voltage

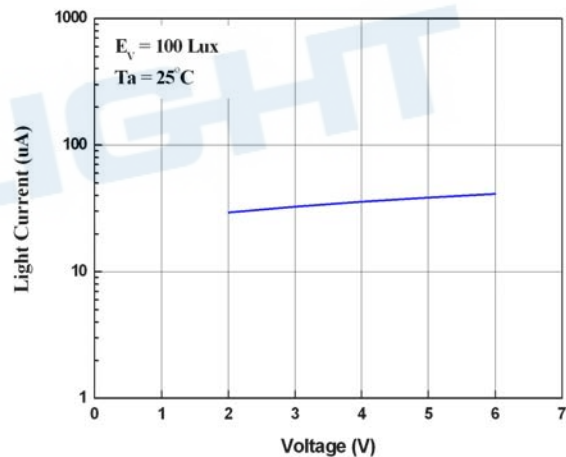


Fig.5 Light Current vs. Temperature



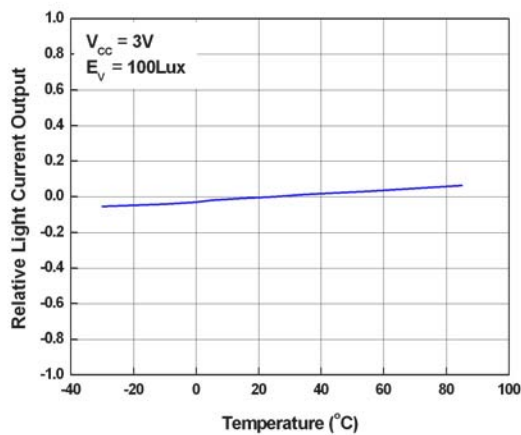


Fig.6 Dark Current vs. Temperature

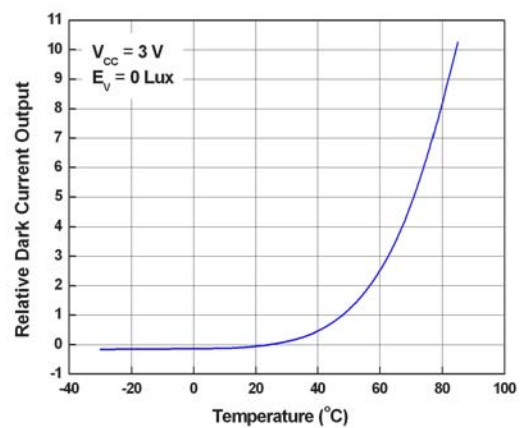

## Converting Photocurrent to Voltage

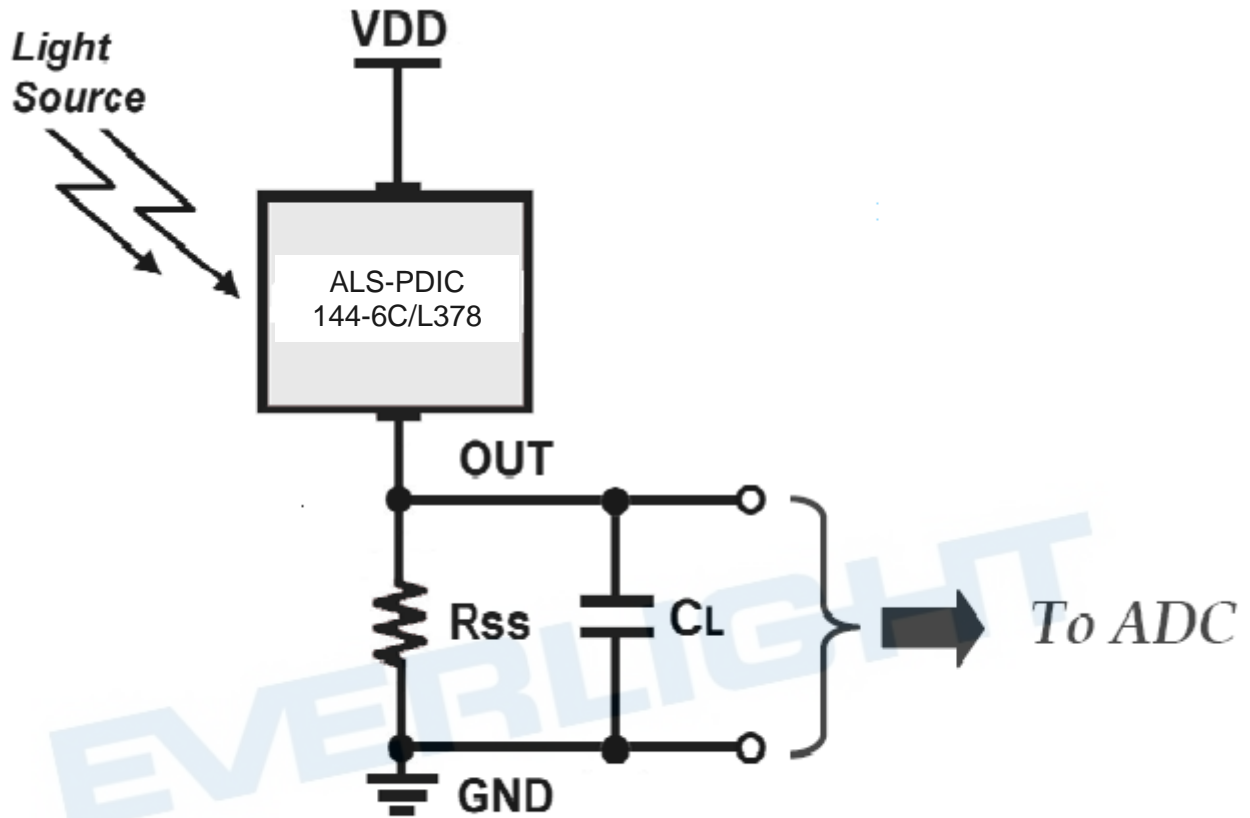

### Note:

1. The output voltage ( $V_{out}$ ) is the product of photocurrent ( $I_{PH}$ ) and loading resistor ( $R_L$ )
2. A right loading resistor shall be chosen to meet the requirement of maximum ambient light, and output saturation voltage:

$$V_{out(max.)} = I_{out(max.)} \times R_L \leq V_{out(saturation)} = V_{CC} - 1.2V$$

## Packing Quantity Specification

1.1000PCS/1Bag , 4Bags/1Box

2.10Boxes/1Carton

## Label Format



CPN: XXXXXXXXXXXXXXXXXXXX



XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX

P/N: XXXXXXXXXXXX




XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX-XXXXXXXXXX

LOT NO: Y150716XXX-XXXXXXXXXX-XXXXXXXXXX



QTY: 0123456789 HUE: XXXXXXXXXXXX



CAT: XXXXXXXXXXXX REF: XXXXXXXXXXXX



REFERENCE: BTPYYMDDXXXXXX



MADE IN TAIWAN



CPN: Customer's Production Number

P/N : Production Number

QTY: Packing Quantity

CAT: Ranks

HUE: Peak Wavelength

REF: Reference

LOT No: Lot Number

MADE IN TAIWAN: Production Place

## DISCLAIMER

1. EVERLIGHT reserves the right(s) on the adjustment of product material mix for the specification.
2. The product meets EVERLIGHT published specification for a period of twelve (12) months from date of shipment.
3. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
4. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from the use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
5. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without obtaining EVERLIGHT's prior consent.
6. This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life saving applications or any other application which can result in human injury or death. Please contact authorized Everlight sales agent for special application request.

EVERLIGHT